

Sub-mm-Wave Superconducting On-Chip Filter Bank for Astronomy

Pascual Laguna, Alejandro; Karatsu, K.; Thoen, D. J.; Murugesan, V.; Endo, A.; Baselmans, J. J.A.

DOI

[10.1109/IRMMW-THz46771.2020.9370959](https://doi.org/10.1109/IRMMW-THz46771.2020.9370959)

Publication date

2020

Document Version

Final published version

Published in

2020 45th International Conference on Infrared, Millimeter, and Terahertz Waves, IRMMW-THz 2020

Citation (APA)

Pascual Laguna, A., Karatsu, K., Thoen, D. J., Murugesan, V., Endo, A., & Baselmans, J. J. A. (2020). Sub-mm-Wave Superconducting On-Chip Filter Bank for Astronomy. In *2020 45th International Conference on Infrared, Millimeter, and Terahertz Waves, IRMMW-THz 2020* Article 9370959 (International Conference on Infrared, Millimeter, and Terahertz Waves, IRMMW-THz; Vol. 2020-November). IEEE.
<https://doi.org/10.1109/IRMMW-THz46771.2020.9370959>

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Green Open Access added to TU Delft Institutional Repository

'You share, we take care!' - Taverne project

<https://www.openaccess.nl/en/you-share-we-take-care>

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

Sub-mm-Wave Superconducting On-Chip Filter Bank for Astronomy

A. Pascual Laguna^{1,2}, K. Karatsu^{1,2}, D. J. Thoen^{2,3}, V. Murugesan¹, A. Endo^{2,3}, J. J. A. Baselmans^{1,2}

¹ Netherlands Institute for Space Research, SRON, Utrecht, The Netherlands

² Faculty of Electrical Engineering, Mathematics and Computer Science, Delft University of Technology, Delft, The Netherlands

³ Kavli Institute of Nanoscience, Faculty of Applied Sciences, Delft University of Technology, Delft, The Netherlands

Abstract—A superconducting on-chip microstrip filter bank spectrometer prototype for Far-Infrared (FIR) Astronomy is presented. The measurements showcase its capabilities towards moderate spectral resolution ($f/\Delta f \sim 500$) broadband FIR spectroscopy. In this sub-mm-wave filter bank, each spectral channel consists of an “I-shaped” microstrip THz bandpass filter that couples the radiation to a Microwave Kinetic Inductance Detector (MKID) for a background limited detection and a scalable frequency-multiplexed microwave readout.

I. SPECTROMETERS FOR FAR-INFRARED ASTRONOMY

THE Cosmic Background is as bright in the infrared as in the optical regime. However, it is the infrared spectrum that can probe star-forming galaxies, which would otherwise be invisible in the optical regime due to their dusty nature [1]. In order to characterize these galaxies, a broadband infrared spectral signature with moderate spectral resolution ($f/\Delta f \sim 500$) is required. State of the art broadband Far-Infrared (FIR) spectrometers tackle this endeavor by sensing with incoherent detectors the light dispersed by either diffraction gratings [2-4] or filter banks [5-8]. On-chip filter bank solutions have a clear advantage towards future multi-object spectrometers in terms of scalability.

II. MICROSTRIP FILTER BANK SPECTROMETER

Our prototype on-chip filter bank spectrometer is based on DESHIMA 1.0 [8], with a layout as depicted in Fig. 1. In this configuration the incoming sub-mm-wave radiation is efficiently coupled to the chip circuitry via a double-slot lens antenna. The radiation is then carried from the antenna to the filter bank via a virtually lossless superconducting transmission line. A microstrip filter bank then sorts the incoming radiation into the different spectral channels, each of which consists of an “I-shaped” THz bandpass filter coupling radiation around frequency f with a resolution $f/\Delta f$ from the through-line to a Microwave Kinetic Detector (MKID). After the filter bank there is a lossy transmission line that absorbs any remaining power to avoid standing waves.

III. MEASUREMENTS OF A SPARSE FILTER BANK PROTOTYPE

As a preliminary performance assessment of our proposed microstrip filter bank concept, we have designed and built a prototype chip with a sparse sampling of the 300-400 GHz sub-mm-wave spectrum with a resolution of $f/\Delta f \sim 500$. From the measurements we can derive an internal quality factor, associated to the amorphous nature of the PECVD a-Si used, in the order of $Q_i \sim 1500$. As depicted in Fig. 2, the measured loaded quality factor of each filter is around $\overline{Q}_l \sim 550$, which is close to the targeted spectral resolution of these filters.

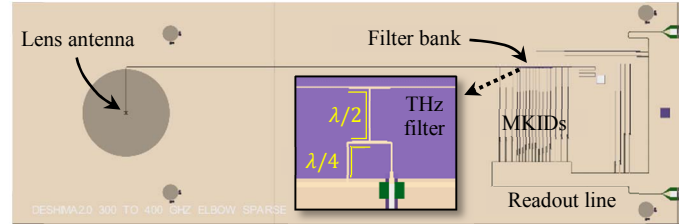


Fig. 1. Prototype chip of a sparsely sampled spectrometer in the band 300-400 GHz. In the inset one can observe one example of an “I-shaped” THz bandpass filter coupling power from the through-line to an MKID behind it.

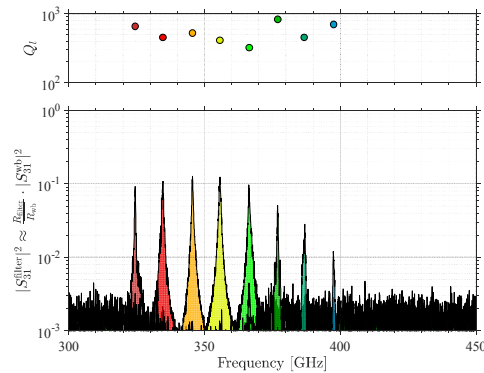


Fig. 2. Measured spectrum of the chip in Fig.1 and the loaded quality factors averaging $\overline{Q}_l \approx 550$. Each channel’s spectrum ($|S_{31}^{\text{filter}}|^2$) is estimated from the ratio of phase response of the MKID behind each filter (R_{filter}) and the average phase response of the MKIDs behind the wideband couplers at the beginning of the filter bank (\overline{R}_{wb}), whose coupling strength ($|S_{31}^{\text{wb}}|^2$) is used as a reference.

REFERENCES

- [1] H. Dole et al., “The cosmic infrared background resolved by Spitzer - Contributions of mid-infrared galaxies to the far-infrared background,” *Astron. Astrophys.*, vol. 451, no. 2, pp. 417-429, 2006.
- [2] C. M. Bradford, et al., “Z-Spec, a broadband millimeter-wave grating spectrometer-design, construction, and first cryogenic measurements,” *Proc. SPIE*, vol. 5498, 2004.
- [3] C. Ferkinhoff, et al., “ZEUS-2: a second generation submillimeter grating spectrometer for exploring distant galaxies,” *Proc. SPIE*, vol. 7741, 2010.
- [4] G. Cataldo, et al., “Second-generation design of Micro-Spec: a medium-resolution, submillimeter-wavelength spectrometer-on-a-chip,” *J. Low Temp. Phys.*, 2018.
- [5] S. Bryan, et al., “WSPEC: A waveguide filter bank focal plane array spectrometer for millimeter wave astronomy and cosmology,” *J. Low Temp. Phys.*, 2016.
- [6] J. Redford, et al., “The design and characterization of a 300 channel, optimized full-band millimeter filterbank for science with SuperSpec,” *Proc. SPIE*, vol. 10708, 2018.
- [7] C. N. Thomas, “The Cambridge Emission Line Surveyor (CAMELS),” *Proc. 24th ISSIT*, 2013.
- [8] A. Endo, et al., “Wideband on-chip terahertz spectrometer based on a superconducting filterbank,” *J. Astron. Telesc. Instrum. Syst.*, vol 5, no. 3, pp. 1-12, 2019.

IV. ACKNOWLEDGEMENTS

This work is supported by the ERC Consolidator Grant ERC-2014-CoG MOSAIC no. 648135.