

Overview of the olympus field development optimization challenge

Fonseca, R. M.; Della Rossa, E.; Emerick, A. A.; Hanea, R. G.; Jansen, J. D.

DOI

[10.3997/2214-4609.201802246](https://doi.org/10.3997/2214-4609.201802246)

Publication date

2018

Document Version

Final published version

Published in

16th European Conference on the Mathematics of Oil Recovery, ECMOR 2018

Citation (APA)

Fonseca, R. M., Della Rossa, E., Emerick, A. A., Hanea, R. G., & Jansen, J. D. (2018). Overview of the olympus field development optimization challenge. In D. Gunasekera (Ed.), *16th European Conference on the Mathematics of Oil Recovery, ECMOR 2018* EAGE. <https://doi.org/10.3997/2214-4609.201802246>

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

Green Open Access added to TU Delft Institutional Repository

'You share, we take care!' – Taverne project

<https://www.openaccess.nl/en/you-share-we-take-care>

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

Tu A2 01

Overview Of The Olympus Field Development Optimization Challenge

R.M. Fonseca* (TNO), E. Della Rossa (ENI), A.A. Emerick (Petrobras), R.G. Hanea (Statoil), J.D. Jansen (Delft University of Technology)

Summary

Since the early 2000's there has been a significant focus from many groups around the world towards the development and application of innovative technologies in order to improve reservoir management strategies and optimize field development plans. Benchmark studies are a very valuable way of evaluating and demonstrating the status and potential of developing technology. Numerical optimization is seen as a valuable technology for decision support in various stages of the life cycle of hydrocarbon fields. Its potential has been demonstrated in previous benchmark studies such as the 2008 Brugge study on Closed-Loop Reservoir Management albeit for primarily well control problems. Additionally since the Brugge benchmark exercise also involved history matching it was difficult to separate and thus draw significant conclusions about the performance of the optimization methods. Thus the OLYMPUS optimization benchmark challenge was setup and aimed at field development (FD) optimization under uncertainty. In this talk we will provide an overview of the OLYMPUS case and the optimization problems defined. In addition we aim to provide an anonymized overview of validated results from the participants for the OLYMPUS workshop which takes place the day after ECMOR.

Introduction

Numerical optimization has been shown to be a potentially valuable technology to provide decision support in various stages of the life cycle of hydrocarbon fields. Over the past decade many studies have appeared on numerical optimization of well controls such as rates, pressures and ICV settings. These studies have investigated optimization algorithms, handling of uncertainty, constraints and multiple objective functions, and more recently also various measures of risk. In recent years, the application of optimization methods has been extended more and more frequently to the field development stage during which decisions are made that have significant impact on the performance of the field. The types of controls that have been considered have been extended to also include various field development parameters such as well positions and trajectories and, more recently, drilling schedule. Some of these controls have even been considered jointly. While for typical well controls a number of approaches have emerged as more promising than others, for field development-type problems no clear consensus has emerged yet. Additionally very rarely do the various available studies use the same set of models or objective function definitions. This makes consensus generation difficult as the results from the various studies are case-dependent. One mechanism to achieve consensus on best practices and applicability of algorithms is through benchmark comparison studies. This is because the set of models, problem definition and objective function calculation is standardized making comparison of the results a fair process.

The potential of numerical optimization was demonstrated in a 2008 benchmark comparison study, SPE Applied Technology Workshop on Closed Loop Reservoir Management (CLRM) held in Brugge, on which included the optimization of well controls (Peters *et al.*, 2010). CLRM is the combination of well control and/or field development optimization with computer-assisted history matching to keep the optimization models ‘evergreen’ using the most recent production data. All benchmark participants were asked to perform both a history match and an optimization step, thus completing the full loop once. One drawback of the closed-loop setting was that different participants generated different history matched models which were subsequently used for optimization exercises, using different approaches. As a result, the relative contributions from history matching and optimization steps were somewhat difficult to disentangle. Additionally, it turned out to be difficult to draw firm conclusions on the relative performance of different algorithms used in the individual steps (i.e. history matching or optimization) since only the data mismatch and the final outcome were evaluated and compared. Furthermore, the 2008 closed-loop Brugge benchmark study assumed a fixed field development with a given set of wells and completions. The development of the field in terms of number, type and placement of wells was not part of the optimization while this may be expected to have a major impact on the value that can be realized. A more detailed review of the Brugge benchmark study was provided by Peters *et al.* (2013), who also discuss some other relatively minor issues.

The first step of any reservoir management workflow would ideally be an optimization of the field development plan. There is therefore clear value in comparison benchmarks for history matching and/or optimization separately. Many insights were gained by the reservoir optimization community as a result of the Brugge benchmark exercise. New research focus areas were pursued and many new algorithms have been developed for a variety of problems since 2008. Thus a comparison of, different approaches would be very useful to assess the applicability of methods for field development optimization under geological uncertainty. This motivated the launch of a benchmarking exercise for field development optimization under uncertainty. Note that history matching does not form part of the current benchmark which is only addressing well control and field development optimization given an ensemble of reservoir models.

In the remainder of this paper we delve into the scope of this benchmark exercise, and provide a description of the geological characteristics of the model. Finally, we end with the problems defined to be tackled using numerical optimization techniques. The definition of the objective function calculation and all associated operational constraints are also provided.

Benchmark Scope and Criteria

In the development of a benchmark study it is essential to clearly define the criteria to be followed in order to setup a benchmark exercise. In this benchmark study we utilize the following criteria, as suggested by Peters *et al.*, (2013), to develop an ensemble of reservoir models suitable for field development optimization.

1. Sufficiently challenging (i.e. no trivial optimal solution) to distinguish between approaches and methods and identify strengths and weaknesses.
2. Realism of property distributions, uncertainty, constraints and number/types of decision variables
3. Relatively short simulation time to allow evaluation of techniques in a manageable time frame.
4. Clearly defined outcome measures such that results can be compared.

The benchmark study is aimed at field development (FD) optimization under uncertainty. Questions that we aim to address in this study are:

1. What added value can be expected if optimization methods would be applied to make field development decisions?
2. What are good workflows to arrive at optimal development plans?
3. Which controls should be considered to construct an optimal development plan?
4. Which methods are best suited for field development optimization?
5. Should well placement and control be considered jointly?

These questions can be answered by formulating and addressing a number of well-defined challenges that are detailed further below. The scope as defined above introduces the need to address several technical issues that have not been part of previous benchmark studies:

- Some controls may naturally appear as integer or binary variables. For example, well positions and drilling ordering are often thought to require treatment as integer controls.
- The number of wells may not be constant throughout an optimization process.
- Incorporating drilling costs into the objective function, and considering the well drilling order, will lead to non-smoothness of the objective function.
- Evaluating different well trajectories requires frequent re-computation of well-reservoir connectivity.
- Joint well placement and control optimization is a mixed-control problem that is expected to be challenging for some workflows and algorithms.
- The FD problem will involve time-dependent nonlinear input and/or output constraints that could be handled by the simulator or, more formally, by an optimizer.

The criteria and scope listed above are about the problem definition and the associated challenges with field development optimization. Another aspect integral to the challenge is to define geological characteristics to be incorporated within the ensemble of models to be used for the optimization.

Geological Model Characteristics & Uncertainty

The following geological features were identified as sources of complexity to be included in a reservoir model:

- Vertical barrier- One completely sealing vertical barrier to flow poses the question of how to best develop two separate reservoirs with the same set of wells.
- Faulting – Makes regular well patterns suboptimal, i.e. placement of individual wells needs to be optimized.
- Fault throws - Should be such that the upper reservoir zone will be juxtaposed against the lower reservoir zone at places.
- Fluvial channels – At least in one of the reservoir zones. Introduces the challenge of high-connectivity and fast water breakthrough (undesired), as well as the possibility to tap into multiple good sands with a single extended reach well.

- K_v/K_h ratio – A very low vertical permeability K_v (relative to the horizontal permeability K_h) makes vertical wells the only reasonable option. The K_v/K_h ratio should therefore not be too low.
- Inclined layering – Tends to suppress the recovery, especially in combination with a low K_v/K_h , as parts of the field will remain unswept.

OLYMPUS Benchmark Model : Geological description

A synthetic reservoir model, OLYMPUS, inspired and loosely based on Brent-type oil fields in the North Sea, was developed for the purpose of the proposed benchmark study for field development optimization. The field is 9 km by 3 km and is bounded on one side by a fault with a large throw. In addition to the boundary fault, six smaller, internal faults are present in the reservoir. The reservoir is 50m thick and consists of two zones that are separated by an impermeable shale layer. The upper reservoir zone contains fluvial channel sands embedded in floodplain shales. The lower reservoir zone consists of alternating layers of coarse, medium and fine sands that are inclined with respect to the general structural dip of the field, so-called clinofolds.

The model consists of grid cells of approximately 50 m × 50 m × 3 m each. The model has 341,728 grid cells of which 192,750 are active. Four different facies types have been modeled in the different layers. An overview of the different facies types with their properties is provided in **Table 1**.

Table 1 Facies types and property distribution ranges for the OLYMPUS reservoir models.

<u>Facies Type</u>	<u>Zones Present</u>	<u>Net-To-Gross</u>	<u>Porosity Range</u>	<u>Permeability Range(mD)</u>
Channel Sand	Upper	0.8-1	0.2-0.35	400-1000
Shale	Upper & Barrier	0	0.03	1
Coarse Sand	Lower	0.7-0.9	0.2-0.3	150-400
Medium Sand	Lower	0.75-0.95	0.1-0.2	75-150
Fine Sand	Lower	0.9-1	0.05-0.1	10-50

Petrophysical properties such as porosity, permeability and Net-to-gross (NTG) were generated using standard geostatistical techniques for the different facies types. No porosity-permeability relationship has been used, based on the assumption that insufficient data are available at the early stage of field development. The permeability values in the X and Y directions are identical. The permeability in the Z direction is 10% of the permeability in the X direction. From the available exploration well logs the depth of the Oil-Water Contact (OWC) was determined to be at 2092 m, with an in-situ hydrostatic pressure of 205 bar. The initial water saturation distribution is modeled using capillary pressure curves. Different capillary pressure curves were assigned to the different facies types. Thus changes in the facies model will lead to different initial water saturation distributions. The dead oil based fluid properties used in the ensemble of models is given in **Table 2**. Note that oil viscosity is modeled as a function of pressure and hence a range is provided in the table below. Similarly the oil formation volume factor is also provided as a function of pressure.

Table 2 Fluid properties of the OLYMPUS reservoir models.

<i>Symbol</i>	<i>Variable</i>	<i>Value</i>	<i>Unit</i>
C_{rock}	Rock compressibility	1.42×10^{-5}	1/bar
c_w	Water compressibility	3.97×10^{-5}	1/bar
μ_o	Oil dynamic viscosity	2.8-3.5	cP
μ_w	Water dynamic viscosity	0.398	cP
ρ_o	Oil Density	850	kg/m ³
ρ_w	Water Density	1020	kg/m ³
d_{well}	Well-bore diameter	0.19	m
T	Simulation time	7200	d

Model Realizations

An ensemble of 50 realizations was generated wherein the facies are regenerated by altering the random seed. The grid geometry, fault geometries and oil water contact are considered to be known for this case and are therefore the same in all realizations. Thus the uncertain properties are

1. Facies
2. Porosity
3. Permeability
4. Net-to-gross ratio
5. Initial water saturation
6. Transmissibility across the faults.

Upscaled permeability fields for four different realizations for layer 3 are illustrated in **Figure 1**. The orientation and number of channels varies in the top reservoir section while in the bottom reservoir section the clinoformal stratigraphic sequence is varied as illustrated in **Figure 2**.

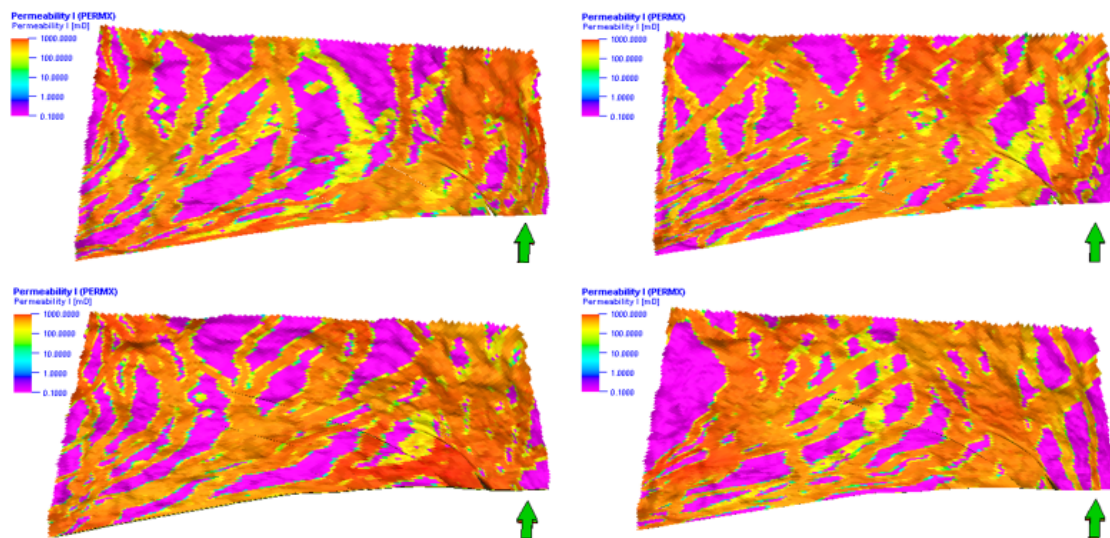


Figure 1 Illustration of the permeability in layer 3 from four different model realizations showing different realizations of fluvial channels in a shale background.

The ensemble of models were generated using the following procedure. A high fidelity base case model of approx. 5 million grid cells was generated as a first step. Five wells were drilled into this base case model and synthetic logs were generated for each of these wells. These logs were then used to constrain the generation of the ensemble of 50 high fidelity models to capture uncertainty. Each of these high fidelity models was upscaled for the purpose of flow simulations using the flow-based upscaling method. The location of the oil/water contact is kept constant in all the model realizations. The ensemble of models that has been provided consists of an upscaled set of models.

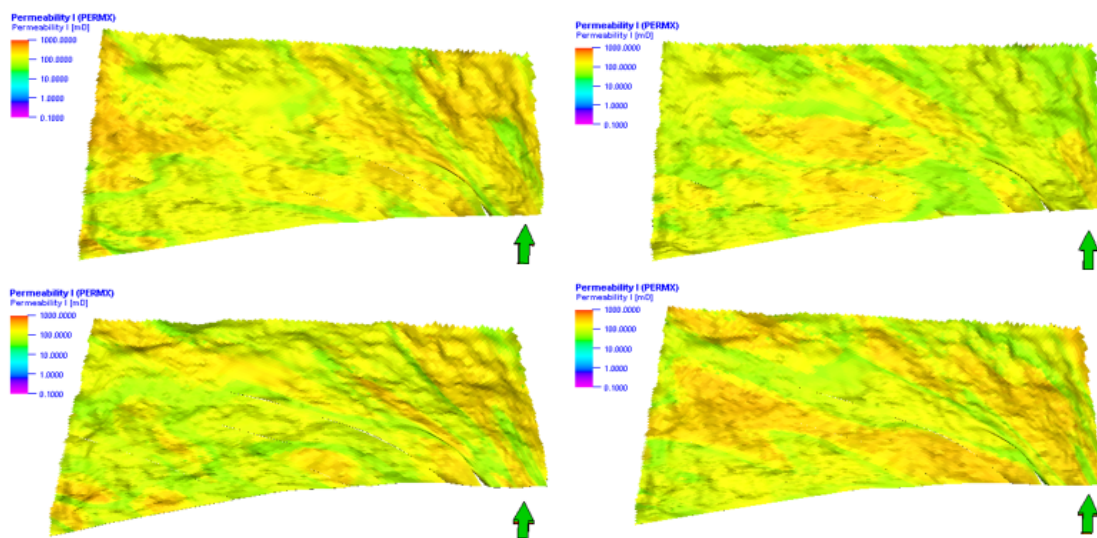


Figure 2 Illustration of the permeability in layer 13 from four different model realizations showing different realizations of the clinoformal stratigraphic sequences.

Drainage strategy and production volumes

Figure 3 illustrates the impact of uncertainty in the 50 model realizations represented in terms of cumulative oil and water production as well as cumulative water injection and field water cut, for the a reference operating strategy. The reference strategy consists of 11 producers and 7 injectors which are operated on a pressure constraint. The placement of the wells in this reference strategy was a result of a manual trial and error exercise based on engineering judgement for a chosen realization. Thus the well placement strategy is probably not optimal over all the realizations. The results were obtained by running a commercial fully implicit black oil simulator (Eclipse, 2017), for each realization. As can be observed in **Figure 3** the uncertainty can be visually classified as relatively large, which can be interpreted as representative of a green field development scenario. **Table 3** provides the minimum, maximum and average value for the different properties plotted which can be a way to substantiate the degree of uncertainty.

Table 3 Volumetric & simulation results for given development strategy for OLYMPUS reservoir models.

<u>Property</u>	<u>Maximum Value</u>	<u>Minimum Value</u>	<u>Average Value</u>
Cumulative Oil Produced	14.50 million m ³	7.42 million m ³	11.12 million m ³
Cumulative Water Injected	64.78 million m ³	19.17 million m ³	42.22 million m ³
Field Water Cut	94%	83%	90%

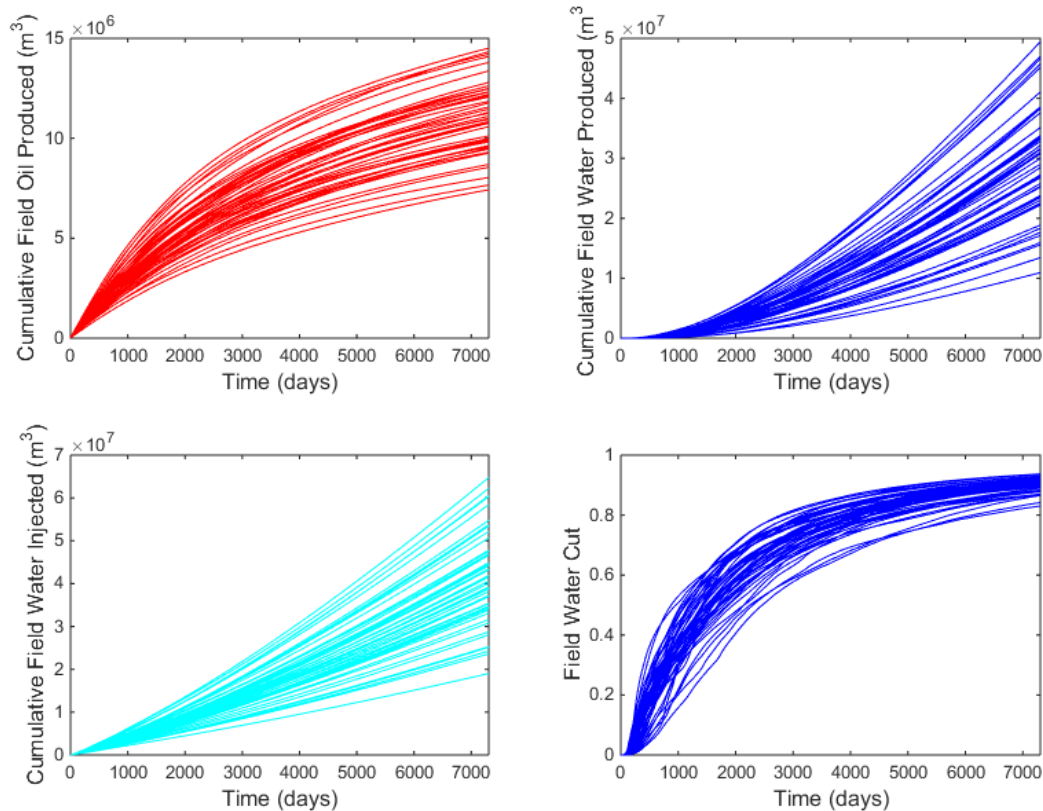


Figure 3 Illustration of the cumulative oil produced (top left), water produced (top right), water injected (bottom left) and field water cut (bottom right) for all the 50 model realizations.

This illustrates that the realizations show very different responses especially in terms of cumulative water injected and cumulative oil produced. The range in the model responses also suggests that there exists significant scope to optimize a field development plan.

Optimization Problem Descriptions

Three tasks/problems were defined as part of this benchmark exercise which are explained below. An optimized strategy is often compared with a reactive control strategy i.e. a shut-in of the well when its production becomes uneconomical. The economic water cut based on the prices provided in **Table 4** has been calculated to be 88%.

Objective Function

The performance of the field development plan is measured by expected Net Present Value (NPV) as evaluated over the full provided set of 50 model realizations (i.e., mean NPV). Cost and revenue contributions for the NPV calculation are listed in **Table 4**

Table 4 Cost and revenue inputs for calculation of the objective function.

<u>Contribution</u>	<u>Value</u>	<u>Units</u>
Platform investment	500	Million USD
Drilling and completion	$5000 \cdot \Delta Z + 10000 \cdot \Delta XY $	USD, m
Oil price	45	USD/bbl
Cost produced water	6	USD/bbl
Cost injected water	2	USD/bbl
Annual discount factor	0.08	
End of life cycle period	20	years

The following formula should be used to compute the NPV for a single realization in USD (\$):

$$NPV = \sum_{i=1}^{N_t} \frac{R(t_i)}{(1+d)^{t_i/\tau}}, \quad (1)$$

where index i refers to the time interval with length $\Delta t_i = t_i - t_{i-1}$ and starting at t_{i-1} and ending at time t_i , all in days, N_t is the total number of time intervals over the life cycle period, d is the discount factor (expressed as a fraction), τ is the time interval for discounting (365 days), and $R(t_i)$ is the sum of all expenses and incomes incurred during the time interval Δt_i . The time intervals are fixed to calendar months to ensure consistency in the NPV calculation for all participants. All cash flows and discounting are assumed to take place on time t_i . Well drilling and completion costs associated with finished drilling and completion of a well in the time interval Δt_i are also assumed to be incurred at the time t_i . The platform investment cost must be introduced in the time interval in which drilling of its first well starts (which is the very first month for the first platform). The cost term $R(t_i)$ in \$ is defined as

$$R(t_i) = Q_{op}(t_i) \cdot r_{op} - Q_{wp}(t_i) \cdot r_{wp} - Q_{wi}(t_i) \cdot r_{wi} - P(t_i) - D(t_i), \quad (2)$$

where $Q_{op}(t_i)$, $Q_{wp}(t_i)$ and $Q_{wi}(t_i)$ are the total oil production, water production and water injection volumes over the time interval Δt_i , respectively. For example: $Q_{op}(t_i) = FOPT(t_i) - FOPT(t_{i-1})$. Furthermore, r_{op} , r_{wp} and r_{wi} are the corresponding oil revenue (price) and water production and injection costs in \$ per unit volume, whereas $P(t_i)$ is the platform investment costs, $D(t_i)$ is the total well drilling and completion costs incurred during the time interval Δt_i specified in **Table 4**. The operational criteria for the wells and information about the other necessary constraints for the wells are provided in **Table 5**.

Table 5 Operational and drilling constraints for the wells in the OLYMPUS reservoir models.

<u>Property</u>	<u>Maximum Value</u>	<u>Units (Field or SI)</u>
Maximum number of wells on a platform	20	-
Maximum platform liquid production rate	88,000 or 14,000	bbl/day or m ³ /day
Maximum well oil production rate	5700 or 900	bbl/day or m ³ /day
Maximum well water production rate	10,000 or 1600	bbl/day or m ³ /day
Maximum allowable injector BHP	235	bar
Minimum allowable producer BHP	150	bar
Maximum dogleg severity	10/30.48	°/m

Task 1: Well Control Optimization

The aim of this exercise is to perform well control optimization. A development plan with 18 wells is provided. The location and trajectory of the wells cannot be altered for this exercise. The well targets/controls can be adjusted every 3 calendar months (i.e. at the first day of every third month) Participants are free to choose control time intervals as any multiple of a 3-month period. For the 18 wells in the deck and a life cycle period of 20 years this would result, in case of 3-month control intervals, in a total of 1440 controls as all the wells are assumed to be drilled and completed at the starting time. Flexibility in the choice of the total number of controls which is a function of the number of control time intervals is provided. Furthermore, the choice of the well controls to be optimized e.g. rates, pressures, single well PI multipliers etc., is left to the discretion of a user. The optimal strategies must adhere to the bounds on well flow rates and bottom-hole pressures specified in **Table 5** as well as the maximum liquid production rate specified.

Task 2: Field development optimization

The aim of this task is to optimize field development plans. The number, type, order and trajectories of the wells as well as the platform location to be used are the focus of the optimization. The well placement strategy provided for the well control exercise does not need to be used.

For this task participants are expected to deliver a development plan that consists of:

- The coordinates $(X_p, Y_p, 0)$ of one or more platforms.,
- A well drilling sequence (which also determines the number of wells N_w to be drilled),.
- The full trajectories (as survey files) of all drilled wells starting from a kick-off point with coordinates $(X_p, Y_p, Z_{k,i})$ where $i = 1, \dots, N_w$ up to the end point of each well with coordinates $(X_p + \Delta X, Y_p + \Delta Y, Z_{e,i})$,.
- Assignment of the type of each well (producer or injector).

The field development options are constrained by a number of factors:

- The wells must adhere to a constraint on dogleg severity as applied to a smooth well-path.
- Each well i , with $i = 1, \dots, N_w$, can have a different kick-off depth $Z_{k,i}$.
- Only single-bore wells are allowed (i.e. no side tracks).
- Wells cannot be converted (e.g. from producer to injector or vice versa) at later time.
- A platform has space for 20 well slots only.
- The liquid processing capacity of the platform facilities limits the field production rate.
- Drilling of each next well is started immediately after finishing the previous one, i.e. without idle time between completing one well and starting the drilling of the next well.
- There are operational well rate capacity and pressure limits as specified in **Table 5**
- The recovery strategy is water flooding so only water can be injected.
- The diameter for all wells is assumed to be 0.1905 m
- Each well is assumed to come on stream immediately after drilling and completion of the well is finished.

Drilling Time Calculation

The following formula should be used for the time (in days) to drill and complete a well:

$$\Delta t_D = 0.015 \cdot \Delta Z + 0.02 \cdot |\Delta XY|, \quad (3)$$

where $\Delta Z = Z_{k,i}$ and $|\Delta XY| = \sqrt{\Delta X^2 + \Delta Y^2}$ is the horizontal offset (step-out) of the well end point from the kick-off point. Note that this assumes that the well end point is both laterally and in depth the furthest point from the kick-off point. With the above formula, and using the values in **Table 4** we obtain a drilling and completion time of 30 days for a vertical well to 2000 m depth and a cost of 10 million \$. For a well with end point at 2000 m depth and 2000 m offset from the platform, drilling cost and time works out to 30 million \$ and 70 days respectively. These and other constraints are listed and quantified in **Table 5**.

Production platform investments cost are assumed to be related to the installed capacity and are therefore not included in the cost per drilled well. Note that since there is no time period between drilling of two wells, the drill rig is never idle and the rig rate is assumed to be incorporated in the costs per well. Moreover, royalties and social and corporate taxes are not considered explicitly. The simulation start time corresponds to the start of the drilling of the first well. It is assumed that all produced associated gas is consumed or exported. We do not include a price of gas in the economic model and assume that all oil and gas processing and exporting costs are incorporated in the oil price listed in **Table 4**.

Task 3: Joint Field Development and Well Control Optimization

In this task participants are encouraged to come up with optimal field development strategies as well as well control (operational strategies). All the inputs needed for this exercise are exactly the same as the inputs used for the field development optimization task.

Conclusions

This paper provides an overview of the OLYMPUS field development optimization benchmark challenge. The scope, criteria, model and problem description are provided so that in the future new research developments can be benchmarked to the provided data set. The data set and simulation input files for this benchmark case can be requested from TNO.

Acknowledgements

The OLYMPUS benchmark study is an initiative of the partners of the Integrated Systems Approach to Petroleum Production (ISAPP) research consortium consisting of TNO, Delft University of Technology, Statoil, ENI and Petrobras. We would like to acknowledge the contribution of Dr. Kees Geel for help with building the OLYMPUS geological models. We would like to acknowledge the contribution of Dr. Olwijn Leeuwenburgh in defining the scope and criteria of the OLYMPUS benchmark challenge.

References

Eclipse. 2017. <https://www.software.slb.com/products/eclipse>

Peters, L., Arts, R.J., Brouwer, G.K., Geel, C.R., Cullick, S., Lorentzen, R.J., Chen, Y., Dunlop, K.N.B., Vossepoel, F.C., Xu, R., Sarma, P., Alhuthali, A.H. and Reynolds, A.C., 2010. Results of the Brugge Benchmark Study for Flooding Optimization and History Matching. *SPEEE* **13** (3) 391-405. DOI: 10.2118/119094-PA.

Peters, E., Chen, Y., Leeuwenburgh, O. and Oliver, D.S., 2013. Extended Brugge benchmark case for history matching and water flooding optimization. *Computers & Geosciences* **50** 16-24. DOI: 10.1016/j.cageo.2012.07.018.