



Delft University of Technology

## Open Gimbal

### A 3 Degrees of Freedom Open Source Sensing and Testing Platform for Nano and Micro UAVs

Sharma, Suryansh; Dijkstra, Tristan; Prasad, R. Venkatesha

#### DOI

[10.1109/LSENS.2023.3307121](https://doi.org/10.1109/LSENS.2023.3307121)

#### Publication date

2023

#### Document Version

Final published version

#### Published in

IEEE Sensors Letters

#### Citation (APA)

Sharma, S., Dijkstra, T., & Prasad, R. V. (2023). Open Gimbal: A 3 Degrees of Freedom Open Source Sensing and Testing Platform for Nano and Micro UAVs. *IEEE Sensors Letters*, 7(9), 1-4. Article 2502704. <https://doi.org/10.1109/LSENS.2023.3307121>

#### Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

#### Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

#### Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

***Green Open Access added to TU Delft Institutional Repository***

***'You share, we take care!' - Taverne project***

**<https://www.openaccess.nl/en/you-share-we-take-care>**

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

# Open Gimbal: A 3 Degrees of Freedom Open Source Sensing and Testing Platform for Nano- and Micro-UAVs

Suryansh Sharma<sup>1</sup> , Tristan Dijkstra<sup>2</sup> , and Ranga Venkatesha Prasad<sup>2\*</sup> 

<sup>1</sup> Networked Systems Group, Delft University of Technology, 2628 CD Delft, The Netherlands

<sup>2</sup> Faculty of Aerospace Engineering, Delft University of Technology, 2628 CD Delft, The Netherlands

\*Senior Member, IEEE

Manuscript received 26 July 2023; accepted 3 August 2023. Date of publication 22 August 2023; date of current version 29 August 2023.

**Abstract**—Testing the aerodynamics of micro-UAVs (mUAVs) and nano-UAVs (nUAVs) without actually flying is highly challenging. To address this issue, we introduce *Open Gimbal*, a specially designed 3 degrees of freedom (DoF) platform that caters to the unique requirements of mUAVs and nUAVs. This platform allows for unrestricted and free rotational motion, enabling comprehensive experimentation and evaluation of these UAVs. Our approach focuses on simplicity and accessibility. We developed an open-source, 3-D printable electromechanical design that has minimal size and low complexity. This design facilitates easy replication and customization, making it widely accessible to researchers and developers. Addressing the challenges of sensing flight dynamics at a small scale, we have devised an integrated wireless batteryless sensor subsystem. Our innovative solution eliminates the need for complex wiring and instead uses wireless power transfer for sensor data reception. To validate the effectiveness of open gimbal, we thoroughly evaluate and test its communication link and sensing performance using a typical nanoquadrotor. Through comprehensive testing, we verify the reliability and accuracy of open gimbal in real-world scenarios. These advancements provide valuable tools and insights for researchers and developers working with mUAVs and nUAVs, contributing to the progress of this rapidly evolving field.

**Index Terms**—Physical sensors, wireless sensor, batteryless sensing, gimbal, gyroscopic testbed, nano-UAV (nUAV).

## I. INTRODUCTION

Miniaturized unmanned aerial vehicles (UAVs) show great promise for a wide range of applications, including greenhouse monitoring [1], disaster management [2], crowd monitoring [3], inventory management [4], and environmental monitoring [5]. These UAVs have compact dimensions, enabling them to navigate through narrow spaces, while their lightweight design ensures safe flight near humans. Typically, micro-UAVs (mUAVs) have a width of around 25 cm and weigh up to 500 g, while nano-UAVs (nUAVs) are approximately 10 cm wide and weigh up to 50 g. These UAVs are powered by motors in the range of a few Watts and are primarily operated in large indoor spaces. The popularity of small UAVs has been steadily increasing, driving ongoing research in sensor payload development, control algorithm design, and onboard sensor-based stabilization techniques [6], [7], [8]. Despite their agility and maneuverability, mUAVs and nUAVs face limitations in terms of sensing and processing capabilities. Their agility also makes them prone to crashes when not piloted correctly. Since these platforms are often not built for high endurance or ruggedness, crashes can result in irreparable damage. Furthermore, developing state estimation and control algorithms for multirotor mUAVs and nUAVs operating in real-world scenarios is a lengthy, iterative, and risky process. Therefore, it is essential to have testing and evaluation capabilities in controlled and safe environments. Research and development on these UAVs necessitate a test platform that allows for controlled flight testing, tuning of PID or other control parameters, studying rotor failure response, and measuring UAV performance under different conditions. A suitable test gimbal for mUAVs and nUAVs should fulfill several requirements:

- 1) It should enable unrestricted rotational motion [3 degrees of freedom (DoF)].
- 2) It should add minimal additional inertia to the UAV's flight dynamics to preserve its original characteristics.
- 3) It should be compatible with small, weakly powered motors that are sensitive to even minor changes in mass.
- 4) It should sense the attitude and accelerations of the tested platform without interfering with its dynamics or control algorithms.

Although there are some previous works, they have some shortcomings too. Thus, we compare relevant works from the literature in Section III-C.

In this letter, we introduce open gimbal: a specially designed 3 DoF platform that caters to the unique requirements of mUAVs and nUAVs, offering unrestricted rotational freedom to enable their comprehensive experimentation and evaluation. Our contribution can be summarized as follows:

- 1) We have developed an open source [9], 3-D printable electromechanical design that emphasizes minimal size and complexity.
- 2) We have devised an integrated wireless batteryless sensor subsystem to nonintrusively measure flight dynamics at a small scale. Our innovative solution eliminates the need for complex wiring and enables wireless power transfer from a distance.
- 3) We thoroughly evaluate and test the open gimbal to validate its effectiveness, communication link, and sensing performance using a typical nanoquadrotor.

Through comprehensive testing, we verify the reliability and accuracy of the open gimbal in real-world scenarios.

## II. SYSTEM DESIGN

The class of UAVs that open gimbal needs to be designed for usually have small, lightweight, and often core-less dc motors equipped with

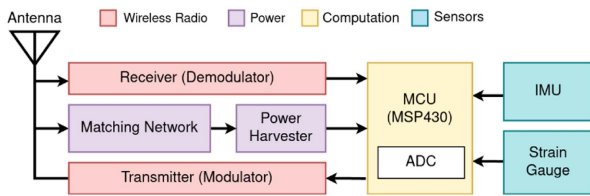


Fig. 1. Open Gimbal: Sensing and communication block diagram.

sub-5 in propellers. For instance, an indoor nano-drone Crazyflie is equipped with 16 mm dc motors with a maximum rotation speed of 26 000 RPM and a maximum generated thrust of 15.7 g. These motors were rated for 1 A of current. This imposes additional challenges regarding how much additional inertial mass the test platform is allowed us to add to these already small-scale UAVs. Furthermore, to test algorithms that address issues like rotor failure for quadrotors, the gimbal must allow for free yaw rotation. For such system when all four rotors are functioning, the gyroscopic moment generated by their different rotational speeds is typically neglected. However, in case of complete single rotor failure, this can be significant and cause a parasitic yaw spin of the drone due to imbalanced forces. Any sensor to be placed on such a test platform must be capable of operating without wires while adding the smallest possible inertial mass. The entire test platform must be optimized for weight and have all 3 DoF to emulate the flight dynamics of the test UAV while also providing sensing information about its attitude and acceleration.

### A. Sensor System Design

The system uses radio frequency energy harvesting and wireless backscatter techniques to power and communicates the sensed data. It is inspired by the wireless identification and sensing platform (WISP) introduced and patented by Intel [10], [11]. The system does not require any batteries to power itself, and is environment and orientation agnostic in its operation. It includes sensors that can measure attitude and linear accelerations of the m- and nUAV under test. Fig. 1 shows the block diagram of the sensing system. The system is powered by (and communicates with) an UHF radio frequency identification (RFID) reader with an 8 dBi circularly polarized reader antenna. The RFID reader acts as an interrogator and uses the EPC Class 1 Gen 2 standard to communicate with our battery-less node. A computer is connected to the RFID interrogator to send commands to the node and to receive and process the sensed data. The sensor system uses the transmitted high-frequency carrier signal to power itself, read the onboard sensors, and then modulate the same carrier by either reflecting or absorbing (grounding) the signal to transmit data back through backscatter. To keep the weight of the sensor low, we do not add any other energy harvesting mechanisms except RF energy harvesting. For our application, the high-powered RFID transponder can be placed close to the sensor PCB, which is mounted on the test gimbal. The sensor is solely powered by the RF energy harvested from the onboard antenna. The WISP platform with an identical antenna, has been shown to have a range of up to 4.5 m [11]. After the high-power RF signal is absorbed by the antenna, it is fed into two blocks simultaneously. It is passed through a receiver, which demodulates and decodes the received signal after rectification. It does so using an Onsemi NCS2200 comparator that forms an average calculator stage and has a quiescent supply current of only 10  $\mu$ A. At the same time, the signal is also fed to an impedance-matching network used to minimize potential reflection losses and harvest the energy. The matching network is followed by a power harvesting block that is responsible for rectifying, regulating,

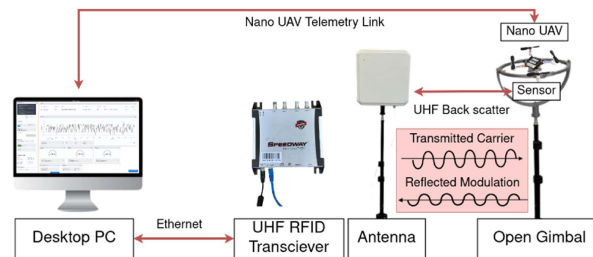


Fig. 2. Open Gimbal test system.



Fig. 3. Fabricated Open Gimbals for (a) Tripod and (b) Tabletop version along with the sensing system and sensor PCB.

and storing the harvested energy (in a capacitor). We use a Skyworks SMS7621 Schottky diode and a 10 pF capacitor for rectification and a TI BQ25570 harvester IC to collect energy. This energy then triggers the ultra-low-power microcontroller unit (MCU) and reads the sensor values. TI MSP430 was chosen since it requires significantly low power. Once sufficient energy is stored in the capacitor, the MCU is activated. It uses an I2C bus to read an IMU. We use LSM303AGRTR, an ultra-low-power high-performance 3-D digital linear acceleration and 3-D digital magnetic sensor provide 3-D attitude and acceleration values. It has a 12.6  $\mu$ A normal mode accelerometer current consumption. A sensor data packet containing the ID information (EPC identifier) based on RFID standards is created. The MCU modulates the carrier using an analog devices ADG902 RF switch. The backscattered signal is then read by the RFID interrogator and further processed by the computer. The entire sensing and communication process is shown in Fig. 2.

### B. Mechanical Design

The test gimbal allows full rotational degrees of freedom for the UAV under test through gyroscopic mechanism. The mechanical design consists of 3-D printed parts with low-friction smooth radial bearings. Our open gimbal has 3 coupled axes: an innermost roll axis, a pitch, and an outermost yaw axis. The two types of versions, based on mounting style, are shown in Fig. 3 [9]. The sensor system is attached to the middle section of our gimbal right below the UAV mount. Mounting the entire gimbal on standard camera tripods with the screw thread of sizes 1/4-20 UNC or 3/8-16 UNC is possible. In such a case, the RFID reader for the sensor is placed laterally within a distance of 1.5 m from the gimbal center. There is also a tabletop version where the RFID is mounted below the stand, and the entire setup is placed on a tabletop.

*Limitations:* The added weight of the sensor is only 2% though it can affect the dynamics, it is significantly minimal. The variations in RSSI of the packet transmission vary but for the application, it is more than sufficient. The sensor cannot be used to dynamically change the

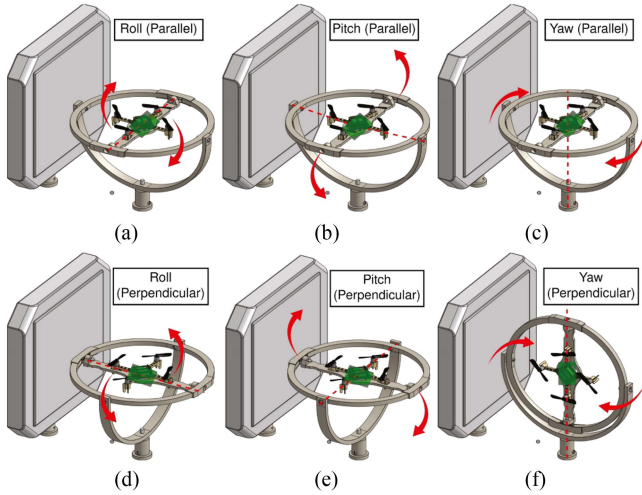


Fig. 4. Variation of sensor antenna position in (a), (d) roll; (b), (e) pitch; and (c), (f) yaw axis.

orientation or control the gimbal but the idea is to get the dynamics of the drone that is possible herein.

### III. EXPERIMENTAL EVALUATION

We use a popular nUAV, Crazyflie to investigate the utility of our proposed open gimbal. Crazyflie is a nano-quadrotor that flies using four 16 mm coreless dc motors with a KV value of 14 000 RPM/V. The entire UAV measures 92 mm diagonally and 29 mm high. Its total weight is 27 g [12]. The Crazyflie was mounted along with the sensor system on the tripod version of the gimbal. The onboard Crazyflie IMU readings were recorded using the wireless 2.4 GHz telemetry link. The experimental maneuver consists of a 360 rotational maneuver which started with 0 initial velocity and actuated in the pitch and yaw axes. We do so by setting the maximum commanded thrust and controller setpoint for both pitch and yaw. The total maneuver time was 5 s. The two versions of the test gimbal were 3-D printed, and the completed open gimbals are shown in Fig. 3. All of the parts are 3-D printed using 0% infill setting with Polylite lightweight PLA has a density of only 0.8 g/cm<sup>3</sup> [13]. These weigh a total of 41.3 g. The sensor PCB weighs 1.7 g. The design is shared through creative commons, available at [9].

#### A. Effect of Orientation on Communication Link

There are three independent axes in which the nUAV can freely rotate. In order to test the performance of the communication link, we considered two configurations of the sensor PCB with a rectangular antenna for each axis. Fig. 4 shows the possible permutations. The longer side of the antenna can be perpendicular to the face of the RFID antenna (perpendicular configuration), or it can be parallel to the face(parallel configuration). This orientation will have an impact on the sensor performance on the data rate of the sensor. We characterize this in Fig. 5. Fig. 5(a), (c), and (e) represents the parallel configuration and (b), (d), and (f) represent the perpendicular configuration. The blue dotted line indicates the sensing rate of the wireless link from the nUAV. Communication can be established for all orientations with a much higher read rate compared to the nUAV baseline. It is interesting to note that the read rate significantly drops for the configuration perpendicular to the Roll. This can be explained by the antenna orientation being in a narrow field of view from the RFID transponder. If required, an

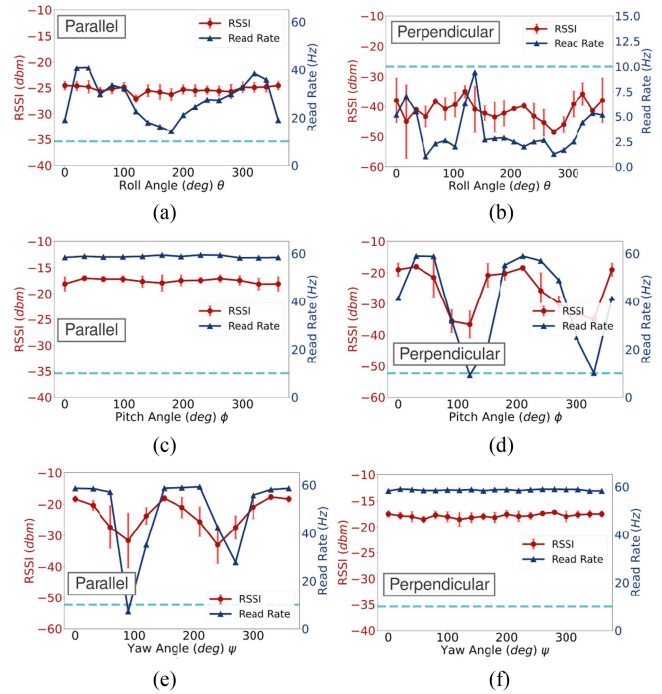


Fig. 5. RSSI of the received sensor data packet and read rate for varying yaw, pitch, and roll angles for both configurations of sensor antenna position.

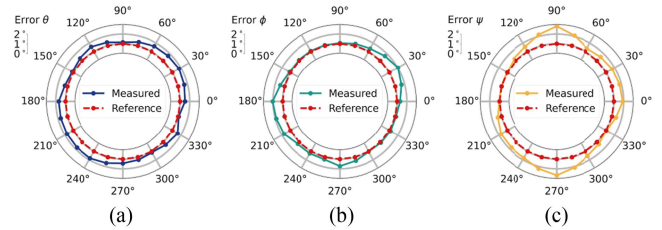


Fig. 6. Attitude estimation error with a controlled reference input signal for roll, pitch, yaw ( $\phi, \theta, \psi$ )

additional RFID antenna placed perpendicularly to the first can provide a high read rate in all possible orientations of the open gimbal. Since the packet transfer happens on-demand using energy harvesting, we consider the RSSI to show the efficacy of open gimbal; maximum RSSI is 17.56 dbm and minimum is  $-41.22$  dbm, which is sufficient to receive packet transfer. Similarly, the minimum datarate is 1 packet/s and the maximum is 59.4 packet/s.

#### B. Attitude and Acceleration Sensing Performance

The attitude of the open gimbal was changed for each independent rotational axis at a time to record the estimated attitude. This was varied into 15° steps. The results of the attitude estimation are shown in Fig. 6. The absolute estimation error for all three rotational angles is within 2°. The performance of acceleration measurement of the open gimbal is shown in Fig. 7. 360° controlled rotations were performed, and the accelerations  $a_x, a_y, a_z$  were recorded. The data was postprocessed using a rolling average uniform kernel. The open gimbal data follows the same trend as reported by the nUAV with the repeatability error being 0.5 ms<sup>-2</sup> and 2° for acceleration and angle, respectively.

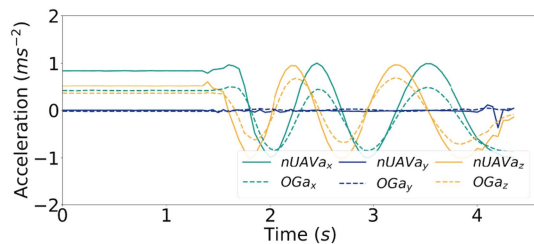


Fig. 7. Measured  $a_x$ ,  $a_y$ ,  $a_z$  by the nUAV and open gimbal.

TABLE 1. Comparison of Open Gimbal With Literature

Work	360° freedom	Sensed parameters	Sensing modality	Data acquisition	Suitability n/m-UAVs
[14]	No	Attitude, acceleration	IMU, potentiometer	Wired	Only VTOLs
[15]	No	Attitude, acceleration	IMU, potentiometer	Wired	No
[16]	No	Attitude, thrust, power consumption	IMU, load cells, current sensor	Wired	Only VTOLs
[17]	No	Attitude	Tri-axial encoders	Wireless	yes
[18]	Yes	Attitude	UAV's Sensors	Wired	No
[19]	Yes	Only mechanical	None	Wired	No
Open Gimbal	Yes	Attitude, acceleration	IMU	Wireless backscatter	Yes

### C. Comparison of Open Gimbal With Existing Work

Many multirotor testbeds have been in use since the beginning of UAV research, like the OS4 3DoF microvertical take-off and landing (VTOL) platform [14] or the custom quadrotor test rig built for attitude stabilization [15]. DronesBench [16] can measure thrust, power consumption, and instantaneous attitude of a light VTOL multirotor, while another custom mUAV platform uses a tri-axial gimbal with encoders mounted on every axis [17]. However, these platforms have mechanical limitations that restrict the complete rotational space of the UAV under test, which is problematic when evaluating highly agile maneuvering like 180° flips or rotor failure scenarios. In contrast, 3 DoF gyroscopic platform allows complete rotational experimentation [18], [19]. The comparison is detailed in Table 1.

## IV. CONCLUSION

Tiny UAVs offer significant potential for various applications due to their small size and maneuverability. However, they are prone to crashes, and thus, necessitate a proper testing and development platform. In this study, we introduced the design and functionality of our nonrestrictive 3 DoF open gimbal platform, tailored explicitly for tiny UAVs. We demonstrated using our sensor subsystem design to measure various flight and attitude parameters. Our evaluation confirms high sensing accuracy, with attitude measurements exhibiting an error margin within 2° and linear accelerations within 0.5 ms<sup>-2</sup>. In addition, we assess the sensor subsystem's performance under diverse orientations and configurations of the open gimbal, achieving a consistent sensing rate of 10 Hz. Furthermore, the sensor subsystem can be expanded to accommodate additional sensors as per specific

UAV testing requirements. The open gimbal, with its easily reproducible and customizable nature, will facilitate accelerated research and development of mUAV and nUAV platforms.

## ACKNOWLEDGMENT

This work was supported by the H2020 ECSEL EU Project "Intelligent Secure Trustable Things" (InSecTT), funded by the ECSEL Joint Undertaking (JU) under Grant 876038. The document reflects only the author's view, and the commission is not responsible for any use that may be made of the information it contains.

## REFERENCES

- [1] P. Radoglou-Grammatikis, P. Sarigiannidis, T. Lagkas, and I. Moscholios, "A compilation of UAV applications for precision agriculture," *Comput. Netw.*, vol. 172, 2020, Art. no. 107148.
- [2] M. Erdelj and E. Natalizio, "UAV-assisted disaster management: Applications and open issues," in *Proc. IEEE Int. Conf. Comput., Netw. Commun.*, 2016, pp. 1–5.
- [3] D. Palossi et al., "Fully onboard AI-powered human-drone pose estimation on ultralow-power autonomous flying nano-UAVs," *IEEE Internet Things J.*, vol. 9, no. 3, pp. 1913–1929, Feb. 2021.
- [4] M. Longhi and G. Marrocco, "Flying sensors: Merging nano-UAV with radiofrequency identification," in *Proc. IEEE Int. Conf. RFID Technol. Appl.*, 2017, pp. 164–168.
- [5] M. Allegretti et al., "Recharging RFID tags for environmental monitoring using UAVs: A feasibility analysis," *Wireless Sensor Netw.*, vol. 7, p. 13, 2015.
- [6] J. A. Preiss, W. Honig, G. S. Sukhatme, and N. Ayanian, "CrazySwarm: A large nano-quadcopter swarm," in *Proc. IEEE Int. Conf. Robot. Autom.*, 2017, pp. 3299–3304.
- [7] V. Niculescu, D. Palossi, M. Magno, and L. Benini, "Energy-efficient, precise UWB-based 3-D localization of sensor nodes with a nano-UAV," *IEEE Internet Things J.*, vol. 10, no. 7, pp. 5760–5777, Apr. 2023.
- [8] B. Şimşek and H. Ş. Bilge, "A novel motion blur resistant vSLAM framework for micro/nano-UAVs," *Drones*, vol. 5, no. 4, p. 121, 2021.
- [9] S. Sharma and T. Dijkstra, "OpenGimbal," Jun. 2023. [Online]. Available: <https://doi.org/10.5281/zenodo.8052218>
- [10] A. P. Sample, D. J. Yeager, P. S. Powladge, and J. R. Smith, "Design of a passively-powered, programmable sensing platform for UHF RFID systems," in *Proc. IEEE Int. Conf. RFID*, 2007, pp. 149–156.
- [11] D. J. Yeager, A. P. Sample, and J. R. Smith, "WISP: A passively powered UHF RFID tag with sensing and computation," in *RFID Handbook*. Boca Raton, FL, USA: CRC, 2017, pp. 261–276.
- [12] W. Giernacki, M. Skwierczyński, W. Witwicki, P. Wroński, and P. Koziński, "Crazyflie 2.0 quadrotor as a platform for research and education in robotics and control engineering," in *Proc. IEEE 22nd Int. Conf. Methods Models Autom. Robot.*, 2017, pp. 37–42.
- [13] "PolyLite LW-PLA technical data sheet," Accessed: Jan. 4, 2023. [Online]. Available: [https://cdn.shopify.com/s/files/1/0548/7299/7945/files/PolyLite\\_LW-PLA\\_TDS\\_US\\_5.1.pdf?v=1641783192](https://cdn.shopify.com/s/files/1/0548/7299/7945/files/PolyLite_LW-PLA_TDS_US_5.1.pdf?v=1641783192)
- [14] S. Bouabdallah, P. Murrieri, and R. Siegwart, "Design and control of an indoor micro quadrotor," in *Proc. IEEE Int. Conf. Robot. Autom.*, 2004, pp. 4393–4398.
- [15] F. Hoffmann, N. Goddemeier, and T. Bertram, "Attitude estimation and control of a quadcopter," in *Proc. IEEE/RSSJ Int. Conf. Intell. Robots Syst.*, 2010, pp. 1072–1077.
- [16] P. Daponte et al., "Dronesbench: An innovative bench to test drones," *IEEE Instrum. Meas. Mag.*, vol. 20, no. 6, pp. 8–15, Dec. 2017.
- [17] A. Bondyra, P. Gasior, and S. Gardecki, "Experimental test bench for multirotor UAVs," in *Proc. Autom.: Innovations Autom., Robot. Meas. Techn.*, 2017, pp. 330–338.
- [18] U. Veyna, S. Garcia-Nieto, R. Simarro, and J. V. Salcedo, "Quadcopters testing platform for educational environments," *Sensors*, vol. 21, no. 12, 2021, Art. no. 4134.
- [19] M. Santos et al., "Experimental validation of quadrotors angular stability in a gyroscopic test bench," in *Proc. IEEE 22nd Int. Conf. System Theory, Control Comput.*, 2018, pp. 783–788.