

An adaptive route choice model for integrated fixed and flexible transit systems

Leffler, David; Burghout, Wilco; Cats, Oded; Jenelius, Erik

DOI

[10.1080/21680566.2024.2303047](https://doi.org/10.1080/21680566.2024.2303047)

Publication date

2024

Document Version

Final published version

Published in

Transportmetrica B

Citation (APA)

Leffler, D., Burghout, W., Cats, O., & Jenelius, E. (2024). An adaptive route choice model for integrated fixed and flexible transit systems. *Transportmetrica B*, 12(1), Article 2303047. <https://doi.org/10.1080/21680566.2024.2303047>

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

An adaptive route choice model for integrated fixed and flexible transit systems

David Leffler, Wilco Burghout, Oded Cats & Erik Jenelius

To cite this article: David Leffler, Wilco Burghout, Oded Cats & Erik Jenelius (2024) An adaptive route choice model for integrated fixed and flexible transit systems, Transportmetrica B: Transport Dynamics, 12:1, 2303047, DOI: [10.1080/21680566.2024.2303047](https://doi.org/10.1080/21680566.2024.2303047)

To link to this article: <https://doi.org/10.1080/21680566.2024.2303047>



© 2024 The Author(s). Published by Informa UK Limited, trading as Taylor & Francis Group.



Published online: 25 Jan 2024.



Submit your article to this journal [↗](#)



Article views: 370



View related articles [↗](#)



View Crossmark data [↗](#)

An adaptive route choice model for integrated fixed and flexible transit systems

David Leffler ^a, Wilco Burghout ^a, Oded Cats ^{a,b} and Erik Jenelius ^a

^aDivision of Transport Planning, KTH Royal Institute of Technology, Stockholm, Sweden; ^bDepartment of Transport and Planning, Delft University of Technology, Delft, The Netherlands

ABSTRACT

Over the past decade, there has been a surge of interest in the application of agent-based simulation models to evaluate flexible transit solutions characterized by different degrees of short-term flexibility in routing and scheduling. A central modelling decision in the development is how one chooses to represent the mode- and route-choices of travellers. The real-time adaptive behaviour of travellers is important to model in the presence of a flexible transit service, where the routing and scheduling of vehicles is highly dependent on supply-demand dynamics at a near real-time temporal resolution. We propose a utility-based transit route-choice model with representation of within-day adaptive travel behaviour and between-day learning where station-based fixed-transit, flexible-transit, and active-mode alternatives may be dynamically combined in a single path. To enable experimentation, this route-choice model is implemented within an agent-based dynamic public transit simulation framework. We first explore model properties in a choice between fixed- and flexible-transit modes for a toy network. The adaptive route choice framework is then applied to a case study based on a real-life branched transit service in Stockholm, Sweden. This case study illustrates level-of-service trade-offs, in terms of waiting times and in-vehicle times, between passenger groups and analyzes traveller mode choices within a mixed fixed- and flexible transit system. Results show that the proposed framework is capable of capturing dynamic route choices in mixed flexible and fixed transit systems and that the day-to-day learning model leads to stable fixed-flexible mode choices.

ARTICLE HISTORY

Received 4 June 2022



Accepted 15 November 2023

KEYWORDS

Public transit; flexible transit; agent-based simulation; transit assignment; route choice

1. Introduction

Transit network assignment refers to the process in which an origin-destination (OD) matrix of traveller demand is assigned to a set of transit routes that connect each OD pair. This problem plays a vital role in the modelling and evaluation of transit systems, with rich literature covering both theoretical developments and a wide array of applications. The route (or, more generally, the path) choice of transit users is a key element of transit assignment models. Traditional approaches to route-choice modelling tend to be based on conventional transportation modes, such as private cars or fixed line and schedule public transport services (FIX). To accommodate simulation-based evaluation of novel shared-transport services and demand scenarios, transit route-choice models have been rapidly developing. This can be attributed to an increased attention towards resource-sharing and transit systems as a core component in sustainable urban development, together with innovations within Intelligent

CONTACT David Leffler  dleffler@kth.se  Division of Transport Planning, KTH Royal Institute of Technology, Stockholm, Sweden

© 2024 The Author(s). Published by Informa UK Limited, trading as Taylor & Francis Group.

This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited. The terms on which this article has been published allow the posting of the Accepted Manuscript in a repository by the author(s) or with their consent.

Transport Systems (ITS) and real-time information provision to both travellers and operators. Furthermore, new data sources with higher degrees of temporal and spatial richness (e.g. mobile phone, automatic vehicle location [AVL], automatic passenger counting) have become increasingly available for tracking the real-time evolution of both supply and demand. This enables more disaggregate approaches to modelling and forecasting the movements and interactions of individual travellers and vehicles under alternative scenario settings and intervention strategies (Ibarra-Rojas et al. 2015; Koutsopoulos et al. 2019).

The term *flexible transit* (FLEX) refers to public transit services characterized by flexible routing and scheduling adapted to traveller needs at a within-day temporal scale. In the literature, FLEX can refer to many service types ranging from door-to-door shared taxi-like services (Cebeacauer et al. 2021; Fagnant and Kockelman 2014) to semi-flexible services with partially fixed routes and timetables that allow for demand-responsive dynamic fleet management (Errico et al. 2013). In a recent survey, Vansteenwegen et al. (2022) compiled a wide range of terms referring to such systems, for example *on-demand*, *dial-a-ride*, *demand-adaptive*, *demand-responsive*, *flex-route*, *flexible*, *hybrid*, or *variable-type* to name a few. Generally, FLEX is found to be most beneficial in scenarios when travel demand is low (e.g. in more rural or suburban areas) and/or more variable (e.g. where there are considerable differences between peak and off-peak hours) (Potts et al. 2010; Sørensen et al. 2021) but are in practice difficult to economically sustain due to difficulties in spreading the cost of individual trips over a greater number of travellers (Davison et al. 2012; Ferreira, Charles, and Tether 2007). Interest in FLEX systems has grown in the past decade with the emergence of smartphone-enabled ride-pooling services (e.g. Uber) and technological progress in the development of automated vehicles (AVs). With great opportunities for real-time fleet coordination and prospective lower per-vehicle operational costs (Bösch et al. 2018), many conceptual FLEX use cases for AVs have been proposed in recent years (Narayanan, Chaniotakis, and Antoniou 2020).

Agent-based simulation models have been utilized in evaluating a broad FLEX service design space (both with and without the inclusion of AVs), with varying levels of integration with FIX, as well as different network topologies and demand settings at different spatial and temporal scales (Markov et al. 2021; Ronald, Thompson, and Winter 2015). In relation to public transit, novel FLEX services evaluated in the literature can be classified as: (i) independent of traditional public transit (e.g. as a shared trip alternative to individual-use taxis or private cars) (Alonso-Mora et al. 2017; Bischoff and Maciejewski 2016; Fagnant and Kockelman 2014; Liu et al. 2017; Markov et al. 2021; Martinez, Correia, and Viegas 2014), (ii) as a replacement for FIX (Berrada and Poulhès 2021; Jäger, Brickwedde, and Lienkamp 2018; Narayan et al. 2021; Winter et al. 2018) or as a competing alternative (Hörl, Becker, and Axhausen 2021; Liu et al. 2019), and (iii) as an alternative that may be combined with FIX (e.g. feeder/last-mile) to construct a complete trip from origin to destination (Horn 2002; Leffler et al. 2021; Moorthy et al. 2017; Narayan et al. 2020; Salazar et al. 2018; Scheltes and de Almeida Correia 2017; Shen, Zhang, and Zhao 2018; Wen et al. 2018). While performance measures and motivations for these studies vary, they tend to conclude with similar messages; to achieve a sustainable FLEX service from passenger-oriented, operator-oriented, or societal perspectives, it is crucial that this service is efficiently integrated with existing FIX systems rather than introduced as a directly competing alternative (Narayanan, Chaniotakis, and Antoniou 2020; Sørensen et al. 2021).

The characteristics of FIX or FLEX services, e.g. in terms of expected in-vehicle time, waiting time, crowding, and reliability, may inherently be better suited to the individual preferences of a traveller during different legs (e.g. first-mile or last-mile) of their trip, and in light of new information as their trip progresses. In this sense, it is important to understand how travellers combine FIX and FLEX public transport services in different ways in the evaluation of such systems. Agent-based simulation frameworks utilized for this purpose are developing hand-in-hand with envisioned use cases of AVs and FLEX services. The incorporation of integrated FIX and FLEX route choice models and dynamic assignment techniques within these frameworks are, however, still at their earlier stages of development.

In this study, we develop a transit route choice model for integrated FIX and FLEX services, i.e. FLEX that can be used as an independent mode from an origin to a destination, but also allows travellers to

transfer between FIX and FLEX in-vehicle legs of a trip. We assume a single centralized fleet manager of this service that coordinates a fleet of vehicles in response to traveller requests according to a predetermined operational policy, however with no synchronization strategy with the co-existing FIX service. This model is implemented within a dynamic public transit assignment framework representing FIX and FLEX operations. Using the taxonomy of Vansteenwegen et al. (2022), the FLEX service that we consider in this study is a stop-based, many-to-many system, that users access in real-time with no pre-bookings, that is fully-flexible in terms of timetable (i.e. timetables are determined from scratch based on real-time information) and semi-flexible in routing (i.e. routes are partially determined based on real-time information). The assignment of FLEX requests to vehicles is done in a dynamic online fashion, meaning that the basic schedule for assigned vehicles can change during operations, even for those already executing a previous assignment. To our knowledge the proposed modelling framework is pioneering in allowing for FLEX and FIX combinations in any sequence, and in which both within-day and en-route, as well as day-to-day choice behaviour is represented in an integral way.

The contributions of the paper are:

- A within-day route choice model that allows users to combine walking, FIX, and FLEX services to perform a trip integrated within a day-to-day learning framework.
- A combined route and mode choice model that allows FIX and FLEX modes to be combined, including any sequence of FIX and FLEX legs in the multi-leg passenger routes.
- A case study based on a coordinated branched line with bidirectional demand showing how travellers make trade-offs between FLEX options and FIX lines and how these choices evolve with day-to-day learning.

The structure of the paper is as follows. Section 2 reviews the literature on integrated FIX and FLEX route choice and assignment in simulation studies of FLEX systems. The study is divided into two parts. First, the transit simulation framework and extension to model dynamic transit user route choice in the presence of FIX, FLEX, and combined FIX and FLEX mode alternatives is described in Section 3. In the second part of the paper, a two-link toy network is used to illustrate model properties in a simpler setting in Section 4. The combined simulation framework is then applied in a case study based on a real-world coordinated branched transit service in Stockholm characterized by a high-demand trunk section towards the inner-city and lower-demand branches in Section 5. Conclusions and a discussion of limitations and future work is presented in Section 6.

2. Literature review

2.1. Transit route choice and assignment

Modeling transit route choice involves both representation of the transit system (e.g. in terms of both tactical and operational policies, vehicles types, and transit infrastructure) and how users interact and potentially give rise to congestion (e.g. in the form of in-vehicle crowding, denied boarding, queuing) within the transit system. More recently developed methodology for modelling mode/route choice within studies of FLEX systems largely builds on previous approaches for conventional transit. Liu, Bunker, and Ferreira (2010) categorize route-choice models within the context of transit assignment into three groups: (i) static transit assignment, (ii) within-day dynamic transit assignment, and (iii) emerging approaches.

The first category, static transit assignment, encompasses methods based on shortest-path estimation and all-or-nothing assignment to the minimal cost route for a given OD pair (Archetti, Speranza, and Weyland 2017; Atasoy et al. 2015), and user equilibrium-based assignment. The equilibrium assignment problem is often solved through fixed-point iterations to estimate the travel cost of available routes under capacity constraints, typically using a variant of the method of successive averages (MSA) (Berrada and Poulhès 2021; Pinto et al. 2020; Sheffi and Powell 1982; Wen et al. 2018) to update

solutions between iterations. Seminal works (see e.g. Dial 1971; Spiess and Florian 1989) also find different ways of dealing with the well-known ‘common lines’ problem of transit assignment (travellers at a transit stop often choose opportunistically between several competitive transit lines with potentially different routes) and the task of generating a ‘reasonable’ choice-set of alternative transit routes for each OD (i.e. eliminating paths that are highly unlikely to ever be considered by a traveller) while avoiding the computational intractability of enumerating all possible paths. To incorporate the behavioural aspects of route choice (for example different levels of knowledge, familiarity, or preference of travellers for different routes), these methods are combined with stochastic assignment and discrete random utility maximization (RUM) choice models (Narayan et al. 2020; Pinto et al. 2020; Wen et al. 2018).

The adaptive behaviour of travellers is important to model in the presence of FLEX services where, in comparison with FIX, the routing and scheduling of vehicles is even more dependent on traveller requests and supply-demand imbalances at a closer to real-time temporal resolution. Compared to traditional transit assignment models, a FLEX operator can also be viewed as more of a within-day decision-maker that anticipates and responds in real-time to the within-day decision ‘events’ of travellers. Within-day dynamic transit assignment models relax assumptions regarding the static distributions of travel times and choice behaviour of travellers and incorporate the within-day time dimension in route choices (Cats, West, and Eliasson 2016).

Emerging approaches enhance these methods further by attempting to include additional complexities in choice behaviour, for example, incorporating the bounded rationality of transit users (Jiang and Ceder 2021). The inclusion of additional adaptive choice dynamics and the integration of new data sources into route-choice models is a trend that has continued within the past decade (Chen et al. 2016). Such studies are often inspired by research originating in cognitive psychology (Leong and Alan Hensher 2012) and may include how travellers integrate various information sources into their decision making (e.g. smartphone journey-planners, timetables, and both individual and collective experiences) together with models for habit formation and learning (Bogers, Bierlaire, and Hoogendoorn 2007; Cats and West 2020).

In simulation-based evaluations of FLEX (whether as an independent mode or as part of a combined FIX and FLEX service), demand may be modelled exogenously, i.e. that demand for the FLEX service is independent of the level-of-service (LoS) provided (e.g. Jäger, Brickwedde, and Lienkamp 2018; Leffler et al. 2021; Shen, Zhang, and Zhao 2018), or endogenously, i.e. that demand for the FLEX service is dependent on LoS provided (e.g. Archetti, Speranza, and Weyland 2017; Atasoy et al. 2015; Berrada and Poulhès 2021). A FLEX system typically does not exist in isolation, but rather as a part of a public transit system as a complementary or competing alternative to other modes, and it is reasonable to model demand for such services endogenously. The vast majority of studies, however, focus on FLEX systems as an independent mode or replacement to conventional modes and assume fixed and inelastic demand for such services Vansteenwegen et al. (2022).

2.2. Flexible transit simulation with endogenous demand

A comparative summary of simulation-based evaluations of FLEX systems from the literature review with endogenous modal flows is presented in Table 1. The papers are categorized according to what LoS effects are considered in presented case studies, whether FLEX is evaluated as integrated with a FIX system, what type of FLEX system and alternative modes are considered, how combined FIX and FLEX paths are constructed, and whether within-day path choice dynamics are included in the modelling approach.

The three first papers in Table 1, Archetti, Speranza, and Weyland (2017), Atasoy et al. (2015), and Berrada and Poulhès (2021), evaluate systems that are not integrated with FIX in the sense that demand for the FLEX system considered is based on the relative LoS of other FLEX systems (Atasoy et al. 2015) or only in competition with FIX (Archetti, Speranza, and Weyland 2017; Berrada and Poulhès 2021) rather than as a combined mode. Several recent studies have also been dedicated to modelling FLEX systems

Table 1. Comparative summary of literature regarding flexible transit simulation with endogenous demand.

Paper	LoS effects considered	Integration with FIX	Modes	Mixed FIX and FLEX paths	Within-day path choice
Atasoy et al. (2015)	Fixed Fare, IVT, WT, Early/Late schedule-delay	Independent mode	Private taxi, Shared-ride Taxi, Door-to-door FLEX minibus	No	No
Archetti, Speranza, and Weyland (2017)	Detour from shortest-path IVT, WT,	Competing with FIX	Door-to-door FLEX shuttle, Bus, Private car	No	No
Berrada and Poulhès (2021)	Fixed Fare, IVT, WT	Competing with FIX	Stop-based FLEX shuttle, Bus	No	No
Wen et al. (2018)	Fixed and Dynamic Fare, IVT, WT, Max WT, Detour from shortest-path, Number of transfers	Integrated FIX and FLEX	Private Car, Private Taxi, Walk, Bike, FIX, First-mile to FIX P/K and ride, First-mile to FIX SAV	First-mile	No
Pinto et al. (2020)	Fixed Fare, IVT, On-board crowding, WT, Denied boarding, Walk time, Number of transfers,	Integrated FIX and FLEX	Walk, FIX, Door-to-door SAV	No restriction	No
Narayan et al. (2020)	Distance-based Fare, Walk/Bike time, IVT, WT, Number of transfers	Integrated FIX and FLEX	Walk, Bike, Private Car, FIX, Private Taxi	First/last-mile	No
<i>This paper</i>	IVT, On-board crowding, WT, Denied boarding, Number of transfers	Integrated FIX and FLEX	Walk, FIX, Stop-based FLEX	No restriction	Yes

with endogenous demand that also model their integration with FIX systems (Narayan et al. 2020; Pinto et al. 2020; Wen et al. 2018). Each of these studies utilize a RUM choice model and iterative stochastic equilibrium assignment approach, which is also the focus of this paper. Results from case studies of integrated FIX and FLEX services all find that the addition of such a service can improve the LoS provided to passengers without increasing operational costs. However, studies have also shown that the introduction of such services can both encourage or discourage the use of more sustainable modes.

2.3. Synthesis

In relation to the small but growing literature on modelling integrated FLEX systems with endogenous modal flows, the modelling framework suggested in this paper allows for greater flexibility in designing joint FIX and FLEX systems. As outlined in Table 1, previous studies have typically made assumptions about the most efficient way to integrate FIX and FLEX services (such as treating FLEX solely as a first/last-mile service for FIX) or treated FLEX as an independent or competing mode to FIX. Like previous work, we generate a static choice-set as an initialization step and apply filtering rules which permit the exclusion of certain route combinations (e.g. transferring from one FLEX leg to another, dominated paths, and to mitigate the common-lines problem). The composition of candidate paths, however, permits any sequence of walking, FIX and FLEX legs.

In all studies seen so far where demand for combined FIX and FLEX is considered endogenously, integrated FIX and FLEX systems are combined as a single synthetic mode alternative with predefined paths that may be offered as an alternative to 'FIX only' or non-public transit modes such as private car or taxi services. Route choice decisions are made only once at the origin of the traveller and thus cannot capture en-route adjustments in response to new within-day information that may inform anticipated conditions of downstream paths. In contrast with other approaches, we propose a route choice model where traveller decisions are made in an 'online' fashion, i.e. the path used to reach the traveller's final destination is constructed at different decision nodes corresponding to the within-day actions (walking, boarding, alighting, request-sending) of a traveller where within-day information informing these actions may be considered explicitly. The assignment of travellers to FIX, FLEX, or combined FIX and FLEX services are thus potentially made dynamically within-day. The combinatorial possibilities of a multi-modal trip, including FIX, FLEX, and active-mode legs, can be further extended if needed.

3. Methodology

This section introduces the simulation framework used to model FIX and FLEX operations and extensions to the dynamic transit assignment model to include FLEX alternatives. An overview of the simulation framework is presented in Section 3.1. Descriptions of the path alternative data structure and choice-set generation process that lie at the core of the route choice model are introduced in Section 3.2. Descriptions of traveller states, actions, and state transitions in the presence of combined FIX + FLEX alternatives are presented in Section 3.3. The traveller choice model and how path-sets used in choice probability calculations are associated with different actions are described in Sections 3.4 and 3.5. The components of LoS anticipations used in the evaluation of action choices is presented in Section 3.6. Finally, the model for traveller learning between days used in this study is described in Sections 3.7 and 3.8.

3.1. Simulation framework

We propose a transit route choice model in the presence of combined FIX and FLEX alternatives. The model is implemented within an agent-based public transit simulation framework, BusMezzo (Toledo et al. 2010), that includes essential components that enable modelling both FIX and FLEX operations and traveller behaviour. The modelling framework is event-based and embedded within the mesoscopic traffic simulation model Mezzo (Burghout 2004).

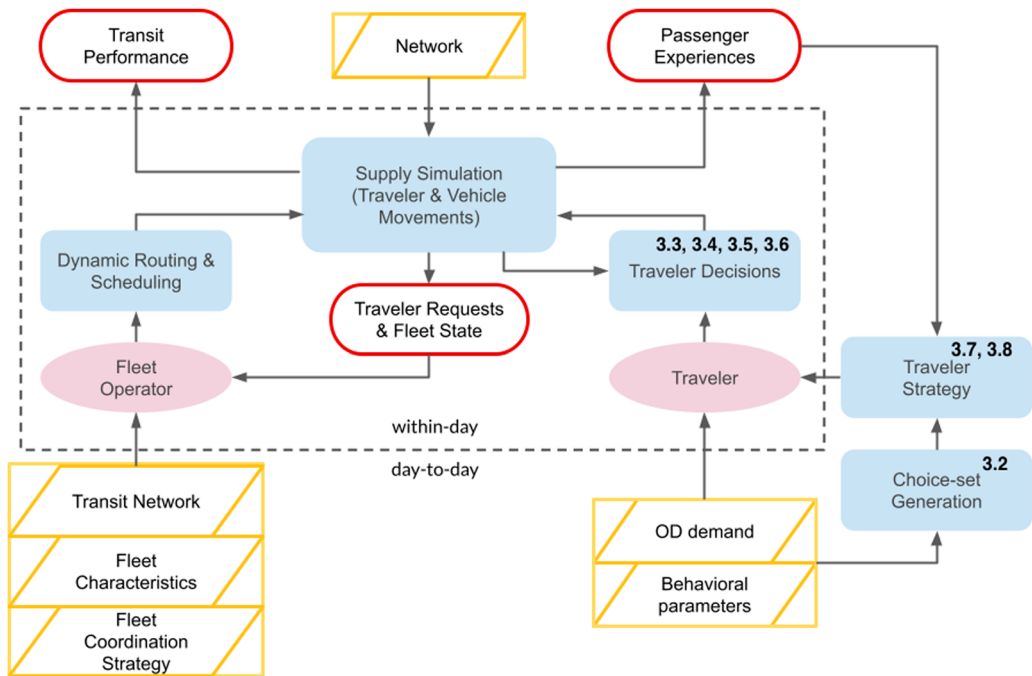


Figure 1. High-level overview of the simulation framework. Static inputs are marked with yellow boxes, key transit agents with purple ovals, processes with blue rectangles, and final and intermediate process outputs with red stadiums. Subsections in which key concepts are discussed are marked in bold


BusMezzo was originally developed to model FIX operations and has been shown to replicate FIX phenomena such as headway variability propagation and bunching (Toledo et al. 2010). In the assessment of FIX operations and dynamic traveller behaviour, the model has been applied to evaluate the performance of different real-time holding strategies (Cats et al. 2011; Laskaris et al. 2018), short-turning strategies (Leffler et al. 2017), and demand-management strategies with real-time information provision (Drabicki et al. 2021; Pefitsi, Jenelius, and Cats 2021). A high-level overview of the simulation framework is displayed in Figure 1.

As shown in Figure 1, the simulation framework consists of *within-day* and *day-to-day* processes and feedback loops. Hitherto, the day-to-day learning framework described in Cats and West (2020) was limited to FIX services. In this study, we introduce modelling functionalities to allow for the representation of FLEX alternatives as part of a dynamic transit assignment model. Static inputs to the framework (marked with yellow boxes) are the underlying road network (e.g. links, nodes, turning-servers), FIX service definitions (e.g. bus lines, stops, schedules, real-time control strategies, fleet characteristics), FLEX service definitions (e.g. possible service routes, stops, vehicle-travel request assignment strategy, empty-vehicle rebalancing strategy, fleet characteristics) and traveller population definitions (e.g. OD demand rates, value-of-time/learning parameters, choice-set filtering parameters). As part of the initialization process, a choice-set generation model is called to generate an initial set of possible path alternatives for each OD, dependent on the available transit network (described further in Section 3.2).

Individual traveller agents use Traveler Strategies that consist of a priori knowledge and learned experiences to construct a path from their origin to their destination dynamically within the day with respect to available choice alternatives (as also visualized in Figure 2). Traveler Decisions such as path choice, mode choice, boarding, and alighting, are made according to the probabilistic outcome of a RUM, with intermediate choice probabilities determined by an expected maximum utility. Anticipations regarding the downstream utility of a path alternative are updated based on accumulated experiences learned from day to day.

Day 1

07:05 Action decision 1 → 07:13 Action decision 2 → 07:27 Action decision 3 → Accumulated exp.

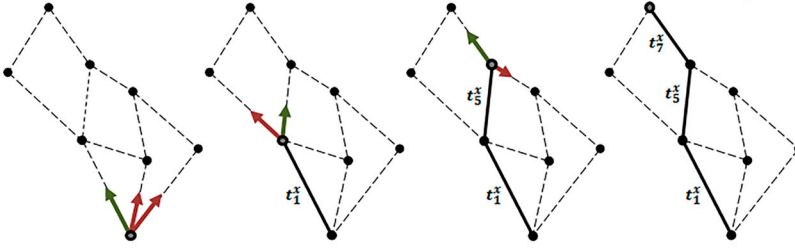**Day 2**

07:03 Action decision 1 → 07:17 Action decision 2 → 07:24 Action decision 3 → 07:29 Action decision 4 → Accumulated exp.

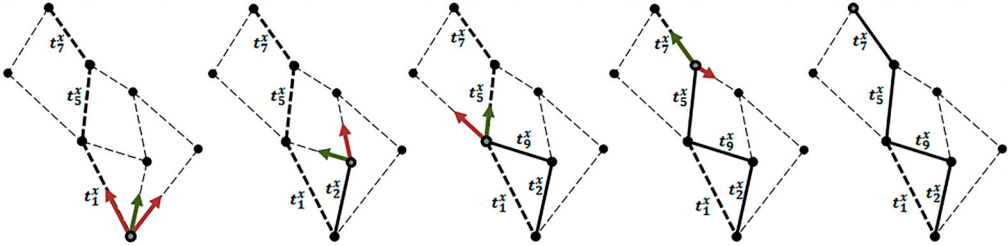


Figure 2. Example of the sequence of within-day decisions made by a traveller agent and accumulated experiences from the sampled path that inform within-day decisions the following day. An accumulated travel time experience of a path component j is denoted t_j^x . Green arrows indicate a chosen action, and red arrows indicate evaluated action alternatives. Source: (Cats and West 2020)

Travelers choosing to utilize a FLEX service as part of their chosen path will send a *request* consisting of a desired stop for pick-up, a desired stop for drop-off, and a desired time for departure to the FLEX fleet operator. The FLEX extension to BusMezzo (Leffler et al. 2021) allows for switching between different greedy nearest-neighbour assignment heuristics to assign traveller requests made known to a FLEX fleet operator in real-time to vehicles that are coordinated on-demand. Furthermore, alternative empty-vehicle rebalancing strategies may be used. Dependent on the fleet coordination strategy employed by this fleet operator, vehicles are assigned to traveller requests in real-time. The travel times, paths, and choices of individual passengers and network-wide LoS and vehicle utilization measurements are produced as model output for later analysis.

3.2. Path alternative and choice-set definitions

The path alternative data structure lies at the core of the transit route choice model. A path alternative i is defined as an ordered, alternating sequence of walking links w and transit (i.e. FIX or FLEX) links l , each connecting pairs of stops s , or more generally locations, as follows:

$$i = \{o, w_1, s_2, l_1, s_3 \dots s_{2n}, l_n, s_{2n+1}, w_{n+1}, d\}. \quad (1)$$

The index of each path component denotes its position in this sequence, with the exception of the first and last components, o and d , corresponding to the origin and destination of the path, respectively. For example, the stop o denotes the first stop, or origin, of the path alternative i , w_1 denotes the first walking link connecting stops o and s_2 , l_1 is the first transit link connecting stops s_2 and s_3 , and so on. A path may include zero-cost walking links that represent the case when a traveller chooses to remain at the current stop rather than walk (e.g. if o and s_2 in an instance of (1) refer to the same stop).

The global set of path alternatives available to all travellers is generated as part of model initialization. Several filtering rules and logical constraints may be included to limit the number of relevant paths available to each traveller for any OD pair, such as a maximum number of transfers, maximum walking distance, or path dominance principles. Path components for FIX paths, with the exception of o and d , may also be merged into hyperpaths or, more specifically, sets (e.g. S_j, W_j, L_j for component j of a path alternative) if multiple stops, walking links or transit links that a traveller is considered to be indifferent to, are available for a given segment in a path (described in greater detail in Cats (2011)). The more general path definition is thus:

$$i = \{o, W_1, S_2, L_1, S_3 \dots S_{2n}, L_n, S_{2n+1}, W_{n+1}, d\}. \quad (2)$$

A FLEX leg of a path differs from a FIX leg in the sense that it represents one of many possible routes between stops within the service area of the FLEX operator, which may or may not be realized. In contrast with line-based FIX, a FLEX service operator serves an area containing possible pick-up and drop-off locations instead of a specific route. The FLEX service considered in this study is stop-based, meaning that the set of possible pick-up and drop-off points in a FLEX service area is fixed. In generating the global set of path alternatives, the full set of shortest routes in terms of free-flow travel time between all pairs of stops is generated for the FLEX service area as an initialization step. This set of routes is then used in the generation of traveller choice-sets for paths including FLEX legs. For simplifying purposes, it is assumed that there are no separately operated FLEX services with overlapping service areas. For this reason, as well as to mitigate the combinatorial explosion of explicit enumeration, in the generation of path-sets, paths with repeating FLEX links are omitted (e.g. if transit link l_j in (1) is a FLEX link, then l_{j+1} cannot also be a FLEX link). Consequently, FLEX links are always considered distinct from FIX links. This assumption is considered reasonable as several studies have indicated that travellers consider FLEX services as a significantly different mode to FIX (Li and Quadrioglio 2010).

Let I^{od} denote the set of all path alternatives available to travel between a location o and a destination d utilizing a sequence of walking- and transit links as defined in (1). The path that a traveller agent utilizes is not known or selected upfront. Instead, as displayed in Figure 2, a traveller makes a sequence of *choices* between alternative walking, boarding, and alighting *actions* at various decision nodes in a trip. Travel experiences (denoted t_j^x in Figure 2) for each chosen component j of a path are accumulated and inform path choices in the following days (more on this in Section 3.8).

As displayed in Figure 2, at each decision node the set of available path alternatives considered by the traveller will change dependent on their most recently chosen action. The path-set $I_a^{od}(t) \subseteq I^{od}$ considered by a traveller when making a choice of action is dependent on the context of the traveller in terms of: (1) the current location o , (2) the category of the next action a to be made and (3) the state of the transit network, as well as the traveller's knowledge of this state, at time t .

3.3. Traveler states, actions and state transitions

As described in Section 3.2, a traveller makes a sequence of choices among alternative actions at various decision nodes (or traveller states) to construct a complete trip. A diagram of all traveller states and actions that transition a traveller between these states is displayed in Figure 3. As shown in Figure 3, there are four states a traveller can be in: (1) having *arrived at a stop* where a decision is made on how to continue their journey to their final destination, (2) *waiting at a stop* where a decision is made to board either a FIX or (3) FLEX vehicle, and (4) sitting or standing *on-board a vehicle* where a decision must be made of which stop to alight at to continue their journey.

Five categories of decisions among alternative actions transition the traveller from one state to another, based on their current state and simulation events. The first three categories connect the two traveller states of having arrived to a stop and waiting for either a FIX or FLEX vehicle: (1) a *connection* decision to go to a stop within walking distance (including staying at the current stop) upon arriving to a new location, (2) a *mode* decision of whether to use FIX or FLEX for the next trip leg from the traveller's

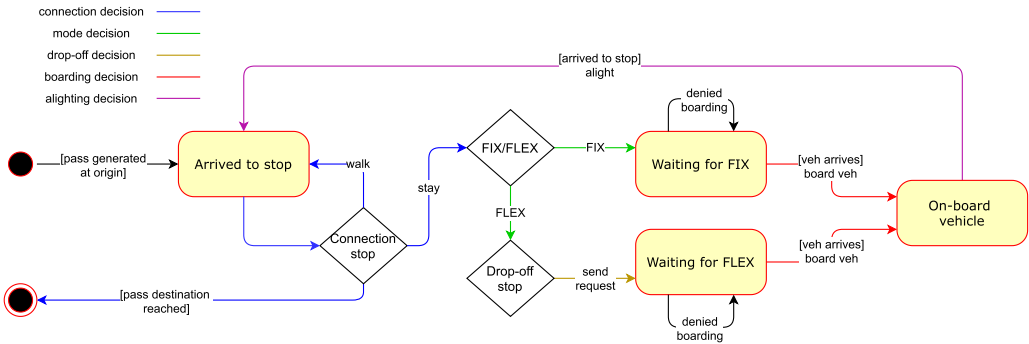


Figure 3. Traveler state diagram with FIX and FLEX alternatives available. Traveler states are represented by yellow rounded rectangles, action decision categories with coloured arrows, and diamonds where action decisions branch conditional on previous actions.

chosen connection stop and, conditional on FLEX being chosen, (3) a *drop-off* decision of which stop to request a ride to. Note that this drop-off stop can correspond to the traveller's final destination or an intermediate transfer stop. The remaining two action categories follow the state of waiting for a FIX or FLEX vehicle to arrive: (4) a traveller will make a *boarding* decision of whether or not to board an approaching transit vehicle, and (5) an *alighting* decision of which stop to alight at once on-board.

Additional assumptions regarding FIX and FLEX service operations and traveller behaviour are embedded in the traveller state transitions in Figure 3. It is assumed that a traveller commits to using a FIX or FLEX service once a mode choice has been made (no traveller cancellation). The FLEX service operator also commits to serving the traveller if a trip request is accepted (no operator cancellation). A traveller evaluates a potential trip from a FLEX service operator right after making a connection decision. If FLEX and a drop-off stop is chosen, the traveller will instantly send a trip request before walking (if needed) to the pick-up stop of the chosen FLEX service.

3.4. Connection, mode and drop-off decisions

All action decisions described in Section 3.3 are modelled within the framework of RUM discrete choice models. An MNL model is used in calculating the probabilities of action choices. The probability $P_{a,k}$ of traveller k to choose action a from a set of alternative actions A is thus:

$$P_{a,k} = \frac{e^{v_{a,k}}}{\sum_{a \in A} e^{v_{a,k}}}$$

where $v_{a,k}$ is the expected utility of action a for traveller k . Each action a is associated with a downstream path-set, I_a , that allows the traveller to reach their final destination conditional on this action being chosen. The expected utility $v_{a,k}$ is given by the logsum over the expected utilities of individual path alternatives in I_a :

$$v_{a,k} = \ln \sum_{i \in I_a} e^{v_{i,k}}, \quad (3)$$

where $v_{i,k}$ is the expected utility of path $i \in I_a$ for traveller k (more on this in Section 3.6).

The first choice of action a traveller must make is a connection action, i.e. the choice of which stop to walk to when initiating their trip. This decision is also made each time a traveller alights from a vehicle at a new location. As shown in Figure 3, once a connection decision has been made, it is followed by a mode decision conditional on the chosen connection stop, and a drop-off decision conditional on the choice of mode and connection stop.

Using the definition of a path alternative i as in (2), a connection decision amounts to choosing between the combined utility of subsets of $I^{pd}(t)$ the set of path alternatives available to the traveller

to move from current location o to final destination d at time t . The path-sets $I_{s^+}^{od} \subseteq I^{od}(t)$ associated with each candidate connection stop s^+ is defined as:

$$I_{s^+}^{od} = \left\{ i \mid s^+ \in S_{i,2} \text{ for some } i \in I^{od}(t) \right\}.$$

The mode decision (i.e. the choice between FIX and FLEX mode actions) is conditional on the choice of connection stop s^+ . We can define a function $mode(\cdot)$ that takes a transit link component L_{ij} of a path i as an argument and outputs whether or not this is operated as a FIX or a FLEX service:

$$mode(L_{ij}) = \begin{cases} fix & \text{if a fixed route and schedule exists } \forall l \in L_{ij} \text{ of path } i \text{ and leg } j, \\ flex & \text{otherwise.} \end{cases}$$

The path-sets $I_{s^+,m}^{od} \subseteq I_{s^+}^{od}$ associated with a mode decision are defined conditional on the choice of a stop-mode pair, or action $a = (s^+, m)$. This action amounts to walking to stop $s^+ \in S_{i,2}$, using a walking link $w \in W_{i,1}$, with the intention of using mode $m \in \{fix, flex\}$ for the next transit leg $l \in L_{i,1}$ for some path i . More formally, the path-sets associated with each mode action are:

$$I_{s^+,m}^{od} = \left\{ i \mid m = mode(L_{i,1}) \text{ for some } i \in I_{s^+}^{od} \right\}.$$

If a FLEX link is chosen, a traveller must communicate their intention to use a FLEX service to the operator of this service via a travel request. This request must include a desired time t^+ and location s^+ for pick-up, and a desired location for drop-off, s^- . The pick-up point has already been chosen in the connection decision of the traveller and is associated with a path-set when choosing to utilize FLEX for the next transit leg, i.e. $I_{s^+,flex}^{od}$. The desired time for pick-up t^+ is assumed to be as soon as the traveller plans to arrive to stop s^+ , i.e. the current time t plus the expected time it takes to walk from the traveller's current location o to stop s^+ .

If there are several paths in $I_{s^+,flex}^{od}$, then a decision has to be made by the traveller to choose the most beneficial drop-off point to send a request for. Each drop-off point available after a FLEX transit leg is associated with its own set of path alternatives $I_{s^+,flex,s^-}^{od} \subseteq I_{s^+,flex}^{od}$. The path-set associated with each candidate drop-off point is given by

$$I_{s^+,flex,s^-}^{od} = \left\{ i \mid s^- \in S_{i,3} \text{ for some } i \in I_{s^+,flex}^{od} \right\}$$

The combined utility of each connection, mode and drop-off action and resulting probabilities are then calculated by taking the logsum over the expected utilities of all path alternatives associated with each action (i.e. $I_{s^+}^{od}$, $I_{s^+,m}^{od}$ and $I_{s^+,flex,s^-}^{od}$) as in (3). The choice structure of these decisions can be visualized as a tree as displayed in Figure 4. Figure 4 displays the event triggering a connection decision and the set of alternative actions and associated path-sets for each action.

3.5. Boarding and alighting decisions

Boarding and alighting decisions are invoked if FIX is chosen by a traveller. In this paper, if a decision is made to use FIX, the traveller will walk (if needed) and wait at the chosen stop for the next available FIX service vehicle from a line deemed relevant to board. The path-set $I_{s^+,fix}^{od}$, associated with walking to s^+ to use fix , is divided into path alternatives associated with choosing to not board I^{stay} versus choosing to board I^{board} a vehicle arriving from line $I^{arr}(t)$ at time t :

$$I^{board}(t) = \left\{ i \mid I^{arr}(t) \in L_{i,1} \text{ for some } i \in I_{s^+,fix}^{od} \right\},$$

$$I^{stay}(t) = \left\{ i \mid I^{arr}(t) \notin L_{i,1} \text{ for some } i \in I_{s^+,fix}^{od} \right\}$$

If a traveller has instead decided to use FLEX (i.e. walk to s^+ to use $flex$ to stop s^-), then the traveller is committed to boarding any FLEX vehicle that has been assigned to this request. With the assumption

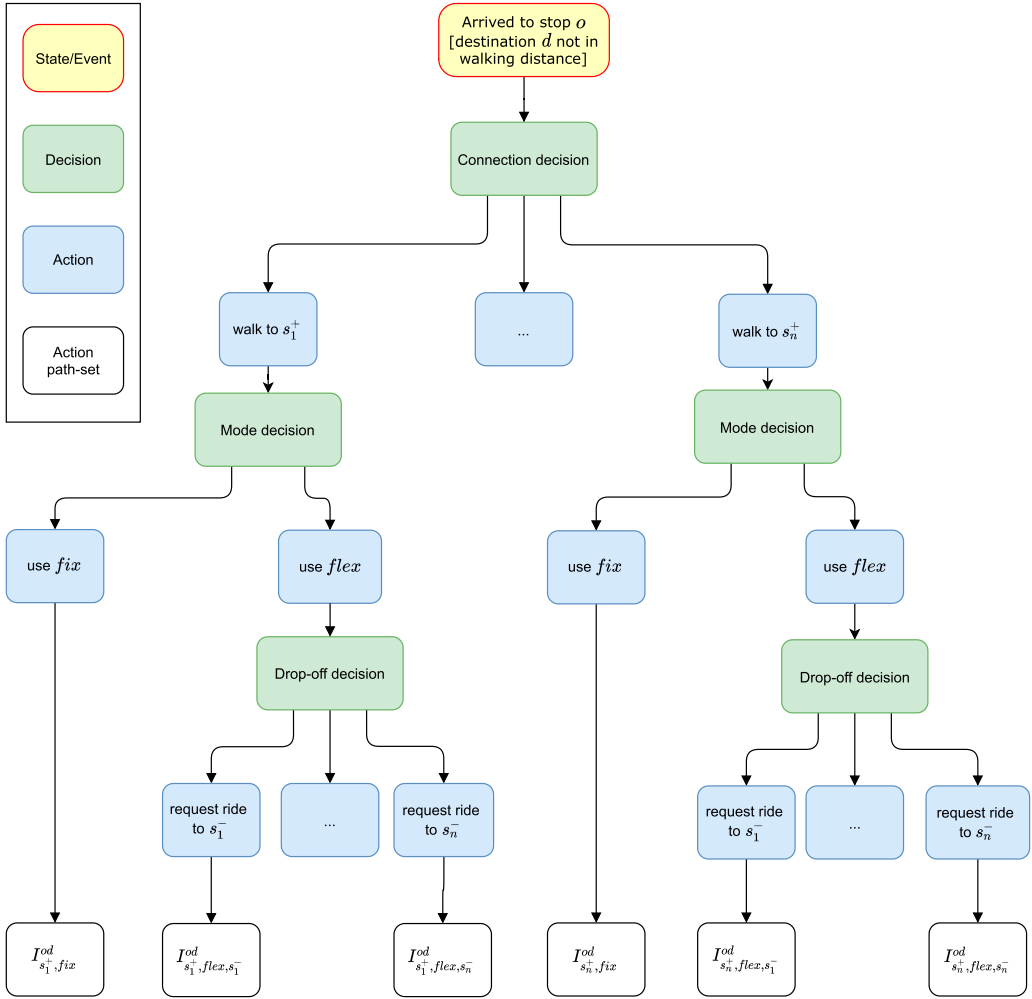


Figure 4. Connection, mode and drop-off decisions.

that travellers do not cancel a request once sent, there is thus no boarding decision invoked for a traveller in the state of waiting for a FLEX trip.

Similarly, FLEX users are assumed committed to alight at the specific drop-off point for which they sent a request. Again, with the assumption that a traveller will not re-make their decision once a FLEX vehicle has been boarded, no alighting decision is invoked for a traveller in the state of being on-board a FLEX vehicle. Instead, the on-board traveller will alight whenever the chosen drop-off point is reached. For FIX users, the choice of alighting stop is made immediately after a boarding decision has been made. The downstream alternative path-sets for an alighting decision $I_{s^-}^{alight}$ are then determined by the line that was just boarded:

$$I_{s^-}^{alight}(t) = \left\{ i \mid s^- \in S_{i,3} \text{ for some } i \in I^{board}(t) \right\}.$$

3.6. Expected utility of a path

As described in Sections 3.4 and 3.5, the probability of choosing an action a is determined by the logsum (3) over the expected utilities of all path alternatives associated with that action. The expected

utility of a path alternative is calculated based on the anticipated GTC associated with traversing stop, walking link and transit link path components. More formally, the expected utility $v_{i,k}$ of path $i \in I_a$ for traveller k is given by the weighted sum of anticipated waiting ($\widehat{t}_{j,k}^{wait}$), in-vehicle ($\widehat{t}_{j,k}^{ivt}$), and walking ($\widehat{t}_{j,k}^{walk}$) times over all legs $j \in J_i$ of path i , and the number of transfers of path i , n_i^{trans} :

$$v_{i,k} = \sum_{j \in J_i} \left[\beta_{j,k}^{wait} \widehat{t}_{j,k}^{wait} + \beta_{j,k}^{ivt} \widehat{t}_{j,k}^{ivt} + \beta_{j,k}^{walk} \widehat{t}_{j,k}^{walk} \right] + \beta_k^{trans} n_i^{trans}, \quad (4)$$

where β^{wait} , β^{ivt} , β^{walk} and β^{trans} are value-of-time parameters corresponding to each GTC component. The number of transfers for a given path is considered static and known by all travellers. The anticipated walking time associated with walking links is assumed static and uncapacitated, based only on distance and the traveller's average walking speed (realized walking time variability is simulated with stochastic error terms however). The associated cost of waiting- and in-vehicle time at different stages of a trip are dynamic, however, due to confrontations between prevailing demand flows and capacitated supply as well as supply and demand uncertainty (e.g. vehicle occupancy restrictions, on-board crowding, vehicle travel time delays) and are thus anticipated via a day-to-day learning model.

3.7. Traveler waiting- and in-vehicle time anticipation

In Section 3.6 the anticipated GTC of a path used in the choice model for selecting among alternative actions is described. In this study, the anticipations of waiting- and in-vehicle times (i.e. $\widehat{t}_{j,k}^{wait}$ and $\widehat{t}_{j,k}^{ivt}$ in the path utility definition (4), respectively) of traveller k for transit link j of a path are based on two information sources: (1) the accumulated experience ($t_{j,k}^x$) of utilizing transit link j , and (2) prior knowledge (t_j^p) corresponding to static LoS expectations of transit link j .

Prior knowledge anticipations are assumed always known by the traveller before any decision is made (i.e. can inform future decision-making from day 1 and onward). Accumulated experiences are collected within-day, however, only after a decision has already been made. Accumulated experiences are thus only utilized to inform future decisions day-to-day when previously utilized paths are re-evaluated.

Prior knowledge for FIX transit links is based on the predefined schedule of the service. In the absence of a predefined schedule, an optimistic estimate is used for the anticipated waiting- and in-vehicle times based on prior knowledge for FLEX legs. This could either correspond to a static service guarantee from the operator (e.g. a maximum waiting- and in-vehicle time independent of current fleet and demand status) or a 'best case' evaluation from the traveller's perspective (e.g. immediate service with zero waiting time and the most direct route available with free-flow in-vehicle time). These estimates can be viewed as an exploration parameter used for the first iterations of a traveller's learning process that favors choosing paths that include unexplored FLEX legs. For both FIX and FLEX links, we assume that t_j^p is only used in the absence of any accumulated waiting- or in-vehicle time experience for a given leg. More precisely, the anticipated waiting- or in-vehicle time $\widehat{t}_{j,k}$ of path component j for traveller k is given by:

$$\widehat{t}_{j,k} = \begin{cases} t_j^p & \text{if no experience has been gathered by traveller } k \text{ for leg } j, \\ t_{j,k}^x & \text{otherwise.} \end{cases} \quad (5)$$

3.8. Accumulated travel time experiences including dynamic congestion effects

In Section 3.7 the prior knowledge and accumulated experience information sources that inform the anticipated GTC calculations are introduced. In this section, we describe the learning model for how accumulated travel time experiences between days is estimated and how additional dynamic congestion effects, such as the discomfort a passenger may experience if denied boarding a full vehicle

and the experience of crowding on-board vehicles (dependent on vehicle type and the number of standing/seated passengers) are also considered in the model.

Learned travel time component anticipations for all decisions in the iterative day-to-day learning process in this study are based directly on the accumulated travel time experiences as defined in (5). The accumulated travel time experience $t_{j,k,d}^x$ of path component j for traveller k at the beginning of day d is updated in an MSA formulation. The most recent experiences, $t_{j,k,d-1}$, are discounted as a function of the number of days elapsed (with a discount factor of 1 for the first day). More precisely, the accumulated travel time experiences used in traveller LoS anticipations is given by:

$$t_{j,k,d}^x = t_{j,k,d-1}^x + \frac{1}{d}(t_{j,k,d-1} - t_{j,k,d-1}^x). \quad (6)$$

To include the additional discomfort induced by denied boarding, a distinction is made between waiting time until the first vehicle the passenger wishes to board ($t_{j,k}^{wait,nominal}$) and additional (unexpected) waiting time ($t_{j,k}^{wait,denied}$) until their next opportunity to board if denied boarding. In registering a waiting time experience, the portion of waiting time due to denied boarding is weighted with an additional penalty α^{denied} for the discomfort experienced. The most recent waiting time experience, $t_{j,k,d-1}^{wait}$, used in the learning update (6) is then given by the weighted sum of these, i.e. $t_{j,k,d-1}^{wait} = t_{j,k,d-1}^{wait,nominal} + \alpha^{denied} \cdot t_{j,k,d-1}^{wait,denied}$.

The total nominal in-vehicle time ($t_{j,k}^{ivt,nominal}$) of passenger k for an in-vehicle leg j of their trip is comprised of the sum of all sub-intervals h of in-vehicle times ($t_{j,k,h}^{ivt,nominal}$) between pairs of stops along the passenger's trip. The additional discomfort experienced when on-board a crowded vehicle is taken into account by multiplying each in-vehicle sub-interval by weights (α_h) that are a function of crowding level for that segment of the complete trip, i.e. $t_{j,k,d-1}^{ivt} = \sum_h \alpha_h \cdot t_{j,k,h,d-1}^{ivt,nominal}$. The crowding level of a given in-vehicle sub-interval may for example be estimated by the ratio of passengers on-board, and the seated and standing capacity of the vehicle.

Since the number of transfers and walking time anticipations of each path are considered static and known beforehand, the learned path component travel time experiences correspond to the average total waiting time (adjusted with additional weight for any waiting time due to denied boarding) and the average crowding-weighted in-vehicle time of different legs of a public transit trip.

4. Demonstration: toy network

To demonstrate how travellers learn of the trade-offs between waiting time (service headway versus vehicle-travel request assignment) and in-vehicle crowding levels (larger buses versus smaller shuttles) for the FIX and FLEX service types and how this is reflected in resulting mode choices, we construct the following scenario using the setting described in Figure 5. The physical network consists of two stops (A and B) and two links (AB and BA). Two types of services are available to transport travellers from stop A to stop B: (1) a FIX even-headway (10 min) service run by 100 passenger capacity buses, and (2) a FLEX service with 10 passenger capacity shuttles that assigns vehicle trips to traveller trip requests. FLEX vehicles are assigned to traveller requests every second without rebalancing idling vehicles. Access/egress by walking links is the same for FIX and FLEX services. Both FIX, and FLEX use the same links with the same constant nominal in-vehicle time (30 min) in either direction.

4.1. Experimental design

The value-of-time parameters used for calculating the GTC of a path as described in (4), as well as in simulation outputs, are generally set in relation to the value of in-vehicle time β^{ivt} . The weight of perceived waiting time is set to double that of in-vehicle time, $\beta^{wait} = 2 \cdot \beta^{ivt}$, based on the study of Wardman (2004). The weight α^{denied} introduced in Section 3.8 to penalize any additional waiting time due to denied boarding is set to 3.5 as detailed in Cats, West, and Eliasson (2016).

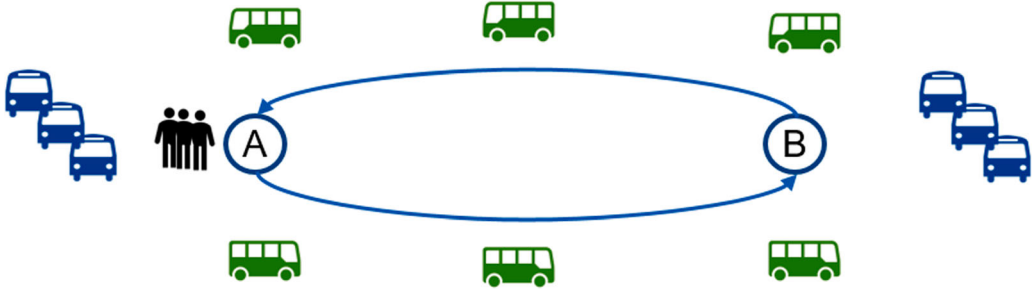


Figure 5. Two stop and two link network. Two services are available to travellers at stop A travelling to stop B: one fixed headway (10 min) service run with 100 passenger capacity buses (colored green), and one on-demand service run by 10 passenger capacity shuttles (colored blue). Both services use the same links with the same in-vehicle time (30 min) in either direction.

The in-vehicle crowding factors described in Section 3.8 that are used in this paper are based on the values reported in the meta-study by Wardman and Whelan (2011). The load factor is given by the ratio of passengers on-board a vehicle, $q_h^{onboard}$, to the maximum seat capacity of that vehicle, γ_h^{seats} , for a given time-interval h . Based on this load factor an in-vehicle time multiplier is used in weighting passenger in-vehicle time experiences for this time-interval dependent on whether the passenger is seated or standing. Travelers queuing at stops board vehicles in a first-in-first-out manner. The in-vehicle time multiplier for seated passengers, α^{sit} , ranges between 0.95 to 1.71 and all passengers that board are assumed to sit if there are unoccupied seats available. The in-vehicle time multiplier for standing passengers, α^{stand} , used when all seats are occupied, ranges between 1.78 to 2.69.

To simplify for the sake of demonstration we assume that both FIX and FLEX vehicle types have seats available for each passenger for the toy network scenario. Dwell times (t^{dwell} , in seconds) at stops for both FLEX and FIX vehicles are calculated using a linear function of the number of boarding passengers n^{board} and alighting passengers n^{alight} at that stop as estimated in Dueker et al. (2004) for buses without lift operations:

$$t^{dwell} = 5.14 + 3.48n^{board} + 1.7n^{alight}. \quad (7)$$

Besides affecting vehicle running times, t^{dwell} is registered as additional in-vehicle time in traveller experiences.

100 travellers are generated at stop A simultaneously with destination stop B. The arrival time of these travellers is 1 s after the departure time of a FIX bus. Since the capacity of the FIX buses is equal to the total number of travellers, any traveller that chooses FIX will thus experience a waiting time of close to 600 s, the full headway of the service. To simulate varying capacity limitations for the FLEX service, we initialize 1–7 vehicles at stop A before the travellers arrive. If there is capacity at A available for a traveller using FLEX, then the traveller will experience a waiting time of 1 s. If there is no capacity immediately available at A, a vehicle must be sent from stop B to A to serve the traveller. The number of FLEX vehicles initialized at stop B for all scenarios is always sufficient to serve all travellers meaning that, in the worst case, a traveller choosing to use FLEX will experience a waiting time corresponding to the full in-vehicle time it takes for a reactive FLEX vehicle to traverse the link BA, i.e. 30 min.

Mode-choice decisions between FIX and FLEX are mainly dependent on differences in the accumulated experience of waiting time in our demonstration. There are particularly large variations in LoS due to waiting times dependent on how many FLEX vehicles are initialized at stop A and how many passengers choose FLEX on a given day. The influence of anticipated crowding-weighted in-vehicle time in this scenario becomes relevant in conditions when the anticipated waiting time between FIX and FLEX are closer to equal. The system optimum solution for the mode-split over all travellers in terms of resulting total GTC is always that the capacity of the FLEX fleet at A is filled precisely with no overflow with the remaining collection of travellers choosing FIX. In other words, 10% choosing FLEX is optimal for 1 FLEX vehicle at A, 20% for 2 vehicles, etc..

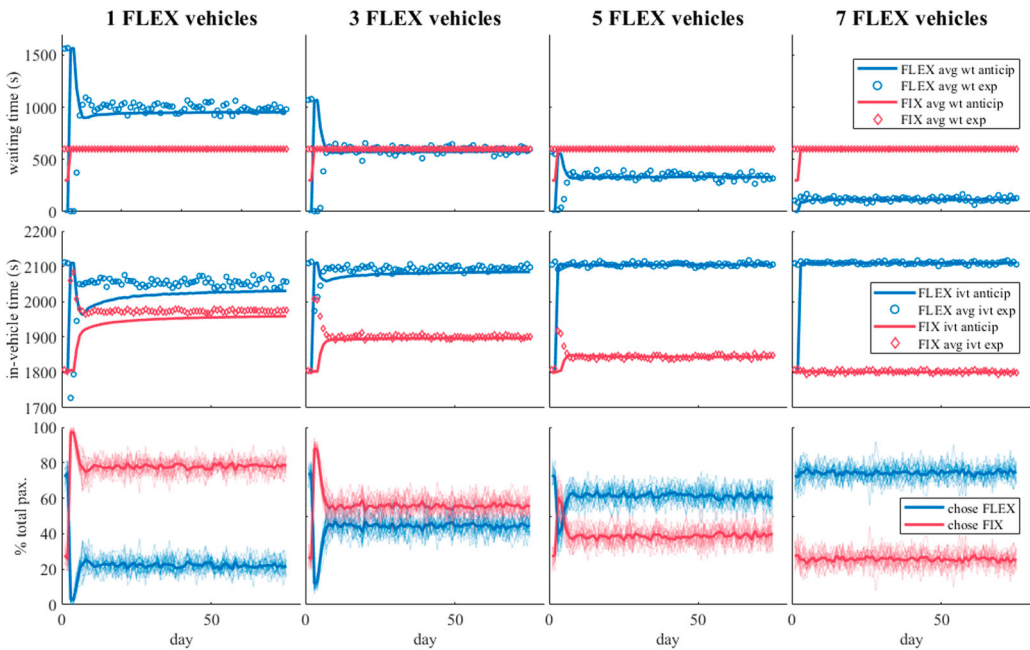


Figure 6. Per-mode (blue for FLEX and red for FIX) anticipated and average experienced waiting time (top row), per-mode anticipated and average experienced (weighted for crowding) in-vehicle time (middle row), and the average share of all travellers that chose FLEX or FIX over days (bottom row). Columns correspond to the size of the FLEX fleet initialized at stop A.

Finally, with no prior experience of either service, the initial anticipated waiting time for FIX is set to half the headway of the service (i.e. 5 min) and for FLEX an initial exploration parameter of 0 s. The anticipated in-vehicle time for both services is set to the shortest-path nominal in-vehicle time (i.e. 30 min). There is thus an inherent preference towards choosing FLEX over FIX on the first day to stimulate exploration. Each instance is simulated until 75 days have passed with 20 replications per scenario.

4.2. Results

To demonstrate the evolution of average passenger LoS anticipations and long-term convergence behaviour, Figure 6 displays the average (over the 20 replications) learning trajectory of waiting times (top row), crowding-weighted in-vehicle times (middle row) and resulting mode-split (bottom row) for different initial FLEX supply conditions (columns labelled by initial FLEX capacity at stop A). As can be seen in Figure 6, even in this simple setup there is considerable variation and interaction between LoS experiences. The effects of the strong MSA discounting (6) of newer experiences is also apparent, where initial accumulated experiences are retained over a long period of time, and result in smooth learning curves with little oscillation. After the first 7–10 days variations in both mode-split and experiences start to stabilize, which together with quick discounting of newer experiences result in very small changes in LoS anticipations in later days.

Initial conditions translate into a mode-split of roughly 72% of travellers choosing FLEX and 28% choosing FIX on the first day for all FLEX supply variations. For the smallest fleet size of one FLEX vehicle (leftmost column) this means that, on day 1, 10 FLEX passengers experience a waiting time of 0 s, and the remaining 62 must wait 1800 s for 7 vehicles to be sent from stop B. With the exception of the last vehicle to arrive, all of these vehicles are filled to their maximum capacity and the highest crowding factor is used to weight the in-vehicle time of these passengers. FIX passengers always experience a waiting time of 600 s and receive a small discount to their in-vehicle time due to less than half of

the seats of the FIX bus being occupied. Since all 28 passengers board the same bus, rather than separate vehicles, a slightly longer dwell time is experienced and registered as in-vehicle time for the FIX passengers compared to FLEX.

The extreme conditions of the first day are followed by a strong increase in anticipated waiting time and perceived in-vehicle time for FLEX and a shift towards FIX the following day (on average 97% of travellers). The few passengers that now chose FLEX experience a 0 s waiting time and a discounted in-vehicle time, close to the lowest GTC possible for this network. The remaining travellers choosing FIX experience a 600 s waiting time and the highest crowding factor for in-vehicle time. The poor experience of FLEX from the first day is retained over the following days where slowly more passengers, on average 4% and then 11%, start to choose FLEX. This is also reflected in a gradually decreasing anticipated waiting time and in-vehicle time which finally converge towards the stabilizing average experiences. In-vehicle times are consistently underestimated with slow convergence to average experiences, however, due to the rapid discounting of new experiences, mode choices converge to a roughly 22% FLEX and 78% FIX mode-split. Individual runs oscillate around this within a $\pm 6\%$ band due to the random draws of choices.

In the second column of Figure 6 results for three FLEX vehicles initialized at stop A are displayed. Mode-split and LoS anticipations follow a similar pattern as for the single vehicle case. However, waiting time anticipations converge to an approximately equal level between FIX and FLEX. With similar waiting time experiences, the crowding levels on-board the two vehicle types have a greater impact on choices. The FIX buses are never more than 75% full, compared to the FLEX shuttles, which are more or less always filled to capacity, resulting in a higher anticipated crowded in-vehicle time for FLEX compared to FIX. Close to equal waiting time anticipation and higher in-vehicle expectations when using FLEX are reflected in the mode split, which converges to roughly 43% choosing FLEX.

Initial conditions for the 5–7 FLEX vehicle scenarios again result in an average 72% split in favor of FLEX. This time, however, most FLEX passengers experience a 0 s waiting time instead of 1800 s which results in less extreme oscillation the following days. Waiting time anticipations converge to a lower anticipated waiting time for FLEX compared to FIX. Crowding-weighted in-vehicle times are still consistently higher for the smaller FLEX vehicles when compared to FIX with several vehicles filled to their maximum capacity. However, due to greater differences in waiting times, further weighted at twice the importance in traveller decisions compared to in-vehicle time, the mode-split for the 5 vehicle and 7 vehicle cases converge to close to the capacity of FLEX vehicles at stop A at 60% and 70%, respectively.

5. Application: Stockholm coordinated branched line

To further investigate model properties at a larger scale and demonstrate how the framework can be applied to evaluate a mixed FIX and FLEX system design, we construct a study based on two existing bus lines in Stockholm: lines 176 and 177. The two lines run with 10 min even-headway during peak hours and form a fork-like trunk-and-branches network that connects rural parts of the Ekerö islands to the more central parts of Stockholm. As displayed in Figure 7, the lines run between the branches (colored red and blue) to/from stops Solbacka and Skärvik to the west in the Ekerö region, and form a common corridor (colored purple) to/from Mörby in the northeast. The timetables of the two lines are coordinated such that they run on the corridor section with an even 5 min headway. However, bunching regularly occurs and vehicle utilization on the branch sections is low. This network has been previously studied to evaluate multi-line holding control strategies targeted at reducing bunching (Laskaris et al. 2018, 2021) and shortening the FIX service to the corridor and running a FLEX service on the branches (Leffler et al. 2021). Rather than evaluate the replacement of the FIX services with a FLEX service on branches, as in Leffler et al. (2021), in this paper we investigate the potential of only partially replacing FIX service on branches with a FLEX service. Conceptually, this could provide a more adaptive service on the branches, while improving service regularity on the corridor where demand is

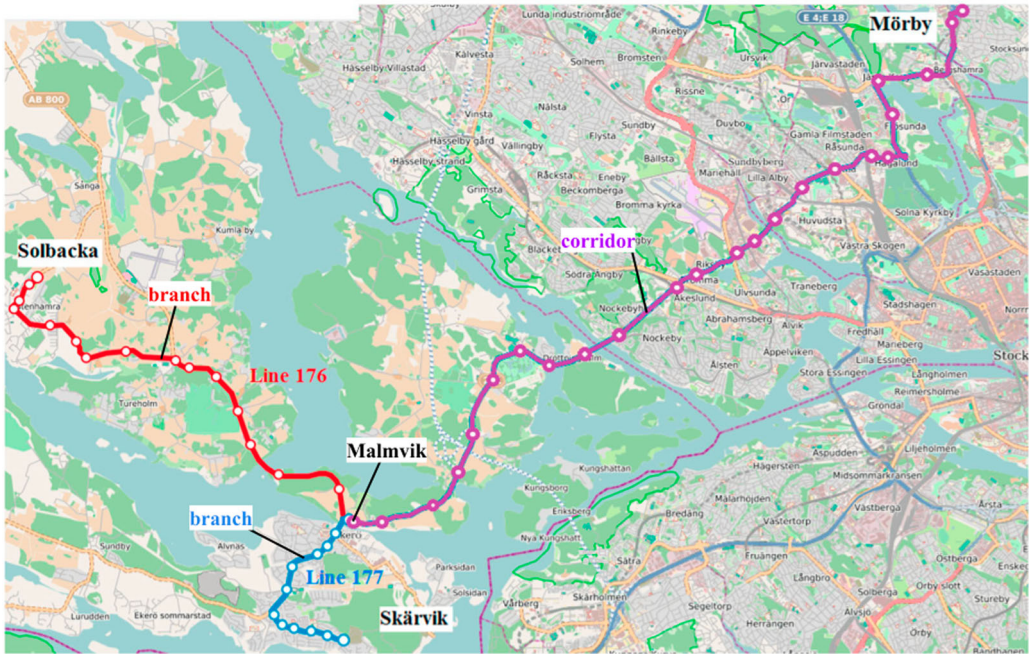


Figure 7. Lines 176 (red and purple segments) and 177 (blue and purple segment) in Stockholm. The purple segment is common for both lines. The lines merge/split at the stop Malmvik. Figure adapted from Laskaris et al. (2018), Figure 2.

higher with more direct connections to the inner-city. This scenario also allows us to further evaluate model properties for a more complex scenario with mixed FIX and FLEX paths.

5.1. Traveler population definitions

Table 2 displays the total demand rates and distribution of demand for the AM (07–10) peak for lines 176 and 177. Given the headway-based operations, the temporal distribution of simulated passenger arrivals in our study is assumed Poisson, i.e. passengers are assumed to arrive at stops independently of anticipations of the timing of vehicle arrivals. The demand rates of these distributions as well as the spatial distribution of arrivals are estimated from aggregated tap-in data obtained from the Stockholm public transport authority (SLL).

In describing the demand profile of the two lines in Table 2, as well as for later reporting of results, we define the following passenger categories that are spatially grouped based on ODs: corridor-to-corridor (C2C), corridor-to-branch (C2B), branch-to-corridor (B2C) and branch-to-branch (B2B). The directionality of demand for lines 176 and 177 is reasonably balanced. As displayed in Table 2, however, in general there is higher demand on line 176 (which is also longer) compared with line 177. For both lines, the majority of demand (around 50%) in both directions (towards and away from Mörby) is in the C2C category (i.e. where both the passenger's origin and destination are on the common corridor section of the two lines). The smallest proportion of travellers are within the B2B passenger category, those that have both origin and destination on a branch. The proportion of B2B demand is almost twice as high for line 176 than for line 177.

In a combined FIX and FLEX system there are a multitude of possible path choice compositions from a passenger's origin to their final destination that could be constructed. Besides potential computational constraints, many of these compositions are highly improbable to ever be considered an alternative (for example those that include a great deal of backtracking or transfers), yet will still maintain a probability of being chosen and could potentially influence choice behaviour and resulting

Table 2. Total demand rates in average passengers per hour for 3-hour AM peak with directional distribution.

Line	Direction	Total demand [pass./h]	Share of total demand			
			C2C	C2B	B2C	B2B
Both	Total	4651	48%	16%	25%	12%
	Eastbound	2485	43%	0%	46%	11%
	Westbound	2166	54%	34%	0%	12%
176	Total	2477	45%	15%	25%	15%
	Eastbound	1369	41%	0%	46%	13%
	Westbound	1109	49%	34%	0%	16%
177	Total	2174	52%	16%	24%	8%
	Eastbound	1117	46%	0%	46%	8%
	Westbound	1057	59%	33%	0%	8%

Note: The total demand and share of demand per passenger OD categories (corridor-to-corridor [C2C], corridor-to-branch [C2B], branch-to-corridor [B2C], branch-to-branch [B2B]) are also presented for the Eastbound direction toward Mörby centrum and Westbound direction from Mörby centrum. Rates and demand shares per passenger OD category are further divided by bus line (i.e. 176, 177).

Table 3. Path type alternatives per passenger category.

Path type	Passenger OD category			
	C2C	C2B	B2C	B2B
FIX	1	1	1	1
FLEX	0	0	0	1
FIX-FLEX	0	1	0	0
FLEX-FIX	0	0	1	0

A one indicates that the path type is available for the corresponding passenger category, and a zero if it is not available.

assignment if included in a passenger's choice set. Additionally, it is well known that correlations between route alternatives can induce bias into discrete choice models (e.g. the independence of irrelevant alternatives property of MNL random utility models). To focus our analysis on a select group of paths that are characteristic for each of the passenger categories we have defined, we restrict the choice set of each passenger category as displayed in Table 3.

As seen in Table 3, for C2C passengers, only FIX paths without transfers are allowed. Similarly, only direct FIX or FLEX paths are made available to B2B passengers. A direct FIX path is also always available to C2B and B2C passengers if one of the lower frequency lines is chosen. Alternatively, the C2B passengers may transfer from FIX to FLEX and the B2C passengers may transfer from FLEX to FIX. To simplify the choice set further, the first common stop (i.e. Malmvik, as seen in Figure 7) between lines 177 and 176 is designated as the only available transfer stop for these passenger categories.

To speed up learning, LoS experiences of alternative paths are shared between travellers that share the same OD. In the learning update described in (6) at the beginning of a day d , $t_{j,k,d-1}$ will then correspond to the average experience of a chosen path component j over all travellers k sharing the same OD that chose to use that path component. Similarly, $t_{j,k,d-1}^x$ corresponds to the so-far accumulated experience for travellers sharing the same OD of that path component.

5.2. Flexible transit operations

The FLEX service in this study employs a nearest-neighbour heuristic (described in greater detail in Leffler et al. 2021) that prioritizes serving stops with the largest cumulative waiting times of passengers when assigning FLEX vehicles to requests and a rule-based rebalancing strategy that aims to maintain an even supply of vehicles at all stops on branches. Note that the aim is not to necessarily optimize the performance of the FLEX service provided but rather represent characteristics of FLEX operations and

observe learning output in serving existing public transit users with no pre-bookings. It is common in studies of FLEX assignment algorithms and simulation-based evaluations of FLEX services to include LoS constraints where more costly requests (e.g. low-demand that requires relatively high detouring to serve) may be rejected by the fleet operator to improve assignment efficiency, or to model a maximum acceptable LoS threshold that travellers might tolerate before switching modes or planned activities altogether. To evaluate the alternative system design in our study as a true replacement for a public transit service, however, LoS constraints are not included in determining which requests to accept or reject.

When traveller requests are made known to the FLEX fleet operator, they are bundled into trip-plans (consisting of a sequence of stop visits and a route to serve these requests) and assigned to FLEX vehicles dynamically. In this study, if there are no existing trip-plans when a new request is received, a new trip-plan that serves the request directly from origin to destination is generated. The insertion of an additional request into an existing trip-plan is considered feasible if both the stop for pick-up and the stop for drop-off of that request does not require an assigned vehicle to backtrack from already planned stop visits downstream towards the final destination of that trip-plan. Furthermore, a request is only inserted into an existing trip plan if the forecasted load of an assigned vehicle based on already assigned requests does not exceed its maximum passenger capacity.

Assignment calls are made in 'real-time', i.e. every 5 s in this study. For each assignment call, all existing trip-plans are sorted based on the current cumulative waiting time over all requests that have been grouped into each plan. Once sorted, the highest-ranking trip plan (i.e. with the largest cumulative waiting time) is assigned to the nearest on-call vehicle. The next highest-ranking trip-plan is then assigned to the nearest on-call vehicle and so on until there are either no more unassigned trip-plans or no on-call vehicles available.

If on-call vehicles are available after all requests have been assigned to vehicles, then the excess supply may be rebalanced to other stops in anticipation of future demand. In our study, a simple rebalancing strategy is applied. At 10 min intervals throughout the simulation, a rebalancing call is performed. When rebalancing, if available, on-call vehicles are redistributed to all stops (again, the closest on-call vehicle to the stop with the lowest supply) on branches such that an equal supply (i.e. the total number of on-call vehicles at the stop plus the number of vehicles en-route to this stop) at these stops is maintained.

5.3. Parameter set-up

In the proposed mixed FIX and FLEX system design, we increase the headway of the two FIX lines on branches from 10 min to 30 min. A third line that only services the corridor with a 7.5 min headway is added, which, in combination with the two original lines, maintains the current combined service frequency of 5 min on the corridor (if headways along the corridor are perfectly synchronized). Reducing the frequency of the FIX lines on the branches means that the FIX bus fleet can be reduced by six buses, each with a maximum capacity of 100 passengers and 44 seats (i.e. an urban articulated bus). For the alternative service design, we exchange the total maximum capacity of these vehicles for 60 smaller FLEX shuttles operating by the policy described in Section 5.2 that only run on the branches, each with a maximum capacity of 10 passengers with 5 seats.

Access/egress times at stops are considered the same for both FIX and FLEX. For transferring passengers, a FIX cost per transfer β^{trans} is set to be roughly equal to 5 minutes of in-vehicle time in line with the study of Balcombe et al. (2004). To estimate on-board comfort, the in-vehicle crowding factors for standing and seated passengers described in Section 4 are used.

The running times of both FIX and FLEX vehicles are drawn from log-normal distributions to characterize the variability of vehicle running times, with parameters calculated from AVL data. To model dwell times, we use the same dwell time function (7) as in the toy network demonstration.

All presented results are averaged over 20 simulation replications per scenario for 100 days of learning. The relative standard errors of the mean for all final day results are then smaller than 2% for all reported KPIs. Passengers are generated according to the AM peak demand pattern presented in Table 2 over 3 simulated hours. All results reported are based on choices, travel time experiences, and vehicle utilization results registered within this period. Before the first passenger arrival, a warm-up period is included to distribute FIX vehicles with an even headway along all FIX lines. The FLEX vehicles are initialized as on-call uniformly distributed over all branch stops.

5.4. Results

The scenarios were run on a 1.10 GHz Intel Core i7 with 16GB of RAM. The average run-time per scenario (with day-to-day learning over 100 days) for the FIX case is 2531 seconds, versus 3948 seconds for FIX+FLEX (with 60 vehicles). As mentioned in Section 5.3, for each of the scenarios, this was replicated 20 times. This indicates that the run-time for the FIX+FLEX increases by 56%, compared to the FIX case. Regarding the path-set sizes, the inclusion of FLEX alternatives results in an increase from 2500 (unfiltered) paths for the FIX case, to 400 000 (unfiltered) paths for the FIX-FLEX case. Note that filtering combines many of these into fewer hyperpath alternatives.

To explore how evolving LoS expectations translate into mode-choice decisions for the larger case study, learning curves for waiting time including weighted waiting time due to denied boarding, crowding-weighted in-vehicle time, and resulting mode-split in a decision between FIX only paths or paths including a FLEX leg are presented in Figure 8. Note that in Figure 8, unlike the toy network results in Figure 6, the blue 'FLEX' results (as also labelled in the legend) refers to any path that includes a FLEX leg as part of the complete trip, in other words, the FLEX path alternative for each passenger category presented in Table 3. As observed in Figure 8, mode-split convergence (bottom row), after initial oscillations, starts to level out after the first 7–10 days with a $\pm 6\%$ band due to the random draws of choices. Notably, not all individual mode-split trajectories converge as quickly, however all display a similar long-term trend. The combination of optimistic initial LoS anticipations and rapid discounting of new experiences can be observed in the convergence of the learning curves for waiting time (top row) and in-vehicle time (middle row). This is perhaps most apparent for the B2C passenger learning curves using the FIX-only paths. The initially optimistic anticipations for both path types are retained over successive days. The long-term trend of anticipated experiences moves toward average realized experiences after consistently underestimating them in earlier days, both for waiting times and in-vehicle times. In general, there are higher degrees of variation in waiting time experiences for transferring passengers (in groups C2B and B2C).

In the second row of Figure 8, all FIX paths converge to higher weighted in-vehicle times when compared to paths including FLEX for the C2B, B2C, B2B passenger categories, particularly for the transferring passengers. The ratio of passenger-kilometres travelled (PKT) over vehicle-kilometres travelled (VKT) provides a measure of average traveller flow per FIX or FLEX path types. Dividing this by the seat capacity for FIX versus FLEX vehicles indicates crowding levels per path type chosen. The PKT/VKT ratio for FIX trips is 38.74, which, divided by the seat capacity of 44 of FIX buses, would give a load factor of 77%. For FLEX vehicles, the PKT/VKT ratio is 2.77, which with a seat capacity of 5, yields a load factor of 55% resulting in higher crowding-weighted in-vehicle times for passengers using FIX.

With perfect even-headway synchronization, the combined frequency of the three lines serving the C2C passengers (leftmost column) would result in an average waiting time of 150 seconds (half the combined headway) for Poisson distributed passengers. This is also set as the initial waiting time anticipation. Similarly, anticipated in-vehicle times are set to the average shortest-path nominal (i.e. uncrowded) in-vehicle times for each OD within this category. However, the actual average waiting time and in-vehicle time experiences are higher, with the anticipation of waiting time converging to roughly 600 seconds. This indicates a high level of bunching of FIX vehicles along the corridor and a

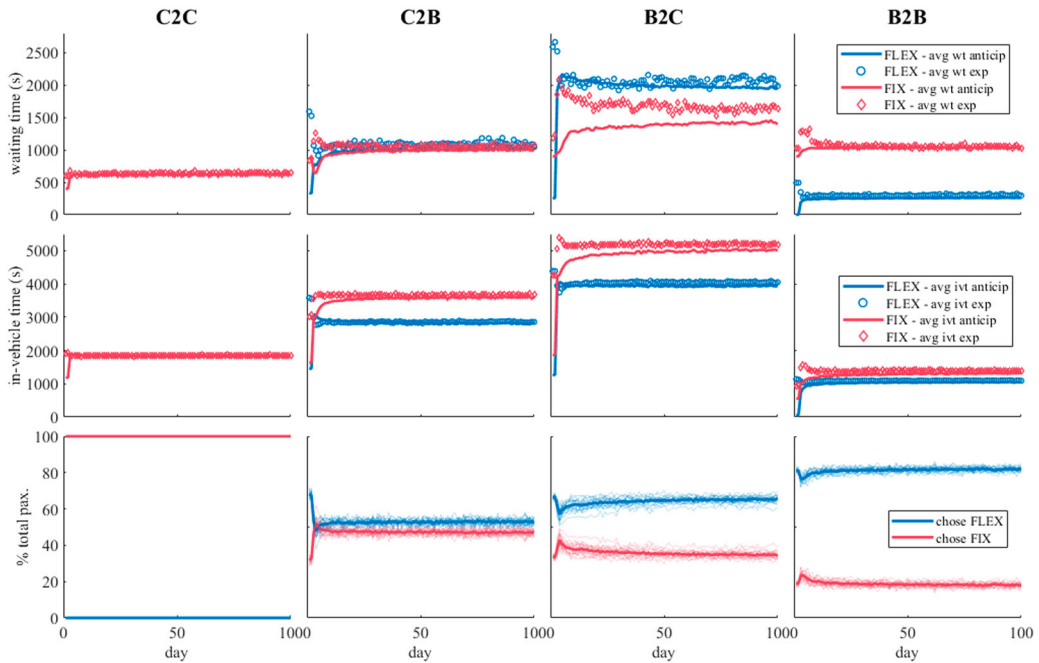


Figure 8. Learning results from the mixed-mode scenario and AM peak demand. Per path type (FIX- for the C2C category, FIX-FLEX for C2B, FLEX-FIX for B2C, and FLEX- for B2B) waiting time (weighted for denied boarding) anticipation/experience (top row), in-vehicle time (weighted for crowding) anticipation/experience (middle row), and the percentage of all travellers that chose a path that included a FLEX leg or a FIX only path over days (bottom row). Columns correspond to the passenger OD categories.

higher frequency of denied boarding. Passengers learn to anticipate the consistent deviations from the planned headway and crowding levels.

For the C2B passenger category (second column from the left), travellers have the option of either choosing FIX directly to their final destination (with an even headway of 1800 s) or using any of the FIX lines (with a combined headway of 600 s with perfect synchronization) to the transfer stop Malmvik and take FLEX to their final destination on a branch. The initially optimistic expectations towards FIX-FLEX (300 s waiting time for FIX to the transfer stop + 0 s waiting time for FLEX to the final destination) versus FIX (900 s expected waiting time) result in an initial preference towards the FIX-FLEX path (68% of all passengers within this category) on the first day. Waiting time anticipations between the two alternative path types converge to close to the same level. Passengers opting to choose FIX experience more crowding for a longer duration of their trip, resulting in higher average in-vehicle times when compared to the FIX-FLEX path. This is reflected in path/mode preferences, which, after initial oscillation, converge slowly together with travel time anticipations to a close to equal number of passengers choosing each path type with a slight preference towards the FIX-FLEX (53%) path with less crowding but an additional transfer.

For the B2C passenger category (third column from the left), the choice scenario is between the FIX path from the branches (again with an even headway of 1800 s, however starting on the lower demand branches) and the FLEX-FIX path (again with an initial 0 s expected waiting time for FLEX to the transfer stop Malmvik and 300 s waiting time to transfer to one of the three FIX lines available). Initial anticipations result in a 67% mode-split in favor of the FLEX-FIX path on the first day. After some initial oscillation in path choices, the combined FLEX-FIX path results in a lower weighted in-vehicle time that compensates for a higher waiting time when compared to FIX only. This results in convergence towards a 66% preference for the FLEX-FIX path.

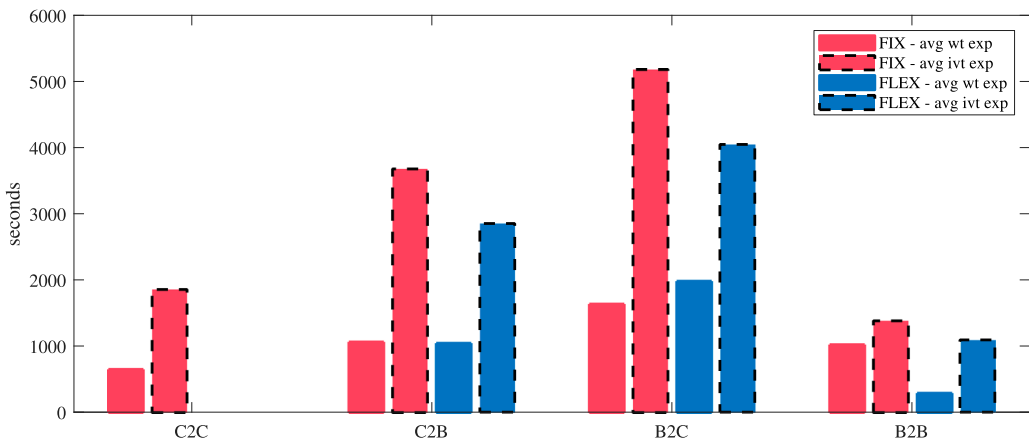


Figure 9. Final day average waiting time (weighted for denied boarding) and in-vehicle time (weighted for crowding) per passenger OD category (C2C, C2B, B2C, B2B) and per path type (FIX- for the C2C category, FIX-FLEX for C2B, FLEX-FIX for B2C, and FLEX- for B2B).

Finally, for the B2B passenger category (the rightmost column), the choice is between a FIX direct line with an initial anticipated waiting time of 900 s and a direct FLEX line with an initial anticipated waiting time of 0 s. With a larger difference in initial waiting time expectations, the initial mode-split heavily favors the FLEX paths (81% of all passengers within this category) on the first day. However, crowding-weighted in-vehicle times converge to similar levels between FIX and FLEX alternatives, with slightly less crowding on-board FLEX vehicles. Average waiting times are consistently far lower for FLEX versus FIX (300 s versus 900 s), and mode-split preferences converge after initial oscillation to 82% of all passengers choosing FLEX over FIX.

The final day waiting times adjusted for denied boarding and the in-vehicle times adjusted for crowding are presented per passenger category in Figure 9. LoS performance is similar between FIX-only paths and paths including FLEX for transferring passengers (C2B, B2C), with a preference towards FLEX mainly due to lower crowding on-board the smaller FLEX shuttles. The B2B passenger category benefits the most from the FLEX service in terms of waiting times compared to FIX-only paths.

6. Conclusions and discussion

In this paper, a combined FIX (i.e. fixed line and schedule public transit service) and FLEX (i.e. public transit service with flexible routing and scheduling) route choice model is developed and integrated into an existing public transit simulation framework containing core components for modelling FIX and FLEX operations and adaptive traveller behaviour. To solve the equilibrium assignment problem and represent traveller day-to-day learning, an MSA approach, where new experiences are discounted by the inverse of the number of days elapsed, is used to guide traveller waiting time and in-vehicle time anticipations towards average realized experiences. A two-link toy network is used to diagnose the implementation of the model and evaluate the evolution of waiting time (including a penalty if denied boarding) and crowding-weighted in-vehicle time trade-offs in mode-split convergence. A case study based on two existing coordinated trunk-and-branches bus lines in Stockholm is then performed to evaluate model properties for a more complex case while demonstrating the usefulness of the combined simulation framework in appraising a broader range of emerging mixed FIX and FLEX service designs and scenarios.

The two-link toy network displays in some sense a 'worst-case' scenario for travellers utilizing FLEX, with imbalanced and limited supply availability. Large waiting time discrepancies between individual travellers for the capacitated FLEX service are reflected in mode split convergence as the capacity for this service increases. In cases where waiting time anticipations between FIX and FLEX services

are similar, differences in crowding-weighted in-vehicle times due to differences in vehicle sizes are also reflected in mode-split, where the larger FIX bus is preferred on average over the smaller FLEX shuttles. The Stockholm case study highlights many important LoS dynamics for first/last-mile mixed FIX and FLEX service design, for example, the uncertainty of waiting times when transferring between congested FIX and FLEX services and potential trade-offs in in-vehicle discomfort due to crowding, dependent on fleet composition. A high degree of bunching and denied boarding was observed for FIX transit users. In particular, for the transferring B2C passengers, high variability in waiting times is observed for travellers transferring between FLEX and FIX and FIX users that have their origin on one of the branches. Both the lack of transfer synchronization to an already congested corridor and the possibility of being denied boarding one of the lower-frequency lines can substantially reduce the LoS experienced by this traveller group.

Some limitations of the study should be noted. In the absence of FLEX shuttle-specific crowding factors, crowding factors based on the meta-study by Wardman and Whelan (2011) were applied for both FIX and FLEX passenger in-vehicle experiences. This meta-study was based on experiments for larger vehicles (crowding preferences based on the seated and standing capacity on-board train cars). However, the crowding effect per passenger or square metre on-board a vehicle with lower passenger capacity is likely different. In future studies, this emphasizes the need for vehicle- and service-type specific value-of-time valuations.

The case studies also highlight the need for more explicit consideration of the discontinuous increase in travel cost in LoS anticipations for capacity-restricted FLEX operations. The waiting time distributions of FLEX services can be characterized as being heavily skewed, i.e. travellers tend to either experience the lowest possible total travel time for the scenario if FLEX vehicles are available on-call or the longest possible for the network with the learned long-term anticipation converging to the average over these. An interesting line of future work is incorporating waiting time variability more explicitly into the learning processes of the model, for example, through the inclusion of within-day real-time information provision in informing traveller decisions, or more directly in LoS variability valuations (see for instance Alonso-González et al. 2020; Geržinič et al. 2022) within traveller GTC functions.

Another possible improvement is to utilize the real-time information component to provide updated waiting time estimates for FLEX passengers, for example depending on the number of requests at that moment. Further, the current (public transport) framework assumes that all requests have to be served, but many services allow rejection of requests, which allows for substantial improvements in waiting times and levels of service but violates the implicit 'contract' that operators have to serve each customer equally. This cancellation could be made by either users or the operator. This trade-off would be an interesting venue for further research.

The importance of initial conditions combined with day-to-day learning dynamics is seen in both the toy network and the larger case study. Using the inverse of the number of days elapsed in MSA discounting of new experiences often results in slow convergence that consistently underestimates waiting and in-vehicle times. A dynamic discount factor (for example, the self-regulated averaging method suggested by Liu, He, and He 2007) that instead induces more aggressive exploration when there are small differences in LoS anticipations between days and greater discounting when LoS anticipations diverge, or taking into consideration additional behavioural factors of learning (such as the distinction between reinforcement-based and belief-based learning in route-choice as suggested by Bogers, Bierlaire, and Hoogendoorn (2007)), could perhaps be used in future work to improve convergence speed while still pushing anticipations towards an equilibrium.

It is well known that correlations between route alternatives within discrete-choice models can result in inaccurate substitution patterns. Traveler choice-sets were restricted to a predefined set of path types in this study. Although certain correlation structures can be considered within the choice-set generation step, for example, by merging comparable FIX lines into hyperpaths, correlations between routes are not explicitly accounted for. There is a lack of behavioural knowledge on how overlap and similarities among mode-route combinations of fixed and flexible services are

perceived. Future research should investigate the choice-set composition and choice preferences based on empirical behavioural data. Furthermore, due to a potentially large number of possible insertion points of FLEX legs in a combined path, the choice-set sizes for larger networks may rapidly grow with the inclusion of FLEX. Future research should further investigate the trade-offs of a hierarchical approach (as adopted here) versus an integrated representation of FIX and FLEX legs in PT route sets.

The study presented in this paper leaves several further avenues open for future work. In this work we considered a single PT operator that managed the FLEX operations, which is likely to be the case given the nature of PT tendering in European settings. However, in other parts of the world such services may be offered in competition, and modelling such competition between multiple FLEX operators may be a useful extension of the proposed framework. The developed simulation framework is expressive in that it allows for experimentation with real-time operational policies and real-time information provided to travellers for individual legs of a complete trip, along with a wide range of behavioural parameters. To simplify the interpretability of results at this stage of model development, traveller adaptation was limited to day-to-day information sources (prior knowledge of each service and accumulated experiences). To further evaluate integrated FIX and FLEX designs for the Stockholm case, experimentation with real-time transfer synchronization strategies (Laskaris et al. 2018, 2021), combined with real-time information provision to travellers (Cats and West 2020), is an interesting line of future work. Furthermore, combining the developed simulation framework with day-to-day supply-side re-planning (e.g. trading off fleet size for the FLEX service with the frequency of the individual FIX lines as in Pinto et al. 2020) could help find a better balance between service types. Finally, the case-studies presented in this work are of limited size, to limit complexity and to enable the analysis of the FLEX and FIX integrated choice behaviour. However, the BusMezzo simulation framework (including the integrated FLEX) is capable of simulating much larger city-wide networks, as was previously reported in Cats and Jenelius (2015) and Drabicki et al. (2021). Future studies may apply the framework to more complex network topographies.

Acknowledgments

The authors would like to thank Matej Cebecauer for his help and instructive advice in acquiring the demand data used in the second case study and Giorgos Laskaris for sharing the underlying network and fixed transit operations data used in the second case study.

Disclosure statement

No potential conflict of interest was reported by the authors.

Funding

This paper is part of the SMART (Simulation and Modeling of Autonomous Road Transport) project (grant number TRV-2019/27044), financed by the Swedish Transport Administration Trafikverket. The work of the third author was supported also by the CriticalMaaS project (grant number 804469), which is financed by the European Research Council and the Amsterdam Institute for Advanced Metropolitan Solutions.

ORCID

David Leffler  <http://orcid.org/0000-0002-4556-4382>

Wilco Burghout  <http://orcid.org/0000-0003-1514-6777>

Oded Cats  <http://orcid.org/0000-0002-4506-0459>

Erik Jenelius  <http://orcid.org/0000-0002-4106-3126>

References

Alonso-González, María J., Niels van Oort, Oded Cats, Sascha Hoogendoorn-Lanser, and Serge Hoogendoorn. 2020. "Value of Time and Reliability for Urban Pooled on-demand Services." *Transportation Research Part C: Emerging Technologies* 115:102621. <https://doi.org/10.1016/j.trc.2020.102621>.

- Alonso-Mora, Javier, Samitha Samaranyake, Alex Wallar, Emilio Frazzoli, and Daniela Rus. 2017. "On-demand High-capacity Ride-sharing Via Dynamic Trip-vehicle Assignment." *Proceedings of the National Academy of Sciences* 114 (3): 462–467. <https://doi.org/10.1073/pnas.1611675114>.
- Archetti, Claudia, M. Grazia Speranza, and Dennis Weyland. 2017. "A Simulation Study of An on-demand Transportation System." *International Transactions in Operational Research* 25 (4): 1137–1161. <https://doi.org/10.1111/itor.2018.25.issue-4>.
- Atasoy, Bilge, Takuro Ikeda, Xiang Song, and Moshe E. Ben-Akiva. 2015. "The Concept and Impact Analysis of a Flexible Mobility on Demand System." *Transportation Research Part C: Emerging Technologies* 56:373–392. <https://doi.org/10.1016/j.trc.2015.04.009>.
- Balcombe, Richard, Roger Mackett, Neil Poulley, John Preston, Jeremy Shires, Helena Titheridge, Mark Wardman, and Peter White. 2004. "The Demand for Public Transport: A Practical Guide." Technical Report TRL593. London, UK: TRL Limited.
- Berrada, Jaâfar, and Alexis Poulhès. 2021. "Economic and Socioeconomic Assessment of Replacing Conventional Public Transit with Demand Responsive Transit Services in Low-to-medium Density Areas." *Transportation Research Part A: Policy and Practice* 150:317–334.
- Bischoff, Joschka, and Michal Maciejewski. 2016. "Autonomous Taxicabs in Berlin – A Spatiotemporal Analysis of Service Performance." *Transportation Research Procedia* 19:176–186. <https://doi.org/10.1016/j.trpro.2016.12.078>.
- Bogers, Enide A. I., Michel Bierlaire, and Serge P. Hoogendoorn. 2007. "Modeling Learning in Route Choice." *Transportation Research Record* 2014 (1): 1–8. <https://doi.org/10.3141/2014-01>.
- Bösch, Patrick M., Felix Becker, Henrik Becker, and Kay W. Axhausen. 2018. "Cost-based Analysis of Autonomous Mobility Services." *Transport Policy* 64:76–91. <https://doi.org/10.1016/j.tranpol.2017.09.005>.
- Burghout, Wilco. 2004. "Hybrid Microscopic-Mesosopic Traffic Simulation." PhD diss., KTH Royal Institute of Technology.
- Cats, Oded. 2011. "Dynamic Modelling of Transit Operations and Passenger Decisions." PhD diss., KTH Royal Institute of Technology.
- Cats, Oded, and Erik Jenelius. 2015. "Planning for the Unexpected: The Value of Reserve Capacity for Public Transport Network Robustness." *Transportation Research Part A: Policy and Practice* 81:47–61. Resilience of Networks
- Cats, Oded, Haris N. Koutsopoulos, Wilco Burghout, and Tomer Toledo. 2011. "Effect of Real-Time Transit Information on Dynamic Path Choice of Passengers." *Transportation Research Record: Journal of the Transportation Research Board* 2217 (1): 46–54. <https://doi.org/10.3141/2217-06>.
- Cats, Oded, and Jens West. 2020. "Learning and Adaptation in Dynamic Transit Assignment Models for Congested Networks." *Transportation Research Record: Journal of the Transportation Research Board* 2674 (1): 113–124. <https://doi.org/10.1177/0361198119900138>.
- Cats, Oded, Jens West, and Jonas Eliasson. 2016. "A Dynamic Stochastic Model for Evaluating Congestion and Crowding Effects in Transit Systems." *Transportation Research Part B: Methodological* 89:43–57. <https://doi.org/10.1016/j.trb.2016.04.001>.
- Cebacauer, Matej, Wilco Burghout, Erik Jenelius, Tatiana Babicheva, and David Leffler. 2021. "Integrating Demand Responsive Services Into Public Transport Disruption Management." *IEEE Open Journal of Intelligent Transportation Systems* 2:24–36. <https://doi.org/10.1109/OJITS.2021.3057221>.
- Chen, Cynthia, Jingtao Ma, Yusak Susilo, Yu Liu, and Menglin Wang. 2016. "The Promises of Big Data and Small Data for Travel Behavior (aka Human Mobility) Analysis." *Transportation Research Part C: Emerging Technologies* 68:285–299. <https://doi.org/10.1016/j.trc.2016.04.005>.
- Davison, Lisa, Marcus Enoch, Tim Ryley, Mohammed Quddus, and Chao Wang. 2012. "Identifying Potential Market Niches for Demand Responsive Transport." *Research in Transportation Business & Management* 3:50–61. <https://doi.org/10.1016/j.rtbm.2012.04.007>.
- Dial, Robert B. 1971. "A Probabilistic Multipath Traffic Assignment Model which Obviates Path Enumeration." *Transportation Research* 5 (2): 83–111. [https://doi.org/10.1016/0041-1647\(71\)90012-8](https://doi.org/10.1016/0041-1647(71)90012-8).
- Drabicki, Arkadiusz, Rafał Kucharski, Oded Cats, and Andrzej Szarata. 2021. "Modelling the Effects of Real-time Crowding Information in Urban Public Transport Systems." *Transportmetrica A: Transport Science* 17 (4): 675–713. <https://doi.org/10.1080/23249935.2020.1809547>.
- Dueker, Kenneth J., Thomas J. Kimpel, James G. Strathman, and Steve Callas. 2004. "Determinants of Bus Dwell Time." *Journal of Public Transportation* 7 (1): 2. <https://doi.org/10.5038/2375-0901>.
- Errico, Fausto, Teodor Gabriel Crainic, Federico Malucelli, and Maddalena Nonato. 2013. "A Survey on Planning Semi-flexible Transit Systems: Methodological Issues and a Unifying Framework." *Transportation Research Part C: Emerging Technologies* 36:324–338. <https://doi.org/10.1016/j.trc.2013.08.010>.
- Fagnant, Daniel J., and Kara M. Kockelman. 2014. "The Travel and Environmental Implications of Shared Autonomous Vehicles, Using Agent-based Model Scenarios." *Transportation Research Part C: Emerging Technologies* 40:1–13. <https://doi.org/10.1016/j.trc.2013.12.001>.
- Ferreira, Luis, Phil Charles, and Clara Tether. 2007. "Evaluating Flexible Transport Solutions." *Transportation Planning and Technology* 30 (2-3): 249–269. <https://doi.org/10.1080/03081060701395501>.
- Geržinič, Nejc, Niels van Oort, Sascha Hoogendoorn-Lanser, Oded Cats, and Serge Hoogendoorn. 2022. "Potential of on-demand Services for Urban Travel." *Transportation* 50:1289–1321.

- Hörl, Sebastian, Felix Becker, and Kay W. Axhausen. 2021. "Simulation of Price, Customer Behaviour and System Impact for a Cost-covering Automated Taxi System in Zurich." *Transportation Research Part C: Emerging Technologies* 123:102974. <https://doi.org/10.1016/j.trc.2021.102974>.
- Horn, M. E. T. 2002. "Multi-modal and Demand-responsive Passenger Transport Systems: a Modelling Framework with Embedded Control Systems." *Transportation Research Part A: Policy and Practice* 36 (2): 167–188.
- Ibarra-Rojas, O. J., F. Delgado, R. Giesen, and J. C. Muñoz. 2015. "Planning, Operation, and Control of Bus Transport Systems: A Literature Review." *Transportation Research Part B: Methodological* 77:38–75. <https://doi.org/10.1016/j.trb.2015.03.002>.
- Jäger, Benedikt, Carsten Brickwedde, and Markus Lienkamp. 2018. "Multi-Agent Simulation of a Demand-Responsive Transit System Operated by Autonomous Vehicles." *Transportation Research Record: Journal of the Transportation Research Board* 2672.
- Jiang, Yu, and Avishai Ceder. 2021. "Incorporating Personalization and Bounded Rationality Into Stochastic Transit Assignment Model." *Transportation Research Part C: Emerging Technologies* 127:103127. <https://doi.org/10.1016/j.trc.2021.103127>.
- Koutsopoulos, Haris N., Zhenliang Ma, Peyman Noursalehi, and Yiwen Zhu. 2019. "Chapter 10 – Transit Data Analytics for Planning, Monitoring, Control, and Information." In *Mobility Patterns, Big Data and Transport Analytics*, edited by Constantinos Antoniou, Loukas Dimitriou, and Francisco Pereira, 229–261. Elsevier.
- Laskaris, Georgios, Oded Cats, Erik Jenelius, Marco Rinaldi, and Francesco Viti. 2018. "Multiline Holding Based Control for Lines Merging to a Shared Transit Corridor." *Transportmetrica B: Transport Dynamics* 7 (1): 1062–1095.
- Laskaris, Georgios, Oded Cats, Erik Jenelius, Marco Rinaldi, and Francesco Viti. 2021. "A Holding Control Strategy for Diverging Bus Lines." *Transportation Research Part C: Emerging Technologies* 126:103087. <https://doi.org/10.1016/j.trc.2021.103087>.
- Leffler, David, Wilco Burghout, Erik Jenelius, and Oded Cats. 2021. "Simulation of Fixed Versus on-demand Station-based Feeder Operations." *Transportation Research Part C: Emerging Technologies* 132:103401. <https://doi.org/10.1016/j.trc.2021.103401>.
- Leffler, David, Oded Cats, Erik Jenelius, and Wilco Burghout. 2017. "Real-Time Short-Turning in High Frequency Bus Services Based on Passenger Cost." In *2017 5th IEEE International Conference on Models and Technologies for Intelligent Transportation Systems (MT-ITS)*. IEEE.
- Leong, Waiyan, and David Alan Hensher. 2012. "Embedding Decision Heuristics in Discrete Choice Models: A Review." *Transport Reviews* 32 (3): 313–331. <https://doi.org/10.1080/01441647.2012.671195>.
- Li, Xiugang, and Luca Quadrioglio. 2010. "Feeder Transit Services: Choosing Between Fixed and Demand Responsive Policy." *Transportation Research Part C: Emerging Technologies* 18 (5): 770–780. <https://doi.org/10.1016/j.trc.2009.05.015>.
- Liu, Yang, Prateek Bansal, Ricardo Daziano, and Samitha Samaranyake. 2019. "A Framework to Integrate Mode Choice in the Design of Mobility-on-demand Systems." *Transportation Research Part C: Emerging Technologies* 105:648–665. <https://doi.org/10.1016/j.trc.2018.09.022>.
- Liu, Yulin, Jonathan Bunker, and Luis Ferreira. 2010. "Transit Users' Route-Choice Modelling in Transit Assignment: A Review." *Transport Reviews* 30 (6): 753–769. <https://doi.org/10.1080/01441641003744261>.
- Liu, Henry X., Xiaozheng He, and Bingsheng He. 2007. "Method of Successive Weighted Averages (MSWA) and Self-Regulated Averaging Schemes for Solving Stochastic User Equilibrium Problem." *Networks and Spatial Economics* 9 (4): 485–503. <https://doi.org/10.1007/s11067-007-9023-x>.
- Liu, Jun, Kara M. Kockelman, Patrick M. Boesch, and Francesco Ciari. 2017. "Tracking a System of Shared Autonomous Vehicles Across the Austin, Texas Network Using Agent-based Simulation." *Transportation* 44 (6): 1261–1278. <https://doi.org/10.1007/s11116-017-9811-1>.
- Markov, Iliya, Rafael Guglielmetti, Marco Laumanns, Anna Fernández-Antolín, and Ravin de Souza. 2021. "Simulation-based Design and Analysis of on-demand Mobility Services." *Transportation Research Part A: Policy and Practice* 149:170–205.
- Martinez, Luis M., Gonçalo H. A. Correia, and José M. Viegas. 2014. "An Agent-based Simulation Model to Assess the Impacts of Introducing a Shared-taxi System: An Application to Lisbon (Portugal)." *Journal of Advanced Transportation* 49 (3): 475–495. <https://doi.org/10.1002/atr.v49.3>.
- Moorthy, Aditi, Robert De Kleine, Gregory Keoleian, Jeremy Good, and Geoff Lewis. 2017. "Shared Autonomous Vehicles As a Sustainable Solution to the Last Mile Problem: A Case Study of Ann Arbor-Detroit Area." *SAE International Journal of Passenger Cars – Electronic and Electrical Systems* 10 (2): 328–336. <https://doi.org/10.4271/2017-01-1276>.
- Narayan, Jishnu, Oded Cats, Niels van Oort, and Serge Hoogendoorn. 2020. "Integrated Route Choice and Assignment Model for Fixed and Flexible Public Transport Systems." *Transportation Research Part C: Emerging Technologies* 115:102631. <https://doi.org/10.1016/j.trc.2020.102631>.
- Narayan, Jishnu, Oded Cats, Niels van Oort, and Serge Paul Hoogendoorn. 2021. "On the Scalability of Private and Pooled on-demand Services for Urban Mobility in Amsterdam." *Transportation Planning and Technology* 45:2–18. <https://doi.org/10.1080/03081060.2021.2017214>.
- Narayanan, Santhanakrishnan, Emmanouil Chaniotakis, and Constantinos Antoniou. 2020. "Shared Autonomous Vehicle Services: A Comprehensive Review." *Transportation Research Part C: Emerging Technologies* 111:255–293. <https://doi.org/10.1016/j.trc.2019.12.008>.

- Peftitsi, Soumela, Erik Jenelius, and Oded Cats. 2021. "Evaluating Crowding in Individual Train Cars Using a Dynamic Transit Assignment Model." *Transportmetrica B: Transport Dynamics* 9 (1): 693–711.
- Pinto, Helen K. R. F., Michael F. Hyland, Hani S. Mahmassani, and I. Ömer Verbas. 2020. "Joint Design of Multimodal Transit Networks and Shared Autonomous Mobility Fleets." *Transportation Research Part C: Emerging Technologies* 113:2–20. <https://doi.org/10.1016/j.trc.2019.06.010>.
- Potts, John F., Maxine A. Marshall, Emmett C. Crockett, and Joel Washington. 2010. "A Guide for Planning and Operating Flexible Public Transportation Services." Transportation Research Board.
- Ronald, Nicole, Russell Thompson, and Stephan Winter. 2015. "Simulating Demand-responsive Transportation: A Review of Agent-based Approaches." *Transport Reviews* 35 (4): 404–421. <https://doi.org/10.1080/01441647.2015.1017749>.
- Salazar, Mauro, Federico Rossi, Maximilian Schiffer, Christopher H. Onder, and Marco Pavone. 2018. "On the Interaction Between Autonomous Mobility-on-Demand and Public Transportation Systems." In *2018 21st International Conference on Intelligent Transportation Systems (ITSC)*. IEEE.
- Scheltes, Arthur, and Gonçalo Homem de Almeida Correia. 2017. "Exploring the Use of Automated Vehicles As Last Mile Connection of Train Trips Through An Agent-based Simulation Model: An Application to Delft, Netherlands." *International Journal of Transportation Science and Technology* 6 (1): 28–41. <https://doi.org/10.1016/j.ijst.2017.05.004>.
- Sheffi, Yosef, and Warren B. Powell. 1982. "An Algorithm for the Equilibrium Assignment Problem with Random Link Times." *Networks* 12 (2): 191–207. <https://doi.org/10.1002/net.v12:2>.
- Shen, Yu, Hongmou Zhang, and Jinhua Zhao. 2018. "Integrating Shared Autonomous Vehicle in Public Transportation System: A Supply-side Simulation of the First-mile Service in Singapore." *Transportation Research Part A: Policy and Practice* 113:125–136.
- Sörensen, Leif, Andreas Bossert, Jani-Pekka Jokinen, and Jan Schlüter. 2021. "How Much Flexibility Does Rural Public Transport Need? – Implications From a Fully Flexible DRT System." *Transport Policy* 100:5–20. <https://doi.org/10.1016/j.tranpol.2020.09.005>.
- Spiess, Heinz, and Michael Florian. 1989. "Optimal Strategies: A New Assignment Model for Transit Networks." *Transportation Research Part B: Methodological* 23 (2): 83–102. [https://doi.org/10.1016/0191-2615\(89\)90034-9](https://doi.org/10.1016/0191-2615(89)90034-9).
- Toledo, Tomer, Oded Cats, Wilco Burghout, and Haris N. Koutsopoulos. 2010. "Mesoscopic Simulation for Transit Operations." *Transportation Research Part C: Emerging Technologies* 18 (6): 896–908. <https://doi.org/10.1016/j.trc.2010.02.008>.
- Vansteenwegen, Pieter, Lissa Melis, Dilay Aktaş, Bryan David Galarza Montenegro, Fábio Sartori Vieira, and Kenneth Sörensen. 2022. "A Survey on Demand-responsive Public Bus Systems." *Transportation Research Part C: Emerging Technologies* 137:103573. <https://doi.org/10.1016/j.trc.2022.103573>.
- Wardman, Mark. 2004. "Public Transport Values of Time." *Transport Policy* 11 (4): 363–377. <https://doi.org/10.1016/j.tranpol.2004.05.001>.
- Wardman, Mark, and Gerard Whelan. 2011. "Twenty Years of Rail Crowding Valuation Studies: Evidence and Lessons From British Experience." *Transport Reviews* 31 (3): 379–398. <https://doi.org/10.1080/01441647.2010.519127>.
- Wen, Jian, Yu Xin Chen, Neema Nassir, and Jinhua Zhao. 2018. "Transit-oriented Autonomous Vehicle Operation with Integrated Demand-supply Interaction." *Transportation Research Part C: Emerging Technologies* 97:216–234. <https://doi.org/10.1016/j.trc.2018.10.018>.
- Winter, Konstanze, Oded Cats, Gonçalo Correia, and Bart van Arem. 2018. "Performance Analysis and Fleet Requirements of Automated Demand-responsive Transport Systems As An Urban Public Transport Service." *International Journal of Transportation Science and Technology* 7 (2): 151–167. <https://doi.org/10.1016/j.ijst.2018.04.004>.