

## Insights into factors affecting the combined bicycletransit mode

van Mil, Joeri; Leferink, Tessa; Annema, Jan Anne; van Oort, Niels

**Publication date**

2018

**Document Version**

Final published version

**Published in**

Proceedings of CASPT 2018

**Citation (APA)**

van Mil, J., Leferink, T., Annema, J. A., & van Oort, N. (2018). Insights into factors affecting the combined bicycletransit mode. In *Proceedings of CASPT 2018: 23-25 July, Brisbane, Australia* Article 60

**Important note**

To cite this publication, please use the final published version (if applicable).  
Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights.  
We will remove access to the work immediately and investigate your claim.

# Insights into factors affecting the combined bicycle-transit mode

J.F.P. van Mil · T.S. Leferink · J.A. Annema · N. van Oort

**Abstract** This paper considers an upcoming, sustainable multimodality: the combination of bicycle and transit. The flexibility of the bicycle combined with the speed and comfort of good transit can be a highly competitive alternative to the car. This study shows that many factors influence the uptake and attractiveness of the bicycle-transit combination. An in-depth literature review resulted in over thirty unique factors: six transit related factors, twenty first-last mile factors and fifteen context related factors. All these factors might influence the demand for this 'new' mode positively or negatively. An exploratory choice modelling study showed that Dutch bicycle-train users in our sample are willing to pay €0.11 for a minute less bicycle time, €0.08 for a minute less train time, €0.11 for a minute of less time to park and €0.60 per avoided transfer. These kinds of insights give the bicycle and transit sector valuable information to be used in modelling multimodality and cost-benefit analyses, thereby supporting improved decision making and integrated design of bicycle and transit networks.

**Keywords:** Transit · Cycling · Behaviour

J.F.P. van Mil MSc

Delft University of Technology / AT Osborne  
Email: [joeri.vanmil@atosborne.nl](mailto:joeri.vanmil@atosborne.nl)

T.S. Leferink MSc

Delft University of Technology / Witteveen+Bos  
Email: [tessaleferink@witteveenbos.com](mailto:tessaleferink@witteveenbos.com)

Dr. J.A. Annema  
Delft University of Technology  
Email: [j.a.annema@TUDelft.nl](mailto:j.a.annema@TUDelft.nl)

dr. ir. N. van Oort  
Delft University of Technology  
Email: [N.vanOort@TUDelft.nl](mailto:N.vanOort@TUDelft.nl)

## 1 Introduction

This paper considers an upcoming, sustainable multimodality: the combination of bicycle and transit. The flexibility of the bicycle combined with the speed and comfort of good transit can be a highly competitive alternative to the car. To decrease congestion and levels of air pollution, and improve their citizens health, governments might encourage the bicycle-transit mode. Particularly when combined with the train, metro, BRT and LRT, bicycle-transit can be very successful (Shelat et al. 2017). When bicycle and transit networks and systems are well integrated, people will cycle further to reach stations and stops (Brand et al. 2017). This directly increases the catchment area and accessibility of the transit system. Bicycle-transit combines the advantages of speed and accessibility of (particularly higher level) transit with the flexibility and reliability of the bicycle. Recent publications have highlighted the potential of the marginalised and little researched bicycle-transit combination (Kager, Bertolini, & Te Brömmelstroet, 2016; KiM, 2016b; Scheltema, 2012; Singleton & Clifton, 2014). This paper aims to provide new knowledge on the bicycle-transit combination. First, the paper gives an overview of factors affecting bicycle-transit demand. Despite the increasing attention for bicycle-transit in research, a coherent literature overview of these factors is lacking (Bachand-Marleau, Larsen, & El-Geneidy, 2011). Second, based on this overview, our study aims to give some quantitative insights into the impact of some factors which were found in the literature review influencing the combined bicycle-rail transit. Namely: bicycle time to station, time to park bike, parking costs, train time and transfer (whether there is a transfer within the train trip). This second part is explorative and carried out in the Dutch context. It concerns findings from a stated choice experiment.

The bicycle-transit trip can be seen as a chain of different links and nodes, connecting a point of origin and point of destination. Two types can be distinguished: Bike-and-Ride (BaR) and Bike-on-Board (BoB) (see Fig. 1). This research focuses on Bike-and-Ride (BaR) journeys where travellers park their bicycle at the station or stop and use the bicycle at the first and/or last leg of the journey.

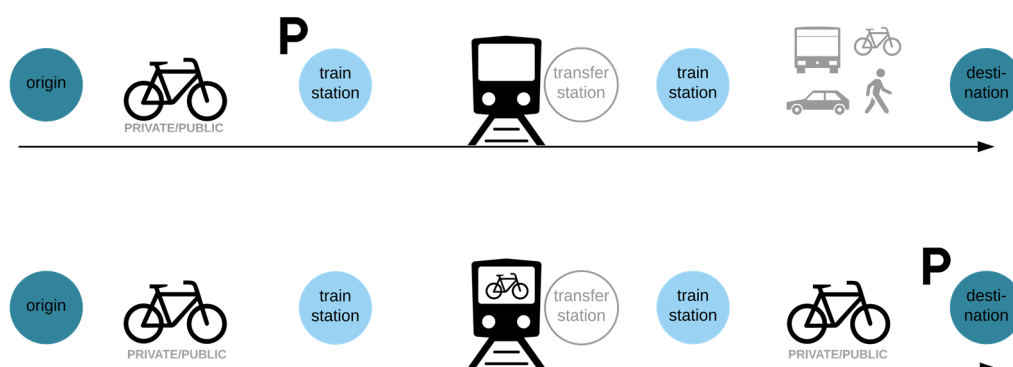


Fig. 1 top) Bike-and-Ride (BaR); bottom) Bike-on-Board (BoB) trip chains. Visualisation by authors.

Despite the theoretic advantages, bicycle-transit use is limited in worldwide practice. Consider access and egress for train journeys. In the European Union on average four percent of rail users arrive or depart from the train station by bicycle (BiTiBi, 2016). But there is an exception: in the Netherlands on average 43% of the home-bound train journeys start or end with a bicycle ride and this number has been growing (Kennisinstituut voor Mobiliteitsbeleid, 2017). As general levels of bicycle and transit use are increasing worldwide, the number of bicycle-transit rides can be expected to rise too.

## 2 Methodology

The paper includes two main methods: a literature review on factors influencing the bicycle-transit combination and a stated choice experiment. The literature was selected through searches in the database of Google Scholar to not only include scientific papers but also grey publications on the rather new research topic. A first search was made for combinations of keywords “bicycle/bike/cycle - transit/train/transit/public transport” and “bike/bicycle-

and-ride/bike/bicycle-on-board". Sources were selected after reading the abstract, to only include papers considering 'factors' (also defined as characteristics, key variables, determinants or aspects). The snowballing technique was used in a second search by looking at the reference list of the selected papers. This review includes over fifty publications in the English or Dutch language.

The structuring of the factors and their relationship to bicycle-transit use is the result of an iterative process. By cross-reading the selected papers, an initial list of significantly influential factors (according to the studies reviewed) was made. The described factors were summed-up per paper. Next, for each factor, the various papers' relevant sections were re-read and summarised. Based on these summaries all factors were assigned a relationship with bicycle-transit use. This approach ensured that factors are not only described in text, but also captured in a more general relationship of 'positive' or 'negative' influence on bicycle-rail use (marked by ++, +, - or -- symbols).

For an individual traveller's station choice, five factors turned out to influence the station's attractiveness most: train time, bicycle time, time to park and walk to the platform, number of transfers and parking costs. This was based on expert opinion. To reveal the interdependencies between these five factors a stated preference choice experiment was set up.

The experiment consisted of nine separate choices between two alternatives in an online questionnaire. To design these choices, a pilot study was executed. This information was used to generate a choice set as a D-efficient design, which optimizes the information that is generated with a minimal number of choices. Statistical analysis was then used to derive the impact of factors on the attractiveness of a station. A multinomial logit (MNL) model was used because it is a fast and efficient way to calculate the parameters, which was in line with the available time for the experiment. Furthermore, the design did not require a more advanced model. The stated choice experiment was incorporated in a questionnaire that was filled out by 269 respondents. Social media targeting resulted in the majority (>90%) of the responses and the additional came from travellers who received a flyer at two train stations in Amsterdam ('Amsterdam RAI' and 'Amsterdam Zuid'). The questionnaire also included questions about personal and socio-economic characteristics enabling deeper analysis in those characteristics. More details are available in Van Mil (2017).

### 3 Factors that influence bicycle-transit demand

A literature review of over fifty worldwide studies on bicycle-transit yielded nearly forty factors. These influential factors can be grouped along the trip chain: transit, first/last-mile and the larger context. The three groups are composed of the following elements:

- **Transit related:** System & Service, Journey and Station typology
- **First/last-mile:** Regions bikeability, Bicycle journey and Competition other modes
- **Context:** Culture & attitude and User characteristics

This paper first describes each group briefly and then presents the related factors in a table. Each factor's relative influence on bicycle-transit demand is captured with a ++/+/-/-- symbol as a rough indication. Note that correlations between factors exist. For example, high levels of employment will closely correlate to more commuters on public transport.

For a more detailed description of the literature review we refer to the work of Leferink (2017), and for more understanding of the factors we refer to the original studies in the sources mentioned in the table and text.

It is not surprising that many of the factors for good bicycle-rail integration focus on the transfer area: the transit stop or station. This part of the transit journey is typically valued lowest by travellers (Peek & Van Hagen, 2002).

### 3.1 Transit related factors

The literature has a rich vocabulary related to transit networks, stations or stops, and the transit journey. For this research the following definition of transit is used: a shared transport mode, in a network (connecting stops) that operates on an interval or timetable.

In the introduction two types of bicycle-transit trip chains were presented. For the transit leg of a journey, bike-and-ride travellers are similar to other transit users after they have parked or collected their bicycle. The differences in transfers and transit may therefore mostly be experienced by bike-on-board travellers. This counts particularly for those with a fixed frame bicycle compared to a foldable bike.

Table 1 shows these factors, their relationship and main sources. They are discussed in more detail in the consecutive paragraphs.

**Table 1** Transit Related Factors, with indication of the factor's influence on bicycle-transit use and relevant sources

Factor	Relation	Source
<b>Transit Journey</b>		
Total (transit) trip of significant length (min. 10-15km)	+	Catchment area increases with rail journey travel time (Flamm & Rivasplata, 2014; Krygsman, Dijst, & Arentze, 2004) and transfer only pays off on longer distance (Van der Loop, 1997).
<b>Transit Stop Typology</b>		
Station at small or medium-sized city centre, out of town or urban areas with parking	+	Certain type of service level on station level attracts more cyclists. Interpretation of numbers from study by Van Hagen & Exel (2014) and study of Cervero et al. (2013), also closely related to competition of other modes.
Urbanised areas (e.g. Population density around transit stop)	+	Popularity for multimodal travel in general (Van Nes et al., 2014)
Bicycle-transit services (e.g. safe and sheltered bicycle parking)	+	Considering the value transit travellers attach to the transfer part of the journey (Peek & Van Hagen, 2002); practical guidelines and findings indicate importance of good bicycle parking, public bicycles and well-integrated ticketing systems (BiTiBi, 2014; Rail Delivery Group, 2016).
<b>Transit System &amp; Services</b>		
Direct routes (no transfers required)	+	People only undertake a maximum number of transits and are thus particularly willing to switch from B/T/M-rail to bicycle-rail if this means one less transfer (Bachand-Marleau et al., 2011; Heinen & Bohte, 2014).
High transit service levels	+	Higher level transit services (e.g. greater distances, speed, directness) attract more rail users (Blainey, 2010; Verschuren, 2016) in general and thus bicycle-rail users (Martens, 2004).

#### 3.1.1 Transit journey

Typically, the largest part of the bicycle-transit combination is the transit journey, both in terms of time and distance. Still on average 30-50% of the travel time of bicycle-transit is spent on access and egress according to a Dutch study using active travel diary information (Krygsman et al., 2004), with similar findings in the US (Flamm & Rivasplata, 2014). It may be concluded that to compensate for the inconvenience and extra time required to collect, park or board a bicycle, the transit journey must be of significant length. Another study looking at the Dutch railway system stated that for bicycle-rail in particular, the travel distance must be at least 10-15 km (Van der Loop, 1997). For short trips people may be more inclined to cycle the whole trip or use the car for a more convenient journey. The stated choice study described in the second section of this paper looks directly from a traveller's point of view.

#### 3.1.2 Transit stop typology

There are many studies on general station's attractiveness and accessibility. The important factors range from its cleanliness to location in the network, and from the feeling of security to the number of benches (Groenendijk, 2015). Not surprisingly, ensuring a good integration of bicycle-rail at local station or transit stop level is a requirement. There are various ways to improve bicycle-transit trips directly. Guidelines from an EU pilot and knowledge sharing project mention six vital services: bicycle parking, public bicycles (e.g. London's Santander

bikes), integrated payment systems (e.g. smartcard schemes), collaborations of bicycle-rail organisations, positive communication and safe cycling infrastructure (BiTiBi, 2017). These bicycle-transit ‘services’ are included in this overview to ensure completeness but their effects not described in more detail due to large local variation.

The location and services of a station also greatly influence the share of cyclists it attracts and produces. The services at different transit stations is described in section 3.2.3 as these are implemented on a system’s wide level.

From data presented in a stated travel choice study among railway passengers in the Netherlands it can be noted that particularly semi-urban stations see a relatively high percentage of bicycle-transit users (Van Hagen & Exel, 2014). Another Dutch study indicated that the main growth of bicycle-rail use at the turn of the century occurred at the commuter towns (so-called ‘voorstadstations’) (Van Boggelen & Tijssen, 2007).

Similar research was undertaken by Cervero et al. (2013), who divided the 42 light rail stations in the San Francisco Bay Area in five categories based on urban setting and parking provisions. The “urban with parking” station type was found to have the largest share of access by bicycle (7% in 2008), where the transit service offered at each station was identical (same frequencies, fares, etcetera). Note that in all these studies the availability of alternative forms of transport play a large share.

### 3.1.3 Transit system & service

There are different types of public transport services as well as network typologies. Some systems or stations seem to be more likely to attract cyclists. Both the study by Bachand-Marleau et al. (2011) as well as by Heinen and Bohte (2014) found that if people are able to substitute one leg of their (primarily higher level) transit journey currently undertaken by another form of public transport with the use of a bicycle, they are more keen to switch. As bicycle-transit is already a multimodal trip by definition, any additional transfers are valued more negatively. Thus, stops with more direct services are more attractive. Additionally, other studies indicate that people will cycle greater differences to higher service level transit stops and stations (Blainey, 2010; Martens, 2004; Verschuren, 2016). Note that these system wide factors trickle down into the transit station factors of section 3.1.1.

More abstractly, Brand et al. (2017) mention physical and network integration, an integrated ticket system and high quality information system as preconditions of bicycle-transit use.

## 3.2 First-/last mile factors

The bicycle leg of the bicycle-transit journey can make up nearly half of the total trip time as indicated earlier in of section 3.1.1. This group of factors contains three subgroups: generic ‘bikeability’ of a place, quality of the bicycle journey and competition with other modes. Competition applies to both access and egress trips to the train station (competition bicycle) as well as the complete door-to-door journey (competition bicycle-rail). Table 2 shows these factors, their relationship and main sources.

**Table 2** Overview first/last-mile factors, with indication of the factor’s influence on bicycle-rail use and relevant sources.

Factor	Relation	Source
<b>Regions bike ability</b>		
long summers / many hours of daylight	+	Indicated for bicycle-rail (Bachand-Marleau et al., 2011) and derived from a US study (Flamm & Rivasplata, 2014)
hilly	-	Research for cycling in general (Harms, Bertolini, & te Brömmelstroet, 2014; Parkin, Wardman, & Page, 2008; Rietveld & Daniel, 2004)
low temperatures	-	Weather was found relevant (Cheng & Liu, 2012)
rainy weather	--	According to (Cheng & Liu, 2012; Molin & Timmermans, 2010; Van Boggelen & Tijssen, 2007) and a research from Bickelbacher in 2001 as described by (Martens, 2004)
<b>Bicycle Journey</b>		
good quality of cycling lanes	+	Attractive route defined by (Krabbenborg, 2015) and explaining bicycle-rail use growth by (Cervero et al., 2013)
high quantity of cycling lanes	+	As derived from studies by (Cervero et al., 2013; Krizek & Stonebraker, 2010; Singleton & Clifton, 2014)

often right of way	+	Mentioned by (Krabbenborg, 2015; Scheltema, 2012)
large number of other cyclists / bicycle lane volume	+	From Dutch survey by (Krabbenborg, 2015) and a study in Singapore (Meng, Koh, & Wong, 2016)
direct cycle routes to station (directness)	+	Described as linearity, continuity, right of way to bicyclists, etc. (Scheltema, 2012), with right of way verified by a Dutch survey (Krabbenborg, 2015) and generally tying-in with reliability as important for train users (Brons & Rietveld, 2009)
high bicycle ownership	+	Relevant for the home-station trip part (Keijer & Rietveld, 2000; KiM, 2016a)
good bicycle storage facilities at/near home/office	+	In a discussion on what bicycle-rail requires by (Pucher & Buehler, 2009)
lack of safety	--	A dissatisfier for cycling to a railway station according to (Scheltema, 2012)
<b>Competition other modes</b>		
high level of cycling	++	Higher share of cycling means a larger number of potential bicycle-transit users. Integrated in various bicycle-transit demand modelling studies (Ensor & Slason, 2011; Geurs, La Paix, & Van Weperen, 2016; Krizek & Stonebraker, 2010)
high level of transit use	++	Higher share of transit use means a larger number of potential bicycle-transit users. Integrated in various bicycle-transit demand modelling studies (Ensor & Slason, 2011; Geurs et al., 2016; Krizek & Stonebraker, 2010)
trip distance first/last mile 1 - 3/5 km	++	Considering the total trip length, cyclists will be willing to make shorter trips to/from transit stations than cycling-only trips. Numerous sources with a range from 1 - 3/5 kilometers that correlate with transit service level and cycling infrastructure (BiTiBi, 2016; Cervero et al., 2013; Krizek & Stonebraker, 2010; Meng et al., 2016; Sherwin & Parkhurst, 2010).
much congestion for cars	+	Given as reason by survey respondents in the UK (Sherwin & Parkhurst, 2010)
good BTM network	-	Captured in terms of frequency and distance to bus stop (Brons, Givoni, & Rietveld, 2009; Meng et al., 2016; Pan, Shen, & Xue, 2010)
available and affordable car parking (at station)	-	Good bicycle-rail integrating measures such as sheltered bicycle parking increases its uptake, similarly good car parking increases car and park-and-ride use (Brons et al., 2009; Sherwin & Parkhurst, 2010)
high car ownership	--	Higher car ownership corresponds with lower levels of bicycle-rail use (Heinen & Bohte, 2014; Huisman, R., Van Oort, N., & Shelat, 2017; Meng et al., 2016; Parkin et al., 2008)
Inexpensive BTM	--	A low price (La Paix Puello & Geurs, 2016) or free public transportation card (for students) will compete with the bicycle as a feeder mode to particular higher level transit systems (Keijer & Rietveld, 2000)

### 3.2.1 Regions bikeability

There are a number of geographical features that describe bicycle uptake in general and bicycle-rail levels in particular. At a local level these characteristics include the weather, hilliness and city size.

The influence of weather is considered in various studies and even defined as “main external factor” by a study in Taiwan of Cheng & Liu (2012), although user experience can differ. Weather conditions were defined by rain, wind, and temperature. Rainy weather has a “large impact” according to a stated preference survey among rail users in the Netherlands (Molin & Timmermans, 2010) and ranked high as well by Van Boggelen & Tijssen (2007). A small but much quoted empirical research by Bickelbacher in 2001 found a decrease in the share of cyclists to a Munich metro station from 16 to 6% on rainy days. Seasonal differences indicated a doubling of bicycle-rail use in summertime in the study. The type of users may, however, differ too, as Bachand-Marleau et al. (2011) describe how users cycle more in summer but increase their overall public transport use during the winter - capturing a predictable substitute.

In a survey in the US among bicycle-rail users, 33% of the participants stated to use bicycle-rail for “*avoiding bad weather or riding in the dark*” (Flamm & Rivasplata, 2014). Note that this was possibly the alternative to cycling the whole trip. Their study also indicated that hilliness may actually increase the use of bicycle-rail compared to bicycle-only trips - arguably trips that else may not have been made at all.

### 3.2.2 *Bicycle Journey*

The bicycle journey to or from a train station shares many characteristics with other bicycle journeys: an attractive and safe bicycle route will also be attractive and safe for bicycle-transit users. A Dutch study considers the bicycle journey to railway stations in particular. Scheltema (2012) formulated the “bicycle-rail traveller’s pyramid of needs”. The fundamental conditions of any bicycle(-rail) route are safety and directness including elements like lighting along the route and right of way. The extra value comes from comfort and attractiveness, where elements as liveliness and bicycle parking are included. The importance of directness becomes clear when considering that railway passengers attach much value to reliability (Brons & Rietveld, 2009). The cyclist has a train to catch and wishes to have as little traffic lights as possible.

Good cycling infrastructure in quality and quantity has been mentioned in a number of cycle-rail studies to greatly affect bicycle-rail usage. Research in San Francisco Bay Area, US (Cervero et al., 2013) mentions how “[a number of infrastructure changes] clearly benefited rail stations (...) in attracting cyclists”. Bicycle infrastructure was ranked among the top-3 most influential factors in the study by (Krizek & Stonebraker, 2010). A third study describes how bicycle-transit use – and its required bicycle parking facilities - was greatly underestimated after cycling infrastructure in Portland improved (Singleton & Clifton, 2014).

### 3.2.3 *Competition other modes*

Bicycle-transit can be a faster, cheaper, more comfortable or convenient alternative to other transport mode options. Public transport services and systems vary in the world from minivans to metro, BRT and high-speed rail. Railway services can typically be classified among the higher-service level forms of public transport. The previous section showed that (more) people are willing to cycle (further) to more direct transit services. Therefore, this section will mainly include studies that look into bicycle-rail trips.

A main indicator for mode choice is trip distance. The exact distance that people are willing to cycle can vary, depending on aforementioned factors like station type and geographic characteristics as well as individual preferences. Roughly speaking, the bicycle is most popular between 1 to 3, up to 5 kilometre distance. Note that travel time and the attractiveness (e.g. safety) of a bicycle route can describe a catchment area better as for example the study of Cervero et al. (2013) shows. Typically people will cycle further on the home-bound side of the journey (Krygsman et al., 2004; Meng et al., 2016; Shelat et al., 2017). An overall preference for walking over both cycling and bus to a higher level transit system seems international, up to a distance of 1 km (Chen, Pel, Chen, Sparing, & Hansen, 2012; KiM, 2015). The financial costs for the alternatives is also a clear indicator of the attractiveness of the alternative modes (La Paix Puello & Geurs, 2016).

Clearly, when both the levels of cycling and rail use are high, the absolute number of bicycle-rail users increases (Kuhnimhof et al., 2010; Martens, 2007). This logical reasoning is integrated in various bicycle-rail demand modelling studies (Ensor & Slason, 2011; Geurs et al., 2016; Krizek & Stonebraker, 2010).

For the complete door-to-door journey, the car will generally be the main competitor. Car ownership among bicycle-rail commuters is slightly lower according to various studies (Heinen & Bohte, 2014; Meng et al., 2016; Shelat, 2016), as among cyclists in general (Parkin et al., 2008) and cyclists in general. Nevertheless, bicycle-rail users often still own a car (Shelat et al. 2017; Sherwin & Parkhurst, 2010), just like other rail users (Givoni & Rietveld, 2007), indicating they are not ‘captive’ public transport users per se.

## 3.3 **Context Factors**

Before we zoom into individuals’ travel purposes of the stated choice model in the next section, we give the larger context of a cycling culture and attitude towards cycling and typical user-characteristics. How is bicycle and rail use perceived? What characteristics do bicycle-rail-users share? How do transportation alternatives affect the share of bicycle-rail? What transport policy is in place? Answers to these questions will vary depending on where and to whom they are asked. Note that these factors are often more qualitative, making it harder to assign a direct relation. Table 3 shows these factors, their relationship and main sources.



High levels of rail use and bicycle use are not mentioned as factors explicitly in this overview but are assumed to be captured by ‘positive attitude towards rail’ and ‘positive attitude towards cycling’.

**Table 3** Overview Context Factors, with an indication of the factor’s relative influence on bicycle-rail use and relevant sources.

FACTOR	RELATION	SOURCE
<b>Culture &amp; Attitude</b>		
positive attitude towards cycling	+	Link between general cycling levels and perception (Rietveld & Daniel, 2004), (Pucher, Komanoff, & Schimek, 1999), (Tight et al., 2011), (Forsyth & Krizek, 2010).
positive attitude towards rail	+	General understanding of how mode perception influences use and vice versa (Heinen & Bohte, 2014), with attitudes varying per user type (Department for Transport, 2015).
low perception of barriers	+	Considering to try cycling. This is relevant as bicycle(-rail) use is limited in practice (Gatersleben & Appleton, 2007).
car as status symbol	-	According to Miles Tight a et al. (2011), but the bicycle is also winning ground. Heinen & Bohte (2014) consider further perception per user group.
<b>User Characteristics</b>		
high number of commuters	++	Commuting trip purpose scores high (Martens, 2007; Van Boggelen & Tijssen, 2007); (Wedderburn, 2013) (Flamm & Rivasplata, 2014), (Meng et al., 2016) and utilitarian travel in general (Bachand-Marleau et al., 2011).
high number of students	+	Strong correlation in various Dutch studies (Keijer & Rietveld, 2000); (KiM, 2014); (Martens, 2007); (Huisman, R., Van Oort, N., & Shelat, 2017).
full-time employment	+	Above average employment in general and full-time in particular (Sherwin & Parkhurst, 2010); Most bicycle-rail trips are work-related (KiM, 2014).
share of mid/higher income	+	Study in the UK (Sherwin, 2010) and in the Netherlands (Shelat, 2016) found bicycle-rail users are often higher income than average population (not than average rail user).
economic growth	+	According to reflection on Dutch bicycle-rail development (Van Boggelen & Tijssen, 2007).
high number of frequent rail travellers	+	Found by various studies (Flamm & Rivasplata, 2014), (Cheng & Liu, 2012; Krizek & Stonebraker, 2010). Also defined as route knowledge (Molin & Timmermans, 2010). Relates to frequent commuters and low perception of barriers.
high share of males	+	Found in England, China and the Netherlands (Heinen & Bohte, 2014; Meng et al., 2016; Sherwin & Parkhurst, 2010).
higher level of education	+	Influence of education (Heinen & Bohte, 2014)
many 20-39 year olds	depends	Slight advantage for young to middle-aged adults (Krizek & Stonebraker, 2010; Shelat, 2016; Sherwin & Parkhurst, 2010), CR-use increases with age (Meng et al., 2016) or does not affect use (Heinen & Bohte, 2014).
travel with heavy luggage	-	According to a stated preference survey in the Netherlands (Molin & Timmermans, 2010)
wearing smart clothes	-	In top-3 reason for not considering to cycle to the station (Sherwin & Parkhurst, 2010). Connected to both culture and trip purpose.

### 3.3.1 Culture & attitude towards transport modes

The culture around, perceptions of and attitude towards various modes of transport, are all contextual factors which influence a traveller’s choice. Particularly the perception of cycling seems to differ per country or social group.

Part of the perception is an interpretation of the actual number and type of cyclists or transit users. If only affluent white males cycle on expensive road bikes (dubbed Mamil in the UK: middle-aged man in lycra) or contrarily students on cheap bicycles, cycling will be perceived accordingly (Aldred & Jungnickel, 2014). The same counts for expensive train travel that only affluent people can afford or vice versa, the train (or bicycle) as a poor man’s mode of transport who cannot afford a car. Negative or stereotypical perceptions can become a barrier to changing people’s travelling habits. The phrase “cycling for all ages and abilities” used by various pro-cycling groups, indicates work is being done on changing perception and hopefully practice.

### 3.3.2 *Bicycle-transit user characteristics*

Traffic flows are the sum of travel choices made by individuals. Research on who are travelling by bicycle, by transit and even by bicycle-transit has accumulated over the years. The literature review focuses on factors for the combination of the two modes only.

Particularly in this group of factors, large differences between places were found. Where some local studies indicated that income or gender may highly correlate with bicycle(-rail) in other locations these appeared to be insignificant. This should be kept in mind when studying these factors. There remains much work to be done in this field.

Mostly socio-economic factors have been identified in the literature. The differentiation of users lays in age, gender and household size, as well as many travel or occupational themes including trip purpose, education levels, employment rate or types and income but also riding frequencies, route knowledge and even clothing. There are clearly correlations between these factors which are outside the scope of this literature review.

### 3.4 **Reflection on factors from literature review**

The relatively most influential factors determining the demand according to the review are the first/last mile distance (most people will cycle up to five km), current bicycle and rail use, competition of other modes, safe and high-quality bicycle routes to the station, share of commuters among railway passengers and number of rainy days. The positive feedback loops (and potentially negative loops) between all the stated factors should be studied in more detail to develop our understanding further. These feed loops are however evident: good bicycle infrastructure will increase cycling levels and in turn high cycling levels will push cycling measures on the agenda (e.g. safer cycling routes) which might increase demand for bicycle train even further, and so forth.

On a system-wide level, good public transportation and high-quality cycling infrastructure can provide a reliable and flexible alternative to the car. People are then less reliant on their car. On an individual's trip choice level, however, there is a competition for the first and last mile between the bicycle and its alternatives to reach or leave a railway station. Then, for bicycle-rail in particular, bus, tram and metro systems will work as a competitor.

As bicycle-rail literature is limited and considering these large variations, more than a generic overview cannot be given. It may be assumed that a combination of the factors can give a first indication of the potential for bicycle-rail use.

## 4 **Results from the Stated Choice experiment**

An explorative stated choice experiment was set up to find the impact of some factors influencing the bicycle-train mode. Five factors were included in this study. Furthermore, only the access trip was considered and no other modes were included.

The five factors are:

- Bicycle time: the amount of time it takes to bicycle from home to the station.
- Time to park: the time it takes to park your bicycle and walk to the platform.
- Parking costs: the costs of parking your bicycle
- Train time: the time the train journey takes from the chosen station to the destination station
- Transfer: whether there is a transfer within the train trip

### 4.1 Choice experiment

To reveal the interdependencies between the five factors a stated preference choice experiment was set up. The experiment consisted of nine choices between two alternatives. Nine choices were presented to respondents to prevent fatigue. This was only possible by making the experiment design more efficient (i.e. acquire more information out of less questions). A pilot study was executed to acquire priors, to deliver the necessary information to create an efficient design. The choice set was generated as a D-efficient design.

Statistical analysis was then used to derive the impact of factors on the attractiveness of a station from a bicycle-rail user’s point of view. The model used was multinomial logit (MNL), this model delivers the required outcomes and has the benefit to be simple and can be calculated very fast.

### 4.2 Results

#### 4.2.1 Relative utility of five station-choice factors

The outcomes are the impact of the five researched factors on the attractiveness (utility) of the bicycle-train mode. Because they are all linked through utility it is possible to compare the impact of the factors

Table 4).

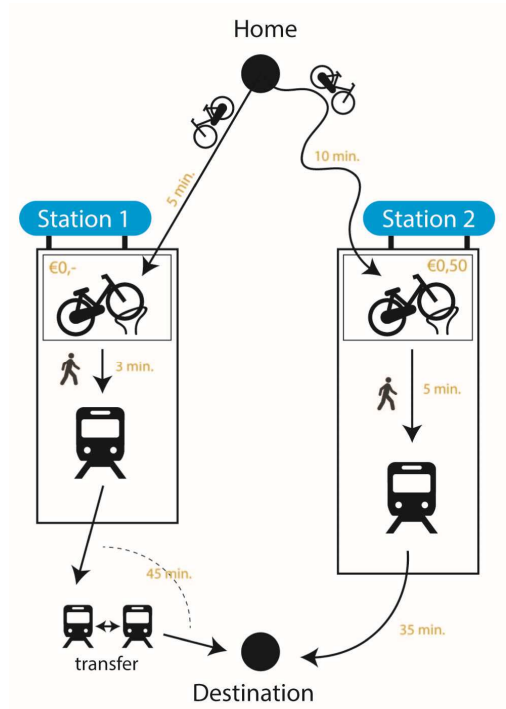


Figure 2 - Example of a choice between two alternatives in the experiment

Table 4 - Outcomes, impact on station attractiveness per factor

Factor name	$\beta$ (impact on utility)	Std err	t-test	p-value
Bicycle time	-0.19	0.0091	-21.02	0.00
Price	-1.77	0.0965	-18.33	0.00
Train time	-0.14	0.0061	-23.28	0.00
Transfer	-1.06	0.0669	-15.80	0.00
Time to park	-0.13	0.0155	-8.66	0.00

By normalising the outcomes (Table 4) the factors (in utility) can be benchmarked to ‘daily used’ values like euro and minute. The result of this normalisation is visualised in two pentagons, where bicycle time is set as a base (Figure 3) and parking price (Figure 4). For Figure 3 this means that bicycle time is equal to one minute. It is possible to create five different pentagons, each with a different base factor. Figure 3 shows that one train transfer in the combined bicycle-train trip is equal to a disutility of almost 6 minutes bicycle time to the station. This supports anecdotal evidence that people cycle to a railway station further away from their point of origin in order to catch a train which takes them directly to their destination without a transfer. This knowledge can also be used to make certain stations more attractive by tuning the price parameter. MNL modelling showed that consumers are willing to pay €0.11 for a minute less bicycle time, €0.08 for a minute less train time, €0.11 for a minute of less time to park and €0.60 per avoided transfer.

### Bicycle time as a base

- One minute of bicycle time is equal to €0.11 (of parking price)
- One minute of bicycle time is equal to 1.43 minute of time to park
- One minute of bicycle time is equal to 1.36 minute of train time
- One minute of bicycle time is equal to 0.18 transfer

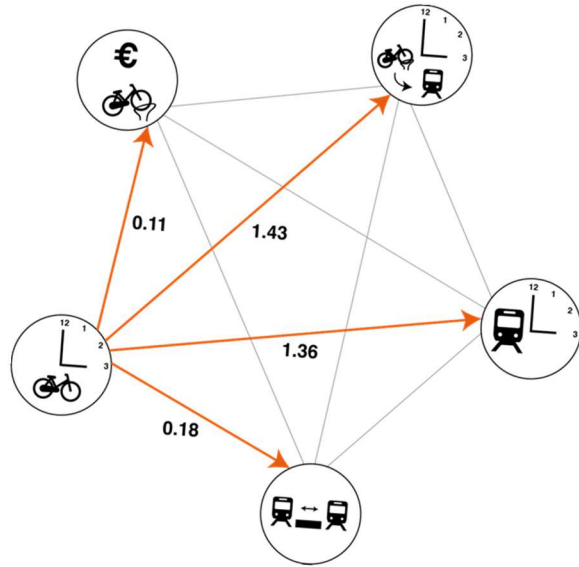


Figure 3 - Interrelation pentagon bicycle time base

### Parking price as a base

- One euro of parking price is equal to 13.2 minutes of time to park
- One euro of parking price is equal 12.6 minutes of train time
- One euro of parking price is equal to 1.66 transfer
- One euro of parking price is equal to 9.21 of bicycle time

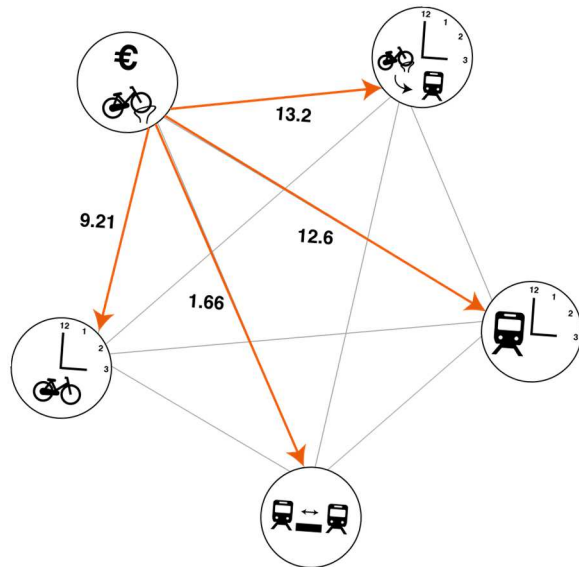


Figure 4 - Interrelation pentagon parking price base

#### 4.2.2 Accounting for personal preferences

The outcome of the choice experiment depends on the behaviour of the respondents. Since the choice behaviour in this particular case might differ per respondent group, it seems useful to analyse the data for selected groups (with personal characteristics and habits). Scientifically, this is important because it further enlarges knowledge on the subject; practically, it is valuable because it makes the findings more usable and applicable to a problem in practice. For example, when the utility for a specific user group is different from others, the effect of a certain measure for the utility of this specific group can be calculated more accurately. In this study, participants were grouped by gender, age, preference for access mode, job occupation, travel purpose, and train trips per week.

In Table 5 the segmented outcomes are presented. The results are normalized by setting price parameter to -1 for all characteristic categories. For example, this shows that increasing one minute of bicycle time (for the general outcome) increases the benefit of this trip with 0.11 Euro (equal to a Value of Time of 6.6 Euro/hour).

Table 5 - Outcomes per personal characteristic, MNL model (normalized)

	Bicycle time	Price	Time park	to Transfer	Train time
General outcomes	-0.11	-1.00	-0.08	-0.60	-0.08
<b>Gender</b>					
Male	-0.11	-1.00	-0.09	-0.63	-0.08
Female	-0.11	-1.00	-0.06	-0.60	-0.08
<b>Age</b>					
15-	-	-	-	-	-
16-24	-	-	-	-	-
25-44	-0.10	-1.00	-0.09	-0.60	-0.08
45-64	-0.18	-1.00	-0.15	-1.30	-0.15
65+	-	-	-	-	-
<b>Access mode</b>					
Bicycle	-0.11	-1.00	-0.09	-0.61	-0.08
Walking	-0.10	-1.00	-0.08	-0.62	-0.08
Transit	-0.10	-1.00	-0.07	-0.61	-0.07
Car	-0.11	-1.00	-0.08	-1.23	-0.08
<b>Job situation</b>					
Employed	-0.12	-1.00	-0.10	-0.73	-0.09
Student	-0.09	-1.00	-0.04	-0.40	-0.07
Unemployed	-	-	-	-	-
<b>Travel purpose</b>					
Work	-0.11	-1.00	-0.10	-0.67	-0.08
Study	-	-	-	-	-
Recreation	-0.11	-1.00	-0.06	-0.58	-0.08
<b>Trips per week</b>					
More than 3	-0.10	-1.00	-0.08	-0.52	-0.07
1 to 3	-0.11	-1.00	-0.07	-0.55	-0.09
Few times per month	-0.12	-1.00	-0.07	-0.75	-0.09
Barely	-	-	-	-	-
<b>All shown parameters are significant at the 1% level. Not shown ( - ) parameters were insignificant.</b>					

The most notable differences are between age categories (25-44 vs. 45-64) and between students and employed people. For example, the value of bicycle time and of avoiding train transfers during the whole trip of the younger and studying people are lower than these values for older people.

The table also shows that women experience less resistance about longer 'time to park bike' than men. Furthermore, these results indicate that people that travel by train often (once a week or more) will accept a transfer easier than people who barely travel. For travellers that use the car as their main mode this effect is even stronger.

#### Generalizability

The outcome (table 4, Figure 3, Figure 4 and first row table 5) is possibly not representative for the whole population of potential bicycle-rail users.

The age of the respondents is compared with the age of NS travellers (Van Hagen & Exel, 2012). This comparison showed that the age distribution of the respondents of the choice experiment differs from the distribution of train users. The age categories 16-24 and 25-44 are overrepresented in our experiment while the other categories are underrepresented. Since the outcomes differed between the age categories 25-44 and 44-65 this might have resulted in an underestimation of the general value of time. At the same time, also the youngest category is underrepresented which might compensate for this effect. This, however, cannot be verified because the outcomes for the other age categories were insignificant.

There is another factor that influences the representativeness of our sample and that is that about 80% of the respondents are highly educated. Research has been done on typical Dutch bicycle-transit users. This research indicates that users are in general highly educated (Shelat et al. 2017). The overrepresentation of higher educated people in our sample, therefore, might not be to harmful for making our sample not representative for the whole population but we cannot underpin this clearly because quantitative underpinning is impossible due to lack of data about the population. Also, the level of income in our sample might result in a skewed result. Accurate information about the income of train travellers is not available therefore a detailed comparison cannot be made. It could have resulted in an overestimation of the overall value of time, since people with higher incomes are willing to spend more on time savings.

The geographical location of our respondents could also have been of influence on the generalizability for the whole of the Netherlands. Most respondents in this study live in the Randstad area, the Netherlands' most populated region.

#### 4.2.3 *Validation*

The outcomes were validated by expert interviews and by a comparison with previous research on value of time. A total of nine experts were interviewed, both researchers and policymakers. In the interviews the focus was on the credibility of the outcomes. They judged the values of time from this research as low. A reason for this could be that in the choice experiment the mode choice was already given to the respondents.. Therefore, travellers are already willing to use this mode. The lack of competition with another mode leads to a lower value of time. Another thing that surprises most interviewees is that 'time to park' has a less negative impact than bicycle time and an approximately equal impact as train time. Remarkable because this is one of the most 'chaotic' parts of the trip. Furthermore, it is a transfer which is generally valued very negative. An explanation for this could be that parking is per definition a part of a cycling trip. A part of the negative impact could therefore already be in the valuation of bicycle time. The other values were confirmed as plausible by the experts.

Next to the interviews the components were compared to literature about value of time and time factors. There is not a singular value for value of time in literature since it is very context specific. For travelling, one hour is valued from about €5 (Antoniou, Matsoukis, & Roussi, 2007) to about €20, with a Dutch average of €9.25 (Warffemius, De Bruyn, & Van Hagen, 2016). The value of time calculated in this study ranges from about €4,80 to €60. This is despite that it is on the lower boundary, still within the range that can be found in literature. The calculated transfer penalty (7.5 min) is within the realistic range of 5-15 minutes (Warffemius, De Bruyn, & Van Hagen, 2016).

#### 4.2.4 *Limitations*

There are limitations to the design of the study: the limited number of included factors and the number and composition of respondents. The method of stated choice acquires outcomes within a non-existing context, when the outcomes are used in a real situation this should be considered. Furthermore, it was impossible to include all factors that influence station choice. However, the most influential factors were a part of this study. A larger research with a deeper analysis on the factors that influence station choice would have made it possible to include more factors in the study and thereby generate more information. Nevertheless, the number of respondents and observations was high and led to many significant values. The last limitation is that the composition of respondents was not perfect, as discussed in 'generalizability'.

## 5 Conclusions

This paper shows that many different factors influence the choice for using the bicycle-train combination. An in-depth literature review resulted in six unique transit related factors, twenty first-last mile actors and fifteen context related factors. All these factors might influence the demand for this 'new' mode positively or negatively. Some of the factors found in the literature can be influenced by policy-makers and/or operators of public transport (e.g. housing projects near stations, transfers on routes or factors related to cycling infrastructure). Some of the factors are very context dependent and are much harder to influence (e.g., weather, hilliness, employment, demography), implying that stimulating the demand for the bicycle-transit combination needs also to be context dependent. The review implies that a 'one size fits all' policy and project strategy for stimulating the bicycle-transit combination does not exist. We argue that the factors identified in the review can result in positive and negative feedback loops which were not scrutinized in this study. Factors alone can never capture the complexity. Therefore, we recommend further scientific research by identifying these potential feedback loops by using system dynamics, for example.

An exploratory choice modelling study showed that Dutch bicycle-train combination users in our sample are willing to pay €0.11 for a minute less bicycle time, €0.08 for a minute less train time, €0.11 for a minute of less time to park and €0.60 per avoided transfer. These kinds of insights might give the bicycle and transit sector valuable information to be used in modelling multimodality and cost-benefit analyses, thereby supporting improved decision making and integrated design of bicycle and transit networks. Our choice experiment study had some limitations related to factors which were taken into account and the representativeness of the sample. Therefore, we find our results not completely generally usable but we think that this way of modelling (which should also be context dependent) can result in useful quantitative information to be used by policy-makers. So, if cities or regions aim to stimulate this relatively new mode we recommend to carry out these kinds of choice experiments using factors which might influence the utility of the bicycle train combination which are specific for this region or city.

## 6 Acknowledgements

This research is performed in cooperation with the Dutch Ministry of Transport, engineering consultants Witteveen+Bos and Delft University of Technology. The authors are grateful for their support.

## 7 Bibliography

- Aldred, R., & Jungnickel, K. (2014). Why culture matters for transport policy: The case of cycling in the UK. *Journal of Transport Geography*, 34, 78–87. <https://doi.org/10.1016/j.jtrangeo.2013.11.004>
- Antoniou, C., Matsoukis, E., & Roussi, P. (2007). A Methodology for the Estimation of Value-of-Time Using State-of-the-Art Econometric Models. *Journal of Public Transportation*, 10(3), 1-19.
- Bachand-Marleau, J., Larsen, J., & El-Geneidy, A. (2011). Much-Anticipated Marriage of Cycling and Transit. *Transportation Research Record: Journal of the Transportation Research Board*, 2247, 109–117. <https://doi.org/10.3141/2247-13>
- BiTiBi. (2014). *Guidelines to implement BiTiBi services*. Retrieved from [http://www.bitibi.eu/dox/BiTiBi\\_guidelines\\_2014.pdf](http://www.bitibi.eu/dox/BiTiBi_guidelines_2014.pdf)
- BiTiBi. (2016). *Faster. Easier. Cooler. Evaluation Report Summary: The Pilot Projects Step by Step*. Retrieved from [http://www.bitibi.eu/dox/BiTiBi\\_Evaluation\\_Report\\_Final\\_January\\_2017.pdf](http://www.bitibi.eu/dox/BiTiBi_Evaluation_Report_Final_January_2017.pdf)
- BiTiBi. (2017). *BiTiBi The Final Report*. Retrieved from [http://www.bitibi.eu/dox/BiTiBi\\_Final\\_Report\\_2017.pdf](http://www.bitibi.eu/dox/BiTiBi_Final_Report_2017.pdf)
- Blainey, S. (2010). Trip end models of local rail demand in England and Wales. *Journal of Transport Geography*, 18(1), 153–165. <https://doi.org/10.1016/j.jtrangeo.2008.11.002>
- Brand, J., Hoogendoorn, S., van Oort, N., & Schalkwijk, B. (2017). Modelling multimodal transit networks

- integration of bus networks with walking and cycling. In *2017 5th IEEE International Conference on Models and Technologies for Intelligent Transportation Systems (MT-ITS)* (pp. 750–755). IEEE. <https://doi.org/10.1109/MTITS.2017.8005612>
- Brons, M., Givoni, M., & Rietveld, P. (2009). Access to railway stations and its potential in increasing rail use. *Transportation Research Part A: Policy and Practice*, *43*(2), 136–149. <https://doi.org/10.1016/j.tra.2008.08.002>
- Brons, M., & Rietveld, P. (2009). Improving the Quality of the Door-to-Door Rail Journey: A Customer-Oriented Approach. *Built Environment*, *35*(1), 122–135. <https://doi.org/10.2148/benv.35.1.122>
- Cervero, R., Caldwell, B., & Cuellar, J. (2013). Bike-and-Ride : Build It and They Will Come. *Journal of Public Transportation*, *16*(4), 83–105.
- Chen, L., Pel, A. J., Chen, X., Sparing, D., & Hansen, I. A. (2012). Determinants of Bicycle Transfer Demand at Metro Stations. *Transportation Research Record: Journal of the Transportation Research Board*, *2276*, 131–137. <https://doi.org/10.3141/2276-16>
- Cheng, Y.-H., & Liu, K.-C. (2012). Evaluating bicycle-transit users' perceptions of intermodal inconvenience. *Transportation Research Part A: Policy and Practice*, *46*(10), 1690–1706. <https://doi.org/10.1016/j.tra.2012.10.013>
- Ensor, M., & Slason, J. (2011). Forecasting the benefits from integrating cycling and public transport. *Transportation*, (September 2010). Retrieved from [http://www.hardingconsultants.co.nz/ipenz2011/downloads/Ensor\\_\\_Matthew.pdf](http://www.hardingconsultants.co.nz/ipenz2011/downloads/Ensor__Matthew.pdf)
- Flamm, B., & Rivasplata, C. (2014). Perceptions of Bicycle-Friendly Policy Impacts on Accessibility to Transit Services: The First and Last Mile Bridge, 100. Retrieved from <http://transweb.sjsu.edu/PDFs/research/1104-bicycle-policy-transit-accessibility-first-last-mile.pdf>
- Forsyth, A., & Krizek, K. J. (2010). Promoting walking and bicycling: Assessing the evidence to assist planners. *Built Environment*, *36*(4). <https://doi.org/10.2148/benv.36.4.429>
- Gatersleben, B., & Appleton, K. M. (2007). Contemplating cycling to work: Attitudes and perceptions in different stages of change. *Transportation Research Part A: Policy and Practice*, *41*(4), 302–312. <https://doi.org/10.1016/j.tra.2006.09.002>
- Geurs, K., La Paix, L., & Van Weperen, S. (2016). A multi-modal network approach to model public transport accessibility impacts of bicycle-train integration policies. *European Transport Research Review*, *8*(4), 25. <https://doi.org/10.1007/s12544-016-0212-x>
- Givoni, M., & Rietveld, P. (2007). The access journey to the railway station and its role in passengers' satisfaction with rail travel. *Transport Policy*, *14*(5), 357–365. <https://doi.org/10.1016/j.tranpol.2007.04.004>
- Groenendijk, L. (2015). Incorporating the traveller's experience value in assessing the quality of transit nodes: A Rotterdam case study.
- Harms, L., Bertolini, L., & te Brömmelstroet, M. (2014). Performance of Municipal Cycling Policies in Medium-Sized Cities in the Netherlands since 2000. <https://doi.org/10.1080/01441647.2015.1059380>
- Heinen, E., & Bohte, W. (2014). Multimodal Commuting to Work by Public Transport and Bicycle: Attitudes Toward Mode Choice. *Transportation Research Record*, (2468), 111–122. <https://doi.org/10.3141/2468-13>
- Kager, R., Bertolini, L., & Te Brömmelstroet, M. (2016). Characterisation of and reflections on the synergy of bicycles and public transport. *Transportation Research Part A: Policy and Practice*, *85*, 208–219. <https://doi.org/10.1016/j.tra.2016.01.015>
- Keijer, M. J. N., & Rietveld, P. (2000). How do people get to the railway station; a spatial analysis of the first and the last part of multimodal trips. *Journal of Transport Planning and Technology, To Appear*. Retrieved from <http://degree.ubvu.vu.nl/repec/vua/wpaper/pdf/19990009.pdf>
- Kennisinstituut voor Mobiliteitsbeleid. (2017). Mobiliteitsbeeld 2017.



- KiM. (2014). Mobiliteitsbeeld 2014, 183. <https://doi.org/978-90-8902-124-3>
- KiM. (2015). Fietsen en lopen : de smeerolie van onze mobiliteit.
- KiM. (2016a). *Mobiliteitsbeeld 2016*. Den Haag.
- KiM. (2016b). *Toekomstbeelden van het fietsgebruik in vijf essays*. Den Haag.
- Krabbenborg, L. (2015). *Cycling to a railway station: exploring the influence of the urban environment on travel resistance*.
- Krizek, K., & Stonebraker, E. (2010). Bicycling and Transit - A Marriage Unrealized. *Transportation Research Record: Journal of the Transportation Research Board*, 2144, 161–167. <https://doi.org/10.3141/2144-18>
- Krygsman, S., Dijst, M., & Arentze, T. (2004). Multimodal public transport: an analysis of travel time elements and the interconnectivity ratio. *Transport Policy*, 11(3), 265–275. <https://doi.org/10.1016/j.tranpol.2003.12.001>
- Kuhnimhof, Tobias, Chlond, Bastian, Huang, & Po-Chi. (2010). Multimodal Travel Choices of Bicyclists - Multiday Data Analysis of Bicycle Use in Germany. *Journal of Transportation Research Board*. <https://doi.org/10.3141/2190-03>
- La Paix Puello, L., & Geurs, K. (2016). Integration of unobserved effects in generalised transport access costs of cycling to railway stations. *EJTIR Issue*, 16(2), 385–405. Retrieved from [http://www.tbm.tudelft.nl/fileadmin/Faculteit/TBM/Onderzoek/EJTIR/Back\\_issues/16.2/2016\\_02\\_05.pdf](http://www.tbm.tudelft.nl/fileadmin/Faculteit/TBM/Onderzoek/EJTIR/Back_issues/16.2/2016_02_05.pdf)
- Leferink, T. S. (2017). *Why cycle to the railway station?* Delft University of Technology.
- Martens, K. (2004). The bicycle as a feeding mode: Experiences from three European countries. *Transportation Research Part D: Transport and Environment*, 9(4), 281–294. <https://doi.org/10.1016/j.trd.2004.02.005>
- Martens, K. (2007). Promoting bike-and-ride: The Dutch experience. *Transportation Research Part A: Policy and Practice*, 41(4), 326–338. <https://doi.org/10.1016/j.tra.2006.09.010>
- Meng, M., Koh, P., & Wong, Y. (2016). Influence of Socio-Demography and Operating Streetscape on Last-Mile Mode Choice. *Journal of Public Transportation*, 19(2). <https://doi.org/http://dx.doi.org/10.5038/2375-0901.19.2.3>
- Molin, E., & Timmermans, H. (2010). Context dependent stated choice experiments: The case of train egress mode choice. *Journal of Choice Modelling*, 3(3), 39–56. [https://doi.org/10.1016/S1755-5345\(13\)70013-7](https://doi.org/10.1016/S1755-5345(13)70013-7)
- Pan, H., Shen, Q., & Xue, S. (2010). Intermodal Transfer Between Bicycles and Rail Transit in Shanghai, China. *Transportation Research Record: Journal of the Transportation Research Board*, 2144, 181–188. <https://doi.org/10.3141/2144-20>
- Parkin, J., Wardman, M., & Page, M. (2008). Estimation of the determinants of bicycle mode share for the journey to work using census data. *Transportation*, 35(1), 93–109. <https://doi.org/10.1007/s11116-007-9137-5>
- Peek, G.-J., & Van Hagen, M. (2002). Creating Synergy In and Around Stations - Three Strategies for Adding Value. *Transportation Research Record*, 1793.
- Pucher, J., & Buehler, R. (2009). Integrating Bicycling and Public Transport in North America. *Journal of Public Transportation*, 12, 79–104. <https://doi.org/10.5038/2375-0901.12.3.5>
- Pucher, J., Komanoff, C., & Schimek, P. (1999). Bicycling renaissance in North America? Recent trends and alternative policies to promote bicycling. *Transportation Research Part A: Policy and Practice*, 33(7), 625–654. [https://doi.org/10.1016/S0965-8564\(99\)00010-5](https://doi.org/10.1016/S0965-8564(99)00010-5)
- Rail Delivery Group. (2016). *Cycle-Rail Toolkit 2*. Retrieved from [http://www.raildeliverygroup.com/files/Publications/2016-04\\_cycle\\_rail\\_toolkit\\_2.pdf](http://www.raildeliverygroup.com/files/Publications/2016-04_cycle_rail_toolkit_2.pdf)
- Rietveld, P., & Daniel, V. (2004). Determinants of bicycle use: Do municipal policies matter? *Transportation*

*Research Part A: Policy and Practice*, 38(7), 531–550. <https://doi.org/10.1016/j.tra.2004.05.003>

- Scheltema, N. (2012). *Recycle City: Strengthening the bikeability from home to the Dutch railway station*. TU Delft.
- Shelat, S., R. Huisman, N. van Oort (2017). Understanding the Trip and User Characteristics of the combined Bicycle and Transit Mode. Thredbo conference Stockholm.
- Sherwin, H. (2010). *Bike-rail integration as one sustainable transport solution to reduce car dependence*. University of the West of England. Retrieved from <http://eprints.uwe.ac.uk/16859/>
- Sherwin, H., & Parkhurst, G. (2010). The promotion of bicycle access to the rail network as a way of making better use of the existing network and reducing car dependence.
- Singleton, P. A., & Clifton, K. J. (2014). Exploring Synergy in Bicycle and Transit Use: Empirical Evidence at Two Scales. *Transportation Research Record: Journal of the Transportation Research Board*, (2417). <https://doi.org/10.3141/2417-10>
- Tight, M., Paul Timms, David Banister, Jemma Bowmaker, Jonathan Copas, Andy Day, ... David Watling. (2011). Visions for a walking and cycling focussed urban transport system. *Journal of Transport Geography*, 19, 1580–1589. Retrieved from [http://ac.els-cdn.com/S0966692311001268/1-s2.0-S0966692311001268-main.pdf?\\_tid=ddaa2002-8af6-11e6-8e51-00000aacb35f&acdnat=1475670536\\_63ae37e2ba18cb08b7457e338f5572bf](http://ac.els-cdn.com/S0966692311001268/1-s2.0-S0966692311001268-main.pdf?_tid=ddaa2002-8af6-11e6-8e51-00000aacb35f&acdnat=1475670536_63ae37e2ba18cb08b7457e338f5572bf)
- Van Boggelen, O., & Tijssen, B. (2007). *Ontwikkelingen van het fietgebruik in voor- en natransport van de trein*. Rotterdam.
- Van der Loop, J. T. A. (1997). Intermodality: Successes By Integrating Public Transport Modes and Cycling, 21–28. Retrieved from <http://trid.trb.org/view/486447>
- Van Hagen, M., & Exel, M. (2014). De reiziger centraal - De reiziger kiest de weg van de minste weerstand. *Spoorbeeld*. Spoorbeeld. Retrieved from <http://www.spoorbeeld.nl/inspiratie/de-reiziger-centraal>
- Van Mil, J. (2017). *Influencing Station Choice of Cyclists*. TU Delft.
- Van Nes, R., Hansen, I., & Constance, W. (2014). Duurzame Bereikbaarheid Randstad: Potentie multimodaal vervoer in stedelijke regio's. Retrieved from [http://dbr.verdus.nl/upload/documents/DBR\\_Notitie\\_10\\_Potentie\\_Multimodaal\\_Vervoer.pdf](http://dbr.verdus.nl/upload/documents/DBR_Notitie_10_Potentie_Multimodaal_Vervoer.pdf)
- Verschuren, M. (2016). *An origin-destination based train choice model for new public transport connections to train stations*. TU Delft.
- Warffemius, P., De Bruyn, M., & Van Hagen, M. (2016). Een nieuwe kijk op de Value of Time!?. *Colloquium Vervoersplanologisch Speurwerk*. Zwolle: CVS.
- Wedderburn, M. (2013). *Improving the cost - benefit analysis of integrated PT, walking and cycling December 2013*. Retrieved from <http://www.nzta.govt.nz/resources/research/reports/537>