

Morphodynamic upscaling with the MORFAC approach

Ranasinghe, Roshanka; Swinkels, Cilia; Luijendijk, Arjen; Bosboom, Judith ; Roelvink, Dano; Stive, Marcel; Walstra, Dirkjan

DOI

[10.9753/ICCE.V32.SEDIMENT.59](https://doi.org/10.9753/ICCE.V32.SEDIMENT.59)

Publication date

2011

Document Version

Final published version

Published in

Proceedings of 32nd Conference on Coastal Engineering, ICCE 2010

Citation (APA)

Ranasinghe, R., Swinkels, C., Luijendijk, A., Bosboom, J., Roelvink, D., Stive, M., & Walstra, D. (2011). Morphodynamic upscaling with the MORFAC approach. In J. McKee Smith, & P. Lynett (Eds.), *Proceedings of 32nd Conference on Coastal Engineering, ICCE 2010* (Vol. 32). Article 1085 ICCE. <https://doi.org/10.9753/ICCE.V32.SEDIMENT.59>

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

MORPHODYNAMIC UPSCALING WITH THE MORFAC APPROACH

Roshanka Ranasinghe^{1,2}, Cilia Swinkels³, Arjen Luijendijk^{3,2}, Judith Bosboom², Dano Roelvink^{1,3}, Marcel Stive² and DirkJan Walstra^{3,2}

The Morphological Acceleration Factor (MORFAC) approach for morphodynamic upscaling enables the simulation of long term coastal evolution. However the general validity of the MORFAC concept for coastal applications has not yet been comprehensively investigated. Furthermore, a robust and objective method for the a priori determination of the highest MORFAC that is suitable for a given simulation (i.e. critical MORFAC) does not currently exist. This paper presents some initial results of an ongoing, long-term study that attempts to rigorously and methodically investigate the limitations and strengths of the MORFAC approach. Based on the results of a numerical modelling exercise using the morphodynamic model Delft3D, the main dependencies and sensitivities of the MORFAC approach are investigated. Also, a criterion is proposed for the a priori determination of the critical MORFAC, based on the CFL condition for bed form migration.

Keywords: morphodynamic modelling; MORFAC; Delft3D; long term coastal evolution

INTRODUCTION

Until recently it was only possible to numerically simulate coastal evolution at time scales of up to a couple of years while using traditional morphodynamic upscaling techniques such as the ‘continuity correction’ method. The introduction of the morphological acceleration factor (MORFAC) concept to coastal morphodynamic modelling by Lesser et al. (2004) and Roelvink (2006) has changed this. The MORFAC approach enables numerical simulations of coastal morphological evolution due to waves and currents at time scales of decades (Lesser 2009, Tonnon et al. 2007, Jones et al. 2007, Lesser et al. 2004) and - under very uniform forcing conditions (e.g. tides only) - for centuries (Dissanayake et al. 2009a, b, Van der Wegen and Roelvink 2008, Van der Wegen et al. 2008).

Bed level update in coastal morphodynamic models is facilitated via the sediment continuity equation. However as the time scales associated with bed level changes are generally much greater than those associated with hydrodynamic forcing, to enable reasonably fast computations, these models have until recently adopted the approach of updating bed levels and feeding them back into the hydrodynamic calculations only every few hydrodynamic time steps. The MORFAC approach departs from this traditional way of thinking and essentially multiplies the bed levels computed after each hydrodynamic time step by a factor (MORFAC) to enable much faster computation. The significantly upscaled new bathymetry is then used in the next hydrodynamic step, see Fig. 1.

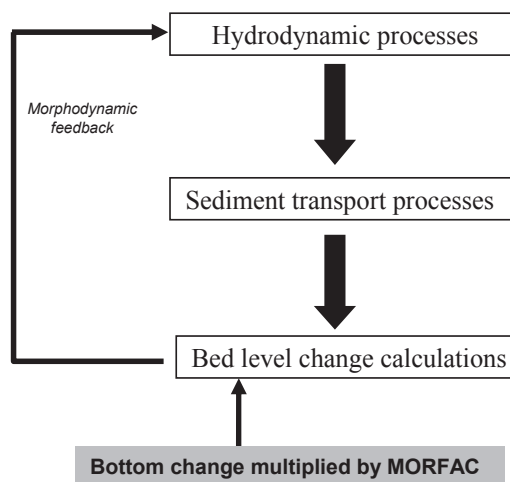


Figure 1. General structure of coastal morphodynamic models and the MORFAC concept.

¹ Department of Water Engineering, UNESCO-IHE, PO Box 3015, 2601 DA Delft, The Netherlands

² Civil Engineering and Geosciences, Technical University of Delft, PO Box 5048, 2600 GA Delft, The Netherlands

³ Harbour, Coastal and Offshore Engineering, Deltares, PO Box 177, 2600 MH Delft, The Netherlands

Although it is very tempting to simply accept the MORFAC concept due to the massive increase in modelling time scales it affords, such a boldly new concept should be rigorously and methodically assessed prior to its general acceptance. This paper presents some initial results of an ongoing study that attempts to systematically investigate the limitations and strengths of the MORFAC approach. Based on the results of a numerical modelling exercise using Delft3D, some of the main dependencies and sensitivities of the MORFAC approach are demonstrated, and a preliminary method for the a priori determination of the critical MORFAC is suggested.

METHODS

In this study it is assumed that the most accurate numerical model simulation currently possible is one undertaken with MORFAC (MF) = 1 (i.e. benchmark simulation). Two simple and opposing idealised cases were considered: the morphological evolution of a symmetrical protrusion (hump) and a depression (trench), one being the direct opposite of the other, both morphologically and hydrodynamically. The hump is expected to represent features such as sand bars, while the trench represents channel-like features; both commonly found features in the coastal zone. In both cases, the bed perturbation was initially located on a flat bed and subjected to uniform unidirectional flow. The ambient water depth was set to 4m above the plane bed, while the amplitude of the bed perturbation was set to 2m, resulting in a minimum water depth of 2m above the hump, and a maximum water depth of 6m in the trench, see Fig. 2.

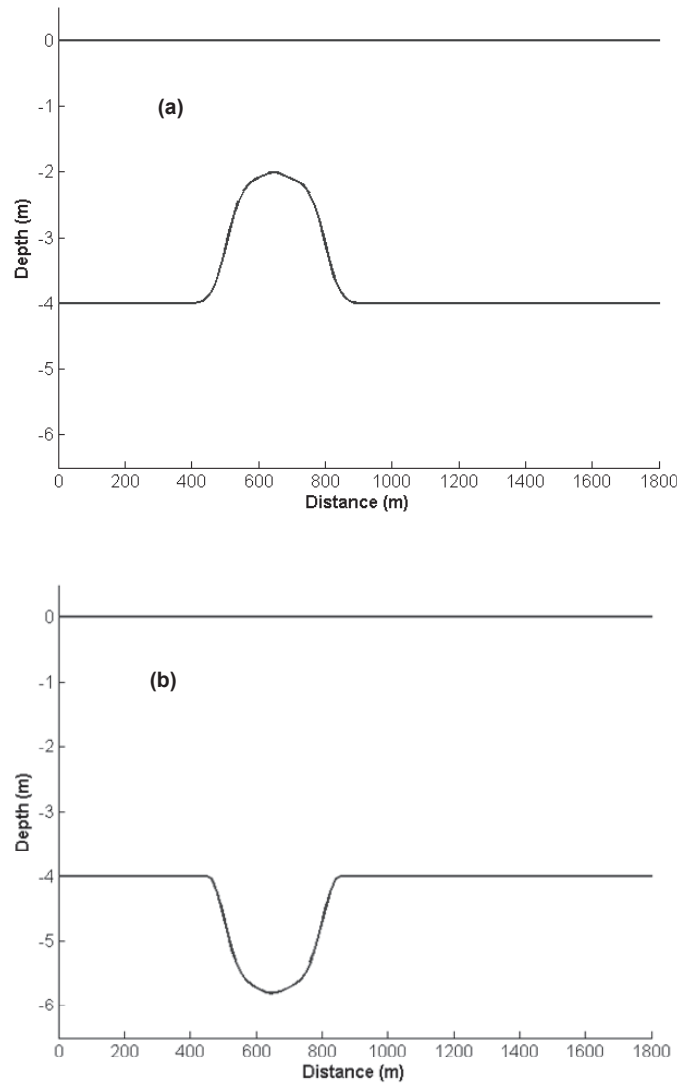


Figure 2. Initial bathymetries: (a) hump on a flat bed, and (b) trench on a flat bed.

Two series of Delft3D simulations were undertaken in profile mode for the two bed perturbations considered. Uniform unidirectional flow was introduced from the left hand side (LHS) boundary and a zero-gradient flow boundary condition was imposed at the downstream (RHS) boundary. The Engelund and Hansen (1967) total load formulation was used for sediment transport calculations. In each series of simulations, the flow velocity, grid size, hydrodynamic time step and the MORFAC were varied systematically.

The critical MORFAC (MF_{crit}) is the highest MORFAC resulting in bed level predictions that are similar to those predicted by a benchmark case at the same morphological time (MT). Therefore, first, the benchmark conditions have to be determined. The benchmark conditions for each forcing condition were thus obtained by continuing the respective $MF = 1$ cases until morphodynamic equilibrium was reached (say at $MT = T_e$). Morphodynamic equilibrium was defined when both the change in amplitude and the change in propagation speed of the bed perturbation approached zero. The bed levels predicted at $MT = T_e$ by subsequent $MF > 1$ simulations were then compared with the equilibrium morphology predicted by the benchmark simulation using the Brier Skill Score (BSS) (Van Rijn et al. 2003).

A BSS value of 1 indicates a perfect match between the bed levels predicted by the benchmark case and a case with a higher MORFAC. BSS values lower than unity indicate a difference between bed levels predicted by the two cases; the lower the BSS the greater the divergence between the predicted bed levels. In this study, BSS values less than 0.99 were considered to represent an unacceptable departure from the benchmark case. For a given set of model conditions (flow velocity, grid size, and time step), as the MORFAC was gradually increased from unity, the first MORFAC at which the BSS dropped below 0.99, before reaching $MT = T_e$, was considered as MF_{crit} .

DEPENDENCIES AND SENSITIVITIES

Hump versus Trench

Two separate sets of simulations were undertaken for the hump and trench cases with flow velocities (U) of 0.5, 0.7, 0.9, 1.1, 1.3 and 1.5m/s. The grid size and hydrodynamic time step were kept constant at 15m and 3s respectively (resulting in a constant Courant number of 2.5) while the MORFAC was systematically increased from 1 to MF_{crit} . The dependency of MF_{crit} on the ambient Froude number (Fr) (i.e. Fr at the upstream boundary) is shown in Fig. 3. Two phenomena are clearly visible in Fig. 3. First, for both cases, MF_{crit} decreases exponentially with ambient Fr . This is intuitively correct as higher velocities will result in higher sediment transport and thus larger bed level variations which will eventually lead to hydrodynamic instabilities in the model. Second, for a given Froude number, the trench case can accommodate a significantly higher MF_{crit} . This is also intuitively correct as velocities (and thus sediment transport) will increase over the hump while they will decrease over the trench. Therefore, further analysis is restricted to the hump case.

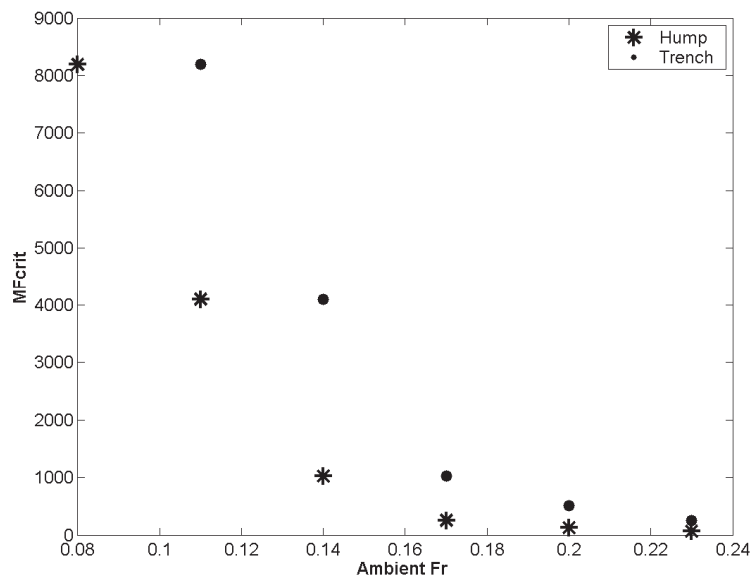


Figure 3. MF_{crit} versus ambient Froude number for the hump and trench cases. Grid size = 15m and hydrodynamic time step = 3s in all cases.

MF_{crit} versus grid size, hydrodynamic time step and Courant number

A second series of simulations was undertaken to investigate the dependency and sensitivity of MF_{crit} on grid size dx , hydrodynamic time step dt and Courant number Cr for the hump case. These simulations were undertaken for flow velocities (U) of 0.9m/s and 1.3m/s. For each U , first dt was kept constant at 3s while dx was systematically doubled from 3.75m to 60m ($\sim 1/5$ th of hump width). Then dx was kept constant at 15m while dt was systematically doubled from 0.75s to 12s. This set of simulations resulted in Cr values that varied between 0.5 and 10 (10 being the largest recommended Cr value for Delft3D). MF_{crit} vs. Cr for this set of simulations is plotted in Fig. 4 which shows that MF_{crit} can vary by up to 1500 for the same Cr . Thus MF_{crit} appears not to be directly governed by Cr .

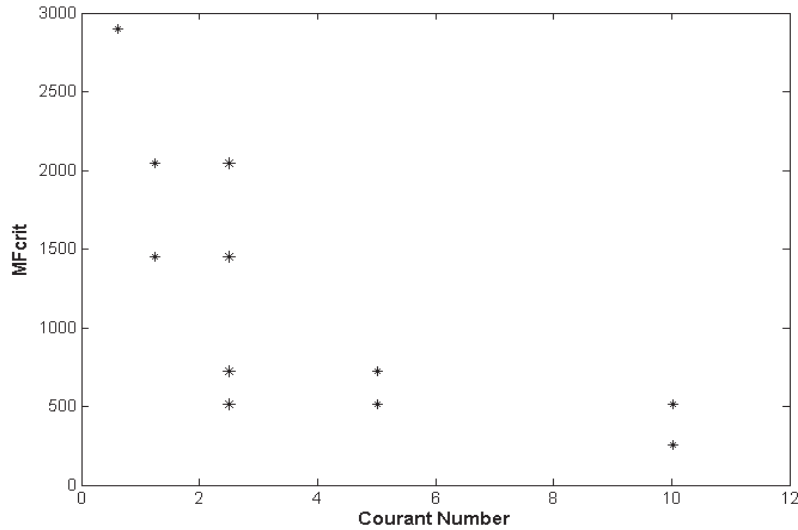


Figure 4. MF_{crit} versus Cr for $U = 0.9\text{m/s}$. dx was varied between 3.75m and 60m while dt was varied between 0.75s and 12s. Cr varied freely between 0.5 and 10.

To investigate the individual dependencies between MF_{crit} and dx , dt , in addition to the above set of simulations where Cr was allowed to freely vary while dx and dt were varied, another set of simulations where Cr was forced to remain constant at 2.5 while dx and dt were varied was undertaken. Fig. 5 shows the resulting variations of MF_{crit} with dx and dt for both constant and varying Cr .

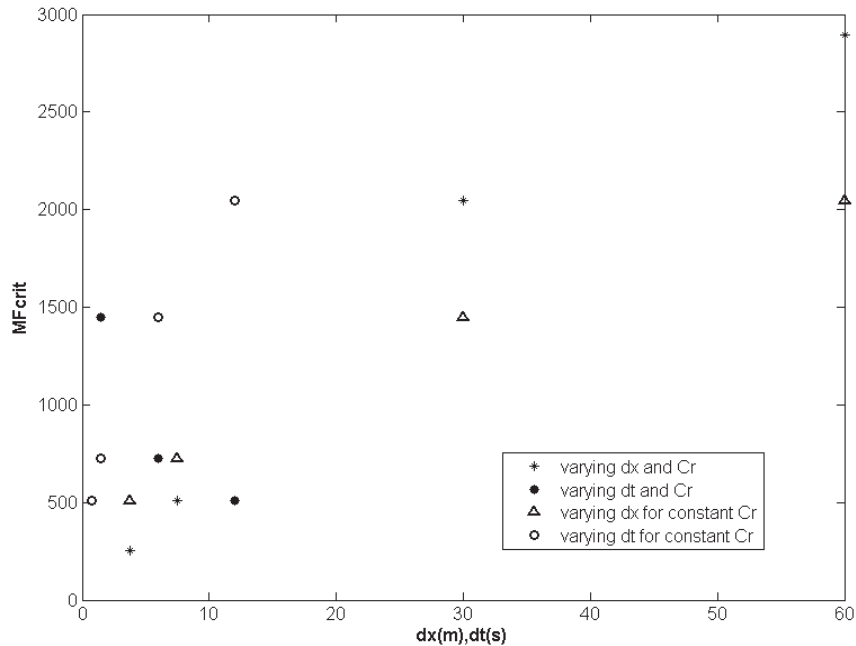


Figure 5. MF_{crit} versus grid size (dx), hydrodynamic time step (dt) and Courant number (Cr).

An almost linear correlation between MF_{crit} and dx can be seen, regardless of whether Cr is constant or varying. However, the dependency of MF_{crit} on dt is less clear. For the cases where Cr was allowed to vary with dt (i.e. by keeping dx constant – solid circles), MF_{crit} increases with decreasing dt , which is intuitively correct as numerical stability increases with decreasing dt . However, when Cr is forced to be constant while increasing/decreasing dt (i.e. by simultaneously decreasing/increasing dx), MF_{crit} decreases with decreasing dt (unfilled circles), which is counter-intuitive. This indicates that the dependency of MF_{crit} on dx over-rides that on dt .

CRITERION FOR THE A PRIORI DETERMINATION OF MF_{crit}

To ensure numerical stability, the propagation of bed forms in one morphological time step should not exceed the grid cell size (CFL criterion). The propagation speed (or celerity) of bed forms C_{bed} is commonly estimated as:

$$C_{bed} = \frac{b|\bar{S}|}{(1-\varepsilon)h} \quad (1)$$

where b is the power of the sediment transport formulation used, ε is the porosity, h is the water depth and $|\bar{S}|$ is the sediment transport magnitude.

Including the effect of MORFAC, the above mentioned CFL condition requires that:

$$CFL_{MF} = \frac{C_{bed}MFdt}{dx} < 1 \quad (2)$$

To examine whether the simulations undertaken here satisfy the above criterion, the CFL_{MF} values for the last successful simulation (i.e. the simulation associated with MF_{crit}) and the first unsuccessful simulation for each simulated combination of U , dx and dt are plotted as a binary plot (see Fig. 6). Successful and unsuccessful simulations are indicated by values of 1 and -1 respectively on the Y-axis of Fig. 6.

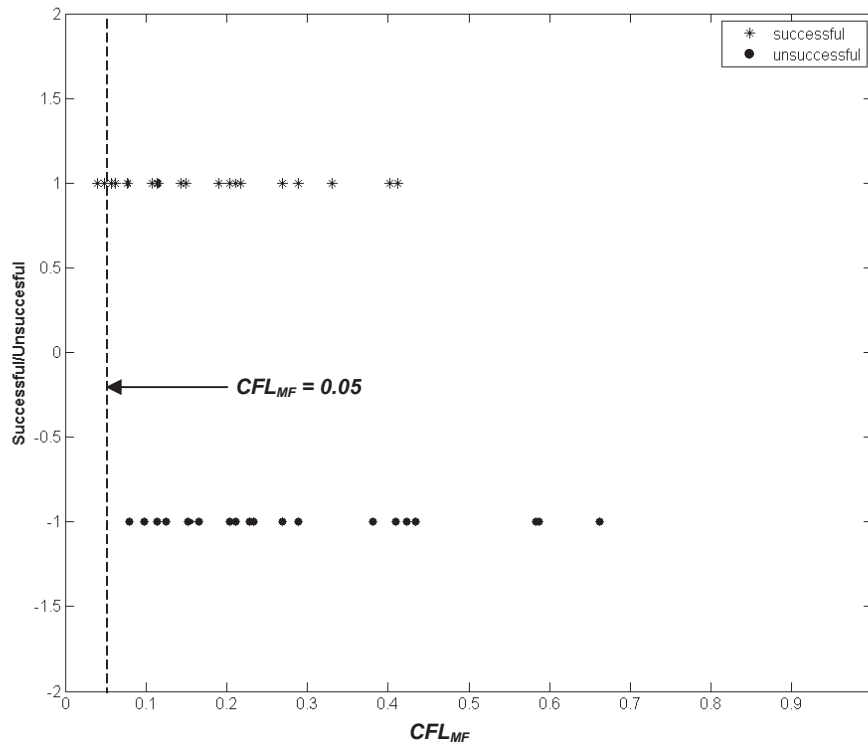


Figure 6. CFL for bed form propagation (CFL_{MF}) for the last successful simulation (i.e. the simulation associated with MF_{crit}) (asterisks) and the first unsuccessful simulation (solid circles) for each simulated combination of U , dx and dt .

It is clear that the CFL_{MF} values associated with both successful and unsuccessful simulations fall below the critical value of 1. This indicates that while the MF_{crit} simulations do satisfy the CFL_{MF} criterion given by Eq. 2, simulations fail at lower MF values than they should. Otherwise, all the circles (i.e. unsuccessful cases) in Fig. 6 would have been located farther to the right on the X-axis such that the associated CFL_{MF} values would be > 1 . There could be numerous reasons for this premature failure including: failure of the assumed linear relationship between morphological response and hydrodynamic response; MORFAC induced errors in bed form celerity and/or amplitude; and variable relationship between MORFAC and numerical errors (due to advection/diffusion scheme), et cetera.

Based on the above analysis, it is clear that the development of a simple and definitive criterion to predict MF_{crit} for even this simplest case of unidirectional flow over a symmetric bed feature is non-trivial. Nevertheless, based on Fig. 6, it appears that, at least for the range of conditions tested here, $CFL_{MF} < 0.05$ may be used as a preliminary guide to obtain a safe first estimate of MF_{crit} . This returns a MF_{crit} value of about 100 when typical values used in nearshore coastal applications are substituted in Eq. 2 for dt (3-10s), dx (5-20m) and C_{bed} (~ 0.001 m/s).

CONCLUSIONS

A strategically designed series of Delft3D simulations has provided new insights regarding the dependencies and sensitivities of the MORFAC approach for morphodynamic upscaling. The main findings are:

1. The critical MORFAC (MF_{crit}), has a strong dependency on the Froude number Fr and the grid size dx . MF_{crit} decreases exponentially as Fr increases, while it increases almost linearly with dx .
2. MF_{crit} does not appear to be directly governed by the Courant number (Cr).
3. The criterion $CFL_{MF} < 0.05$ may provide a safe first estimate of MF_{crit} .

It should be noted that the results and conclusions presented herein may not be directly applicable to complex real-life situations which are likely to incorporate highly non-uniform morphology and time varying non-linear forcing which may include tides, waves, wind etc. Research is currently being undertaken to further investigate the many dependencies and sensitivities of the MORFAC approach with the ultimate goal of developing an effective criterion for the a priori determination of MF_{crit} for any given real-life situation.

REFERENCES

- Engelund, F. and E. Hansen. 1967. A monograph on Sediment Transport in Alluvial Streams. Teknisk Forlag, Copenhagen, Denmark.
- Jones, O. P., O.S. Petersen, and H. Kofoed-Hansen. 2007. Modelling of complex coastal environments: Some considerations for best practice. *Coastal Engineering*, 54: 717-733.
- Lesser, G. 2009. An approach to medium-term coastal morphological modeling, PhD-thesis. Delft University of Technology, ISBN 978-0-415-55668-2.
- Lesser, G., J.A. Roelvink, J.A.T.M. Van Kester, and G.S. Stelling. 2004. Development and validation of a three-dimensional morphological model. *Coastal Engineering*, 51: 883-915.
- Roelvink, J.A., 2006. Coastal morphodynamic evolution techniques. *Coastal Engineering*, 53: 277-287.
- Tonnon, P.K., L.C. Van Rijn, and D.J.R. Walstra, D. J. R. 2007. Morphodynamic modelling of tidal sand waves on the shoreface. *Coastal Engineering*, 54: 279-296.
- Dissanayake, D.M.P.K., R. Ranasinghe, and J.A. Roelvink. 2009. Effect of sea level rise on tidal inlet evolution, *J. Coastal Research*, SI 56(2): 942-946.
- Dissanayake, D.M.P.K., J.A. Roelvink, and M. Van der Wegen. 2009. Modelled channel patterns in a schematized tidal inlet. *Coastal Engineering*, 56: 1069-1083.
- Van der Wegen, M., and J.A. Roelvink. 2008. Long-term morphodynamic evolution of a tidal embayment using a two-dimensional, process-based model. *J. Geophysical Research*, 113, C03016. doi:10.1029/2006JC003983.
- Van der Wegen, M., Z.B. Wang, H.H.G. Savenije, and J.A. Roelvink. 2008. Long-term morphodynamic evolution and energy dissipation in a coastal plain, tidal embayment, *J. Geophysical Research*, 113, F03001, doi:10.1029/2007JF000898.

- Van Rijn, L.C., D.J.R. Walstra, B. Grasmeijer, J. Sutherland, S. Pan, and J.P. Sierra. 2003. The predictability of cross-shore bed evolution of sandy beaches at the time scale of storms and seasons using process-based profile models. *Coastal Engineering*, 47: 295-327.