

When and why does transition fail? A model-based identification of adoption barriers and policy vulnerabilities for transition to natural gas vehicles

Hidayatno, Akhmad; Jafino, Bramka Arga; Setiawan, Andri D.; Purwanto, Widodo W.

DOI

[10.1016/j.enpol.2020.111239](https://doi.org/10.1016/j.enpol.2020.111239)

Publication date

2020

Document Version

Accepted author manuscript

Published in

Energy Policy

Citation (APA)

Hidayatno, A., Jafino, B. A., Setiawan, A. D., & Purwanto, W. W. (2020). When and why does transition fail? A model-based identification of adoption barriers and policy vulnerabilities for transition to natural gas vehicles. *Energy Policy*, 138, Article 111239. <https://doi.org/10.1016/j.enpol.2020.111239>

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

When and why does transition fail? A model-based identification of adoption barriers and policy vulnerabilities for transition to natural gas vehicles

Akhmad Hidayatno^a, Bramka Arga Jafino^b, Andri D. Setiawan^a, Widodo W. Purwanto^c

^a Industrial Engineering Department, Faculty of Engineering, Universitas Indonesia

^b Policy Analysis Section, Faculty of Technology, Policy, and Management, Delft University of Technology

^c Chemical Engineering Department, Faculty of Engineering, Universitas Indonesia

Abstract

Natural gas vehicles (NGV) face significant adoption barriers in Jakarta. Therefore, a successful transition requires measures from the government. Owing to the high cost of transition policies, the efficacy of these policies must be analyzed to identify the most effective policy. The implementation of transition policies, however, could dynamically influence people's perception and behavior, which then changes the landscape of adoption barriers. Furthermore, even a seemingly successful policy may fail when a certain pathway of uncertainties emerges in the future. To address these concerns, we integrated agent-based modeling, exploratory modeling, and diffusion of innovation theory into the exploratory model-based diffusion analysis approach. This approach evaluates the policy's performance, explores changes in the relative importance of different adoption barriers, and identifies policy vulnerabilities, i.e., scenarios leading to policy failures. We tested this approach on four NGV transition policies targeting three adoption barriers. We found that the importance of adoption barriers and the critical uncertainties upon the implemented policies. The social-behavioral barrier predominates under current conditions, whereas the economic factor becomes more relevant when all policies are executed. Understanding the changes in adoption barriers and policy vulnerabilities will help decision-makers to prepare additional measures that ensure a successful transition.

Keywords: Adoption Barriers, Technology Diffusion, Exploratory Modelling, Policy Vulnerabilities, Natural Gas Vehicles

1 Introduction

Concerns related to energy security have encouraged the Indonesian government to promote energy diversification (Erahman et al., 2016). Since the late 1980s, the Indonesian government has introduced natural gas vehicles (NGV) as a clean alternative to gasoline and diesel vehicles (Hartanto et al., 2012). The aim was primarily to reduce the consumption of fossil fuels and CO₂ emissions in the transportation sector. Several policies were implemented by the Indonesian government to support the uptake of NGV, including enforcing regulations on securing gas supply, controlling gas prices, and accelerating the development of gas refueling stations (Hartanto et al., 2012; Sopha et al., 2017). Despite extensive efforts, the increase in the usage of NGV in Indonesia has been quite slow, which can be confirmed by the minimal increase in the number of NGV (Sopha et al., 2017). At present, there are ~5690 NGVs in Indonesia, which is significantly lower in comparison to other Asian countries, such as India (~1,800,000), Pakistan (~2,790,000), and Iran (~3,500,000) (NGVJournal, 2014). Barriers such as social, economic, and technological factors have been the primary reasons behind this discouraging outcome (Hartanto et al., 2012).

NGV adoption in Indonesia reflects a complex dynamic process. It also represents a socio-technical transition of technology diffusion, encompassing the embeddedness of technology within its broader systems of practices (Jacobsson & Bergek, 2011). Technology diffusion involves multisector interdependencies carrying related uncertainties and risks (Raven & Verbong, 2007). Hence, despite the implementation of specific policies and strategy development, barriers may expand, new problems may arise, and undesirable social, economic, and environmental consequences may emerge during the diffusion process. The diffusion of innovation (DOI) theory captures the socio-technical transition phenomena by specifying several factors contributing to technology adoption: the adopters' characteristics, technology attributes, communication channels, and decision-making processes (Rogers, 2010). Potential adopters can be typically classified into five categories, depending on their willingness to purchase new technology: innovators, early adopters, early majority, late majority, and laggards (Robertson, 1967). These categories show that adopters play different roles in triggering the diffusion in a given market; therefore, their attitudes are crucial to the diffusion process (Im et al., 2003). For this reason, adopters' decision-making behavior has

1 received considerable attention in socio-technical transitions studies (Farmer & Foley, 2009;
2 Im et al., 2003).
3
4

5 Socio-technical transitions have been studied using different approaches. Within transitions
6 research, socio-technical transformations have been extensively formulated or modeled using
7 various transition modeling approaches (Bergman et al., 2008; Köhler et al., 2018a). Agent-
8 based modeling is among of the most widely used approaches (Bergman et al., 2008; Holtz et
9 al., 2015; Köhler et al., 2018a; Rahmandad & Sterman, 2008). Agent-based modeling
10 captures the heterogeneity of adopters and models the dynamics of micro-level decision-
11 making and the interactions between actors (Bonabeau, 2002; Farmer & Foley, 2009). Among
12 the different socio-technical transition studies, this approach has been extensively applied to
13 diffusion of new energy technologies (Hansen et al., 2019) such as electric cars (Noori &
14 Tatari, 2016; Wolf et al., 2015), solar PV and battery systems (Palmer et al., 2015; Rai &
15 Robinson, 2015), and micro-cogeneration (Faber et al., 2010). Additionally, transitions in the
16 mobility sector have been investigated using agent-based modeling as well (Köhler et al.,
17 2018b; Köhler et al., 2009; Moallemi & Köhler, 2019). Most of these studies were intended to
18 elucidate adoption barriers and to explore the effectiveness of alternative transition policies.
19
20
21
22
23
24
25
26
27
28
29
30

31
32 To date, very few studies on NGV adoption in Indonesia have examined both the barriers and
33 potential supporting policies for adoption. Hartanto et al. (2012) discussed the development
34 and barriers of NGV adoption in Indonesia. Using the agent-based modeling approach, Sopha
35 et al. (2017) explored policy options that support NGV adoption by examining the decision-
36 making processes of adopters. These studies, however, neglected two policy-relevant
37 concerns. First, these studies do not systematically explore nor explain which adoption
38 barriers are to be targeted and affected by alternative transition policies Thorough insights
39 into the existing adoption barriers and their interactions with the heterogeneity of potential
40 adopters are keys to successful adoption of a new technology, including NGV (Tran et al.,
41 2012). A more detailed understanding would empower policymakers to target specific stages
42 in the adoption process, and hence improve the adoption rate.
43
44
45
46
47
48
49
50
51
52

53
54 The second concern is neglecting the uncertainties in the transition dynamics and in the
55 simulation models supporting those transitions, which are often subject to deep uncertainties
56 (Ascough et al., 2008; van Asselt & Rotmans, 2002). Deep uncertainties depict conditions
57 under which policymakers and analysts cannot agree on the relative importance of the
58
59
60
61
62
63
64
65

1 outcomes to be considered, do not know or cannot characterize the probability distributions of
2 some variables, and/or cannot concede the underlying relationships among the system
3 variables (Lempert et al., 2003; Walker et al., 2013a). By accounting for deep uncertainties in
4 the analysis, one can identify the vulnerabilities of alternative policies, i.e., the future states of
5 the world in which the policies fail to meet their intended goals (Bryant & Lempert, 2010;
6 Walker et al., 2001). One can also evaluate the policy robustness, i.e., to what extent the
7 policies remain successful in the face of deep uncertainties (Lempert et al., 2006; Maier et al.,
8 2016; McPhail et al., 2018). When deep uncertainties are ignored and simplified in model-
9 based analyses, the resulting policy recommendations will most certainly fail if the future
10 uncertainties materialize differently from those of the model assumptions (Haasnoot et al.,
11 2013; Lempert, 2002; Schweizer, 2018; Walker et al., 2013b).

21 Deep uncertainties inherently exist in models that analyze transitions to and adoption of new
22 technologies (Moallemi et al., 2017; Moallemi & Köhler, 2019; Noori & Tatari, 2016). For
23 example, the survey data of consumer behavior fed to a model do not always extensively
24 capture the consumers' heterogeneity (McCoy & Lyons, 2014). Moreover, these models are
25 developed by competing agent-level decision-making theories, such as planned behavior
26 theory (Ajzen, 1991; Kowalska-Pyzalska et al., 2014; Rai & Robinson, 2015), utility
27 functions (Palmer et al., 2015; Sopha et al., 2017), and the consumat approach (Jager et al.,
28 2001; Janssen & Jager, 1999). The model structure may conceivably depend on the selected
29 decision-making framework. To account for deep uncertainties in model-based analysis,
30 researchers have proposed the Exploratory Modeling and Analysis (EMA) approach (Bankes,
31 1993; Bankes, 2002; Kwakkel, 2017; Kwakkel & Pruyt, 2013; Moallemi & Malekpour, 2018;
32 van Asselt & Rotmans, 2002). The EMA proposes that a model be used for exploratory
33 purposes rather than for prediction. Specifically, a user of this approach conducts large-scale
34 computational experiments of the model by sampling and searching over the plausible
35 uncertainty space, and then systematically explores the space of model outcomes. Sampling
36 techniques and machine learning algorithms are the primary components of this approach.

51 To address the abovementioned concerns, we aim to examine the effectiveness and
52 vulnerabilities of alternative policies by considering the case of NGV diffusion in Jakarta,
53 Indonesia, as a case study. For this purpose, we introduce the exploratory model-based
54 diffusion analysis (EMBDA) approach, which integrates agent-based modeling, DOI theory,
55 and exploratory modeling to identify dominant adoption barriers and policy vulnerabilities

1 under deep uncertainties. Generally, agent-based modeling is employed to evaluate the
2 performance of alternative policies, explore changes in the adoption barriers resulting from
3 policy implementation, and assess the vulnerability of each policy alternative to deep
4 uncertainties. In this study, the agent-based model is built on the DOI theory. Furthermore,
5 the exploratory modeling approach is used to generate computational experiments on top of
6 the model to embrace deep uncertainties.
7
8
9

10
11
12 The remainder of this paper is structured as follows. In Section 2, we explain the methodology
13 used to examine the case study and how it is applied. In Section 3, we present and discuss the
14 results of the study. In Section 4, we discuss the conclusion and policy implications of the
15 study.
16
17
18
19

20 21 **2 Methodology**

22 To evaluate the consequences and vulnerabilities of alternative transition policies, we apply
23 the exploratory modeling and analysis (EMA) approach to an agent-based model of
24 technology diffusion. The model is built on the DOI theory, in which agents proceed through
25 certain stages of adoption (Rogers, 2010). EMA is applied to generate computational
26 experiments for this model and to evaluate the results (Kwakkel, 2017; Kwakkel & Pruyt,
27 2013). This approach allows for embracing deep uncertainties, which are ubiquitous in
28 technology diffusion problems (Lempert, 2002). We integrate agent-based modeling, DOI
29 theory, and EMA into the EMBDA approach, as shown in Figure 1. We follow this approach
30 to evaluate alternative transition policies for NGV adoption in Jakarta.
31
32
33
34
35
36
37
38
39
40

41 [Figure 1 here]
42
43
44

45 *2.1 Agent-based model description*

46 In Jakarta, most NGVs are private cars that have been converted from gasoline or diesel.
47 Accordingly, the agent-based model accounts for the heterogeneity of the socio-economic
48 background and the geographical location of car owners. It comprises the agents' properties,
49 their actions, and alternative transition policies by the government. The agents' properties are
50 categorized into states (i.e., their stage of adoption) and attributes (e.g., their socio-economic
51 background) (Van Dam et al., 2012). Of core importance in an agent-based adoption model is
52 the conceptualization of adoption barriers. By evaluating numerous agent-based adoption
53 studies, Hesselink and Chappin (2019) reported that the barriers considered in such studies
54
55
56
57
58
59
60
61
62
63
64
65

could be categorized into structural, economic, social, and behavioral factors. Accordingly, we consider the same categories of adoption barriers in the model.

New vehicle technology often requires different types of fuel. Accordingly, in agent-based modeling studies on the adoption of new vehicle technology, the structural barrier that is most considered is the availability of the fuel supply infrastructure (Huétink et al., 2010; Sweda & Klabjan, 2011). The lack of infrastructure would cause inconvenience to potential adopters, preventing them from adopting the new technology. The economic barrier comprises an upfront purchasing cost and the expected relative savings from the operational cost (Sierzchula et al., 2014). The latter depicts the difference in the maintenance cost and the fuel price between the new and the old technology. Both social and behavioral barriers are closely interlinked. The social barrier is primarily concerned with the agents' interactions with their social network (e.g., homophily and conformity as considered by Eppstein et al. (2011)). The behavioral barrier is concerned with the agents' ignorance because of information unavailability, which was also affected by their social network.

To simplify the complex phenomenon of NGV transition in Jakarta, we make three major assumptions. First, we assume that car owners adopt NGV by upgrading their gasoline car using converter kits rather than buying a new car; hence, the investment cost is the purchasing price of the converter kit. In Jakarta, this technology is preferred because it allows car owners to revert to gasoline-powered vehicles. Second, we assume that the gas and oil fuel prices are constant throughout the simulation. In reality, these prices tend to be constant over three to five years unless there is a major shock in the global market. We ignore such shock scenarios and instead treat the spiked prices as part of the uncertainties. Third, we limit the considered adoption barriers to one or two specific barriers in each of the four barrier categories, i.e., the structural, economic, social, and behavioral factors (Hesselink & Chappin, 2019). The chosen assumptions primarily depend on which details are irrelevant to the policy.

2.1.1 Agent attributes

Car owners are considered as agents in our model. As approximately 3.5 million cars were registered in Jakarta in 2016 (Pardosi et al., 2017), we represent 1000 car owners as a single agent, thus providing a total of 3480 agents in the model. Each agent is characterized by its attributes, i.e., its spatial, socioeconomic, and behavioral properties. To account for the heterogeneity of agents, the values of each attribute assigned to the agents are based on

1 certain probability distributions. Most of these distributions were derived from official and
2 local statistics reports and from previous large-scale transport and commuting surveys
3 (JUTPI, 2012; Pardosi et al., 2017; SITRAMP, 2004). The details of these attributes and the
4 model in general are provided in Appendix A. The description follows the ODD+D protocol
5 (Müller et al., 2013).
6
7
8
9

10 The model is spatially explicit to accommodate the structural barrier of NGV adoption.
11 During weekdays, the agents travel to and from their assigned home and work locations. The
12 home location of the agents is spatially distributed across the 42 districts in Jakarta. The
13 spatial distribution is linearly related to the population of the districts, as shown in Figure 2.
14 The agents use the closest NGV refueling station to either their home or work location. The
15 closest NGV refueling station of each agent is annually updated to reflect the building of new
16 refueling stations. Figure 2 shows the locations of the existing NGV and oil refueling stations.
17 As seen in the figure, the NGV refueling stations are dominated by oil refueling stations.
18
19
20
21
22
23
24
25
26

27 [Figure 2 here]
28
29
30

31 An important economic attribute of the agents is their monthly income. Because of the lack of
32 detailed information on provincial-level income statistics, this attribute is estimated based on
33 the education background and the age of the agents along with the minimum wage level in
34 Jakarta. Accordingly, the income is annually updated, along with the agents' age.
35 Furthermore, the social-behavioral attributes of the agents include their social network, i.e.,
36 with whom they interact, their degree of innovativeness, and the frequency of their
37 interaction.
38
39
40
41
42
43
44

45 2.1.2 Agent states and decision-making

46 Figure 3 shows the five stages an agent undergoes prior to finally adopting an NGV. Among
47 these states, various adoption barriers exist along with the transition phases; some barriers
48 strictly prevent the transition between states (Transition 1 and 3 in Figure 3), while others
49 only delay the transition (Transition 2 and 4). Transition 1 requires agents in the Potential
50 state to be triggered by a “message” from agents in the Adopter state. Adopter agents
51 randomly send the “message” to two of their social networks. This message-triggered
52 transition logic is based on behavioral problems of ignorance and availability bias, which are
53 prevalent in agent-based energy-efficient adoption studies (Moglia et al., 2017).
54
55
56
57
58
59
60
61
62
63
64
65

1 [Figure 3 here]
2
3
4

5 Two economic barriers, i.e., Transition 2 and Transition 4, can delay the adoption process.
6 Agents in the Aware state are assumed to know the potential of NGV technology; however,
7 they have not evaluated benefits in detail. Hence, the time required for an agent to move to the
8 Evaluating state is dependent on the perceived economic benefits of adopting the NGV, which
9 is approximated by the ratio of the gas fuel price and the oil fuel price. Once the agent enters
10 the Deciding state, they have a better understanding of the economic benefits of adopting
11 NGV. Thus, the delay time of Transition 4 is dependent on the expected break-even point of
12 purchasing the converter kit (see Table 1 for further explanation).
13
14
15
16
17
18
19
20

21 Transition 3 includes social-behavioral, economic, and structural barriers. Figure 4 shows the
22 decision-making logic within this transition. Agents regularly evaluate these conditions about
23 three times a year. The social-behavioral barrier demands a significant portion of an agent's
24 social network to have already adopted NGV before that particular agent decides to follow the
25 trend. This barrier symbolizes social network adoption and DOI theories. The former reveals
26 that the tendency of an agent to change their behavior increases with the increase in social
27 reinforcement from their network (Centola, 2010). The latter reveals that the social network
28 impact on a person's adoption behavior is dependent on their degree of innovativeness
29 (Rogers, 2010).
30
31
32
33
34
35
36
37
38
39

40 [Figure 4 here]
41
42
43

44 The economic barrier constrains agents from adopting NGV based on their financial capacity
45 to purchase converter kits. The agents' annual income and their willingness to sacrifice their
46 income to purchase converter kits (i.e., their affordability threshold) are important factors of
47 this barrier. Most households in Jakarta spend less than 20% of their income on transportation
48 (Sugiarto et al., 2014); therefore, we assume that the affordability threshold follows a
49 triangular distribution from 7.5% to 12.5%. In addition to the economic barrier, the
50 availability of refueling stations close to the agents' home or work locations epitomizes the
51 structural barrier. Previous surveys have reported that citizens in Jakarta are willing to travel
52 for a maximum of approximately 3.33 to 6.67 kilometers to refuel their cars (JUTPI, 2012;
53 SITRAMP, 2004). If the distance to the nearest refueling station is above this threshold, the
54
55
56
57
58
59
60
61
62
63
64
65

1 agent will be hesitant to adopt NGV, even when the social–behavioral and economic barriers
2 are overcome.
3
4

5 2.1.3 Policy interventions and performance indicators 6

7 We evaluate three alternative policy interventions that have been publicly debated for a long
8 time and will likely improve the adoption of NGV in Jakarta. Each policy focuses on different
9 adoption barriers. The alternative policies include distribution of free converter kits, reduction
10 in converter kit purchasing price through subsidies, and construction of new NGV refueling
11 stations. In addition to these policies, this study considers a baseline policy with the following
12 assumptions: (i) at the start of the simulation, seven agents that represent around 7000 NGV
13 in Jakarta are placed directly in the Adopter state, while the rest of the agents are in the
14 Potential state; (ii) the converter kit price starts at IDR 17 million (~\$1200) and decreases by
15 2% each year because of technological advancement; and (iii) there are 13 fully operating
16 refueling stations (Hartanto, 2017), and, according to the central government plan, two
17 additional refueling stations will become operational every two simulation years.
18
19
20
21
22
23
24
25
26
27
28

29 In addition to each individual policy, the combination of all policies is tested, which results in
30 five policy setups:
31

- 32 1. Baseline policy: No additional interventions.
- 33 2. Kit subsidy policy: Reducing the converter kits' price by 10%. This policy attempts to
34 offset the economic barrier by making the converter kits more affordable.
35
- 36 3. Free kit policy: Distributing 20,000 free converter kits. In the model, this corresponds to
37 20 additional agents that enter the Adopter state at the beginning of the simulation. This
38 policy attempts to offset the social–behavioral barrier as there are more adopters.
39
- 40 4. Infrastructure enhancement policy: Substantially accelerating the development of the
41 refueling stations by constructing 70 new refueling stations within ten simulation years.
42 This policy attempts to offset the structural barrier by strengthening the fuel supply
43 infrastructure.
44
- 45 5. Integrated policy: Combination of subsidy policy for kits, free kit policy, and
46 infrastructure enhancement policy.
47
48
49
50
51
52
53
54
55

56 The model is implemented in AnyLogic simulation package. The simulation is run for 14
57 years from 2017 to 2030. At the end of the run, two groups of performance indicators are
58 observed. The first one is the number of agents in each adoption state. Of particular interest is
59
60
61
62
63
64
65

1 the number of agents in the Adopter state and those in the Potential and Evaluating states. A
2 high number of agents in the Potential state indicates a low degree of citizen awareness for
3 NGV; while a high number of agents in the Evaluating state indicates that many car owners
4 failed to overcome the strict adoption barriers. This leads to the second group of indicators,
5 called “the adoption lags.” This group of indicators attempts to unravel the most critical
6 barriers that prevent diffusion. In particular, we record the number of agents in the Evaluating
7 state who fail to meet either the social–behavioral, the economic, or the structural barrier, and
8 we label them as social lags, economic lags, and structural lags, respectively.
9
10
11
12
13
14
15

16 *2.2 Exploratory model-based diffusion analysis*

17 Embracing deep uncertainties in new technology diffusion problems requires a different
18 approach in the simulation models. One popular approach to support decision-making under
19 deep uncertainties is the EMA approach (Banks, 1993; Banks, 2002; Kwakkel, 2017;
20 Kwakkel & Pruyt, 2013), which requires systematic exploration of different uncertainties in
21 model inputs and assumptions in the model structure by generating an ensemble of simulation
22 runs. EMA is a generic approach that is applicable to various modeling paradigms such as
23 integrated assessment models (e.g., Lamontagne et al., 2018; Rozenberg et al., 2014), system
24 dynamics (e.g., Eker & van Daalen, 2015; Hamarat et al., 2014; Moallemi et al., 2017; Pruyt
25 & Kwakkel, 2014), and agent-based models (e.g., Gerst et al., 2013; Greeven et al., 2016;
26 Jaxa-Rozen et al., 2019; Moallemi & Köhler, 2019). While this universal approach can be
27 applied to several cases, a tailored EMA approach specific to model-based diffusion studies
28 has not been reported to date. To address this gap, we combined EMA with the DOI theory
29 and developed the Exploratory Model-based Diffusion Analysis (EMBDA) approach.
30
31
32
33
34
35
36
37
38
39
40
41
42
43

44 *2.2.1 Exploratory Modeling and Analysis (EMA)*

45 EMA is the systematic exploration of the impacts of various parametric, structural, and
46 methodological uncertainties on the performance indicators of a simulation model (Banks et
47 al., 2013). EMA aims at using simulation models not for “prediction,” but rather for
48 “exploration” purposes. EMA comprises three main steps: generation of an ensemble of
49 scenarios, execution of simulation runs on these scenarios and inductive reasoning on the
50 simulation results. Accordingly, the first step in EMA concerns the experimental design of
51 scenarios that span the entire plausible range of model parameters and competing alternative
52 model structures (Islam & Pruyt, 2016; Moallemi et al., 2018). This step uses statistical
53
54
55
56
57
58
59
60
61
62
63
64
65

1 sampling techniques such as the Monte Carlo or the Latin hypercube sampling (Herman et al.,
2 2015; Kwakkel, 2017).
3
4

5 The next step in EMA entails conducting a backward induction from the simulation results to
6 model parameters and structures using scenario discovery techniques (Bryant & Lempert,
7 2010; Groves & Lempert, 2007; Lempert et al., 2008; Lempert et al., 2006). These techniques
8 are probability neutral, and they attempt to map the scenarios (input space) to performance
9 indicators (output space) without applying the probabilistic aggregation approaches from the
10 simulation results. Scenario discovery can help in identify policy vulnerabilities, i.e., the
11 condition under which a policy fails to meet its objective (Walker et al., 2001). By analyzing
12 policy vulnerabilities, one can increase the robustness of the policy by formulating further
13 hedging and shaping actions that can safeguard the success of the policy (Dewar, 2002).
14
15
16
17
18
19
20
21
22

23 Two steps exist in scenario discovery techniques (Bryant & Lempert, 2010). First, the
24 threshold value for the outcomes of interest must be determined. The simulation runs, and
25 their associated scenarios are classified into those whose performance indicators fall below
26 (or above) the threshold and those that do not. In the case of new technology adoption, for
27 instance, a low number of adopters is undesirable. A threshold is thus set at the minimum
28 acceptable number of consumers who adopt the technology. Subsequently, in the second step,
29 the scenario discovery algorithm identifies the combinations of uncertain parameters leading
30 to these undesired outcomes. The Patient Rule Induction Method (PRIM), a bump-hunting
31 algorithm, is most often used for this purpose (Friedman & Fisher, 1999; Lempert et al.,
32 2008). This algorithm maps the simulation results to their corresponding input parameters and
33 then searches for regions within the input space with a high density of undesired simulation
34 results.
35
36
37
38
39
40
41
42
43
44
45
46

47 Experiments were conducted on the EMA workbench in the Python library (Kwakkel, 2017).
48 The library provides a flexible and user-friendly interface for connecting simulation models to
49 the entire exploratory modeling and analysis steps. The library adopts the XLRM framework
50 (Lempert et al., 2003; Tran & Daim, 2008), wherein users must define the exogenous
51 uncertain variables and their corresponding range of values ('X'), the policy levers ('L'), the
52 system relationships encapsulated in the simulation model ('R'), and the performance
53 measures to be observed ('M'). The library then supports the design, generation, and
54
55
56
57
58
59
60
61
62
63
64
65

1 execution of computational experiments in the simulation model and provides interfaces for
2 visualizing and analyzing the results.
3
4

5 2.2.2 Stages within the EMBDA approach
6

7 We combined concepts from the DOI theory and steps within the EMA approach and
8 formulated the EMBDA approach. The DOI theory focused on the importance of
9 understanding both the impact of uncertainties in the system and the dominant adoption
10 barriers and how policy interventions are related to those barriers (Foxon & Pearson, 2008;
11 Hesselink & Chappin, 2019; Raven & Walrave, 2018; Reddy & Painuly, 2004). The EMA
12 approach suggests the use of computational experiments to systematically map the outcomes
13 of interest to the underlying assumptions and uncertainties. Therefore, combining these two
14 concepts results in a three-stage approach, as depicted in Figure 1.
15
16
17
18
19
20
21
22

23 The approach begins with a problem formulation. Besides developing the simulation model,
24 we must clarify three further aspects. First, we must understand the prominent adoption
25 barriers in the context of the study. To identify the most influential barriers, each barrier must
26 be explicitly represented in the model. Next, each specific adoption barrier is attempted to be
27 overcome through the development of policy interventions. Finally, we must identify the
28 uncertainties that are influential to the adoption barriers and the decision-making processes.
29 These uncertainties may originate from agent attributes (such as willingness to pay for new
30 technology), external variables (such as crude oil price), or model structures (such as
31 interaction patterns among the agents).
32
33
34
35
36
37
38
39
40
41

42 Table 1 lists the uncertainties considered in the case study. This list encompasses the variables
43 that directly influence the decision-making processes of the agents (see Figures 3 and 4). The
44 value bandwidths of these uncertainties were inferred in two ways. To derive the uncertainties
45 related to economic variables, we used the historical statistics of the variable complemented
46 by a small additional margin. The uncertainties related to the states and behaviors of agents
47 were inferred from transport surveys (JUTPI, 2012; SITRAMP, 2004; Sugiarto et al., 2014),
48 and were also complemented by a small additional margin.
49
50
51
52
53
54
55

56 [Table 1 here]
57
58
59
60
61
62
63
64
65

1 The activities in the problem formulation stage were intertwined in multiple ways, represented
2 using bidirectional arrows in Figure 1. First, one must ensure that the relevant uncertainties,
3 adoption barriers of potential adopters, and policy instruments are explicitly present in the
4 model. If they cannot be explicitly represented, they must be replaced by proxy variables that
5 can epitomize the uncertainties, adoption barriers, and policy interventions. Second, the
6 identification of policy interventions should be based on the adoption barriers, i.e., the
7 adoption barriers targeted by each policy intervention should be clearly delineated. Third, the
8 possibility of uncertainties in (i) the heterogeneity of adoption barriers among the potential
9 adopters, (ii) the effectiveness of policy interventions, and (iii) the structural uncertainties of
10 the simulation models, must be considered. The interrelationships among the activities at this
11 stage imply that the activities should be handled in an iterative way.
12
13
14
15
16
17
18
19
20

21 The second stage operates the computational experiments. Here, future scenarios are
22 generated based on the identified uncertainties. Specifically, in this study, 2,000 scenarios
23 were created by uniformly sampling across the uncertainty space presented in Table 1. The
24 performance indicators, namely, the number of agents in each adoption state and the number
25 of agents facing different adoption barriers resulting from each policy, are evaluated in each
26 scenario. A total of 10,000 simulation runs were executed in this experimental setup.
27
28
29
30
31
32

33 The third stage, the vulnerability analysis, gains insights from the results of the computational
34 experiments. The first step in this stage identifies the dominant adoption barrier that emerges
35 when the policies are applied. In agent-based models, the dominant barrier is the barrier that
36 prevents the most significant number of agents from adopting the new technology.
37 Subsequently, the undesired scenarios could be classified based on the identified dominant
38 adoption barrier. For example, if the results of a particular policy indicate that many agents
39 face economic barriers, then the economic barrier for that particular policy would be used as
40 an indicator for undesired scenarios. In our case study, we apply the 75th percentile value of
41 this indicator as a threshold. Note that simulation runs in which the performance indicator
42 score falls above this threshold are characterized as undesirable. Finally, the scenario
43 discovery algorithm is executed to identify the uncertainty space that causes undesired
44 scenarios.
45
46
47
48
49
50
51
52
53
54
55

56 The policy-relevant insight obtained from the third stage supports the design of additional
57 policy packages to further improve the success of the adoption. Policymakers can consider
58
59
60
61
62
63
64
65

1 additional measures to increase the adoption rate of the new technology after examining the
2 identified adoption barriers. Moreover, they may use the identified uncertainty space from the
3 scenario discovery algorithm for this purpose. These measures can then be implemented in the
4 model, and the same EMBDA steps can be followed. Finally, the information obtained
5 regarding changes in the landscape of the adoption barriers can guide future studies that
6 explore specific adoption barriers in further detail.
7
8
9

10 **3 Results and Discussion**

11 We generated 2000 scenarios and tested the impact of alternative policies in each scenario. As
12 a result, we conducted a total of 10,000 simulation runs. We evaluated the results in terms of
13 the number of agents in each adoption state at the end of the simulation. Figure 5a–c shows
14 the number of agents in different adoption states resulting from the implementation of each
15 policy alternative, while Figure 5d shows the percentage of agents in each adoption state. In
16 Figure 5a–c, we focused on the Potential, Evaluating, and Adopter states as the transition in
17 the other two states (Aware and Deciding) are only hindered by time delays. Logically, the
18 number of agents in the Aware and Deciding states is substantially lesser than the number of
19 agents in the Potential and Evaluating states (Figure 5d).
20
21
22
23
24
25
26
27
28
29
30

31 [Figure 5 here]
32
33
34
35

36 As expected, the integrated policy resulted in the highest number of adopter agents (Figure
37 5c) with a median value of 901.5 agents (901,500 cars). However, the distribution of the
38 number of adopter agents from this policy has the widest dispersion compared to those
39 resulting from other policies. This indicates that uncertainties have a more profound influence
40 on the success of this policy than on the success of other policies. Within this policy, for 25%
41 of the entire scenario ensemble, there are more than 1,400 adopter agents. Hence, these results
42 show that the integrated policy has the potential to substantially increase the adoption of NGV
43 or even make it reach a tipping point for complete NGV adoption. However, a concerted
44 effort from multiple agencies is necessary to realize this. The presence of different companies
45 within the energy supply chain network makes it difficult to coordinate the locations of new
46 gas refueling stations. Furthermore, the energy price is still heavily regulated, and setting the
47 price would require cooperation with other government agencies outside the energy sector.
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 The free kit policy had the highest adoption rate among individual policies. The number of
2 adopter agents resulting from this policy has a median value of 234.5 (234,500 cars), which is
3 substantially higher than the baseline policy. Furthermore, more than 100 agents became
4 adopters in 75% of the entire scenario ensemble. Note that the free kit policy stimulates the
5 adoption in two ways. First, at the start of the simulation, there may be some agents who have
6 already overcome multiple barriers (i.e., barriers presented in Figure 4) in the Evaluating
7 state. These agents were grounded in the Potential state because they had not received the
8 “message” from the adopter agents (see Transition 1 in Figure 3). The free kit policy
9 increased the presence of adopter agents at the start of the simulation; hence, more
10 “messages” were sent to agents in the Potential state. This helped other agents escape the
11 Potential state and accelerated the entire adoption process. Second, this policy immediately
12 relaxed the aggregated social-behavioral barrier within the complex barriers. Because this
13 policy is the most successful individual policy, the social-behavioral barrier is the most
14 dominant barrier in the current condition.
15
16
17
18
19
20
21
22
23
24
25
26

27 Individual policies targeting the structural and economic barriers were found to be less
28 effective for improving the adoption rate. The implementation of the infrastructure
29 enhancement policy would have incurred a total cost of approximately IDR 900 billion
30 (~USD 63 million) to develop 60 additional NGV refueling stations (DetikFinance, 2012).
31 Surprisingly, despite having the highest cost, this policy only delivered marginal improvement
32 in the number of adopter agents with a median value of 76.5 (76,500 cars). These results show
33 that, although the low availability of refueling stations is often blamed for hindering the
34 adoption of NGV in Jakarta (Sulistyono & Sopha, 2013), infrastructure enhancement alone is
35 insufficient for improving the situation. The kit subsidy policy performed even worse with
36 only a marginal improvement from the baseline policy. Apparently, financial incentives are
37 the least attractive measures. This result is supported by the fact that the converter kit price
38 (IDR 17 million) is far lower than the purchasing price of cars in Jakarta (>IDR 150 million).
39 Consequently, a minor reduction in the converter kit price would not significantly stimulate
40 the car owners’ willingness to adopt NGV. These results cumulatively strengthen the
41 hypothesis that the social-behavioral barrier is the dominant one in the current situation
42 (baseline policy).
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57

58 Two additional observations can be made from the simulation results. First, to some extent,
59 the number of agents in the Potential and Evaluating states are correlated with the number of
60
61
62
63
64
65

agents in the Adopter state. The baseline, kit subsidy, and infrastructure enhancement policies yield similar median values for the number of agents in the Potential state. The distribution of these median values, however, is more spread out in the infrastructure enhancement policy, which indicates that in a larger number of scenarios, the infrastructure enhancement policy results in a smaller number of agents in the Potential state. This leads to the second observation which is related to the robustness of the policy. A narrower spread of distribution results indicates a more robust policy. Whether robustness is preferred depends on the context. For instance, the relatively narrow spread of results from the baseline and kit subsidy policy in Figure 5a is less desirable because the general preference of the problem is to have a low number of agents in the Potential state. Conversely, with respect to the total number of adopter agents in Figure 5c, a robust policy is preferred if the median value is high.

3.1 Identification of dominant barriers

Identification of the dominant adoption barrier in each policy alternative marks the vulnerability analysis phase of the EMBDA approach. Figure 6 shows the classification of the number of agents in the Evaluating state based on the adoption barriers they faced at the end of the simulation run. The nodes in the graph indicate the median value over 2000 scenarios, while the whiskers indicate the 25th and 75th percentile of the distribution. An agent might face more than one adoption barrier at a time. Such combinations of multiple adoption barriers are not presented because the focus of this phase is to identify individual dominant barriers rather than their combinations. Accordingly, for each policy in Figure 6, the total percentage might exceed 100%.

[Figure 6 here]

Figure 6 shows how the landscape of adoption barriers changes according to different actions taken. In the current situation (baseline policy), more than 80% of the agents face the social-behavioral barrier, followed by the economic and structural barriers with median values of 42% and 35% respectively. This result explains the success of the free kit policy in comparison to other individual policies. As the number of agents facing the social-behavioral barrier is twice the number of agents facing the other two barriers, confronting this barrier significantly increases the adoption rate. The kit subsidy policy marginally reduces the

1 economic lag, although the overall landscape of adoption barriers remains similar to the
2 baseline policy.
3

4
5 A substantial shift in the landscape of adoption barriers can be observed upon the
6 implementation of the free kits, infrastructure enhancement, and integrated policies. The
7 individual policies manage to reduce their targeted barriers. The free kit policy significantly
8 reduces the number of agents facing the social-behavioral barrier, making this barrier the
9 least important. Subsequent to implementing the infrastructure enhancement policy, only
10 approximately 10% of agents still face the structural barrier. The integrated policy suppresses
11 both the structural and social-behavioral barriers (with median values of 10% and 2%,
12 respectively), while surprisingly the economic barrier prevails (with a median value of 67%).
13 This result is counterintuitive because the converter kit price (IDR 17 million) is far lower
14 than the prices of cars in Indonesia (> IDR 150 million). Thus, the economic barrier is not
15 expected to strongly dominate other barriers.
16
17
18
19
20
21
22
23
24
25
26

27 3.2 Policy vulnerabilities

28 The final phase of the EMBDA approach attempts to identify policy vulnerabilities, i.e.,
29 scenarios in which a policy fails to meet its objective. In this study, we defined the objective
30 of each policy as not falling above the 75th percentile of the dominant adoption barrier of that
31 policy; consequently, there will be 500 undesired scenarios in each policy (25% of the total
32 2000 scenarios). The PRIM algorithm was applied to identify the high-density region within
33 the uncertainty space that results in undesired scenarios.
34
35
36
37
38
39
40
41

42 Figure 7 presents the algorithm results. Lists of uncertain variables that define undesired
43 scenarios in each policy are presented, along with the bandwidth of the variables. The left-
44 and right-most values in each subfigure are the entire plausible range of the variables, as
45 defined in Table 1. The blue lines depict the bandwidths of the uncertain variables where the
46 policy tends to fail, while the numbers in blue depict the exact threshold values of the
47 bandwidths. These bandwidths define the narrative of the undesired scenarios. For instance,
48 based on the results in Figure 7b, the free kit policy fails under the following conditions: the
49 converter kit price exceeds IDR 14 million, the price reduction of the annual converter kit is
50 below 2.1% per year, and the oil fuel price exceeds IDR 6500 per liter.
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

[Figure 7 here]

Figure 7a shows that the kits subsidy tends to fail under the following condition: the gas fuel price is higher than IDR 3100 per liter, the oil fuel price is less than IDR 8100 per liter, the converter kit price is more than IDR 14 million per liter, and the contact rate of the adopter to the other agents is higher than 39 days. This result is in agreement with conventional logic because a higher gas price and lower oil price would reduce the potential relative savings accumulated by using NGV, thus making it less attractive. Furthermore, a higher converter kit price would make adoption less affordable and longer durations in between messages from adopter agents would make fewer potential agents move to the Aware state.

The undesired scenarios for the infrastructure enhancement policy presented in Figure 7c also have a trend similar to the kit subsidy policy. A noticeable difference is the threshold of the oil price, which is far lower than the threshold in the undesired scenarios of the kit subsidy policy. This indicates that the oil price influences the success of the infrastructure enhancement policy to a greater extent than the kit subsidy policy. Conversely, identified bandwidths for undesired scenarios in the free kit policy and the integrated policy are more counterintuitive (Figure 7b and Figure 7d). Here, a higher oil price tends to result in policy failure.

4 Conclusion and Policy Implications

The results of this study demonstrate that the importance of NGV adoption barriers changes upon implementation of different policies. The most critical uncertainty was found to change depending on the policy implemented. The identification of the dominant adoption barrier *a posteriori* the implementation of the policy can be useful for policy analysis in two ways. First, the results can provide contextual insight on formulating additional measures, additional to each individual policy, which would be most useful for advancing the adoption. For example, as the economic barrier dominates after implementation of either the integrated or the free kit policy, policymakers can focus on additional policies that target this particular barrier. Policies that aim to reduce the converter kit price or target the affordability threshold of car owners are particularly useful in this case.

Second, the results can help policymakers in prioritizing their budget to increase their understanding of the identified dominant barrier, e.g., by conducting further studies. For

1 example, Figure 6 shows that, under the current situation (the baseline policy), the structural
2 barrier is the weakest one. Hence, funneling budgets to identify the appropriate locations for
3 constructing new NGV refueling stations or coordinating between different institutions to
4 realize their construction is not an effective approach to increase the NGV transition.
5 Moreover, studies that investigate the specific social-behavioral barriers that are prevalent
6 among potential NGV adopters would be more valuable. With respect to the other policies
7 (policy 2 to policy 5), a better understanding of the dominant barrier would help in developing
8 additional measures discussed in the previous paragraph.
9
10
11
12
13
14
15

16 Our results further suggest that uncertainties identified by the vulnerability analysis should be
17 monitored by the policymakers. In the future, if uncertain variables unfold to the bandwidths
18 identified in this study (see Figure 7), additional measures should be taken to safeguard the
19 potential success of the policy. The vulnerability analysis identifies different uncertain
20 variables as the primary cause of policy failures. As different uncertain variables are affected
21 by different institutions, to safeguard the success of the policy, a concerted collaboration
22 between multiple institutions is a prerequisite.
23
24
25
26
27
28
29
30

31 The collaboration between institutions depends on the identified uncertain and influential
32 variables. To this end, the oil fuel price appears as a critical uncertainty in all policies. The oil
33 price is subject to government regulation, prompted by the Ministry of Energy and Mineral
34 Resources (MERM). However, to determine the appropriate oil price, the MERM has to also
35 coordinate with the Ministry of Finance and the state-owned oil and gas companies (i.e.,
36 PERTAMINA and PGN). The oil fuel price is not the only uncertain factor that is highly
37 influential. In Figure 7a to 7c, the scenario discovery results from the individual policy show
38 that the converter price is likewise a decisive uncertain variable. To drive this variable to the
39 intended direction, the MERM has to cooperate with the Ministry of Industry (MoI). The MoI
40 could encourage automotive industries to supply the converter kit as part of their built-in
41 feature offer to the consumer. Further, for policies wherein contact rate is part of the
42 discovered vulnerabilities, a medium to long-term campaign to increase public awareness
43 should be implemented. This could be realized through a public campaign in social media or
44 at all vehicle refueling stations. The NGV community can likewise help by supporting such
45 campaigns.
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

In summary, this study has identified the dominant adoption barriers and the vulnerabilities of alternative policies of NGV adoption in Jakarta. The economic barrier appears as the most prevalent barrier when executing all policies, dominating over the structural and social-behavioral barriers. Meanwhile, the social-behavioral barrier appears as the most dominant factor under the current condition. Among the four alternative policies (kit subsidy, free kit, infrastructure enhancement, and integrated policy), two have similar trends concerning their vulnerabilities, namely the kit subsidy policy, and the infrastructure enhancement policy. Both of these policies tend to fail if the oil fuel price is not too high, and the prices of gas fuel and converter kits are not too low. On the contrary, the free kit policy and the integrated policy tend to fail if the oil fuel price is low. The kit subsidy policy and the infrastructure enhancement policy require a constant stream of government expenditure throughout a period of time, while the cost of the free kit policy is only incurred once at the beginning of the execution.

Furthermore, the proposed approach could be useful for future agent-based adoption policy analysis studies. The EMBDA approach demonstrated in this study tailors the generic EMA framework for a model-based adoption study by including the adoption barrier component. The approach proves to enable the evaluation of the consequences and vulnerabilities of alternative policies under deep uncertainties through a computational experiment of a large number of simulations. The approach enhances the explanatory power of agent-based modeling by exploring not only the performance alternative policies but also their vulnerabilities.

In future research, we recommend addressing the following issues that pose limitations in this study. This study did not take into account the behavioral or nudge effect of the infrastructure enhancement policy. Whereas this study only considers the total number of adopter agents, a cost-benefit analysis of policies could also be conducted to provide a more detailed result. The cost structure of the policy is of central concern. For instance, the kit subsidy policy and the infrastructure enhancement policy require a constant stream of government expenditure throughout a period of time. In contrast, the cost of implementing the free kit subsidy is incurred only once at the beginning of the policy execution. Moreover, the timing of different policies was not evaluated in this study. Although this is not within the scope of this study, this issue should likewise be addressed, e.g., by borrowing the concept from the adaptation pathways.

Acknowledgment

This work was supported by Universitas Indonesia [Hibah Q1Q2 grant numbers NKB-0285/UN2.R3.1/HKP.05.00/2019]

Appendix A

See Table A1

References

- Ajzen, I. (1991). The theory of planned behavior. *Organizational Behavior and Human Decision Processes*, 50(2), 179-211. doi:10.1016/0749-5978(91)90020-T.
- Ascough, J. C., Maier, H. R., Ravalico, J. K., & Strudley, M. W. (2008). Future research challenges for incorporation of uncertainty in environmental and ecological decision-making. *Ecological Modelling*, 219(3-4), 383-399. doi:10.1016/j.ecolmodel.2008.07.015.
- Bankes, S. (1993). Exploratory Modeling for Policy Analysis. *Operations Research*, 41(3), 435-449. doi:10.1287/opre.41.3.435.
- Bankes, S., Walker, W. E., & Kwakkel, J. H. (2013). Exploratory Modeling and Analysis. In Gass, S. I. & Fu, M. C. (Eds.), *Encyclopedia of operations research and management science* (pp. 532-537). Boston, MA: Springer US.
- Bankes, S. C. (2002). Tools and techniques for developing policies for complex and uncertain systems. *Proceedings of the National Academy of Sciences*, 99(suppl 3), 7263. doi:10.1073/pnas.092081399.
- Bergman, N., Haxeltine, A., Whitmarsh, L., Köhler, J., Schilperoord, M., & Rotmans, J. (2008). Modelling Socio-Technical Transition Patterns and Pathways. *Journal of Artificial Societies and Social Simulation*, 11(3).
- Bass, F. M. (1969). A New Product Growth for Model Consumer Durables. *Management science*, 15(5), 215-227. doi:10.1287/mnsc.15.5.215.
- Bonabeau, E. (2002). Agent-based modeling: Methods and techniques for simulating human systems. *Proceedings of the National Academy of Sciences*, 99(suppl 3), 7280. doi:10.1073/pnas.082080899.
- Bryant, B. P., & Lempert, R. J. (2010). Thinking inside the box: A participatory, computer-assisted approach to scenario discovery. *Technological Forecasting and Social Change*, 77(1), 34-49. doi:10.1016/j.techfore.2009.08.002.
- Centola, D. (2010). The Spread of Behavior in an Online Social Network Experiment. *Science*, 329(5996), 1194. doi:10.1126/science.1185231.
- Dewar, J. A. (2002). *Assumption-based planning: a tool for reducing avoidable surprises*. Cambridge, UK: Cambridge University Press.
- Eker, S., & van Daalen, E. (2015). A model-based analysis of biomethane production in the Netherlands and the effectiveness of the subsidization policy under uncertainty. *Energy Policy*, 82, 178-196. doi:10.1016/j.enpol.2015.03.019.
- Eppstein, M. J., Grover, D. K., Marshall, J. S., & Rizzo, D. M. (2011). An agent-based model to study market penetration of plug-in hybrid electric vehicles. *Energy Policy*, 39(6), 3789-3802. doi:10.1016/j.enpol.2011.04.007.
- Erahman, Q. F., Purwanto, W. W., Sudibandriyo, M., & Hidayatno, A. (2016). An assessment of Indonesia's energy security index and comparison with seventy countries. *Energy*, 111, 364-376. doi:10.1016/j.energy.2016.05.100.
- Faber, A., Valente, M., & Janssen, P. (2010). Exploring domestic micro-cogeneration in the Netherlands: An agent-based demand model for technology diffusion. *Energy Policy*, 38(6), 2763-2775. doi:10.1016/j.enpol.2010.01.008.
- Farmer, J. D., & Foley, D. (2009). The economy needs agent-based modelling. *Nature*, 460, 685. doi:10.1038/460685a.
- Foxon, T., & Pearson, P. (2008). Overcoming barriers to innovation and diffusion of cleaner technologies: some features of a sustainable innovation policy regime. *Journal of Cleaner Production*, 16(1, Supplement 1), S148-S161. doi:10.1016/j.jclepro.2007.10.011.
- Friedman, J. H., & Fisher, N. I. (1999). Bump hunting in high-dimensional data. *Statistics and Computing*, 9(2), 123-143. doi:10.1023/A:1008894516817.
- Gerst, M. D., Wang, P., & Borsuk, M. E. (2013). Discovering plausible energy and economic futures under global change using multidimensional scenario discovery. *Environmental Modelling & Software*, 44, 76-86. doi:10.1016/j.envsoft.2012.09.001.

- 1 Greeven, S., Kraan, O., & Chappin, É. J. (2016). The Emergence of Climate Change and Mitigation Action by
 2 Society: An Agent-Based Scenario Discovery Study. *Journal of Artificial Societies and Social*
 3 *Simulation*, 19(3) 9.
- 4 Groves, D. G., & Lempert, R. J. (2007). A new analytic method for finding policy-relevant scenarios. *Global*
 5 *Environmental Change*, 17(1), 73-85. doi:10.1016/j.gloenvcha.2006.11.006.
- 6 Haasnoot, M., Kwakkel, J. H., Walker, W. E., & ter Maat, J. (2013). Dynamic adaptive policy pathways: A
 7 method for crafting robust decisions for a deeply uncertain world. *Global Environmental Change*, 23(2),
 8 485-498. doi:10.1016/j.gloenvcha.2012.12.006.
- 9 Hamarat, C., Kwakkel, J. H., Pruyt, E., & Loonen, E. T. (2014). An exploratory approach for adaptive
 10 policymaking by using multi-objective robust optimization. *Simulation Modelling Practice and Theory*,
 11 46, 25-39. doi:10.1016/j.simpat.2014.02.008.
- 12 Hansen, P., Liu, X., & Morrison, G. M. (2019). Agent-based modelling and socio-technical energy transitions: A
 13 systematic literature review. *Energy Research & Social Science*, 49, 41-52.
 14 doi:10.1016/j.erss.2018.10.021.
- 15 Hartanto, A., Susanti, V., Subekti, R., Saputra, H., Rijanto, E., & Hapid, A. (2012). *Program Konversi dari BBM*
 16 *ke BBG untuk Kendaraan*. Bandung: LIPI. Retrieved from:
 17 <http://www.opi.lipi.go.id/data/1228964432/data/13086710321320817915.makalah.pdf>
- 18 Hartanto, P. (2017). *Perhubungan Darat dalam Angka 2016 (Land Transport in Numbers 2016)*. Jakarta,
 19 Indonesia: Direktorat Jenderal Perhubungan Darat (General Directorate of Land Transportation).
 20 Retrieved from: <http://hubdat.dephub.go.id/data-a-informasi/pdda/2190-tahun-2016>
- 21 Herman, J., Reed, P., Zeff, H., & Characklis, G. (2015). How Should Robustness Be Defined for Water Systems
 22 Planning under Change? *Journal of Water Resources Planning and Management*, 141(10), 04015012.
 23 doi:10.1061/(ASCE)WR.1943-5452.0000509.
- 24 Hesselink, L. X. W., & Chappin, E. J. L. (2019). Adoption of energy efficient technologies by households –
 25 Barriers, policies and agent-based modelling studies. *Renewable and Sustainable Energy Reviews*, 99,
 26 29-41. doi:10.1016/j.rser.2018.09.031.
- 27 Holtz, G., Alkemade, F., de Haan, F., Köhler, J., Trutnevyte, E., Luthe, T., . . . Ruutu, S. (2015). Prospects of
 28 modelling societal transitions: Position paper of an emerging community. *Environmental Innovation and*
 29 *Societal Transitions*, 17, 41-58. doi:10.1016/j.eist.2015.05.006.
- 30 Huétink, F. J., der Vooren, A. v., & Alkemade, F. (2010). Initial infrastructure development strategies for the
 31 transition to sustainable mobility. *Technological Forecasting and Social Change*, 77(8), 1270-1281.
 32 doi:10.1016/j.techfore.2010.03.012.
- 33 Im, S., Bayus, B. L., & Mason, C. H. (2003). An empirical study of innate consumer innovativeness, personal
 34 characteristics, and new-product adoption behavior. *Journal of the Academy of Marketing Science*, 31(1),
 35 61. doi:10.1177/0092070302238602.
- 36 Islam, T., & Pruyt, E. (2016). Scenario generation using adaptive sampling: The case of resource scarcity.
 37 *Environmental Modelling & Software*, 79, 285-299. doi:10.1016/j.envsoft.2015.09.014.
- 38 Jacobsson, S., & Bergek, A. (2011). Innovation system analyses and sustainability transitions: Contributions and
 39 suggestions for research. *Environmental Innovation and Societal Transitions*, 1(1), 41-57.
 40 doi:10.1016/j.eist.2011.04.006.
- 41 Jager, W., Janssen, M. A., & Viek, C. (2001). Experimentation with household dynamics: the consumat
 42 approach. *International Journal of Sustainable Development*, 4(1), 90-100.
- 43 Janssen, M., & Jager, W. (1999). An integrated approach to simulating behavioural processes: A case study of
 44 the lock-in of consumption patterns. *Journal of Artificial Societies and Social Simulation*, 2(2), 21-35.
- 45 Jaxa-Rozen, M., Kwakkel, J. H., & Bloemendal, M. (2019). A coupled simulation architecture for agent-
 46 based/geohydrological modelling with NetLogo and MODFLOW. *Environmental Modelling & Software*,
 47 115, 19-37. doi:10.1016/j.envsoft.2019.01.020.
- 48 JUTPI. (2012). *Jabodetabek urban transportation policy integration project*. Jakarta, Indonesia: Ministry of
 49 Economic Affairs of the Republic of Indonesia & JICA. Retrieved from:
- 50 Köhler, J., De Haan, F., Holtz, G., Kubezcko, K., Moallemi, E., Papachristos, G., & Chappin, E. (2018a).
 51 Modelling Sustainability Transitions: An assessment of approaches and challenges. *Journal of Artificial*
 52 *Societies and Social Simulation*, 21(1).
- 53 Köhler, J., Turnheim, B., & Hodson, M. (2018b). Low carbon transitions pathways in mobility: Applying the
 54 MLP in a combined case study and simulation bridging analysis of passenger transport in the
 55 Netherlands. *Technological Forecasting and Social Change*, 119314. doi:10.1016/j.techfore.2018.06.003.
- 56 Köhler, J., Whitmarsh, L., Nykvist, B., Schilperoord, M., Bergman, N., & Haxeltine, A. (2009). A transitions
 57 model for sustainable mobility. *Ecological Economics*, 68(12), 2985-2995.
 58 doi:10.1016/j.ecolecon.2009.06.027.

- 1 Kowalska-Pyzalska, A., Maciejowska, K., Suszczyński, K., Sznajd-Weron, K., & Weron, R. (2014). Turning
2 green: Agent-based modeling of the adoption of dynamic electricity tariffs. *Energy Policy*, *72*, 164-174.
3 doi:10.1016/j.enpol.2014.04.021.
- 4 Kwakkel, J. H. (2017). The Exploratory Modeling Workbench: An open source toolkit for exploratory modeling,
5 scenario discovery, and (multi-objective) robust decision making. *Environmental Modelling & Software*,
6 *96*, 239-250. doi:10.1016/j.envsoft.2017.06.054.
- 7 Kwakkel, J. H., & Pruyt, E. (2013). Exploratory Modeling and Analysis, an approach for model-based foresight
8 under deep uncertainty. *Technological Forecasting and Social Change*, *80*(3), 419-431.
9 doi:10.1016/j.techfore.2012.10.005.
- 10 Lamontagne, J. R., Reed, P. M., Link, R., Calvin, K. V., Clarke, L. E., & Edmonds, J. A. (2018). Large
11 Ensemble Analytic Framework for Consequence-Driven Discovery of Climate Change Scenarios. *Earth's
12 Future*, *6*(3), 488-504. doi:10.1002/2017EF000701.
- 13 Lempert, R. J. (2002). A new decision sciences for complex systems. *Proceedings of the National Academy of
14 Sciences*, *99*(suppl 3), 7309. doi:10.1073/pnas.082081699.
- 15 Lempert, R. J., Bryant, B. P., & Bankes, S. C. (2008). Comparing algorithms for scenario discovery. *RAND,
16 Santa Monica, CA*.
- 17 Lempert, R. J., Groves, D. G., Popper, S. W., & Bankes, S. C. (2006). A general, analytic method for generating
18 robust strategies and narrative scenarios. *Management science*, *52*(4), 514-528.
- 19 Lempert, R. J., Popper, S. W., & Bankes, S. C. (2003). *Shaping the next one hundred years: new methods for
20 quantitative, long-term policy analysis*: Rand Corporation.
- 21 Maier, H. R., Guillaume, J. H. A., van Delden, H., Riddell, G. A., Haasnoot, M., & Kwakkel, J. H. (2016). An
22 uncertain future, deep uncertainty, scenarios, robustness and adaptation: How do they fit together?
23 *Environmental Modelling & Software*, *81*, 154-164. doi:10.1016/j.envsoft.2016.03.014.
- 24 McCoy, D., & Lyons, S. (2014). Consumer preferences and the influence of networks in electric vehicle
25 diffusion: An agent-based microsimulation in Ireland. *Energy Research & Social Science*, *3*, 89-101.
26 doi:10.1016/j.erss.2014.07.008.
- 27 McPhail, C., Maier, H. R., Kwakkel, J. H., Giuliani, M., Castelletti, A., & Westra, S. (2018). Robustness
28 Metrics: How Are They Calculated, When Should They Be Used and Why Do They Give Different
29 Results? *Earth's Future*, *6*(2), 169-191. doi:10.1002/2017EF000649.
- 30 Moallemi, E. A., de Haan, F., Kwakkel, J., & Aye, L. (2017). Narrative-informed exploratory analysis of energy
31 transition pathways: A case study of India's electricity sector. *Energy Policy*, *110*, 271-287.
32 doi:10.1016/j.enpol.2017.08.019.
- 33 Moallemi, E. A., Elsawah, S., & Ryan, M. J. (2018). An agent-monitored framework for the output-oriented
34 design of experiments in exploratory modelling. *Simulation Modelling Practice and Theory*, *89*, 48-63.
35 doi:10.1016/j.simpat.2018.09.008.
- 36 Moallemi, E. A., & Köhler, J. (2019). Coping with uncertainties of sustainability transitions using exploratory
37 modelling: The case of the MATISSE model and the UK's mobility sector. *Environmental Innovation
38 and Societal Transitions*, *33*, 61-83. doi:10.1016/j.eist.2019.03.005.
- 39 Moallemi, E. A., & Malekpour, S. (2018). A participatory exploratory modelling approach for long-term
40 planning in energy transitions. *Energy Research & Social Science*, *35*, 205-216.
41 doi:10.1016/j.erss.2017.10.022.
- 42 Moglia, M., Cook, S., & McGregor, J. (2017). A review of Agent-Based Modelling of technology diffusion with
43 special reference to residential energy efficiency. *Sustainable Cities and Society*, *31*, 173-182.
44 doi:10.1016/j.scs.2017.03.006.
- 45 Müller, B., Bohn, F., Dreßler, G., Groeneveld, J., Klassert, C., Martin, R., . . . Schwarz, N. (2013). Describing
46 human decisions in agent-based models – ODD + D, an extension of the ODD protocol. *Environmental
47 Modelling & Software*, *48*, 37-48. doi:10.1016/j.envsoft.2013.06.003.
- 48 NGVJournal. (2014). Worldwide NGV statistics. Retrieved on May 15th 2019 from
49 <http://www.ngvjournal.com/c31-statistics/worldwide-ngv-statistics/>
- 50 Noori, M., & Tatari, O. (2016). Development of an agent-based model for regional market penetration
51 projections of electric vehicles in the United States. *Energy*, *96*, 215-230.
52 doi:10.1016/j.energy.2015.12.018.
- 53 Palmer, J., Sorda, G., & Madlener, R. (2015). Modeling the diffusion of residential photovoltaic systems in Italy:
54 An agent-based simulation. *Technological Forecasting and Social Change*, *99*, 106-131.
55 doi:10.1016/j.techfore.2015.06.011.
- 56 Pardosi, T., Rochadiyat, Y., Pudyaswati, Alifah, Gunawan, W., P, K., . . . Suharto, A. (2017). *Jakarta in Figures.
57 Jakarta: Statistics Bureau of DKI Jakarta Province*. Retrieved from:
58 [https://jakarta.bps.go.id/publication/2017/08/16/3e3564fb6453d384983128b0/provinsi-dki-jakarta-dalam-
59 angka-2017.html](https://jakarta.bps.go.id/publication/2017/08/16/3e3564fb6453d384983128b0/provinsi-dki-jakarta-dalam-angka-2017.html)

- 1 Pruyt, E., & Kwakkel, J. H. (2014). Radicalization under deep uncertainty: a multi-model exploration of
2 activism, extremism, and terrorism. *System Dynamics Review*, 30(1-2), 1-28. doi:10.1002/sdr.1510.
- 3 Rahmandad, H., & Sterman, J. (2008). Heterogeneity and Network Structure in the Dynamics of Diffusion:
4 Comparing Agent-Based and Differential Equation Models. *Management science*, 54(5), 998-1014.
5 doi:10.1287/mnsc.1070.0787.
- 6 Rai, V., & Robinson, S. A. (2015). Agent-based modeling of energy technology adoption: Empirical integration
7 of social, behavioral, economic, and environmental factors. *Environmental Modelling & Software*, 70,
8 163-177. doi:10.1016/j.envsoft.2015.04.014.
- 9 Raven, R., & Verbong, G. (2007). Multi-Regime Interactions in the Dutch Energy Sector: The Case of
10 Combined Heat and Power Technologies in the Netherlands 1970–2000. *Technology Analysis &
11 Strategic Management*, 19(4), 491-507. doi:10.1080/09537320701403441.
- 12 Raven, R., & Walrave, B. (2018). Overcoming transformational failures through policy mixes in the dynamics of
13 technological innovation systems. *Technological Forecasting and Social Change*, 119297.
14 doi:10.1016/j.techfore.2018.05.008.
- 15 Reddy, S., & Painuly, J. P. (2004). Diffusion of renewable energy technologies—barriers and stakeholders’
16 perspectives. *Renewable Energy*, 29(9), 1431-1447. doi:10.1016/j.renene.2003.12.003.
- 17 Robertson, T. S. (1967). The process of innovation and the diffusion of innovation. *Journal of marketing*, 31(1),
18 14-19.
- 19 Rogers, E. M. (2010). *Diffusion of innovations*: Simon and Schuster.
- 20 Rozenberg, J., Guivarch, C., Lempert, R., & Hallegatte, S. (2014). Building SSPs for climate policy analysis: a
21 scenario elicitation methodology to map the space of possible future challenges to mitigation and
22 adaptation. *Climatic Change*, 122(3), 509-522. doi:10.1007/s10584-013-0904-3.
- 23 Schweizer, V. (2018). A few scenarios still do not fit all. *Nature Climate Change*, 8(5), 361-362.
24 doi:10.1038/s41558-018-0148-3.
- 25 Sierzchula, W., Bakker, S., Maat, K., & van Wee, B. (2014). The influence of financial incentives and other
26 socio-economic factors on electric vehicle adoption. *Energy Policy*, 68, 183-194.
27 doi:10.1016/j.enpol.2014.01.043.
- 28 SITRAMP. (2004). *The study on integrated transportation master plan for Jabodetabek*. Jakarta, Indonesia:
29 National Development Planning Agency of the Republic of Indonesia & JICA. Retrieved from:
- 30 Sopha, B. M., Klöckner, C. A., & Febrianti, D. (2017). Using agent-based modeling to explore policy options
31 supporting adoption of natural gas vehicles in Indonesia. *Journal of Environmental Psychology*, 52, 149-
32 165. doi:10.1016/j.jenvp.2016.06.002.
- 33 Sugiarto, Miwa, T., Sato, H., & Morikawa, T. (2014). Transportation Expenditure Frontier Models in Jakarta
34 Metropolitan Area. *Procedia - Social and Behavioral Sciences*, 138, 148-158.
35 doi:10.1016/j.sbspro.2014.07.190.
- 36 Sulistyono, S. N., & Sopha, B. M. (2013). *Pengembangan model prediksi pengambilan keputusan terhadap jenis
37 kendaraan (in Indonesian)*. (Undergraduate), Universitas Gadjah Mada, Yogyakarta.
- 38 Sweda, T., & Klabjan, D. (2011). *An agent-based decision support system for electric vehicle charging
39 infrastructure deployment*. 2011 IEEE Vehicle Power and Propulsion Conference.
- 40 Tran, M., Banister, D., Bishop, J. D. K., & McCulloch, M. D. (2012). Realizing the electric-vehicle revolution.
41 *Nature Climate Change*, 2, 328. doi:10.1038/nclimate1429.
- 42 Tran, T. A., & Daim, T. (2008). A taxonomic review of methods and tools applied in technology assessment.
43 *Technological Forecasting and Social Change*, 75(9), 1396-1405. doi:10.1016/j.techfore.2008.04.004.
- 44 van Asselt, M. B. A., & Rotmans, J. (2002). Uncertainty in Integrated Assessment Modelling. *Climatic Change*,
45 54(1), 75-105. doi:10.1023/a:1015783803445.
- 46 Van Dam, K. H., Nikolic, I., & Lukszo, Z. (2012). *Agent-based modelling of socio-technical systems* (Vol. 9):
47 Springer Science & Business Media.
- 48 Walker, W., Lempert, R., & Kwakkel, J. (2013a). Deep Uncertainty. In Gass, S. I. & Fu, M. C. (Eds.),
49 *Encyclopedia of operations research and management science* (pp. 395-402). Boston, MA: Springer US.
- 50 Walker, W., Marchau, V. A. W. J., & Kwakkel, J. H. (2013b). Uncertainty in the Framework of Policy Analysis.
51 In Thissen, W. A. H. & Walker, W. E. (Eds.), *Public Policy Analysis: New Developments* (pp. 215-261).
52 Boston, MA: Springer US.
- 53 Walker, W. E., Rahman, S. A., & Cave, J. (2001). Adaptive policies, policy analysis, and policy-making.
54 *European Journal of Operational Research*, 128(2), 282-289.
- 55 Wolf, I., Schröder, T., Neumann, J., & de Haan, G. (2015). Changing minds about electric cars: An empirically
56 grounded agent-based modeling approach. *Technological Forecasting and Social Change*, 94, 269-285.
57 doi:10.1016/j.techfore.2014.10.010.
- 58
59
60
61
62
63
64
65

Table 1 Uncertain variables and their parameter range

Variable	Base value	Minimum value	Maximum value
Gas fuel price	IDR 3100 / liter	IDR 2500 / liter	IDR 5000 / liter
Oil fuel price	IDR 7000 / liter	IDR 5000 / liter	IDR 9000 / liter
Converter kit price	IDR 17 million	IDR 12 million	IDR 25 million
Contact rate	60 days	30 days	90 days
Annual kits price reduction	2%	0.5%	2.5%
Minimum affordability threshold	7.5%	5%	10%
Maximum affordability threshold	12.5%	12%	15%
Minimum distance threshold	4.5 km	3 km	6 km
Maximum distance threshold	9 km	7 km	12 km

Table A.1. ODD+D description of the agent-based model based on the template provided in Müller et al. (2013).

Outline		Guiding questions	Description
D)	Overview	I.i Purpose	This study evaluates the policy performance of pushing the adoption of Natural Gas Vehicles in Indonesia. The study proceeds by exploring the changes in the relative importance of different adoption barriers, and by identifying the vulnerability of policies, i.e., the scenarios leading to policy failures. The developed model will assist policy makers in systems understanding and quantitative prediction, thereby improving their NGV-adoption policies.
		I.ii.b for whom is the model designed?	

I.ii Entities, state variables, and scales	I.ii.a What kinds of entities are in the model?	<p>Agent-based model layer</p> <ul style="list-style-type: none"> - Vehicle owners in Jakarta <p>Infrastructure layer</p> <ul style="list-style-type: none"> - NGV refueling stations
	I.ii.b By what attributes (i.e. state variables and parameters) are these entities characterized?	<p>Vehicle owners</p> <ul style="list-style-type: none"> - Stages of NGV adoption: Potential, Aware, Evaluating, Deciding, and Adopter - Attributes related to structural barriers of adoption <ul style="list-style-type: none"> o Home location o Work location o Closest NGV refueling station o Distance threshold - Attributes related to economic barriers of adoption <ul style="list-style-type: none"> o Income o Expected break-even point o Affordability threshold - Attributes related to social-behavioral barriers of adoption <ul style="list-style-type: none"> o Social network: (i) agents within the same home location, (ii) agents within the same work location, and (iii) several other random agents in the model (small-world network) o Innovativeness of adopting the new technology o Contact rate with social network o Social threshold <p>NGV refueling stations</p> <ul style="list-style-type: none"> - Location
	I.ii.c What are the exogenous factors/drivers of the model?	<ul style="list-style-type: none"> - Gas fuel price - Oil fuel price - Converter kit price - Annual kits price reduction
	I.ii.d If applicable, how is space included in the model?	<ul style="list-style-type: none"> - Vehicle owners are spatially distributed among the 42 districts in Jakarta - NGV refueling stations are spatially distributed based on the existing infrastructure - The closest refueling station to a vehicle owner agent is calculated using the Euclidean distance

		I.ii.e What are the temporal and spatial resolutions and extents of the model?	<ul style="list-style-type: none"> - The simulation time horizon ranges from 2017 to 2030 - The spatial extent is the entire Jakarta province. Distance is the Euclidean distance (not considering the real road network)
	I.iii Process overview and scheduling	I.iii.a What entity does what, and in what order?	<p>The simulation environment of the model enables a continuous time step. In the model, agents perform actions on a daily basis, depending on their current adoption state.</p> <ul style="list-style-type: none"> - Vehicle owners in the ‘Potential’ state <ul style="list-style-type: none"> o Behavioral barrier: wait for “message” triggers from the ‘Adopter’ agents in their social network o Move to the ‘Aware’ state after receiving a “message” - Vehicle owners in the ‘Aware’ state <ul style="list-style-type: none"> o Economic barrier: wait for certain months before moving to the ‘Evaluating’ state. The waiting time depends on the ratio between the oil fuel price and the gas fuel price - Vehicle owners in the ‘Evaluating’ state <ul style="list-style-type: none"> o Agents evaluate the following three barriers every four months: <ul style="list-style-type: none"> ▪ Social-behavioral barrier: To overcome this barrier, the percentage of ‘Adopters’ in an agent’s social network should exceed the social threshold of the agent. ▪ Economic barrier: To overcome this barrier, the ratio of the converter kit price to the agent’s annual income should be lower than the affordability threshold of the agent. ▪ Structural barrier: To overcome this barrier, the distance between the agent’s home/work location and the closest refueling station should be lower than the distance threshold of the agent. o If agents manage to overcome those barriers, they move to the ‘Deciding’ state - Vehicle owners in the ‘Deciding’ state <ul style="list-style-type: none"> o Economic barrier: The agent waits for several months before moving to the ‘Adopter’ state. The waiting time depends on the expected break-even point of investing in the NGV converter kit

			<ul style="list-style-type: none"> - Vehicle owners in the ‘Adopter’ state <ul style="list-style-type: none"> o Agent sends a “message” randomly to one agent within its social network. The rate of this message-sending activity depends on the agent’s contact rate <p>Aside from the above state-dependent activities, the price of the converter kit yearly decreases, at the annual kit- price reduction rate.</p>
II) Design Concepts	II.i Theoretical and Empirical Background	II.i.a Which general concepts, theories or hypotheses are underlying the model’s design at the system level or at the level(s) of the submodel(s) (apart from the decision model)? What is the link to complexity and the purpose of the model?	The heterogeneity of vehicle owners is based on the diffusion of innovation theory (Robertson, 1967; Rogers, 2010). The overall emerging behavior of the transition and diffusion phenomenon follows the literature of the bass diffusion model (Bass, 1969; Rahmandad & Sterman, 2008), which should yield an S-shaped adoption curve.
		II.i.b On what assumptions is/are the agents’ decision model(s) based?	The agents’ decision model is grounded on two theories. First, is the five-stage adoption process in the diffusion of innovation theory (Rogers, 2010). Second is the barriers along these adoption stages, which are based on a review paper on the adoption of energy-efficient technologies (Hesselink & Chappin, 2019). The paper finds three categories of barriers: economic, structural, and social–behavioral.
		II.i.c Why is a/are certain decision model(s) chosen?	<ul style="list-style-type: none"> - Previous studies on NGV transition in Jakarta focused on adoption using a single-stage utility-based approach (Sopha et al., 2017; Sulistyono & Sopha, 2013). We want to extend the previous studies to multi-stage adoption logic. - There is no clear demarcation of the adoption barriers in previous studies. - The relationships among the adoption barriers, the agents’ attributes, and the policies implemented by the government need to be clarified. This clarification is central to the Exploratory Model-based Diffusion Analysis (EMBDA) approach.
		II.i.d If the model / a submodel (e.g. the decision model) is	<ul style="list-style-type: none"> - Socioeconomic statistics were primarily derived from the official statistics of Jakarta (Pardosi et al., 2017).

		based on empirical data, where does the data come from?	- Travel behavior data were derived from large-scale transport surveys in Jakarta (JUTPI, 2012; SITRAMP, 2004; Sugiarto et al., 2014)
		II.i.e At which level of aggregation were the data available?	Mainly at the district and provincial levels. The parameterization of the agents' attributes were randomly sampled from these aggregated data.
	II.ii Individual Decision Making	II.ii.a What are the subjects and objects of decision-making? On which level of aggregation is decision-making modeled? Are multiple levels of decision making included?	Decision-making activities are performed at the agents' (in this case, vehicle owners) level. Depending on its current adoption state, each agent performs different activities as explained in I.iii.a
		II.ii.b What is the basic rationality behind agents' decision-making in the model? Do agents pursue an explicit objective or have other success criteria?	From a social planner's point of view, the agents are expected to arrive at the 'Adopter' state of adoption. The agents, however, must first undergo the four states of adoption: Potential, Aware, Evaluating, and Deciding. When transitioning from one state of adoption to the next, the agent must overcome different adoption barriers.
		II.ii.c How do agents make their decisions?	- Decision tree (from 'Potential' to 'Aware', and from 'Evaluating' to 'Deciding') - Delay function (from 'Aware' to 'Evaluating', and from 'Deciding' to 'Adopter')
		II.ii.d Do the agents adapt their behavior to changing endogenous and exogenous state variables? And if yes, how?	There are no dynamics within the decision-making logic of the agents. However, agents in the 'Evaluating' state regularly observe their environment and move to the 'Deciding' state when all barriers are overcome. The annual reduction of the converter kit price may remove the economic barrier.
		II.ii.e Do social norms or cultural values play a role in the decision-making process?	Not directly, however certain attributes of the agents—contact rate, social threshold, and innovativeness—reflect the local social norms.
		II.ii.f Do spatial aspects play a role in the decision process?	Yes, the structural barrier of the adoption process requires agents to evaluate the distance of the closest refueling station to their home and work locations.

		II.ii.g Do temporal aspects play a role in the decision process?	N/A
		II.ii.h To which extent and how is uncertainty included in the agents' decision rules?	Uncertainty is not explicitly considered in the decision-making process.
	II.iii Learning	II.iii.a Is individual learning included in the decision process? How do individuals change their decision rules over time as consequence of their experience?	N/A
		II.iii.b Is collective learning implemented in the model?	N/A
	II.iv Individual Sensing	II.iv.a What endogenous and exogenous state variables are individuals assumed to sense and consider in their decisions? Is the sensing process erroneous?	From the social-behavioral barrier viewpoint, vehicle owners judge the social acceptability of NGV from the adoption behavior of their social network. From the economic barrier viewpoint, vehicle owners consider the expected profitability of purchasing converter kits based on the potential saving of their annual fuel expenditure and the converter kit price.
		II.iv.b What state variables of which other individuals can an individual perceive? Is the sensing process erroneous?	Agents observe the adoption state of other agents in their social network. A high percentage of 'adopters' in an agent's social network is important for overcoming the social-behavioral barrier.
		II.iv.c What is the spatial scale of sensing?	The social network of the agents.
		II.iv.d Are the mechanisms by which agents obtain information modeled explicitly, or are individuals simply assumed to know these variables?	Agents are assumed to know these variables.

		II.iv.e Are costs for cognition and costs for gathering information included in the model?	N/A
II.v Individual Prediction		II.v.a Which data uses the agent to predict future conditions?	N/A
		II.v.b What internal models are agents assumed to use to estimate future conditions or consequences of their decisions?	Vehicle owners calculate the expected break-even point of purchasing a converter kit. The revenue in their calculation is the expected annual savings from reducing their fuel expenditure. However, agents do not consider the future changes in fuel price nor the discounts conferred by benefits.
		II.v.c Might agents be erroneous in the prediction process, and how is it implemented?	Technically no, however, realistically yes as oil and gas prices will change
II.vi Interaction		II.vi.a Are interactions among agents and entities assumed as direct or indirect?	Direct interactions: agents in the 'Adopter' state periodically send a "message" to another agent in their social network
		II.vi.b On what do the interactions depend?	Social network of the agents
		II.vi.c If the interactions involve communication, how are such communications represented?	Agents in the 'Adopter' state periodically send a "message" to another agent in their social network
		II.vi.d If a coordination network exists, how does it affect the agent behaviour? Is the structure of the network imposed or emergent?	N/A
II.vii Collectives		II.vii.a Do the individuals form or belong to aggregations that	Agents form their own social networks randomly at the beginning of the simulation. The social network of each agent is assumed static during the entire simulation period.

		affect, and are affected by, the individuals? Are these aggregations imposed by the modeller or do they emerge during the simulation?	As previously mentioned, the number of agents in the ‘Adopter’ state in a social network is related to the social-behavioral barrier of the agents within that network.
		II.vii.b How are collectives represented?	N/A
II.viii Heterogeneity		II.viii.a Are the agents heterogeneous? If yes, which state variables and/or processes differ between the agents?	The heterogeneity of the agents’ attributes is explained in I.ii.b.
		II.viii.b Are the agents heterogeneous in their decision-making? If yes, which decision models or decision objects differ between the agents?	The heterogeneity of the agents’ activities based on their adoption states is explained in I.iii.a.
II.ix Stochasticity		II.ix.a What processes (including initialization) are modeled by assuming they are random or partly random?	<ul style="list-style-type: none"> - Transition from the ‘Aware’ to the ‘Evaluating’ state is hindered by an economic barrier that stochastically delays the transition process. - Transition from the ‘Deciding’ to the ‘Adopter’ state is also hindered by an economic barrier that stochastically delays the transition process. - The rate at which ‘Adopter’ agents send “messages” to their social network is internally stochastic and depends on the contact rate attribute of the agent. - The agent who receives the “message” is also randomly chosen from the social network.
II.x Observation		II.x.a What data are collected from the ABM for testing, understanding, and analyzing it, and how and when are they collected?	<p>The ABM collects the following data:</p> <ul style="list-style-type: none"> - Number of agents within each adoption state (Potential, Aware, Evaluating, Deciding, Adopter) at the end of the simulation run - Percentages of agents in the ‘Evaluating’ state facing each adaption barrier (Economic, Structural, Social-behavioral, see I.iii.a)

		II.x.b What key results, outputs or characteristics of the model are emerging from the individuals? (Emergence)	The key results include the numbers of adopters at different stages of adoption. The rates of different stages of technology adoption are assumed as responses to policy changes that push the adoption of NGVs in Indonesia.
III) Details	II.i Implementation Details	III.i.a How has the model been implemented?	The model is implemented in the Licensed Anylogic 7.0.2 Professional simulation suite owned by Systems Engineering, Modeling, and Simulation (SEMS) Laboratory, Universitas Indonesia
		III.i.b Is the model accessible and if so where?	N/A
	III.ii Initialization	III.ii.a What is the initial state of the model world, i.e. at time $t=0$ of a simulation run?	<p>An agent represents 1000 vehicle owners in Jakarta. Thus, at the initial state, we generated 3480 agents. The agents were spatially distributed across the 42 districts. The percentage of agents in each district corresponded to the population of that district relative to the populations in all other districts.</p> <p>Other socioeconomic and behavioral attributes of the agents were randomly sampled from the official statistics and the travel surveys.</p> <p>We assume that all agents begin in the ‘Potential’ state. However, as there are around 7000 existing NGVs, seven random agents start in the ‘Adopter’ state.</p>
		III.ii.b Is initialization always the same, or is it allowed to vary among simulations?	The initialization is the same in all computational experiments.

		<p>III.ii.c Are the initial values chosen arbitrarily or based on data?</p>	<ul style="list-style-type: none"> - Home location: allocated statistically based on the population data (Pardosi et al., 2017) - Work location: allocated randomly across the 16 business and industrial districts in the Greater Jakarta Region (JUTPI, 2012; SITRAMP, 2004) - Distance threshold: based on surveys by JUTPI (2012) and SITRAMP (2004) - Income: allocated statistically based on socioeconomic statistics (Pardosi et al., 2017) - Affordability threshold: statistically inferred by interpolating between the median annual household income and expenditure statistics (Pardosi et al., 2017) - Social network: randomly formed - Innovativeness: follows the standard distribution proposed by Robertson (1967): Innovators (2.5%), Early adopters (13.5%), Early majority (34%), Late majority (34%), Laggards (16%) - Contact rate: assumed as 30 days - Converter kit price, gas fuel price, oil fuel price: based on actual prices. - Social threshold: dependent on the Innovativeness attribute. <ul style="list-style-type: none"> o Innovators: triangular (0, 1%, 3%) o Early adopters: triangular (0, 3%, 7.5%) o Early majority: triangular (3%, 7.5%, 15%) o Late majority: triangular (7.5%, 15%, 25%) o Laggards: triangular (10%, 25%, 40%) - Converter kit price, gas fuel price, oil fuel price: based on actual prices - Annual kit price reduction: assumed as 2%.
	III.iii Input Data	<p>III.iii.a Does the model use input from external sources such as data files or other models to represent processes that change over time?</p>	N/A
	III.iv Submodels	<p>III.iv.a What, in detail, are the submodels that represent the processes listed in ‘Process overview and scheduling’?</p>	N/A
		<p>III.iv.b What are the model parameters, their dimensions and reference values?</p>	See Table 1 of the main text

		III.iv.c How were submodels designed or chosen, and how were they parameterized and then tested?	N/A
--	--	--	-----

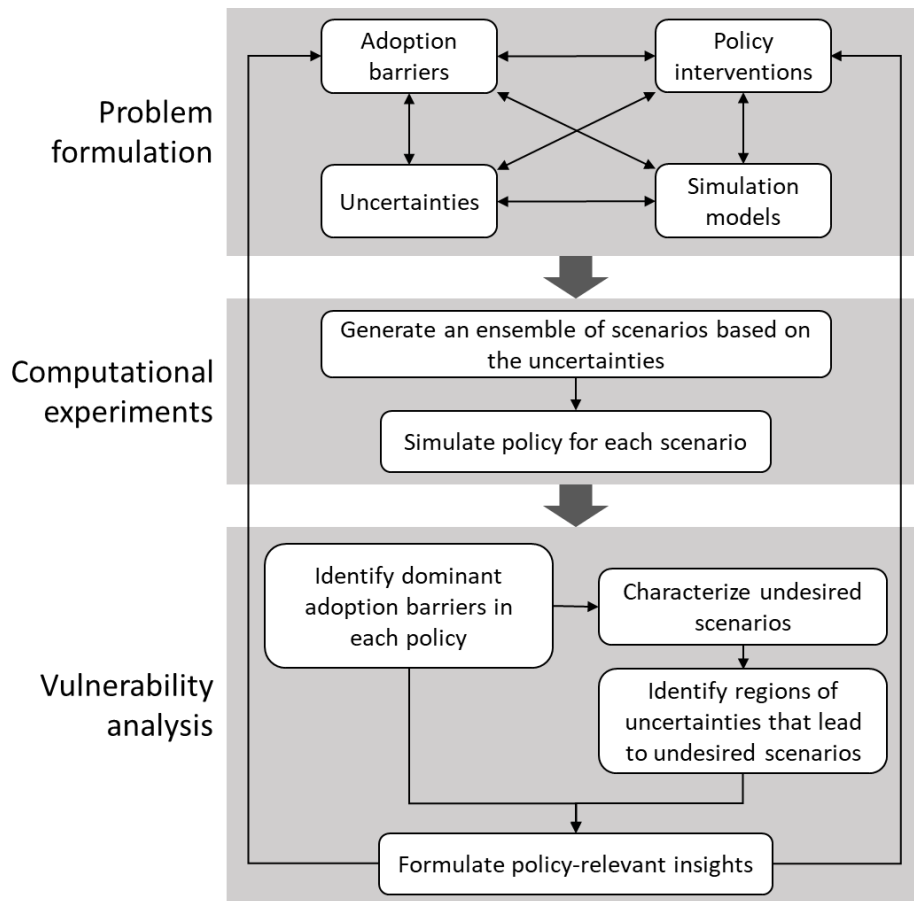


Fig. 1 Stages of the EMBDA approach

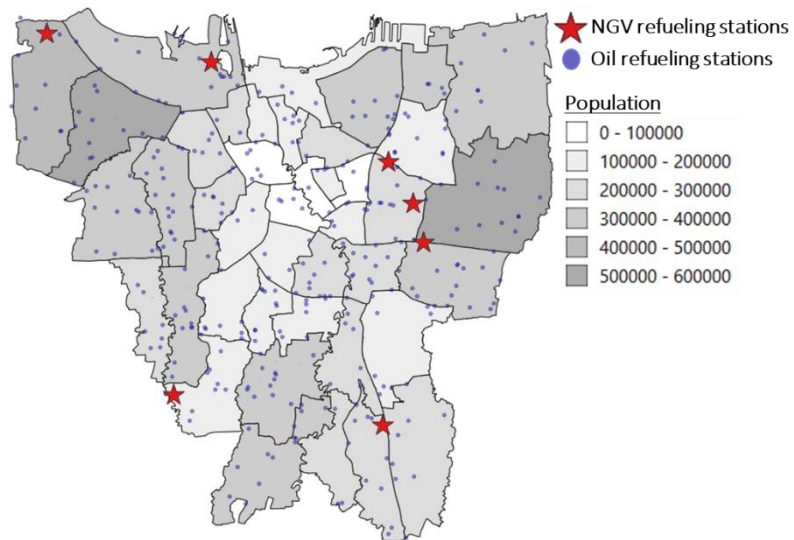


Fig. 2 Population of districts and locations of refueling stations in Jakarta

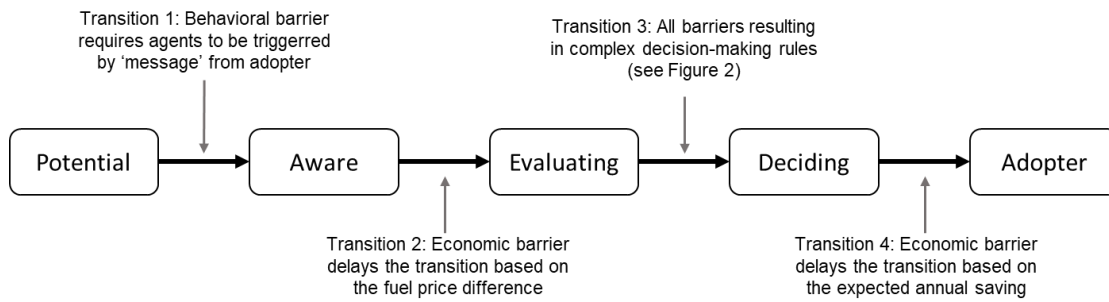


Fig. 3 Chart of agent states and transitions

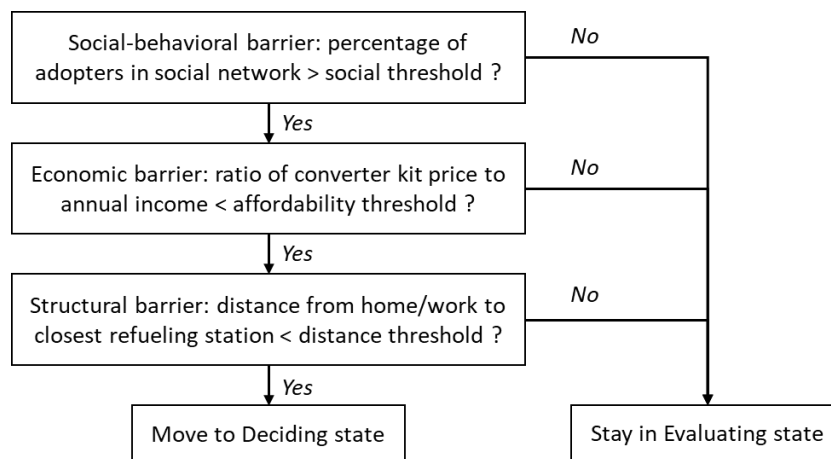


Fig. 4 Decision-making logic of Transition 3

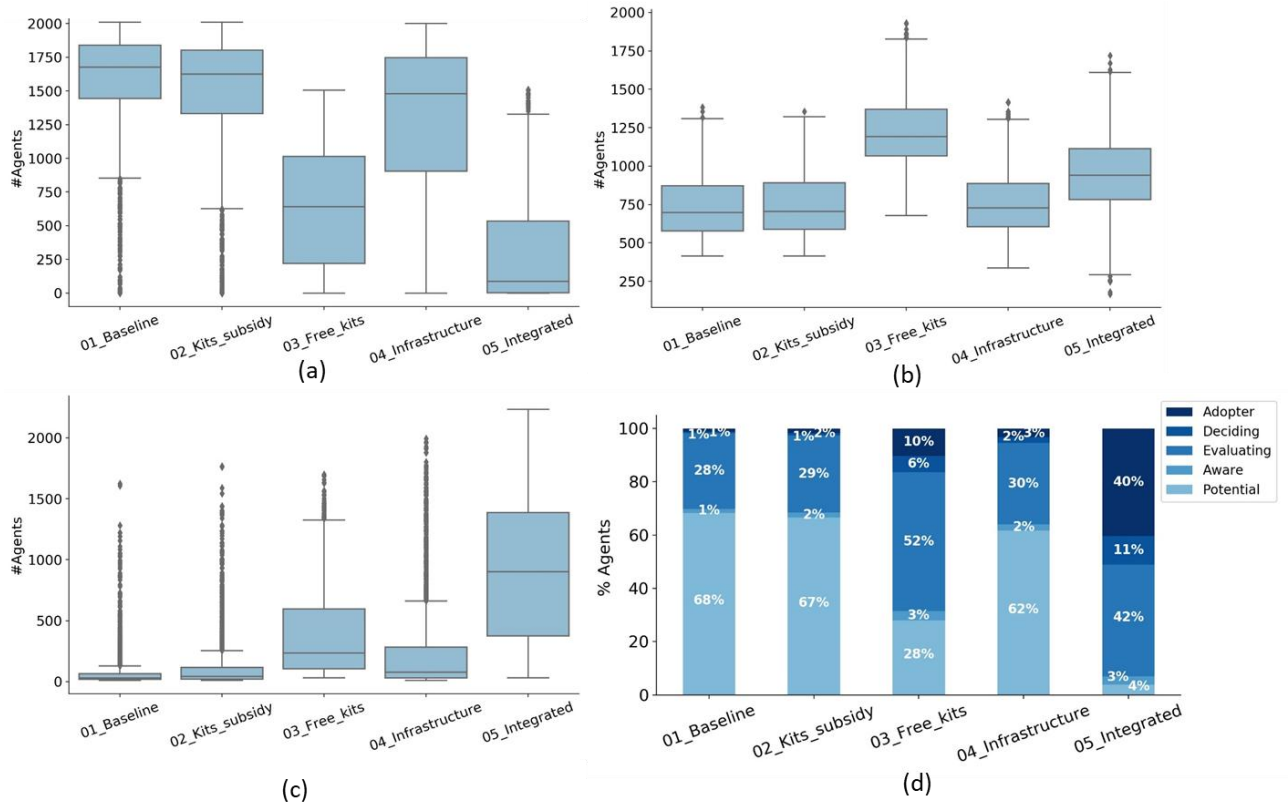


Fig. 5 Numbers of agents (a) in the Potential state, (b) the Evaluating state, (c) the Adopter state, (d) in each adoption state calculated as a percentage, obtained by simulation.

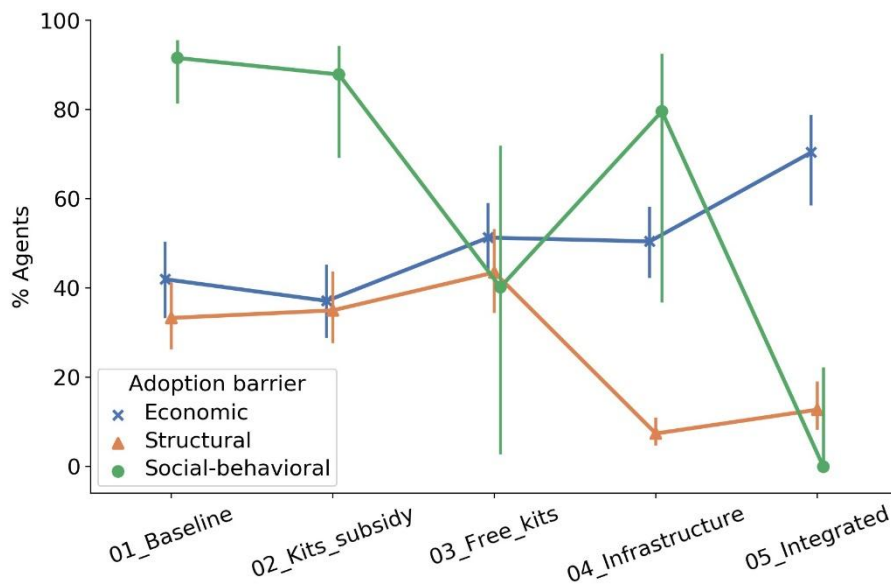


Fig.6 Percentage of agents in the Evaluating state facing each adoption barrier

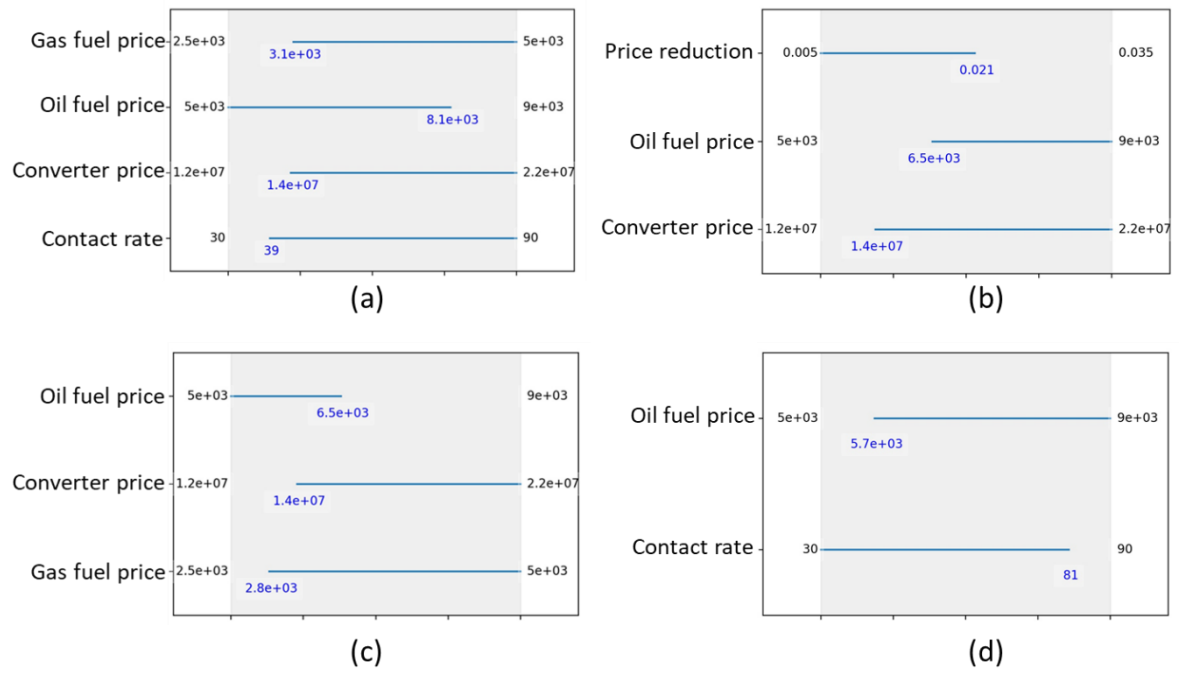


Fig. 7 PRIM algorithm results for (a) kit subsidy policy, (b) free kit policy, (c) infrastructure enhancement policy, and (d) integrated policy