

Effect of Mineral Scaling on Geothermal Wells

Ullas Rajvanshi

Carbonate Scaling



Effect of Mineral Scaling on Geothermal Wells

Carbonate Scaling

by

Ullas Rajvanshi

to obtain the degree of Bachelor of Science
at the Delft University of Technology,
to be defended publicly on Friday September 21, 2018 at 11:00 AM.

Student number: 4429605
Project duration: July 21, 2018 – September 21, 2018
Thesis committee: Prof. dr. ir. P. Vardon, TU Delft, supervisor
Prof. dr. D. Voskov, TU Delft

This thesis is confidential and cannot be made public until September 21, 2018.

An electronic version of this thesis is available at <http://repository.tudelft.nl/>.

Preface

The thesis was written as a part of bachelor studies of Applied Earth Sciences at Delft University of Technology under the supervision of Prof. Phil Vardon and Prof. Denis Voskov. During my eight weeks work, I extensively made use of PHREEQC for batch simulation reactions. During my first weeks I did a literature study to get an idea before starting the project. The literature study was focused on from the basics of geothermal energy to scaling in the wells while understanding the chemical and thermodynamic processes. Scaling is a potential problem since it can slow down the well and hence the production and use of the geothermal energy. A lot of research data from worldwide has been used in this report.

I would like to first of all thanks my supervisors Prof. Phil Vardon and Prof. Denis Voskov who were available in the summer and helped me with the thesis throughout by providing their valuable feedback. They helped me in understanding the process and the problem in a brief and constructive manner. I would also like to thank my study counsellor Mr. Pascal de Smidt, who has provided me with all the guidance in order to get my thesis done in the right time.

Moreover, I would also like to thank my friends and family with their love and support which also made it possible for me to finish my thesis on time.

*Ullas Rajvanshi
Delft, 2018*

Contents

1	Introduction	1
1.1	Introduction to Geothermal Wells.	1
1.2	Introduction to Scaling	1
1.3	CaCO ₃ Scaling	2
1.4	Prevention: CaCO ₃ scaling	3
1.5	Silica Scaling and prevention	3
1.6	Other types of scaling	3
2	Conceptual Model	5
2.1	Diagram	5
3	Hydrogeochemical Modelling	7
4	Results	11
4.1	Mixture 1 - 70-30	11
4.2	Mixture 2 - 30-70	11
4.3	Mixture 3 - 50-50	13
4.4	Mixture 4 - 99-1	13
4.5	Mixture 5 - 1-99	13
5	Discussion	17
6	Conclusion	19
A	PHREEQC Simulation: CODE and Results	21
	Bibliography	25

Introduction

In this chapter an introduction to the geothermal wells along with an introduction to scaling and its effects is given followed by some relevant chemical reactions and their properties.

1.1. Introduction to Geothermal Wells

As of 2040, Energy Information Administration (EIA) expects an increase of 28% in world energy consumption. The majority of this consumption is projected to account from developing countries such as India, China and other third world countries since the economy is increasing rapidly. [3]

In order to overcome this fast increase, the human kind cannot rely only on fossil fuels and other sustainable technologies like solar, wind, geothermal are required. However, the emission of CO₂ is also increasing from 6000 million metric tons carbon in year 2000 to 10000 million metrics tons in 2010. That's why many countries such as Denmark, Norway, Germany, The Netherlands etc., are moving away from traditional fuel sources to the new energy. One of these energy is Geothermal energy.

As the name suggests, *Geothermal* comes from the greek work, *geo*: which means Earth and *therma* meaning heat. Geothermal energy is the fraction of the natural heat of the Earth that is transported by the magma flow, conduction or/and convection from the Earth surface to the drilling range of the surface. The heat comes from the decay of the natural radioactive material that is transmitted to the surface from the molten core in the earth. It has been estimated that about 42 million megawatts of power flow from earth's interior by conduction.[9]

It is important to mention that there are mainly two types of geothermal resources: Low Temperature and High Temperature Resources. Low temperature resources are less than 180 degree C and are enough to supply only heating whereas high temperature resources (more than 180 degree C) are hot enough to generate electricity. The High Temperature resources supply about 99% of its geothermal energy and are considered in this report. [8]

1.2. Introduction to Scaling

Despite the fact that geothermal is a clean energy and almost CO₂ emission free, it does have some challenges mainly, scaling and corrosion. Moreover, that's not the only problem associated with this. Scaling is site specific which is a major problem in the wells.

To get a more detailed understanding of the effect we need to understand how does a geothermal reservoir works In the reservoir, fluid with certain chemical composition is available which is then brought to the surface by production well. Upon reaching the surface the heat is lost to heat exchangers. As a result of which there is a change in temperature which then causes the change in chemical composition. which then leads to mineral scaling and clogging of the piping of the power plant. The same happens when the fluid is reinjected into the reservoir, which changes the temperature and hence chemical composition. Despite the fact that

scaling is site specific, a statistical approach with a geochemical simulation using PHREEQC, an approach can be attempted to solve and estimate the effect in the lifetime of geothermal well.

Scale formation is generally divided into these main classes:


- Carbonate
- Silica and Silicates
- Sulphate and Sulphides

Carbonate and Silicates are the most common scaling mechanisms which can occur in a geothermal reservoir followed by sulphate and sulphides. However due to the much higher complexity of silicates, they are not discussed here. For the sake of simplicity and the level of this report, the main focus is on carbonate scaling.

As mentioned earlier, scaling is very site specific, hence understanding the mechanism behind the formation can change from site to site. In order to understand this situation better, a typical geothermal reservoir in The Netherlands is used for simulations and modelling. However, typical thermodynamics conditions in geothermal power plants have been considered.

1.3. CaCO₃ Scaling

Henry Law states that the amount of dissolved gas is proportional to its partial pressure in the gas phase. Since all geothermal reservoirs contain dissolved CO₂, and this carbon dioxide present in water solution should then be proportional to partial pressure of CO₂ in equilibrium according to the Henry's law. It is important to mention that the concentration of the dissolved carbon dioxide also includes carbonic acid H₂CO₃ and the exploitation of the geothermal reservoir starts with a constant and static CO₂ charged liquid with no vapour phase. As the production starts, there is a shift in equilibrium from left to right due to the decrease in pressure.[2]



The concentration of the CO₃²⁻ ions increases which results in the precipitation of the CaCO₃ because of the solubility product of CaCO₃

$$(Ca^{2+}) \cdot (CO_3^{2-}) = K_p \quad (1.2)$$

Since during flashing the CO₃²⁻ concentration increases, precipitation of CaCO₃ begins with flashing. As a result of which scaling can occur depending where the flashing is more prominent. If flashing occurs in part of the productive well, in-hole scaling is to be expected. However, formation plugging can occur if the flashing begins in the formation. Finally, if flashing begins at the surface equipment encrustations are expected in the equipment's. [2][7]

using the equilibria equation of the above mentioned equation and the partial pressure of CO₂, it is found that the concentration of calcium ions (Ca²⁺) depends upon:

- Temperature
- Partial Pressure of CO₂
- Ionic Strength, I

Using these, saturation index I_s can then be defined as the ratio between the measured Ca²⁺ concentration in equilibrium condition as:

$$I_s = \log F_s \quad (1.3)$$

where F_s is

$$F_s = \frac{[Ca^{2+}] \cdot Alk^2 \cdot k_{HCO_3} \cdot \gamma_{Ca^{2+}} \cdot \gamma_{Alk}^2}{k_{H_2CO_3} \cdot k_{CO_2} \cdot P_{CO_2}} \quad (1.4)$$

In Figure. 1.1 calcite scaling can be observed in a 3" bore where the calcite is over saturated and is deposited in around three weeks. [1]



Figure 1.1: Calcite scaling in a well after three weeks [1]

1.4. Prevention: CaCO₃ scaling

In order to prevent calcium carbonate scaling, prevention methods can be designed and tailored depending upon the site and the conditions at the site. There are mainly three ways to avoid calcium carbonate scaling:

- acting on CO₂ partial pressure
- acting on the pH of the solution
- using chemical additives

However, it is important to emphasize that prevention is not been considered into an extent for this research project since it was out of scope for this report.

1.5. Silica Scaling and prevention

Silica scaling is often found in high-temperature resources mainly in the wells and the re-injection lines. There are two types of common silica scaling: amorphous silica and quartz and are often found especially in countries like Italy and El Salvador with high geothermal gradient. As for carbonate scaling, calcite, aragonite and dolomite were considered to be in equilibrium with the geothermal fluid, however for silica scaling quartz is considered to be in equilibrium with the fluid. As the amount of quartz increases with temperature the solubility of quartz is independent of pH. [2]

As mentioned, silica scaling can be reduced or even eliminated by changing the pH of the solution by adding either HCl or NaOH to the brine fluid. However, this can lead to a huge cost investment and may not be a preferred solution in this case.

Due to the complexity of the kinetics of silica polymerization, they are not considered in the report.

1.6. Other types of scaling

Apart from carbonate and silica, sometimes heavy metal sulphate scaling is observed in production wells which arises due to the sudden pressure decrease of the brine solution which in turn also changes the pH. Again, these are not discussed in this report for the sake of simplicity.

2

Conceptual Model

In the previous chapter, a general introduction to geothermal reservoir was given along with a brief understanding of scaling. In this chapter, a conceptual model for the geothermal reservoir will be discussed along with the boundary conditions set which will then be used to implement in PHREEQC.

2.1. Diagram

In the Figure 2.1, the conceptual model has been designed. At the reservoir, the hot water present with cer-

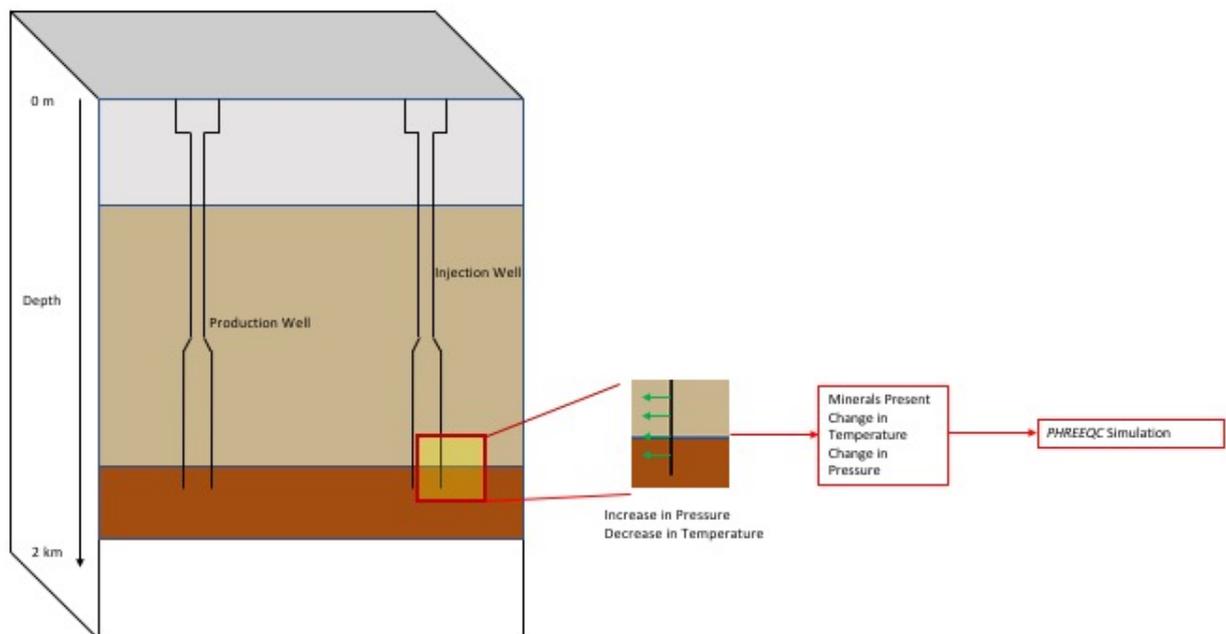


Figure 2.1: Conceptual Model

tain chemical composition is available and is brought to the surface by the production well. When, the fluid reaches the surface it loses heat to heat exchangers. The change in temperature causes a change in the chemical composition of the fluid to change, which eventually leads into scaling of the pipe. Later, the fluid is then condensed and re-injected into the reservoir which again causes a change in the chemical composition which then leads to scaling. See Fig. 2.1

In the figure, a macroscopic, meso-scropic and microscopic model has been structured. In the right side of the figure, i.e., the injection well there is an increase in the well pressure and a decline in the temperature. In the left side, the production well there is only decline in pressure. This change in pressure or temperature as mentioned earlier leads to scaling and further change will lead to continuous scaling of the well or the pipe.

Due to the scaling, there is then a change in the mineral composition of the fluid and hence we obtain a new pore fluid. In this paper, about saturation indices of 3 minerals are considered and modelled in PHREEQC. Moreover, we are considering both the change in production well and the injection well along with considering re-injection in the doublet. However, main focus is done to the injection well and as a effect of which the change in production well is to be observed.

// //

In the mentioned model, the boundary condition is set up at the production well and the injection well :

//

	Pressure (bar)	Temperature (Celsius)	Presence of Oxygen	Phase of Liquid
Production Well	1 - 200	150 - 400	No	Two phase or super saturated
Reinjection Well	20 - 300	50 - 150	Possible	Liquid or possible bubbles

3

Hydrogeochemical Modelling

Since the conceptual model is now set up, the idea can now be implemented inside PHREEQC. In order to find the change in the chemical composition of the geothermal fluid due to the changes in the temperature and pressure, PHREEQC has been used extensively.

It is important to mention that the modelling has been done without considering the gas phase and only saturation indices of carbonate minerals is considered. The minerals with their chemical formula are present in Table 3:

Mineral	Chemical Formula
Aragonite	CaCO ₃
Calcite	CaCO ₃
Dolomite	CaMg(CO ₃) ₂

// The idea behind checking the change in composition will be to look at the saturation index of the minerals. The saturation index is an index which can tell whether water will precipitate out as a particular mineral or will dissolve. The sign indicated whether the mineral is dissolved (if negative) or whether it is precipitated (if positive) or when water and mineral are in equilibrium (if zero) [5]

A change in temperature is only observed in the reinjection well, where the temperature can vary upto 150 degree celsius. As explained in the conceptual model, first the temperature of the fluid is maintained at 150 degree Celsius from the ground to the the re-injection well at a certain depth. There is a pressure drop from 300 bar to about 200 bar. This is because of the fact that the well has less pressure than the ground. Once that is done, the same fluid composition is then carried out with an upward flow, where the temperature changes from 150 degree celsius to 25 degree celsius and pressure from 200 bar to 1 bar. A conceptual design is presented in 3.1. However, these properties of raw geothermal water can help in determining the intensity of the scaling phenomena which can exist on the surface of the nanofiltration membrane and can have an influence on total efficiency of the process. [4][6]

In the batch simulation process PHREEQC was used in order to simulate the mentioned conceptual model. The mentioned model is used with the help of using REACTION TEMPERATURE and REACTION PRESSURE were used extensively in order to work with the change in temperature and pressure. The chemical composition changes when it is cooled and when it is reinjected and hence the simulations are done at surface and reservoir temperature.

It is important to mention about the composition of solution considered at 1 atm and 25 degree Celsius for a general solution present in The Netherlands. The data has been collected from a thesis done by another student at Delft University of Technology under supervision of Prof. Timo Heimovara at TU Delft. [11] The geothermal water selected is set to be highly conductive with a very high hardness level by increasing the amount of calcium sulphates and magnesium. Some values which were found to be a bit absurd were taken from other resources and were then average in order to achieve a better result. [10]

Table 3.1: Minerals Composition with their concentration for the fluid

Sample	Concentration (Mg/kg)
Ba	0.25
C	249.59
Ca	1350
Cl	4713 charge
K	74
Fe(2)	0.49
Li	2.44
Mg	18
Mn	1.28
Na	1670
S(6)	95.32
Sr	22
Zn	1.53
Si	1.3

The idea behind solving this problem was to use first pure water in equilibrium with calcite and aragonite in equilibrium with them. This was then by setting up an equilibrium using PHREEQC function EQUILIBRIUM PHASES as shown below:

```
SOLUTION 1 Pure Water
pH 7.0
temp 25.0
EQUILIBRIUM_PHASES
Aragonite 0.0
Calcite 0.0
Dolomite 0.0
```

// // The solution was then mixed with the chemical composition mentioned in Table 3.1 with a varieties of ratio such as 7:3, 3:7, 5:5 where the first term is pure water and the second is chemical composition of the mentioned minerals in Table 3.1 in order to change the phase of the composition. A phase with completely hard water solution has also been considered with only 1% pure water. [12][6] This was achieved with the use of MIX function in PHREEQC where SOLUTION 1 which is pure water and SOLUTION 2 with the chemical composition. For example for a ratio of 7:3, this can be declared like:

```
MIX
1 7.0
2 3.0
```

Finally the temperature and pressure were changed as mentioned in the conceptual model. This can also be seen from the Figure 3.1 where the injection pressure is set at 300 bars considering that the reservoir pressure at 200 bars. This was achieved by using REACTION TEMPERATURE and REACTION PRESSURE functions of PHREEQC. For the injection well, the steps used are:

```
REACTION_TEMPERATURE 1
25 150 150 150
REACTION_PRESSURE 1
1 300 300 200
```

Using the same concept for production well, the changes were estimated as well, however REACTION TEMPERATURE was not considered due to the fact that there is no change in temperature observed:

```
REACTION_PRESSURE 1
200 100 100 1
```

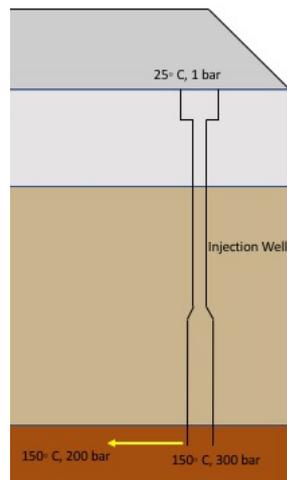


Figure 3.1: Conceptual Design for Modelling input into PHREEQC for injection well

As already mentioned earlier, PHREEQC didn't provide that good results for production well. Due to the fact that most of the changes were in-situ conditions only, no scaling was found during the PHREEQC simulations, due to the fact that PHREEQC is sensitive on temperature and not on pressure this makes sense.

4

Results

In the previous chapter, it was explained how the modelling was to be done. In this chapter, the results obtained from the simulation will be evaluated. The evaluation was done by obtaining the results of PHREEQC simulation and processing them into software package like MATLAB to obtain graphical results for clear understanding. As mentioned, the idea was to focus on three main minerals: Aragonite, Calcite and Dolomite. However, when using the results of Dolomite they were interfering with the values and hence were disregarded. A solution with Dolomite is attached in Appendix A.

Since the simulation was done for mainly five types of mixture as shown in Table 4.1, the result of all these mixtures will be evaluated in brief in the following subsections with their change in regard to temperature, pressure and saturation index at re-injection level.

Table 4.1: Mixture of the fluids with their percentages

Mix #	Pure Water (%)	Brine Fluid (%)
1	70	30
2	30	70
3	50	50
4	99	1
5	1	99

4.1. Mixture 1 - 70-30

In this subsection, the first mixture with 70% pure water and 30% brine solution is discussed. It can be observed in Figure 4.1 that when 70% of pure water is mixed with 30% of the brine solution in the reservoir, the saturation index increases as the temperature changes from in-situ to 150 Celsius to the end of the injection well. However, neither calcite nor aragonite have precipitated out since the saturation index is still less than zero.

This indicates that the minerals are still dissolved in the mineral. There is a change in the saturation index and hence precipitation of calcite as the pressure decreases from 300 bar to 200 bar when the geothermal fluid starts to move from the injection well to the reservoir and then to the production well. This is one of the reason why production wells are often found to have a higher amount of scaling when compared to the injection well. The calculated values can be found in Table A.1 in the Appendix.

4.2. Mixture 2 - 30-70

In this subsection, the first mixture with 30% pure water and 70% brine solution is evaluated.

At concentration of 30% pure water and about 70% brine solution, it is expected that the scaling should be vigorous and in high amount. However, it is not that large. This is probably due to the fact that PHREEQC cal-

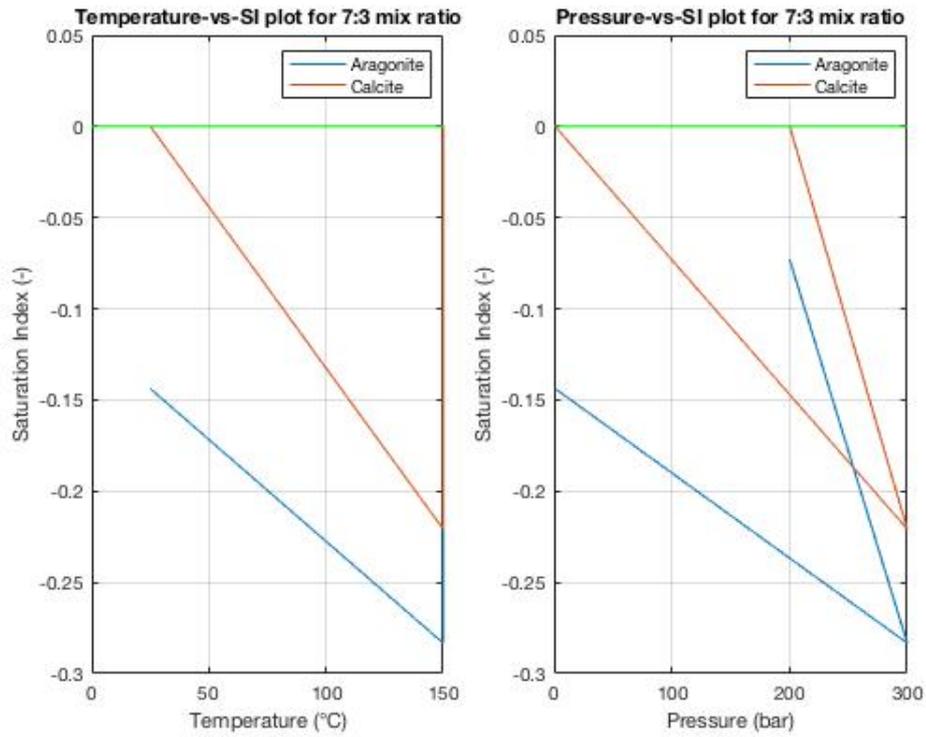


Figure 4.1: Change in SI with Temperature and Pressure for 7:3 mix

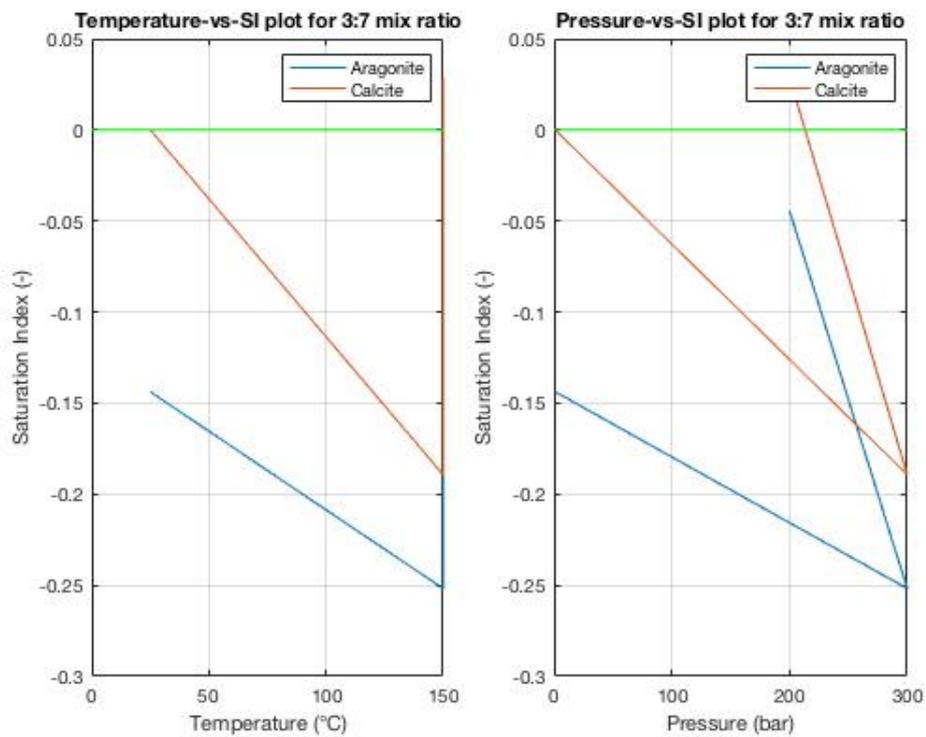


Figure 4.2: Change in SI with Temperature and Pressure for 3:7 mix

culated simulations for one time change and is not time-dependent we do not see that much higher amount of concentration of carbonate minerals. However, it is to be noted that the saturation index is comparatively larger than what was observed in the earlier case. This does prove that higher amount of brine present will often lead to higher amount of scaling if this was carried out for vigorous reaction for a period of time.

The results obtained for this composition have been attached in the Appendix in Table A.1

4.3. Mixture 3 - 50-50

In this subsection, the first mixture with 50% pure water and 50% brine solution is discussed.

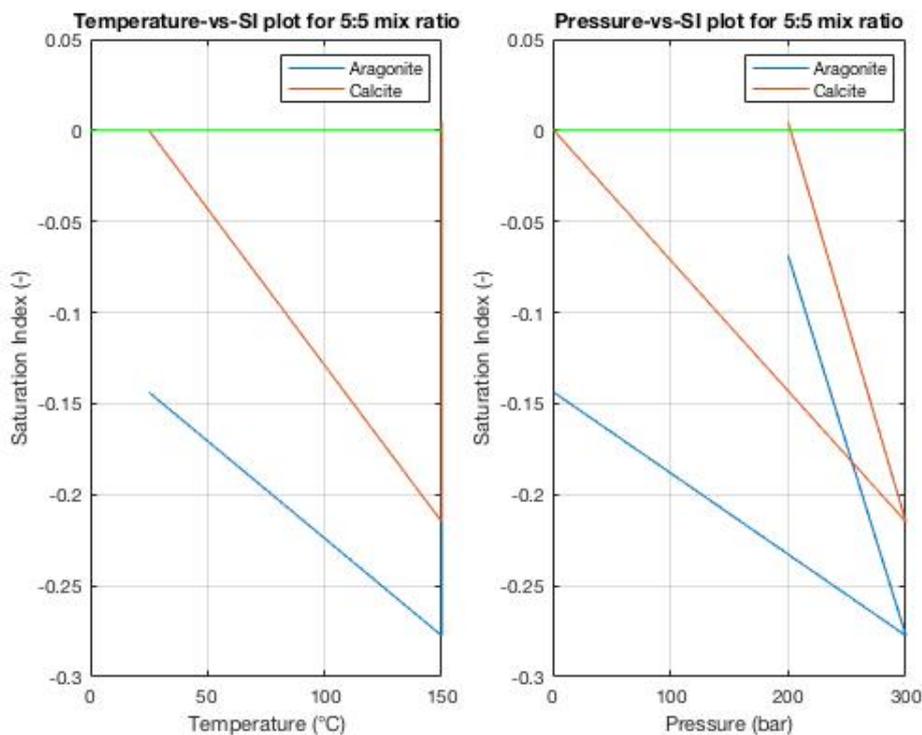


Figure 4.3: Change in SI with Temperature and Pressure for 5:5 mix

For ratio when the geothermal fluid is now with ratio of 50-50%, it is observed that from the equilibrium conditions to the temperature and pressure conditions for the reservoir conditions, precipitation is also observed. It is also important to mention about state of dolomite that if it was allowed to precipitate before the re-injection phase, the precipitation would not occur or if it does, it will hardly lead to precipitation in the reservoir.

The obtained results are presented in the appendix and also in Figure 4.3 for a graphical interpretation.

4.4. Mixture 4 - 99-1

In this subsection, the first mixture with 99% pure water and 1% brine solution is discussed.

It is important to mention for this scenario, that we assumed that the fluid is now composed of only pure water (99%), so that only 1% brine is present. The chances of this case occurring is highly unlikely, but this result indeed proved that the simulation has been projected correctly.

4.5. Mixture 5 - 1-99

In this subsection, the first mixture with 1% pure water and 99% brine solution is discussed. Finally, it was also a necessity to have a scenario where there is only brine solution, about 99% with almost no pure water,

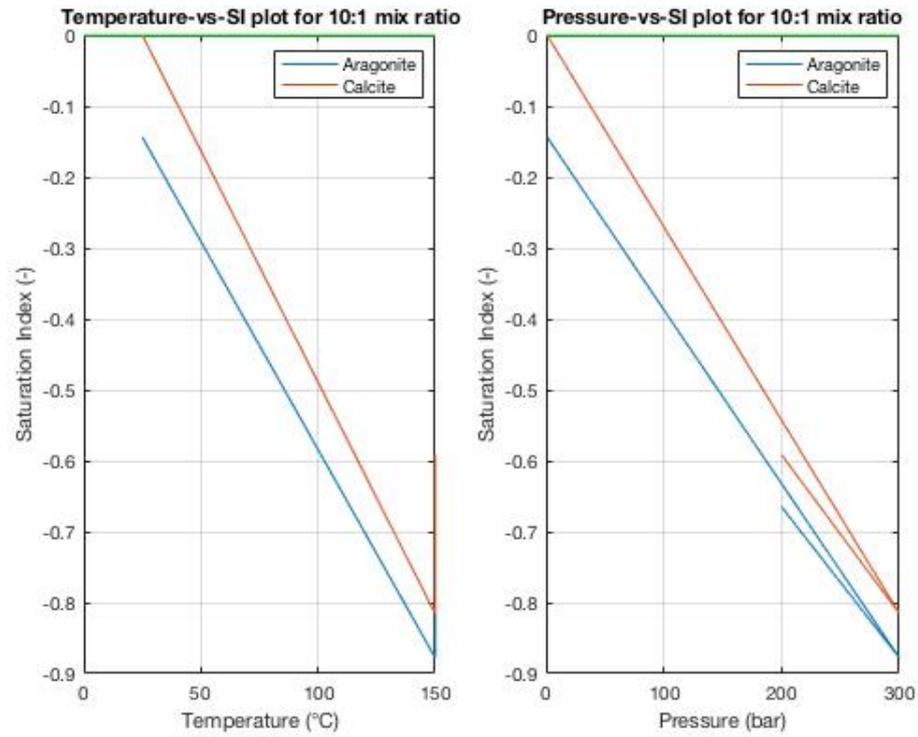


Figure 4.4: Change in SI with Temperature and Pressure for 10:1 mix

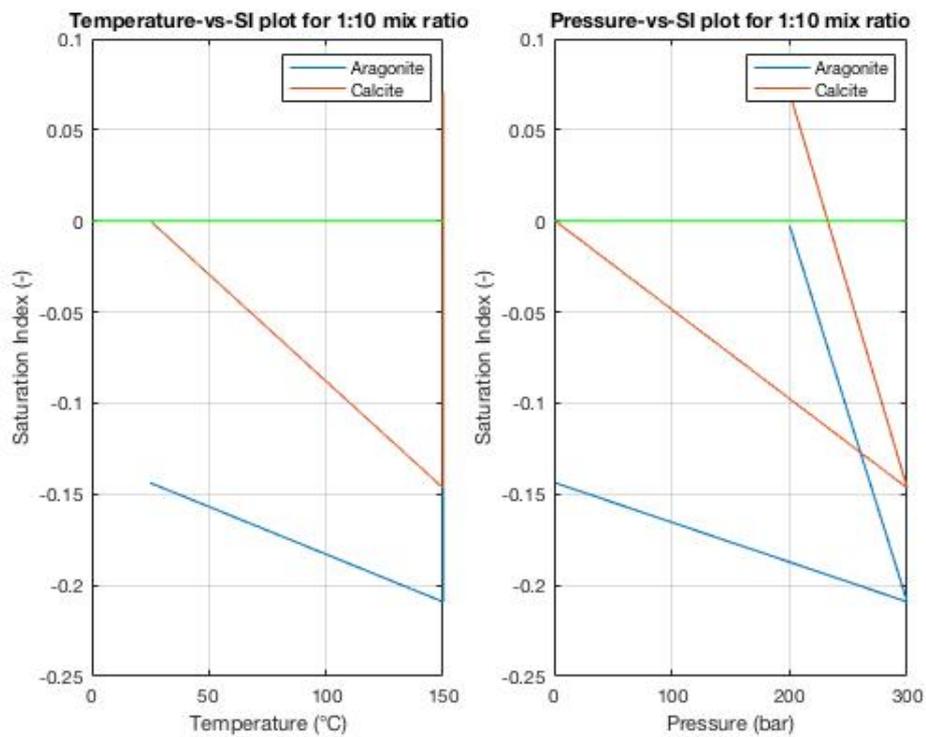


Figure 4.5: Change in SI with Temperature and Pressure for 1:10 mix

about 1%. This indicated that the water injected or the geothermal fluid is now composed of full brine mixture. This can also be a good check for the simulation in order to find if everything is in the right approach or not.

However, it is interesting to note that calcite precipitates very fast and hence can lead to high scaling in less than week if continued like this.

5

Discussion

In the previous chapter, the results for the simulations were discussed for different types of mixes. In this chapter, ideas and strategies that could have been considered in order to improve the results obtained will be discussed.

Firstly, the brine fluid considered is derived from theoretical models of different studies. It would have been better if a site test were to be done and a laboratory analysis would reveal the actual concentration of elements say in The Netherlands. This can make a lot of change since PHREEQC is highly sensitive to the first declared elements and doing so could result into much better results. However, it is important to mention that the general trend should be the same.

Secondly, only injection well was considered for the mentioned simulation. The reaction could have also been carried for the production well with a change in pressure to see an overall change. However, since PHREEQC is more sensitive to temperature, the simulation would have not been successfully carried out. So maybe a different simulation package would have provided better results for the scaling in production well. However, it is to be noted that since high scaling was observed in injection well and much higher scaling is expected for production well due to the fact that it is the same fluid which returns back.

Thirdly as already mentioned in the results, PHREEQC doesn't include the kinetics of a reaction. That is how does the simulations change over time. This can also indicate when higher amount of scaling is expected and how fast will it converge in order to identify the productivity of the wells.

Finally, the report was very extensive in terms since it only includes scaling of carbonate. However, this is not the only type of scaling which occurs. There is also silicates and sulphates which can damage the reservoir wells which were not included in the report. A further research in a similar fashion could have provided with relevant results for other types of scalings.

6

Conclusion


The precipitation of minerals occurs during throughout geothermal process in both the the standard and reservoir conditions.[11]. Since the report was extensive for calcite scaling, three main minerals which have a high chance of precipitation were discussed: Calcite, Aragonite and Dolomite.

At reservoir conditions these minerals were in oversaturation stage since they were not allowed to precipitate before reinjection. As the pressure and temperature change in the injection well occurred, this resulted into precipitation of minerals like Calcite and Aragonite. Dolomite was always in the dissolved stage for the first change in temperature and pressure. However, for a numerous and vigorous changes, dolomite could also precipitate out.

Moreover, pure water in equilibrium with these minerals were considered and was mixed with the brine in the reservoir conditions. This was done since its not possible to estimate that how much brine is present in the fluid in the first time. Five scenarios were taken to handle this problem.

Since after using these simulations, calcite precipitated out in all the mixtures, this proved that scaling is indeed a major problem at standard and reservoir conditions. In order to estimate a more detailed understanding, kinetics need to be taken into account which is a rather complex procedure and cannot be handled by PHREEQC.

To conclude, in order to avoid scaling a kind of treatment is a requirement. One before injection is actually a preferred method like a chemical treatment or storage of the geothermal fluid [11].



PHREEQC Simulation: CODE and Results

```
SELECTED_OUTPUT
-file resultsobtained.sel
-step false
-reaction true
-temperature true
-pressure true
-saturation_indices Aragonite Calcite
Dolomite
SOLUTION 1 Pure Water
pH 7.0
temp 25.0
EQUILIBRIUM_PHASES
Aragonite 0.0
Calcite 0.0
    Dolomite 0.0
SAVE solution 1
END
SOLUTION 2
temp 25
pressure 1
pH 5.7
pe 4
redox pe
units mg/kgw
density 1
Ba 0.25
C 249.59
Ca 1350
Cl 4713 charge
K 74
Fe(2) 0.49
Li 2.44
Mg 18
Mn 1.28
Na 1670
S(6) 95.32
Sr 22
Zn 1.53
Si 1.3
-water 1 # kg
```

```
SAVE solution 2
END
MIX 1
1 0.7
2 0.3
SAVE solution 3
END
EQUILIBRIUM_PHASES 1
USE solution 3
REACTION_TEMPERATURE 1
150 150 150 25
REACTION_PRESSURE 1
300 200 200 1
SAVE solution 1
END
```

Table A.1.: PHREEQC Simulations: Measured Values of all results

RATIO- 7:3									
soln	pH	pe	Pressure (bar)	Temperature (Celsius)	SI_Aragonite	SI_Calcite	SI_Dolomite		
1	7	4	1	25	-999.999	-999.999	-999.999		
1	9.97699	-4.71083	1	25	-0.1438	0	0		
2	5.7	4	1	25	-1.4078	-1.2641	-4.0313		
1	6.06874	-0.960122	1	25	-1.6342	-1.4904	-4.4183		
3	6.12786	-3.39132	300	150	-0.2833	-0.2208	-3.1787		
3	6.25578	-3.50899	300	150	-0.0727	0.0006	-2.7522		
3	6.25578	-3.50899	200	150	-0.0727	0.0006	-2.7522		
3	6.06874	-0.960122	1	25	-1.6342	-1.4904	-4.4183		
RATIO 3:7									
soln	pH	pe	pree	temp	si_Aragonite	si_Calcite	si_Dolomite		
1	7	4	1	25	-999.999	-999.999	-999.999		
1	9.97699	-4.71083	1	25	-0.1438	0	0		
2	5.7	4	1	25	-1.4078	-1.2641	-4.0313		
1	5.79214	-0.545017	1	25	-1.5035	-1.3597	-4.2121		
3	5.81555	-2.9751	300	150	-0.2518	-0.1893	-3.1702		
3	5.94492	-3.09472	300	150	-0.0443	0.0289	-2.7489		
3	5.94492	-3.09472	200	150	-0.0443	0.0289	-2.7489		
3	5.79214	-0.545017	1	25	-1.5035	-1.3597	-4.2121		
RATIO 5:5									
soln	pH	pe	pree	temp	si_Aragonite	si_Calcite	si_Dolomite		
1	7	4	1	25	-999.999	-999.999	-999.999		
1	9.97699	-4.71083	1	25	-0.1438	0	0		
2	5.7	4	1	25	-1.4078	-1.2641	-4.0313		
1	5.89043	-0.716187	1	25	-1.5735	-1.4297	-4.3359		
3	5.93083	-3.12651	300	150	-0.2774	-0.2149	-3.2054		
3	6.0596	-3.24568	300	150	-0.0687	0.0046	-2.7821		
3	6.0596	-3.24568	200	150	-0.0687	0.0046	-2.7821		
3	5.89043	-0.716187	1	25	-1.5735	-1.4297	-4.3359		

soln	pH	pe	Pressure (bar)	Temperature (Celsius)	SI_Aragonite	SI_Calcite	SI_Dolomite
RATIO 10:1							
1	7	4	1	25	-999.999	-999.999	-999.999
1	9.97699	-4.71083	1	25	-0.1438	0	0
2	5.7	4	1	25	-1.4078	-1.2641	-4.0313
1	9.97699	-4.71083	1	25	-0.1438	0	0
3	7.59185	-2.69464	300	150	-0.8777	-0.8152	-3.0374
3	7.70296	-2.75269	300	150	-0.6649	-0.5916	-2.6396
3	7.70296	-2.75269	200	150	-0.6649	-0.5916	-2.6396
3	9.97699	-4.71083	1	25	-0.1438	0	0
RATIO 1:10							
soln	pH	pe	pree	temp	si_Aragonite	si_Calcite	si_Dolomite
1	7	4	1	25	-999.999	-999.999	-999.999
1	9.97699	-4.71083	1	25	-0.1438	0	0
2	5.7	4	1	25	-1.4078	-1.2641	-4.0313
1	5.7	-0.198378	1	25	-1.4078	-1.2641	-4.0313
3	5.70234	-2.82956	300	150	-0.2091	-0.1466	-3.0949
3	5.83248	-2.94956	300	150	-0.0026	0.0707	-2.6752
3	5.83248	-2.94956	200	150	-0.0026	0.0707	-2.6752
3	5.7	-0.198378	1	25	-1.4078	-1.2641	-4.0313

Bibliography

- [1] Kevin L Brown et al. *Mineral scaling in geothermal power production*. United Nations University, 2013.
- [2] Riccardo Corsi. Scaling and corrosion in geothermal equipment: problems and preventive measures. *Geothermics*, 15(5-6):839–856, 1986.
- [3] EIA. Eia projects 28% increase in world energy use by 2040. 2017. URL <https://www.eia.gov/todayinenergy/detail.php?id=32912>.
- [4] N. Hilal, H. Al-Zoubi, N.A. Darwish, A.W. Mohamma, and M. Abu Arabi. A comprehensive review of nanofiltration membranes:treatment, pretreatment, modelling, and atomic force microscopy. *Desalination*, 170(3):281 – 308, 2004. ISSN 0011-9164. doi: <https://doi.org/10.1016/j.desal.2004.01.007>. URL <http://www.sciencedirect.com/science/article/pii/S0011916404800328>.
- [5] "mineral saturation index.". mineral saturation index, 2018. URL <https://www.encyclopedia.com/science/dictionaries-thesauruses-pictures-and-press-releases/mineral-saturation-index>.
- [6] Cüneyt Kaya, Gökhan Sert, Nalan Kabay, Müşerref Arda, Mithat Yüksel, and Özdemir Egemen. Pre-treatment with nanofiltration (nf) in seawater desalination—preliminary integrated membrane tests in urla, turkey. *Desalination*, 369:10 – 17, 2015. ISSN 0011-9164. doi: <https://doi.org/10.1016/j.desal.2015.04.029>. URL <http://www.sciencedirect.com/science/article/pii/S0011916415002829>.
- [7] Petar Papic. *Scaling and corrosion potential of selected geothermal waters in Serbia*. United Nations University, 1991.
- [8] Kristján Saemundsson et al. Geothermal systems in global perspective. 2013.
- [9] V. Stefansson. Global perspective on geothermal energy. 1:11 vol.1–, July 2002. doi: 10.1109/PESS.2002.1043163.
- [10] Barbara Tomaszewska and Magdalena Tyszer. Assessment of the influence of temperature and pressure on the prediction of the precipitation of minerals during the desalination process. *Desalination*, 424: 102–109, 2017.
- [11] TW Van den Ende. Mineral scaling in geothermal wells. 2012.
- [12] Valdemar de Viveiros Pereira et al. Calcium carbonate scaling control in geothermal well pv8 in sao miguel, azores, combining chemical inhibition and mechanical reaming. 2015.