

Characterizing Dynamic Stress Sensitive Fracture Apertures in A DFN Representation: An Example From the Island of Pag (Croatia)

Prabhakaran, Rahul; Bruna, Pierre-Olivier; Bertotti, Giovanni; Mittempergher, S.; Succo, A.; Bistacchi, A.; Storti, F.; Meda, M.

DOI

[10.1306/42357Prabhakaran2019](https://doi.org/10.1306/42357Prabhakaran2019)

Publication date

2018

Document Version

Final published version

Citation (APA)

Prabhakaran, R., Bruna, P.-O., Bertotti, G., Mittempergher, S., Succo, A., Bistacchi, A., Storti, F., & Meda, M. (2018). *Characterizing Dynamic Stress Sensitive Fracture Apertures in A DFN Representation: An Example From the Island of Pag (Croatia)*. Abstract from AAPG Annual Convention and Exhibition (ACE) 2018, Salt Lake City, Utah, United States. <https://doi.org/10.1306/42357Prabhakaran2019>

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

**PS Characterizing Stress Sensitive Fracture Apertures in Discrete Fracture Network Representations:
A Stress Based Method to Represent Fracture Aperture Heterogeneity as an Input for
Fluid Flow from Realistic, Outcrop Derived DFN Fracture Representations***

**Rahul Prabhakaran¹, Pierre-Olivier Bruna¹, Giovanni Bertotti¹, Silvia Mittempergher², Andrea Succo³,
Andrea Bistacchi², and Fabrizio Storti³**

Search and Discovery Article #42357 (2019)**

Posted February 25, 2019

*Adapted from poster presentation given at AAPG 2018 Annual Convention & Exhibition, Salt Lake City, Utah, United States, May 20-23, 2018

**Datapages © 2019. Serial rights given by author. For all other rights contact author directly. DOI:10.1306/42357Prabhakaran2019

¹Section of Applied Geology, Delft University of Technology, Delft, Netherlands (r.prabhakaran@tudelft.nl)

²Department of Earth and Environmental Sciences, Università degli Studi di Milano Bicocca, Milano, Italy

³NEXT- Natural and Experimental Tectonics research Group, Università di Parma, Parma, Italy

Abstract

Carbonate reservoirs contain nearly 60 percent of the world's conventional oil and gas reserves. Subsurface data and outcroppings indicate that they are intensely fractured. The subsurface distribution of natural fractures is often unknown due to their sub-seismic size and owing to difficulties in extrapolating 1D fracture information from available well data to 3D reservoir geomodels. Outcrop analogues is a method that one can resort to for constraining the 3D architecture of fracture networks. Outcrops represent a local snap shot of the current multiscale state of fracturing which is perhaps a net result of multiple events of stress reversals, burial and / or exhumation and tectonics. Outcrop data is still useful to calibrate mechanical and fluid flow models to predict the impact of fractures on storage and flow in the subsurface. The outcrop fracture data is used in building a Discrete Fracture Network (DFN) representation in which multiscale fractures are represented explicitly and hence honors the fracture intensity and topology. DFN representations can be used as input for flow and geomechanics numerical models.

In this work we utilize a combined outcrop based and numerical approach to characterize fracture patterns, fracture apertures and fluid flow sensitivities using a folded 'box-type' anticlinal structure example from the Pag Island, Croatia. Fractured folds often form prolific reservoirs owing to the structural closure they afford and the additional porosity and permeability due to the fold related fracturing. The fracture patterns are of specific interest owing to the complex geometries associated with folding. A 3D model of the Pag Island is created with slices of multiscale fracture traces which are interpreted and digitized from drone photogrammetry. We use 2D finite element modeling to quantify a stress sensitive fracture aperture and by incorporating these apertures into a conformal discrete fracture and matrix reservoir simulation model we can quantify the effect of stressed aperture on fluid flow. Our results indicate that the fluid flow behavior is variable spatially owing to the aperture heterogeneity across the area of the fractured fold.

References Cited

- Asadollahi, P., M.C. Invernizzi, S. Addotto, and F. Tonon, 2010, Experimental validation of modified Barton's model for rock fractures: *Rock Mechanics and Engineering*, v. 43/5, p. 597-613.
- Bandis, S., A. Lumsden, and N. Barton, 1983, Fundamentals of Rock Joint Deformation: *International Journal of Roc Mechanics and Mining Sciences & Geomechanics Abstracts*, v. 20/6, p. 249-268.
- Barton, N., 1982, Modelling rock joint behaviour from in situ block tests Implications for nuclear waste repository design: Technical Report, Office of Nuclear Waste Repository Design, Columbus, OH.
- Barton, N., S. Bandis, and K. Bakhtar, 1985, Strength, Deformation and Conductivity Coupling of Rock Joints: *International Journal of Rock Mechanics and Mining Sciences & Geomechanics Abstracts*, v. 22/3 p. 121-140.
- Bisdom, K., H.M. Nick, and G. Bertotti, 2017, An integrated workflow for stress and permeability modelling using inter-well scale outcrop derived fracture networks: *Journal of Computational Geosciences*, v. 103/Issue C, p. 21–35.
- Bisdom, K., G. Bertotti, and H.M. Nick, 2016, The impact of different aperture distribution models and critical stress criteria on equivalent permeability in fractured rocks: *Journal of Geophysical Research: Solid Earth*, v. 121/5, p. 4045-4063.
- Karimi-Fard, M., 2008, Grid optimization to improve orthogonality of two-point flux approximation for unstructured 3D fractured reservoirs: *ECMOR XI-11th European Conference on the Mathematics of Oil Recovery*.
- Karimi-Fard, M., and A. Firoozabadi, 2001, Numerical simulation of water injection in 2D fractured media using discrete-fracture model: *SPE annual technical conference and exhibition*, Society of Petroleum Engineers.
- Karimi-Fard, M., L.J. Durlofsky, and K. Aziz, 2003, An efficient discrete fracture model applicable for general purpose reservoir simulators: *SPE Reservoir Simulation Symposium*. Society of Petroleum Engineers.
- Korbar T., 2009, Orogenic evolution of the External Dinarides in the NE Adriatic region: a model constrained by tectonostratigraphy of Upper Cretaceous to Paleogene carbonates *Earth-Science Reviews*: v. 96/4, p. 296-312.
- Mäkel, G.H., 2007, The modelling of fractured reservoirs: constraints and potential for fracture network geometry and hydraulics analysis: *Geol. Soc. Lond.*, v. 292, p. 375-403.

Manzocchi, T. 2002, The connectivity of two-dimensional networks of spatially correlated fractures: *Water Resour. Res.*, v. 38, 10.1029/2000WR000180.

Olsson, R., and N. Barton, 2001, An improved model for hydromechanical coupling during shearing of rock joints: *International Journal of Rock Mechanics and Mining Sciences*, v. 38/3, p. 317-329.

Sanderson, D.J., and C.W. Nixon, 2015, The Use of Topology in Fracture Network Characterization: *Journal of Structural Geology*, v. 72, p. 55-66.

Sanderson, D.J., and X. Zhang, 1999, Critical stress localization of flow associated with deformation of well-fractured rock masses, with implications for mineral deposits: in K. McCaffrey, L. Lonergan, J.J. Wilkinson (Eds.), *Fractures, Fluid Flow and Mineralisation*, Geological Society Special Publication, v. 155, p. 69-81.

Tari, V., 2002, Evolution of the northern and western Dinarides: A tectonostratigraphic approach: European Geosciences Union, Stephan Muller Special Publication Series, 1, p. 223–236.


Voskov, D.V., H.A. Tchelepi, and R. Younis, 2009, General nonlinear solution strategies for multiphase multicomponent EOS based simulation: *SPE Reservoir Simulation Symposium*. Society of Petroleum Engineers.

ABSTRACT


Carbonate reservoirs contain nearly 60 percent of the world's conventional oil and gas reserves. Subsurface data and outcroppings indicate that they are intensely fractured. The subsurface distribution of natural fractures are often unknown due to their sub-seismic size and owing to difficulties in extrapolating 1D fracture information from available well data to 3D reservoir geomodels. Outcrop analogues is a method that one can resort to for constraining the 3D architecture of fracture networks. Outcrops represent a local snap shot of the current multiscale state of fracturing which is perhaps a net result of multiple events of stress reversals, burial and / or exhumation and tectonics. Outcrop data is still useful to calibrate mechanical and fluid flow models so as to predict the impact of fractures on storage and flow in the subsurface. The outcrop fracture data is used in building a Discrete Fracture Network (DFN) representation in which multiscale fractures are represented explicitly and hence honors the fracture intensity and topology. DFN representations can be used as input for flow and geomechanics numerical models.

In this work we utilize a combined combined outcrop based and numerical approach to characterize fracture patterns, fracture apertures and fluid flow sensitivities using a folded 'box-type' anticlinal structure example from the Pag Island, Croatia. Fractured folds often form prolific reservoirs owing to the structural closure they afford and the additional porosity and permeability due to the fold related fracturing. The fracture patterns are of specific interest owing to the complex geometries associated with folding. A 3D model of the Pag Island is created with slices of multiscale fracture traces which are interpreted and digitized from drone photogrammetry. We use 2D finite element modeling to quantify a stress sensitive fracture aperture and by incorporating these apertures into a conformal discrete fracture and matrix reservoir simulation model we are able to quantify the effect of stressed aperture on fluid flow. Our results indicate that the fluid flow behavior is variable spatially owing to the aperture heterogeneity across the area of the fractured fold.

WORKFLOW

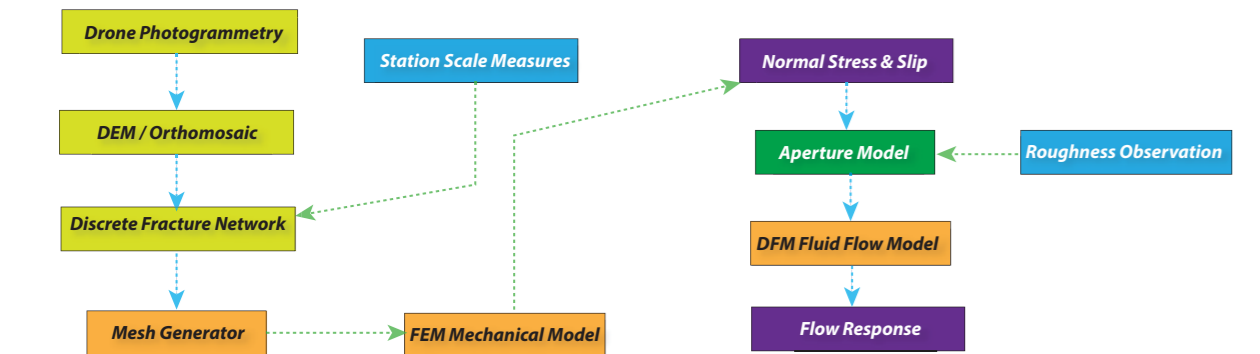


FROM PHOTOGRAMMETRY TO DIGITIZED DISCRETE FRACTURE NETWORK

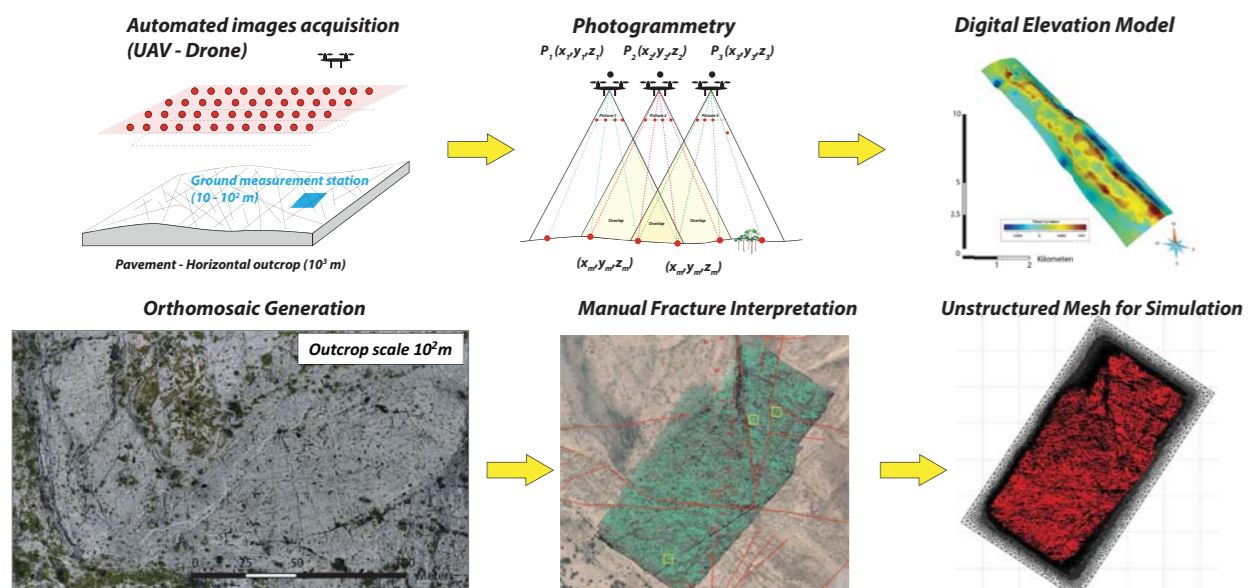

SAMPLING DFN FROM REGIONS OF FOLD

Detailed quantification indicate that fracture intensity and orientations vary along the fold. Owing to the complex nature of the fracture sampling and for computational reasons, we choose to analyze the fracture dataset in 3 boxed samples, one on the limb of the fold (traces in green), one on the hinge (traces in blue) and one sample in between (traces in red). We generate a unstructured, conformal mesh for the three samples and these are also depicted. Fracture density heat maps highlight the variation in orientations of the fractures in the samples.

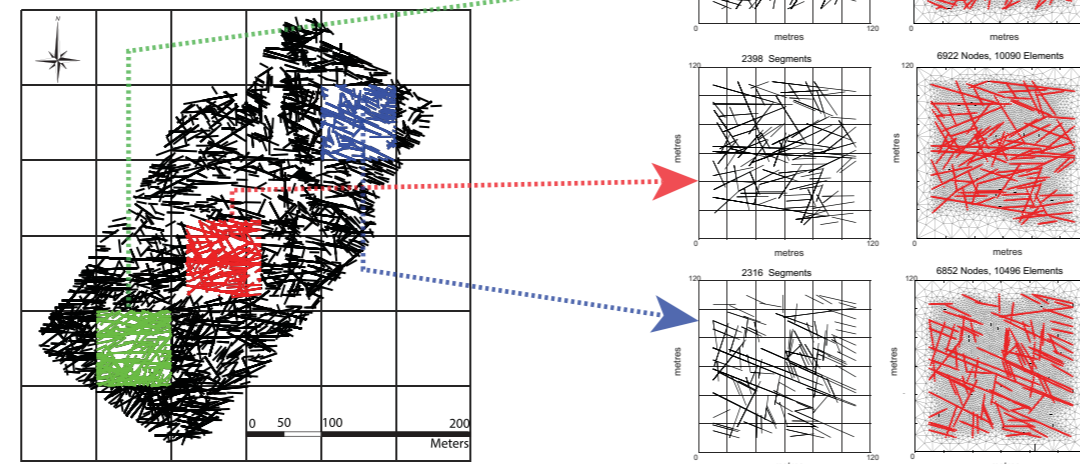

FRACTURE APERTURE CALCULATION

Fracture aperture plays a dominating role in determining fluid flow efficiency and fluid storage in fractured reservoirs. Fracture aperture measurements from outcrop is a poor proxy for use in a reservoir simulation model as the apertures have been opened up owing to release of stress during exhumation and may also be subject to karstification by meteoric waters or may have been weathered. Fracture aperture may be obtained from well data, either measured from cores or from borehole imagery data i.e FMI logs The Barton - Bandis empirical aperture model defines an aperture which is conductive to flow owing to the intrinsic fracture roughness and shear displacement. The aperture is dependent upon local stresses, shear displacement, initial roughness, initial mechanical aperture and the mechanical properties of the rock. A set of empirical functions were defined by Barton and Bandis (1980), Barton (1982). These functions were expanded for cyclic loading by Asadollahi et al (2010). Olsson and Barton (2001) defined the hydraulic aperture as a function of the mechanical aperture.

The initial mechanical aperture is a function of the Joint Roughness Coefficient (JRC) and a mechanical property of the rock, the Joint Compressive Strength (JCS) and uniaxial compressive strength.


$$E_0 = \frac{JRC}{5} \left(0.2 \frac{\sigma_c}{JCS} - 0.1 \right)$$

$$E_m = E_0 \left(\frac{1}{v_m} + \frac{K_m}{\sigma_n} \right)^{-1} \quad K_m = (-7.15) + 1.75 JRC + 0.02 \left(\frac{JCS}{E_0} \right)$$

The maximum closure is dependent on JRC, JCS and the initial mechanical aperture

$$v_m = A + B (JRC) + C \left(\frac{JCS}{E_0} \right)^D$$


The maximum closure fitting parameters have been experimentally obtained by Asadollahi et al (2010) for different loading cycles. The hydraulic aperture for fluid flow is a function of shear displacement, normal stress, peak displacement and a parameter called mobilized fracture roughness and is given as:

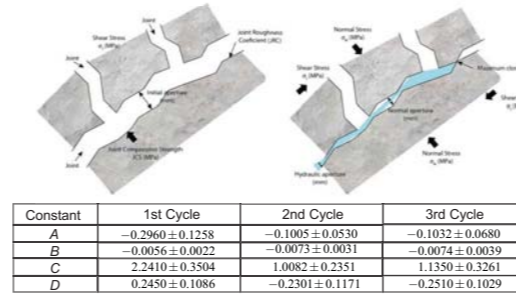


We use the Finite element package ABAQUS for the stress calculations. The fractures are represented as seams with a plane strain continuum. We model the mechanical behavior as elastic. The mesh shown for the 3 samples are contained within a surrounding square geometrical area which is also meshed (not depicted) on which maximum and minimum horizontal loads are applied. This is to prevent any boundary stress perturbations within the fractured system. Displacement boundary conditions are applied on the boundaries to prevent model rotation and to ensure symmetrical deformation. Two stress scenarios are applied, one in which the maximum horizontal stress is perpendicular to the axis of the fold and the second when it is in the direction of the fold axis. With such a setup, the local stress field is computed and within each element abutting a fracture, the principal stresses and fracture strike yield the normal stress. The parameters used for the simulations are as follows:

$$\begin{aligned} S_{h_{max}} &= 30MPa & \nu &= 0.3 (-) & JRC &= 15 (-) \\ S_{h_{min}} &= 10MPa & E &= 35 GPa & JCS &= 120MPa \end{aligned}$$

APERTURE HETEROGENEITY VARIATION WITH STRESS

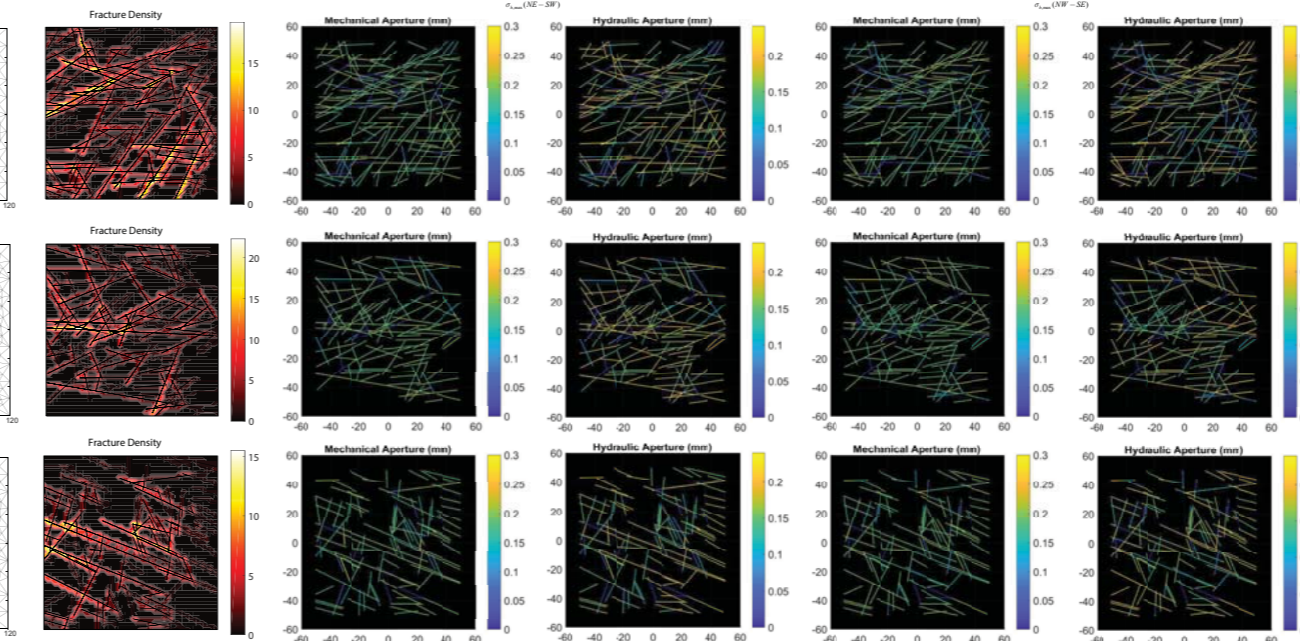

FLUID FLOW SIMULATION RESULTS

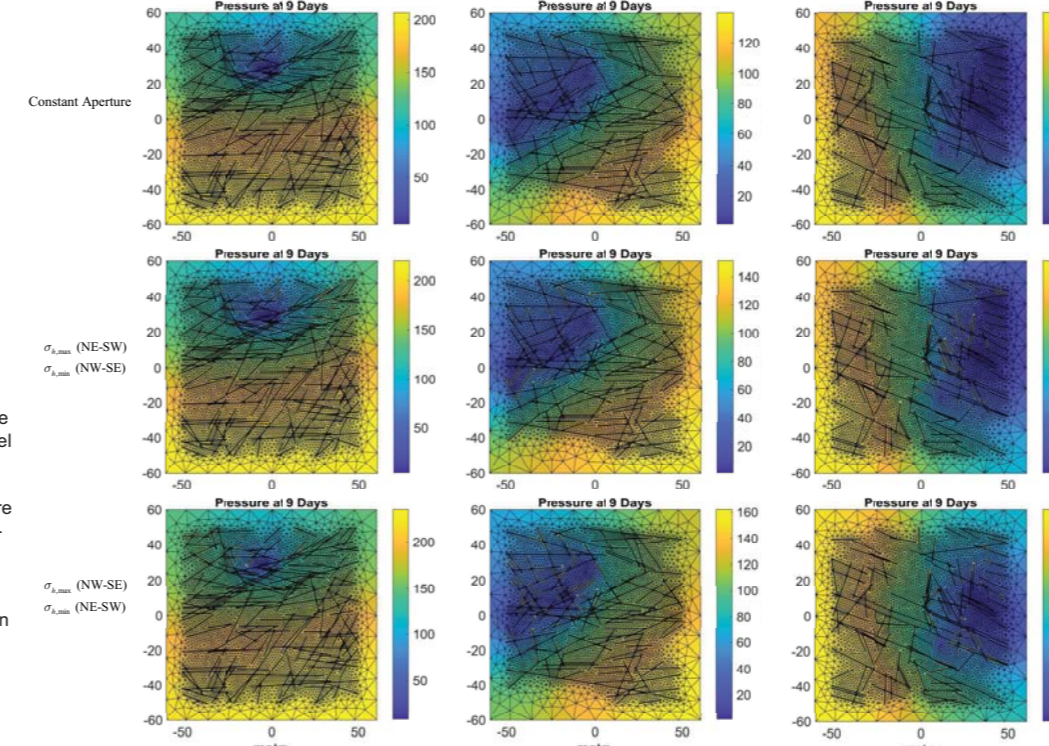

FRACTURED RESERVOIR FLUID FLOW MODEL

The fluid flow reservoir simulation model uses the same unstructured mesh as that of the mechanical finite element model. For the fluid slow simulation, we use the ADGPRS (Automated Differentiation General Purpose Research Simulator) which is a discrete fracture and matrix (DFM) approach. In the 2D case, the fractures are represented explicitly as lower dimensional fracture elements with the matrix elements (triangles) forming a conformally unstructured configuration around the fractures.

The DFM approach of Karimi Fard et al (2003) whereas two point flux approximation is applied between control volumes is used. The mean properties of the grid block as well as the evaluated variables are defined at nodes which are the centroids of the control volumes. The parallel plate model of flow through a fracture is used where fracture walls are separated by an aperture 'h'. The thickness of the fractures is not represented in the grid domain but only on the computational domain.

The transmissibility for a connection between two fractures is achieved by introducing an intermediate control volume that redirects flow. For multiple fracture intersections, the star-delta transformation is used to simplify the transmissibility computation. For a fracture intersection with 'n' connections, transmissibilities are computed using the equation:

$$T_{ij} \approx \frac{\alpha_i \alpha_j}{\sum \alpha_k}$$

For the fluid flow simulations on three fractured samples, we run three cases. The first two are scenarios when the fracture aperture is heterogenous and varies with stress directions. The third case is when the fracture aperture is set constant and when the aperture is not heterogenous (or stress sensitive). The matrix properties are set as 20 % porosity and 0.01875 mD permeability. The fracture porosity is set as 1. The model is initialized with a pressure of 300 bar with a dead oil model. Hence the fluid flow is incompressible and single phase. Wells are set on depletion with bottom-hole pressure constraint of 1 bar.

COMPARISON OF FLUID FLOW RESPONSE

The fluid flow pressure response in the three scenarios highlight certain important issues in fractured reservoir behavior. Firstly the connectivity of the fractures have a huge impact on the depletion behavior. Sample 1 has the largest fracture density but still shows a lower pressure drop in the same time period owing to the placement of the wells on a relatively isolated fracture. Secondly, the constant aperture model seems to overestimate production as compared to the heterogenous aperture model. The difference in production is dependent on the exact well position.

The regions of smaller aperture constrain the depletion in all 3 cases, even as the exact pressure drop is dependent on the well position (on matrix / on well connected fracture / on large aperture fracture / on well connected large aperture fracture. The third key takeaway is the relation of the larger fractures with respect to the stresses acting upon the system. From the aperture heterogeneity plots of the three samples, fractures which are longer and connected with many intersections and are at an angle to the horizontal stresses have more open apertures and are hence more conducive to flow.

CONCLUSIONS

We present a workflow that applies a stress based numerical method to derive heterogenous, sub-millimeter fracture apertures to a realistic outcrop derived 2D Discrete Fracture Network. The derived aperture is variable even along single fractures. Aperture is a function of normal stress, shear displacement and the initial roughness of the rock fracture. The method does not consider the effects of precipitation and dissolution on the effective aperture. Moreover the effects of fracture propagation when stresses are applied (or when fluids are injected) are not considered. The heterogenous fracture aperture is also assumed to be constant on fluid depletion (no fracture closure owing to proelastic effects are considered in the fluid model).

The Pag outcrop is an example of a highly complex fracture network with at least 6 clearly identifiable fracture sets. In such a multiscale network, the intensity, topology of the system is variable spatially and hence the fluid response varies greatly across the network which is obvious from our results. Stochastic fracture generators commonly used to model fractured reservoirs, do not capture this variation. Our stress based approach helps to identify bottlenecks in the network given that there is sufficient data to characterize fracture roughness (measured from cores, FMI) and knowledge of the current day stress field. An additional implication is that, even though there are multiple sets of fractures, only the preferentially oriented fractures would be conducive to flow. In future work, we will attempt to extend the workflow to coupled flow and geomechanics on the DFN in order to quantify the aperture dilation and closure that takes place owing to pressure changes (stress changes) in fractured reservoirs.

ACKNOWLEDGEMENTS

The authors would like to acknowledge the Stanford University Petroleum Research Institute for Reservoir Simulation (SUPRI-B) program for the permission to use ADGPRS in this work.

ACKNOWLEDGEMENTS

Olsson R, Barton N (2001). An improved model for hydromechanical coupling during shearing of rock joints. International Journal of Rock Mechanics and Mining Sciences, 38(3):317-329
 Karimi-Fard, M (2008). "Grid optimization to improve orthogonality of two-point flux approximation for unstructured 3D fractured reservoirs". ECOMOR XI-11th European Conference on the Mathematics of Oil Recovery.
 Karimi-Fard, Mohammad and Abbas Firoozabadi (2001). "Numerical simulation of water injection in 2D fractured media using discrete-fracture model". SPE annual technical conference and exhibition. Society of Petroleum Engineers
 Karimi-Fard, Mohammad, Luis J Durlofsky, and Kazim Aziz (2003). "An efficient discrete fracture model applicable for general purpose simulators". SPE Reservoir Simulation Symposium. Society of Petroleum Engineers
 Voskov, Denis Viktorovich, Hamdi A Tcheppei, and Rami Younis (2009). "General nonlinear solution strategies for multiphase multicomponent eos based simulation". SPE Reservoir Simulation Symposium. Society of Petroleum Engineers.



Bisdorn K, Nick HM, Bertotti G (2017). An integrated workflow for stress and permeability modelling using inter-well scale outcrop derived fracture networks. Journal of Computational Geosciences, Volume 103, Issue C, Pages 21 - 35
 Bisdorn K, Bertotti G, Nick HM (2016). The impact of different aperture distribution models and critical stress criteria on equivalent permeability in fractured rocks. Journal of Geophysical Research: Solid Earth 121 (5), 4045-4063
 Asadollahi P, Invernizzi MC, Addotto S, Tonon F (2010). Experimental validation of modified Barton's model for rock fractures. Rock Mechanics and Engineering, 43(5):597-613
 Bandis S, Lumsden A, Barton N (1983). Fundamentals of Rock Joint Deformation. International Journal of Rock Mechanics and Mining Sciences & Geomechanics Abstracts, 20(6):249-268
 Barton N, Bandis S, Bakhtar K (1985). Strength, Deformation and Conductivity Coupling of Rock Joints. International Journal of Rock Mechanics and Mining Sciences & Geomechanics Abstracts, 22(3):121-140
 Barton N (1982). Modelling rock joint behaviour from in situ block tests Implications for nuclear waste repository design. Technical Report, Office of Nuclear Waste Repository Design, Columbus, OH

Rahul Prabhakaran, TU Delft, CITG, Section of Applied Geology
 Stevinweg 1, 2628CN Delft, The Netherlands
 +31 687916682
 r.prabhakaran@tudelft.nl



FOLDED AND FRACTURED RESERVOIR ANALOGUE : Pag Island, Croatia

GEOLOGICAL SETTING AND DEFORMATION STYLE

The External Dinarides are a fold and thrust belt characterized by general SW vergence [e.g., Tari, 2002]. The Pag anticline involves about 1 km of Cenomanian-Santonian rudist-bearing limestones overlain, through an unconformity, with transgressive Foraminiferal limestones of Eocene age (1b) [Korbar, 2009]. At the km-scale, the fold is continuous along-axis for ca. 30 km between the NW and SE periclinal terminations. In cross section, the fold has box geometry, with sub-vertical to overturned forelimb and a gently undulating hinge zone (1c). The fold is crosscut by minor thrust faults verging both to NE and SW, and by sub-vertical strike-slip faults striking either NS or EW. Thrust and strike-slip faults determine local increases in fracture intensity (1d, 1e).

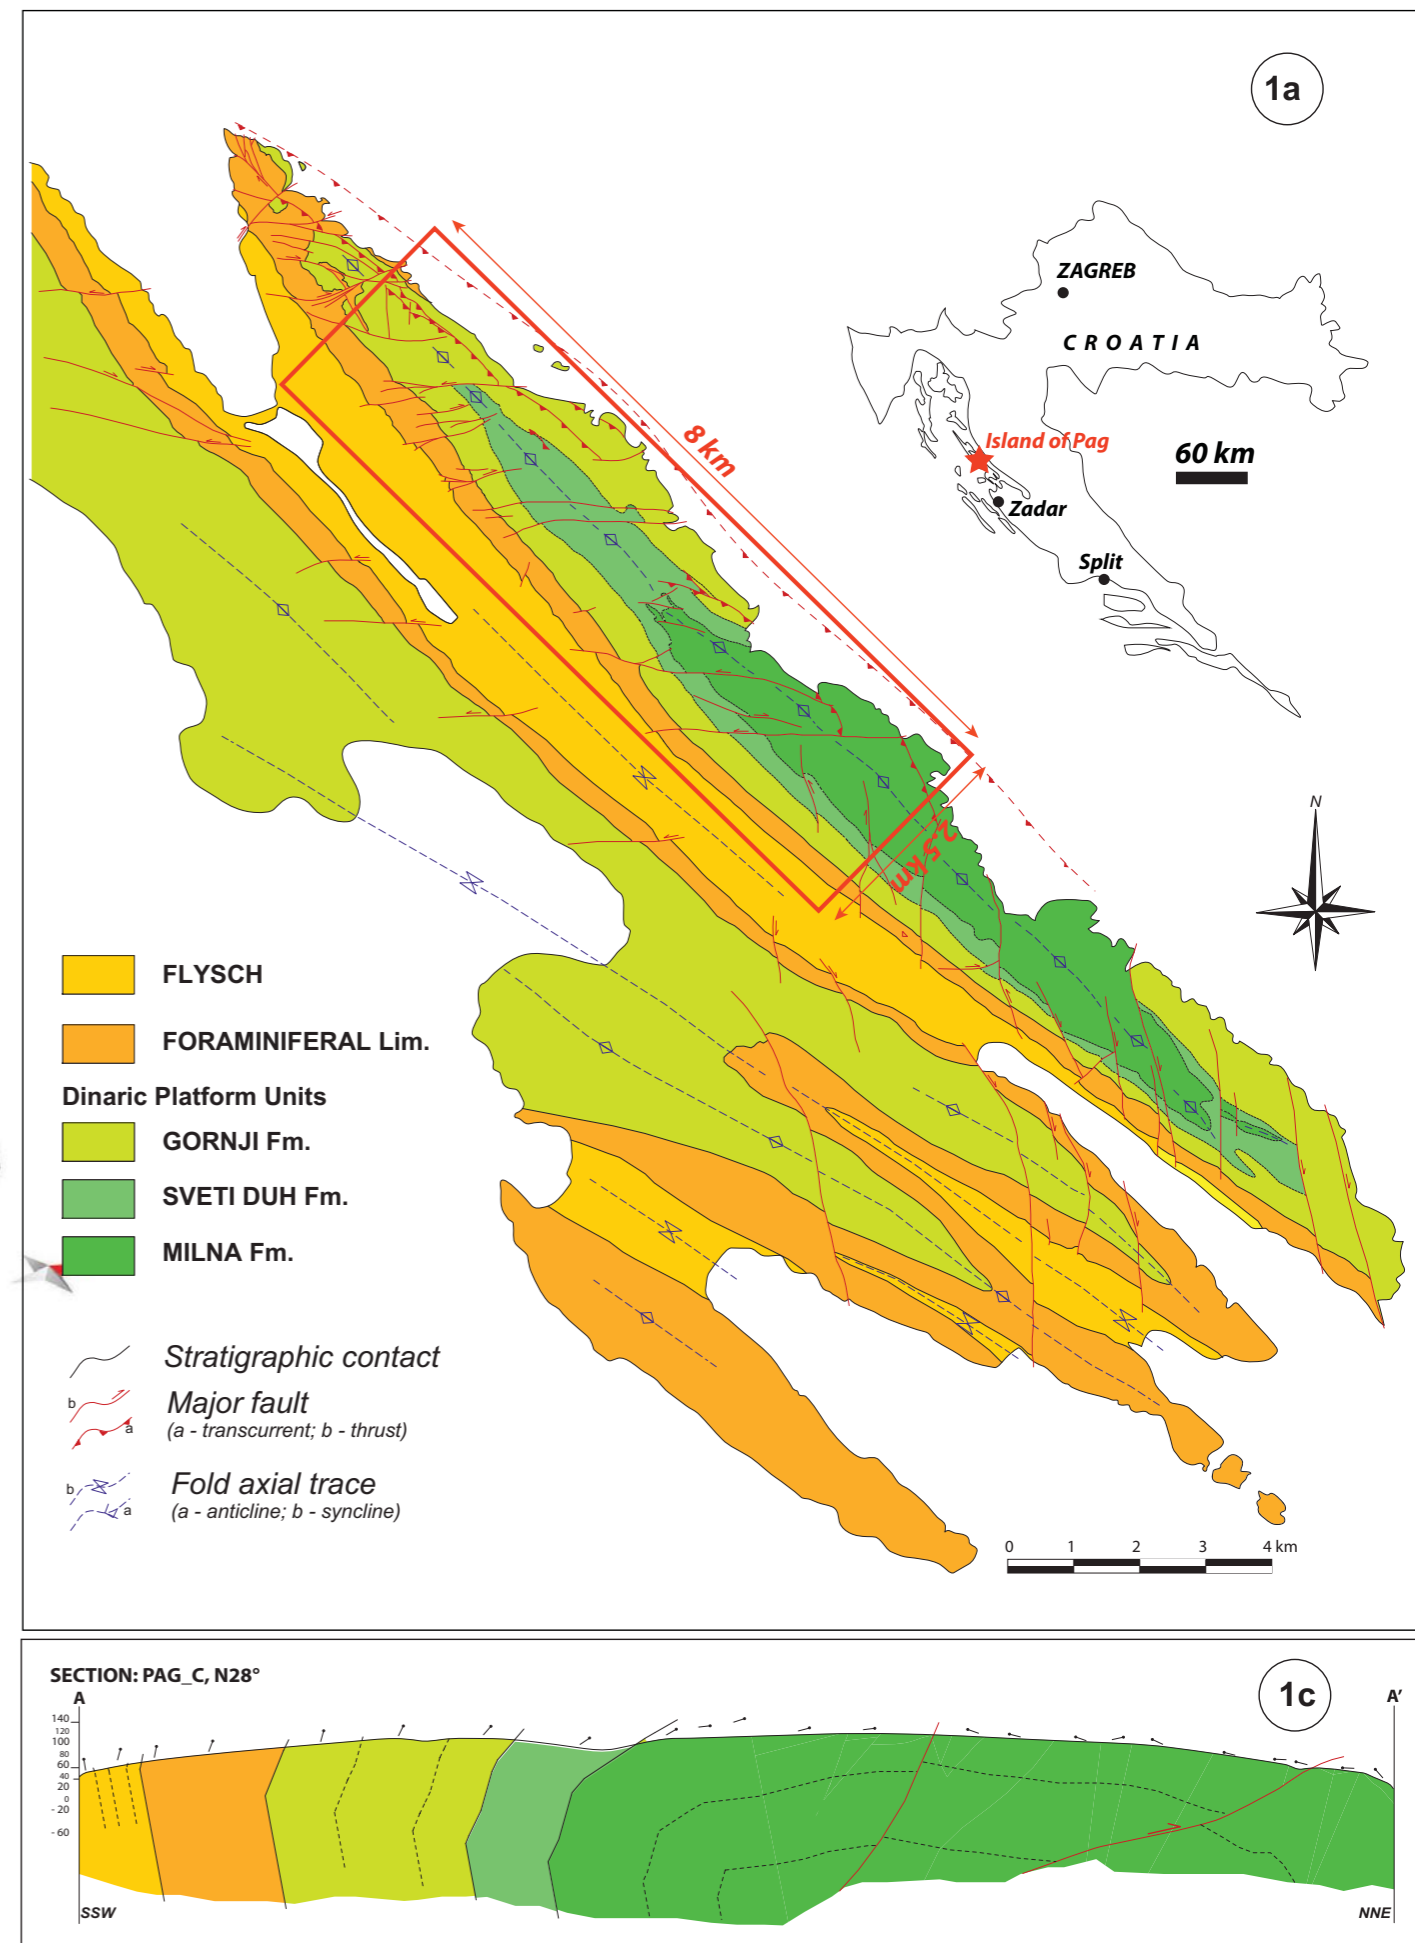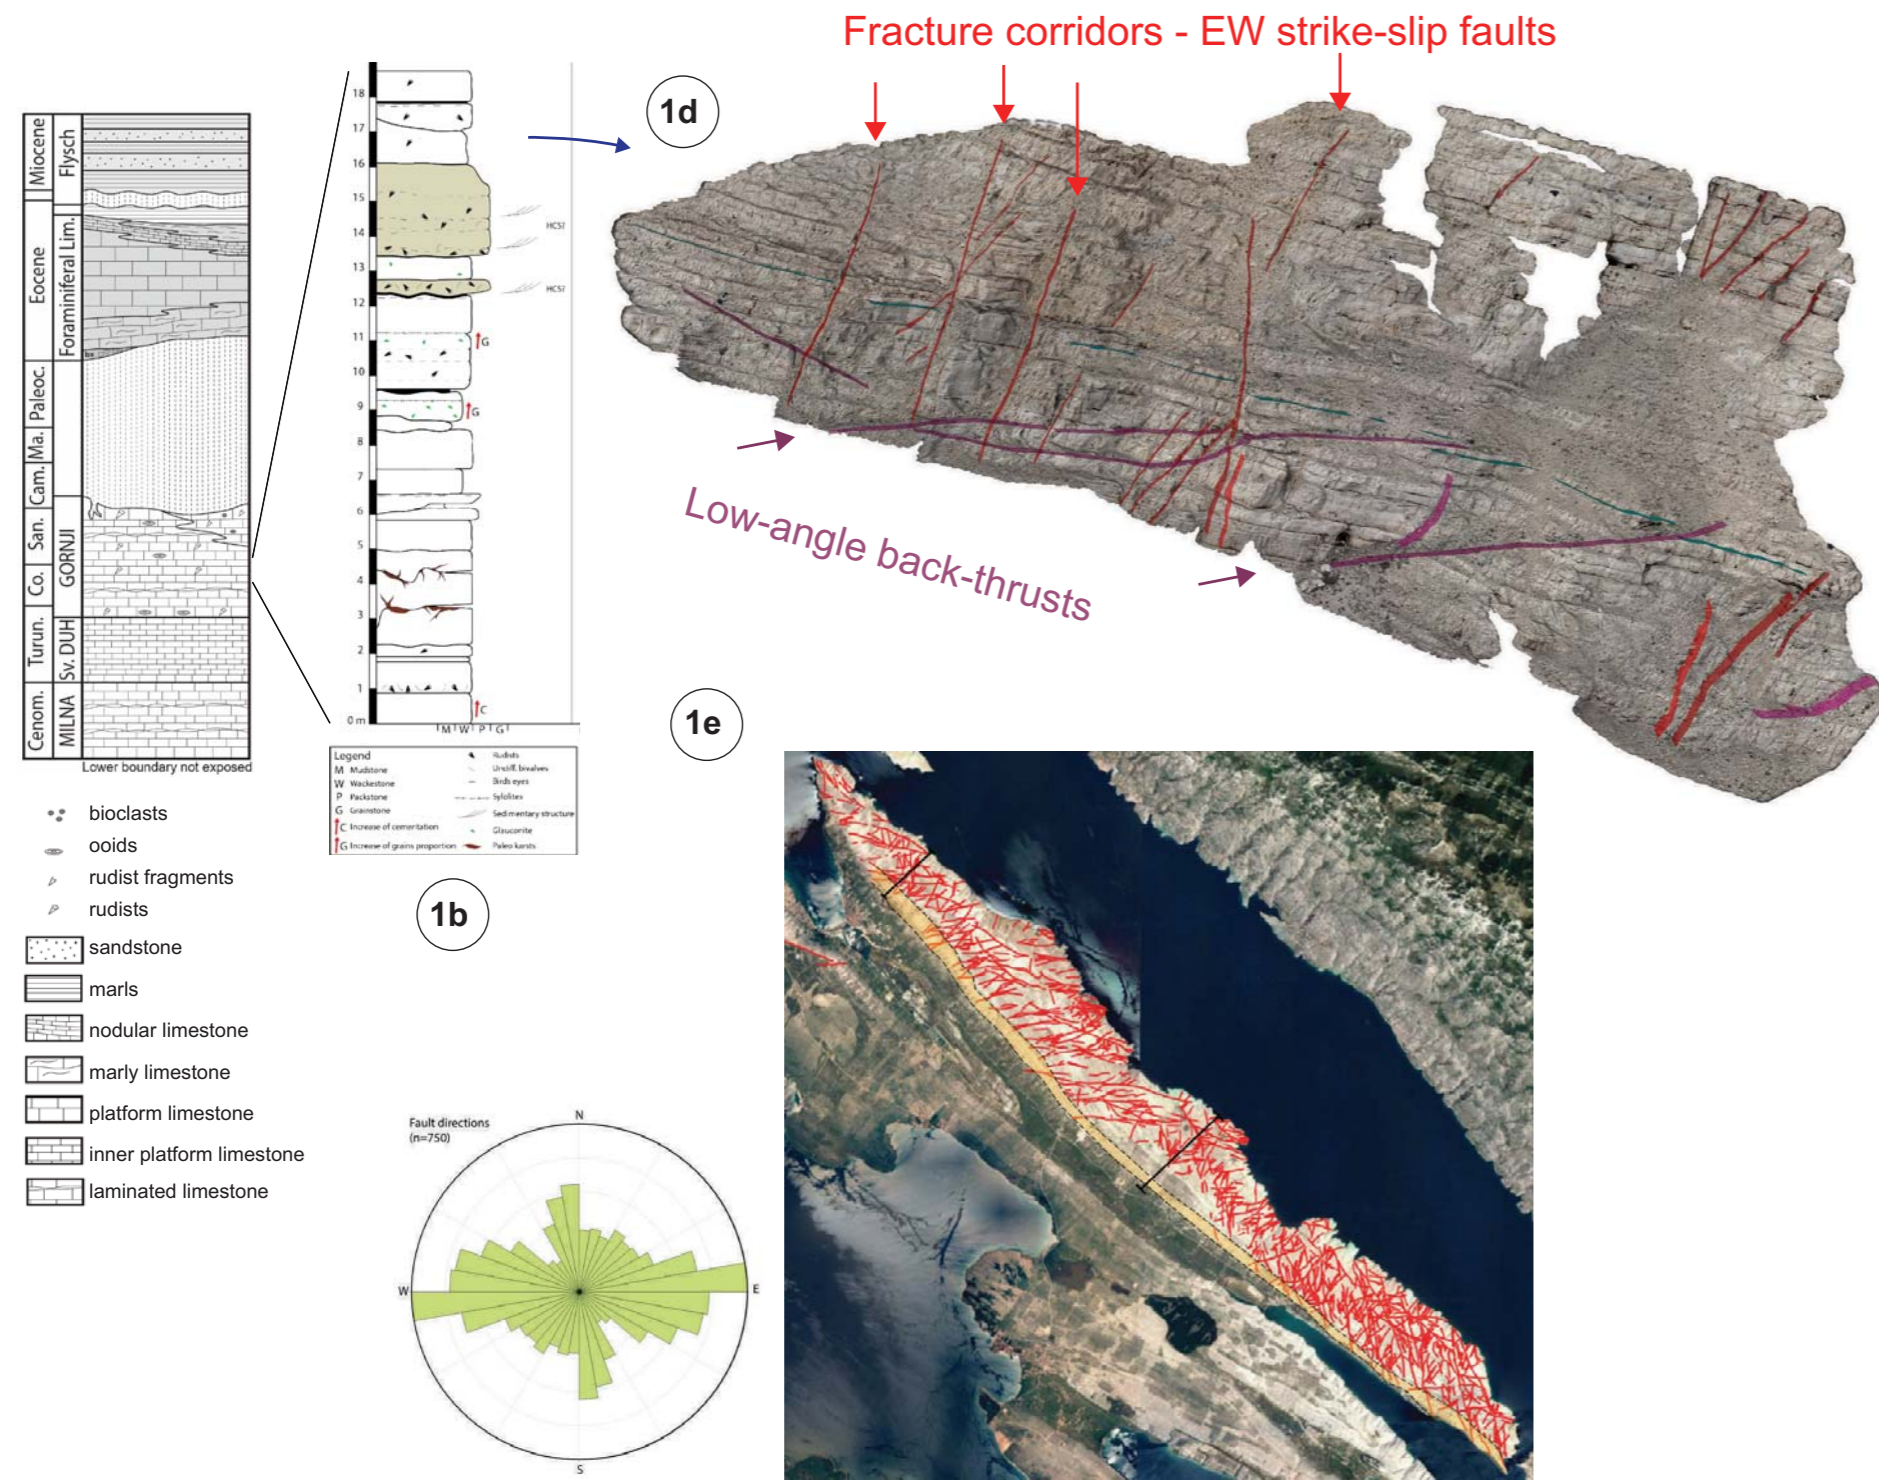


MULTISCALE FRACTURE CHARACTERIZATION AT DIFFERENT SCALES USING DRONE PHOTOGRAMMETRY

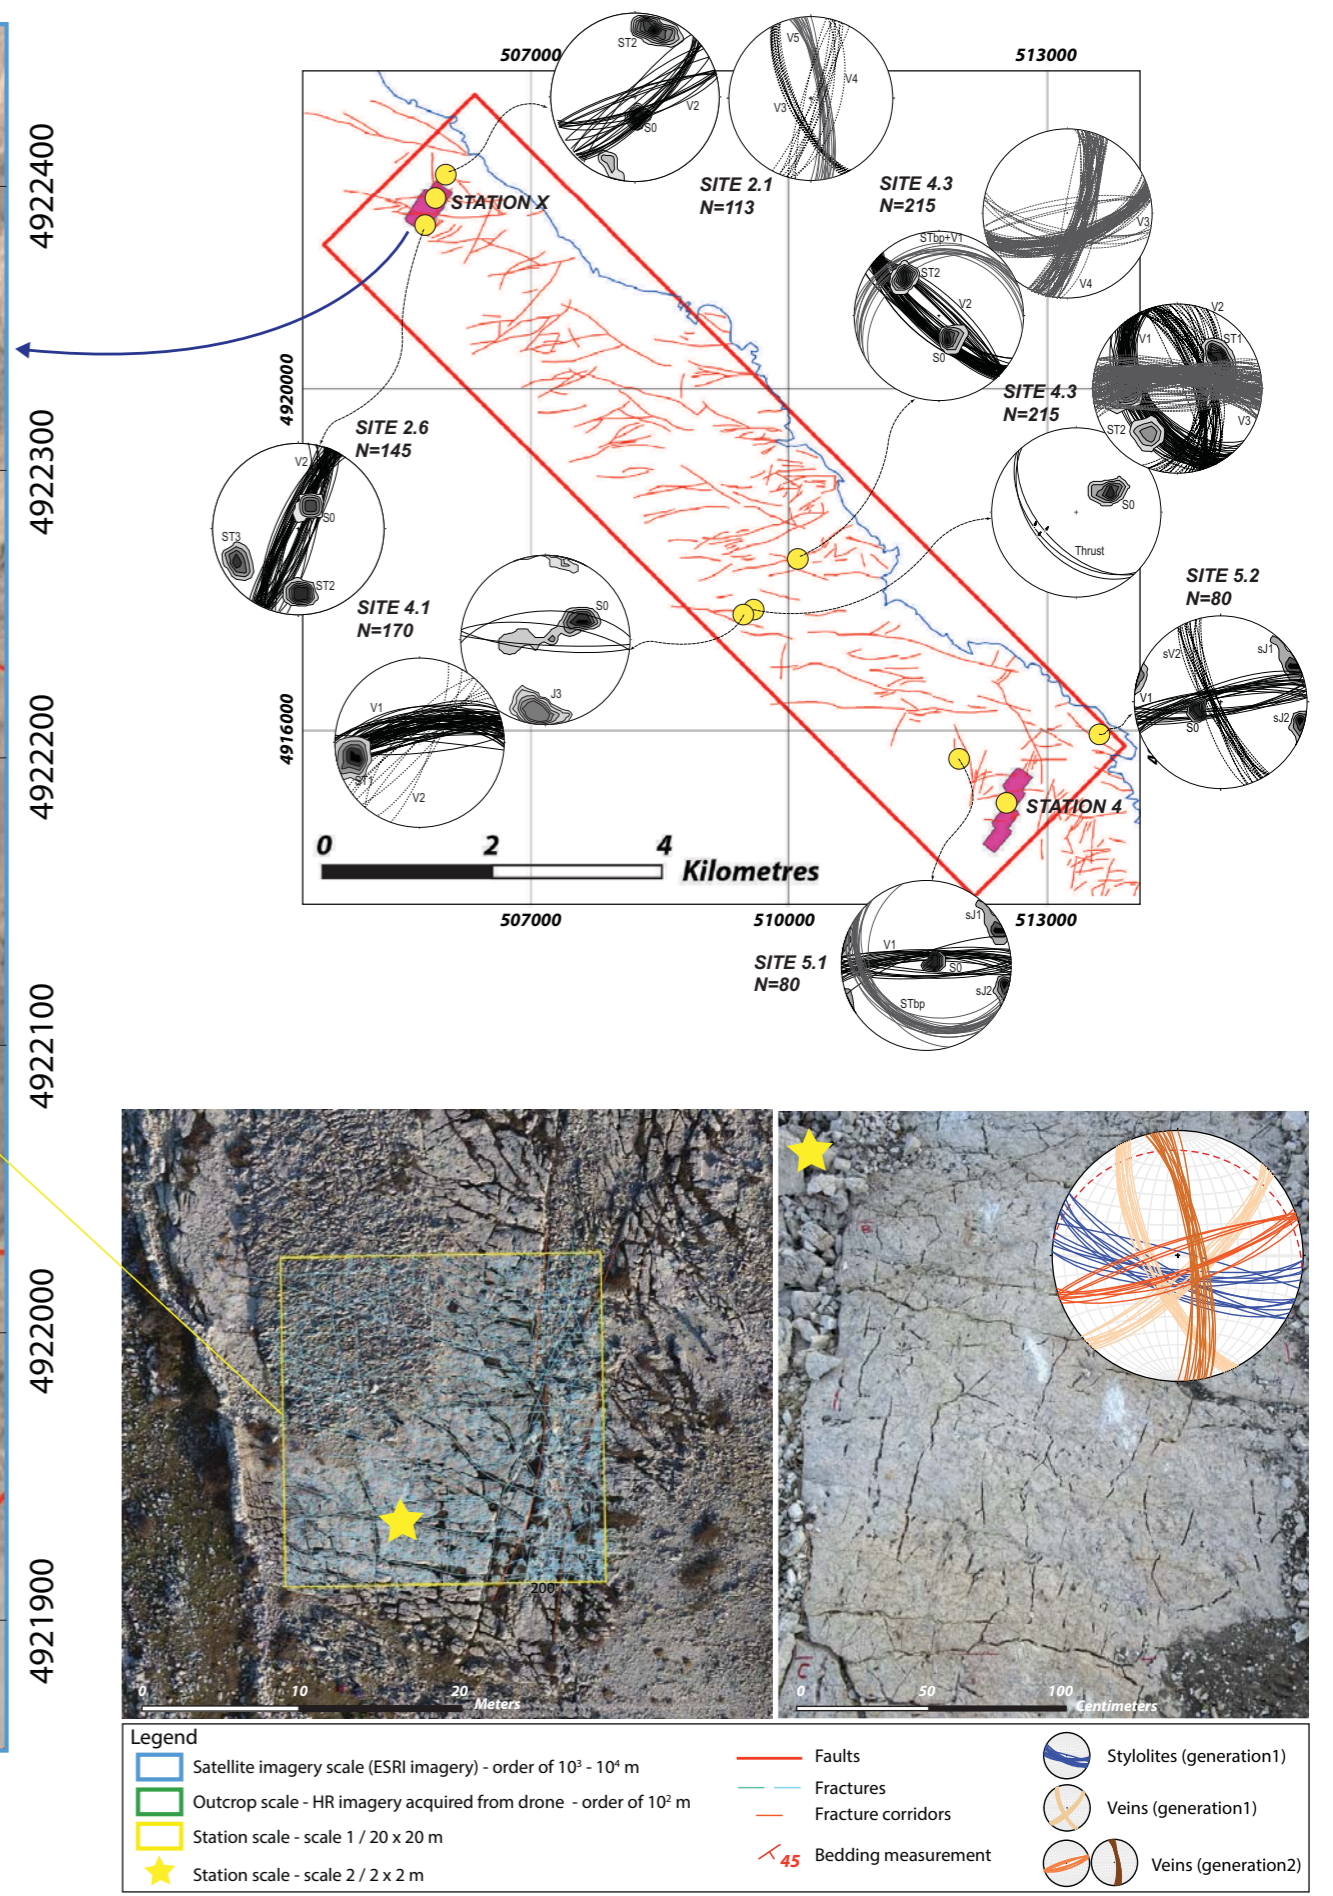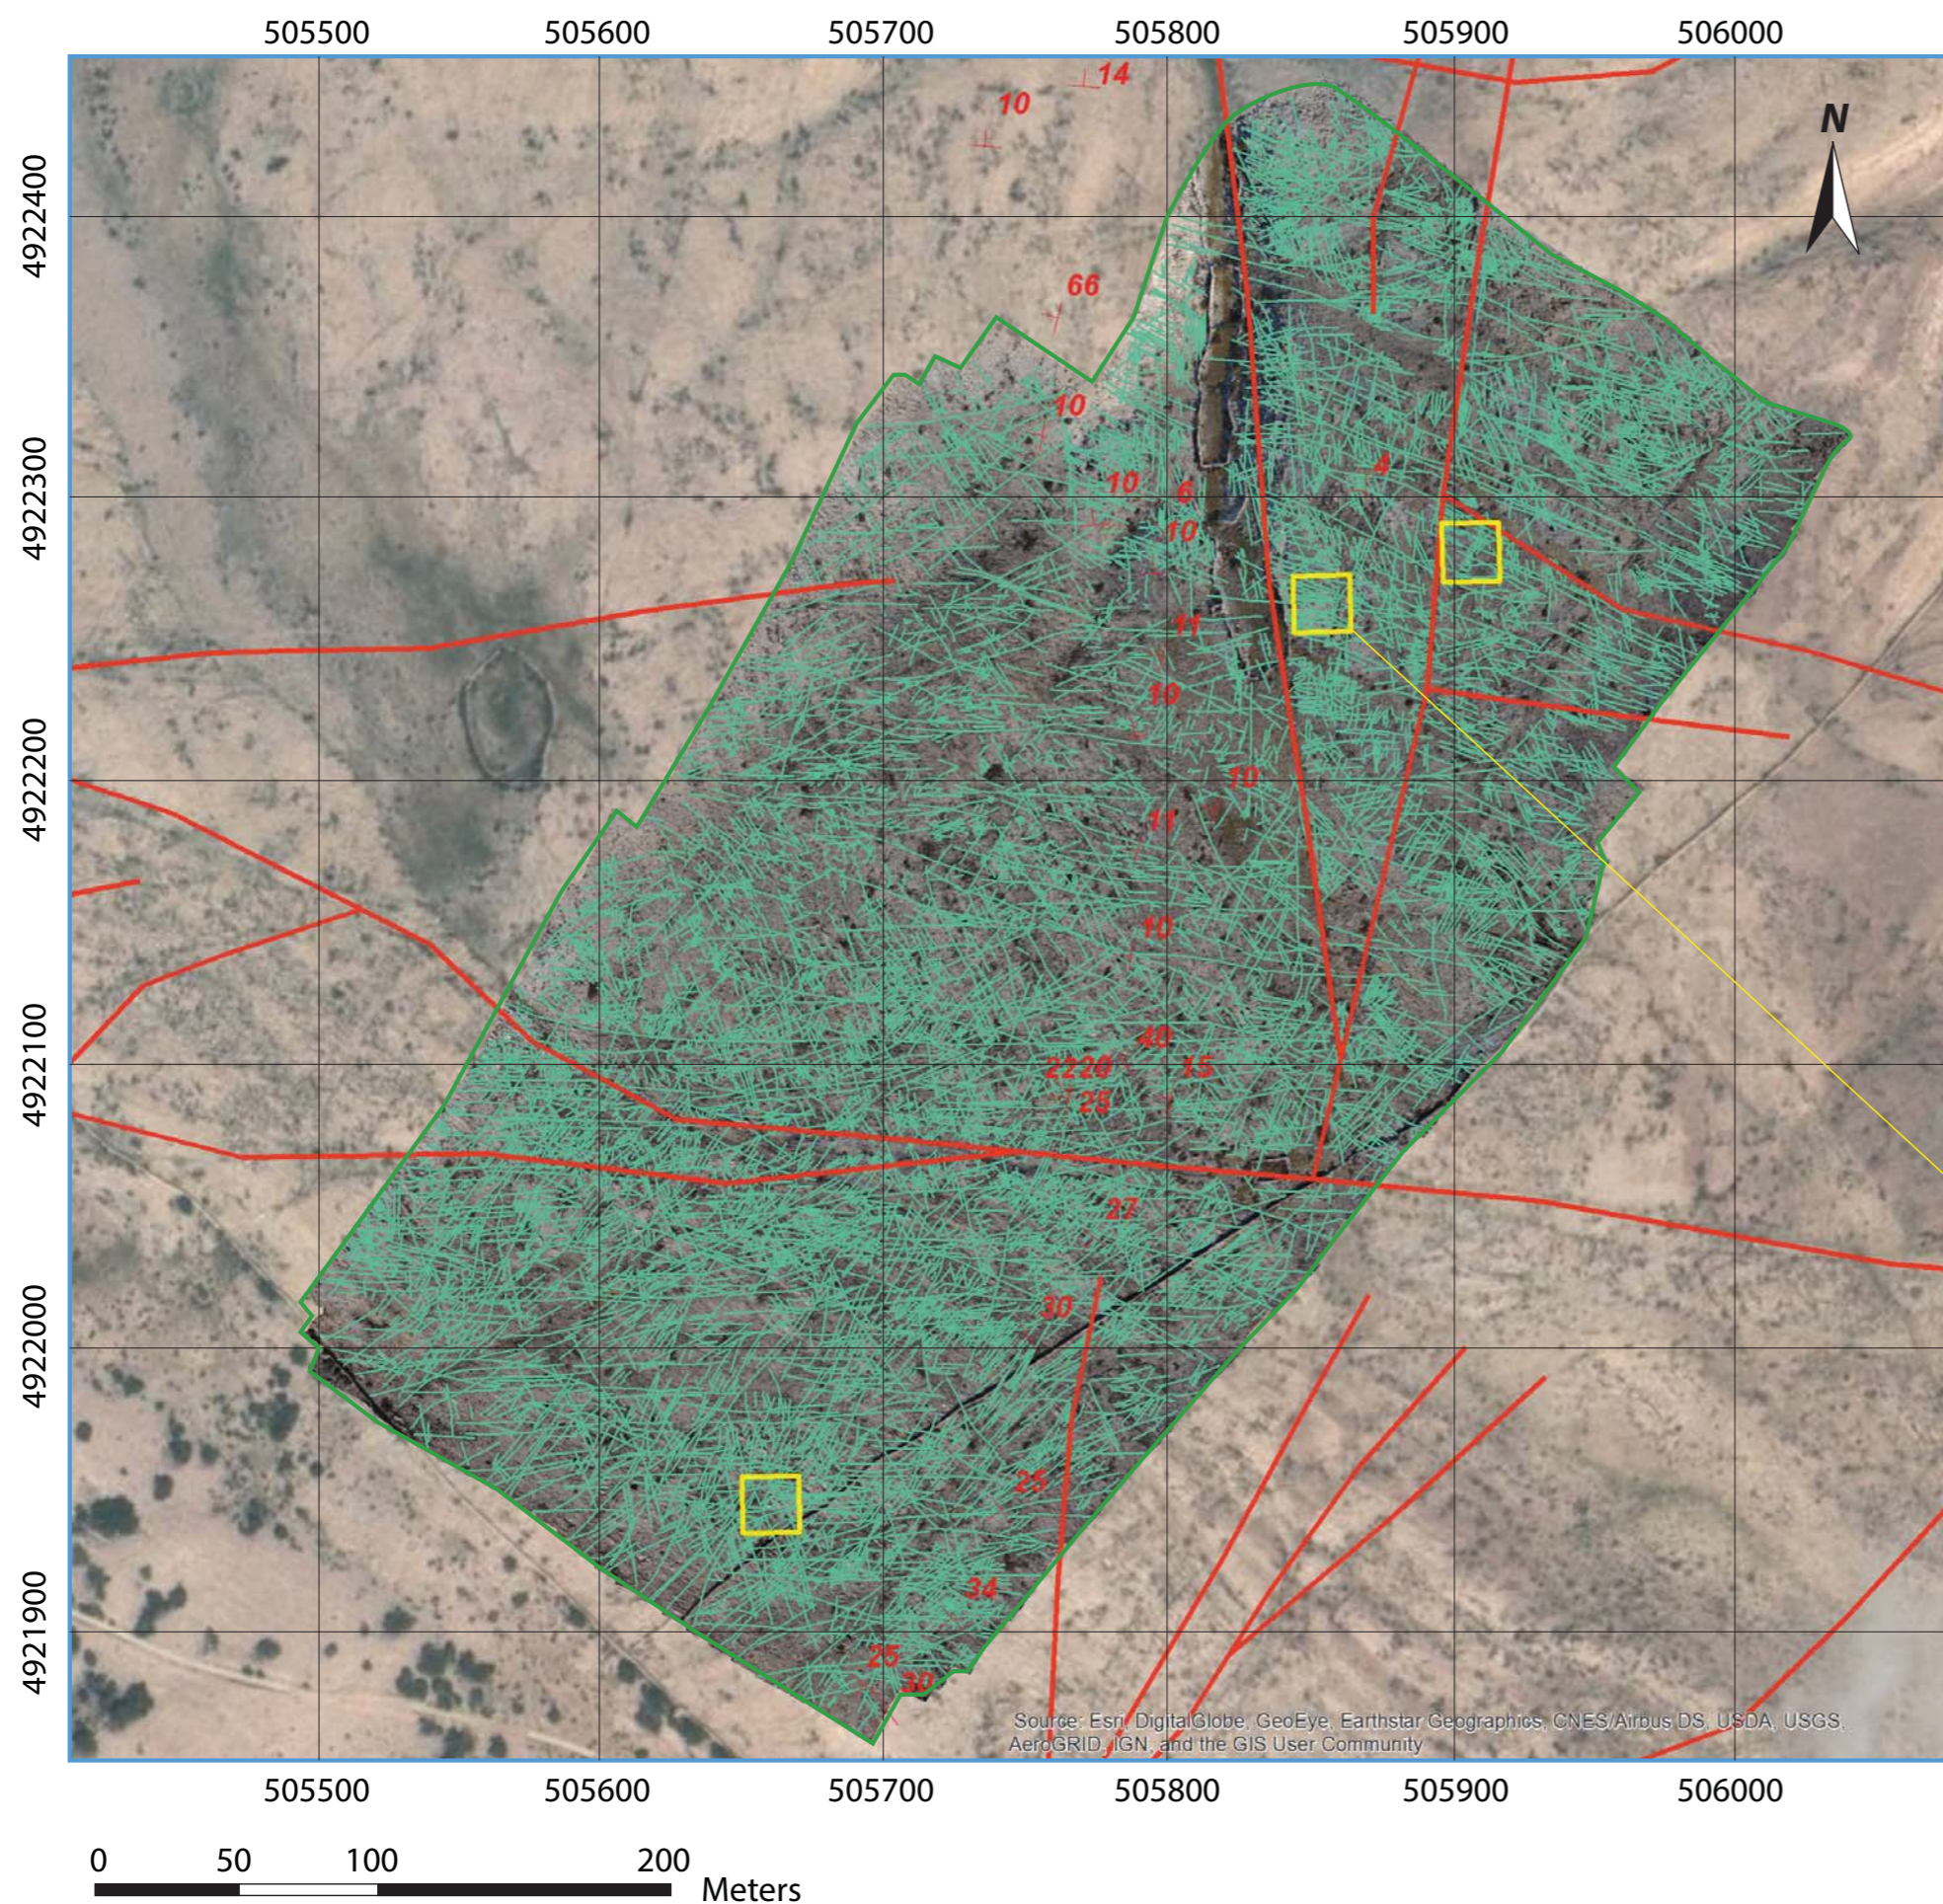


QUANTITATIVE ANALYSIS OF THE MULTISCALE FRACTURE DATASET

Rahul PRABHAKARAN*, Pierre-Olivier BRUNA, Giovanni BERTOTTI, Silvia MITTEMPERGER, Andrea SUCCO, Andrea BISTACCHI, Fabrizio STORTI, Marco MEDA

DIGITISED FRACTURE NETWORK

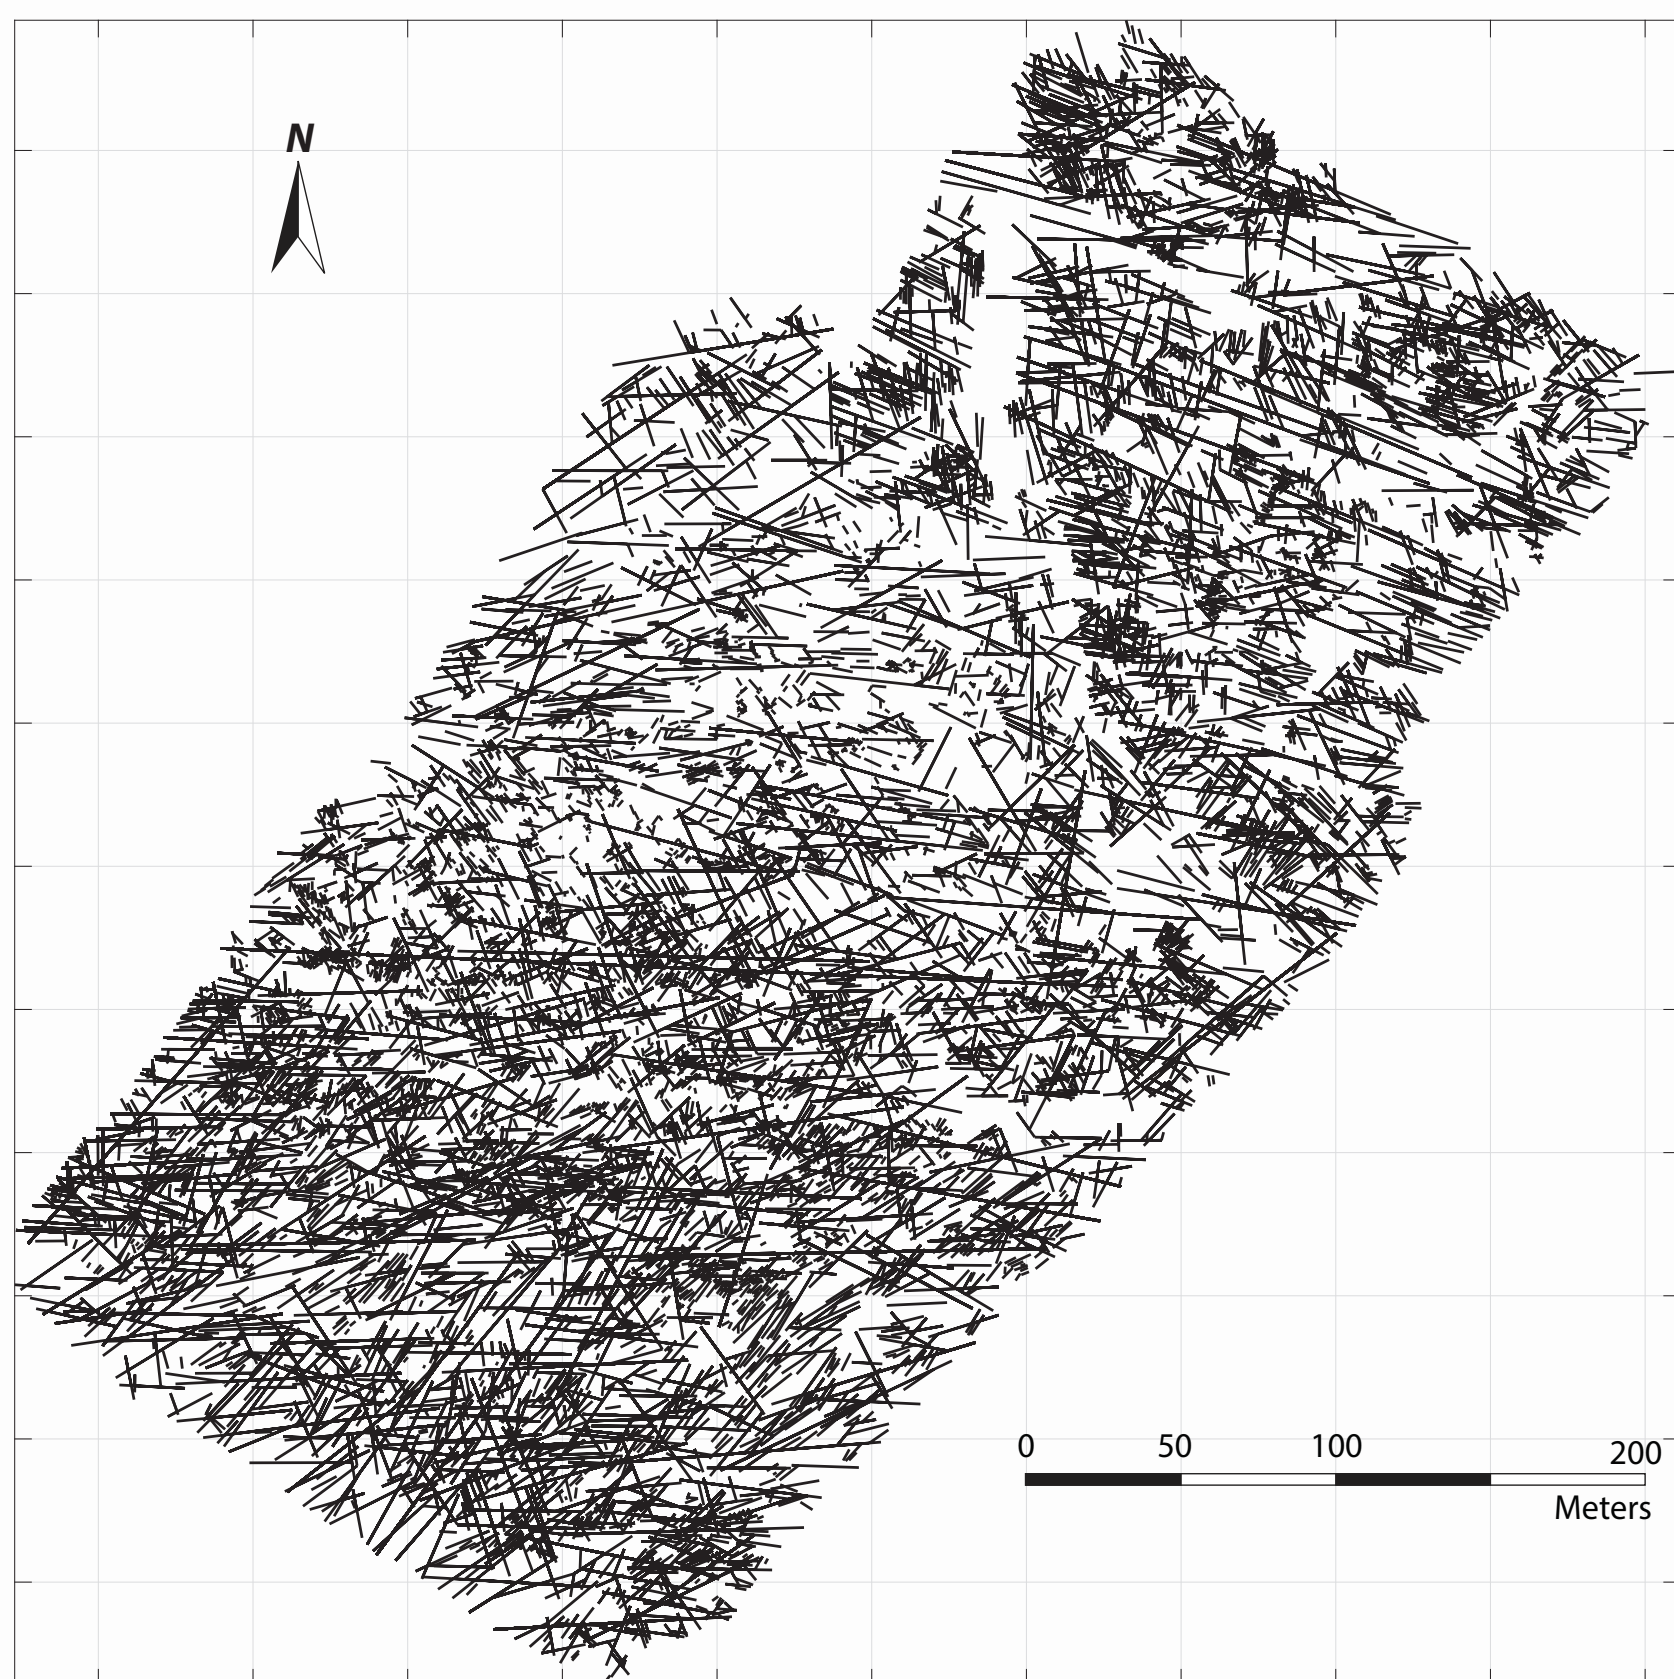


FRACTURE SETS ANALYSIS

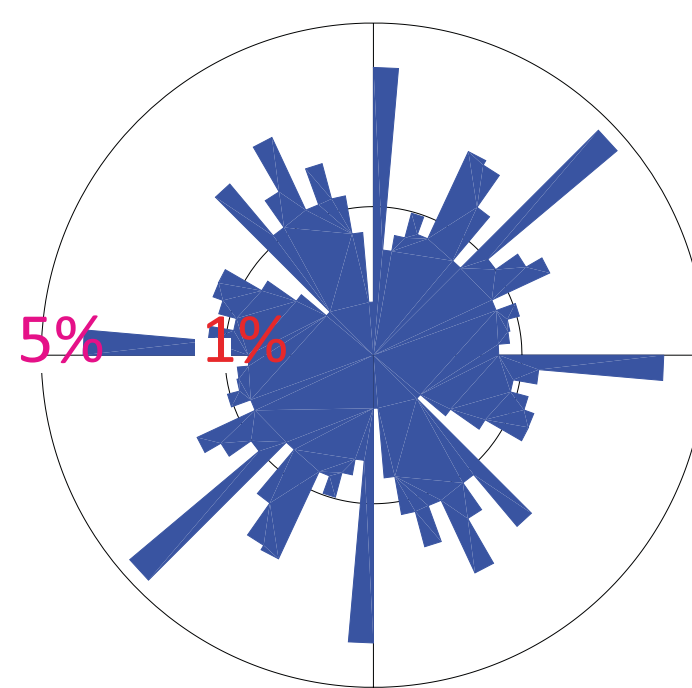

Large Scatter in fracture azimuths are observed that indicate the structural complexity associated with folding related fracturing. Combining analysis of the fracture traces digitized from photogrammetry alongwith station scale measurements, the traces are classified into the following 6 major sets.

1. EW Tectonic Stylolites N 080 - N 110
2. Conjugated Veins N 030 - N 050
3. Conjugated Veins N 130 - N 150
4. NS Tectonic Stylolites N 010 - N 020 & N 160 - N 180
5. NE - SW Veins & Joints N 050 - N 070
6. NS Veins & Joints N 000 - N 030


FRACTURE LENGTH STATISTICS

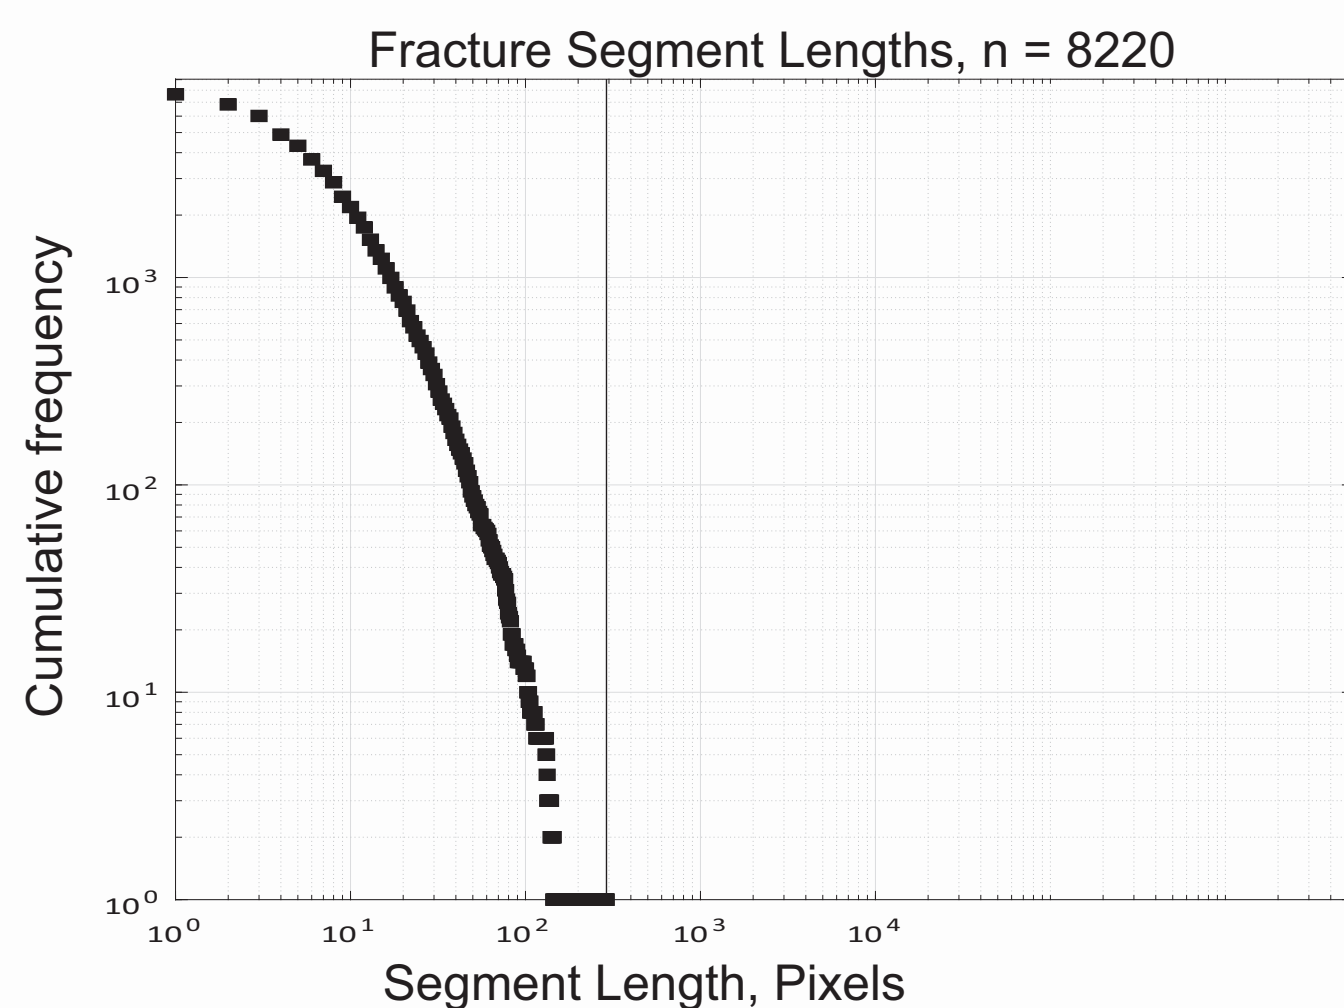

FRACTURE TOPOLOGY ANALYSIS


In 2D fracture networks, the fractures may be considered to be a system of branches and nodes (Sanderson & Nixon, 2015). Fracture topology refers to the relationship between the elements of the network. The behavior of the fracture network to flow and stress depends not only upon the geometrical features of the fractures but also upon these connecting relationships. The nodes may be divided into isolated (I) nodes, abutting or terminating (T) or (Y) nodes and crosscutting (X) nodes. The proportion of these nodes define the topology (Manzocchi, 2002; Mäkel, 2007) and can be used to characterize the fracture system. We perform such a topological analysis of the nodes and derive the node metrics for the Pag fracture network.

Type	Count	%
I	16492	63
Y	2889	11
X	6659	26

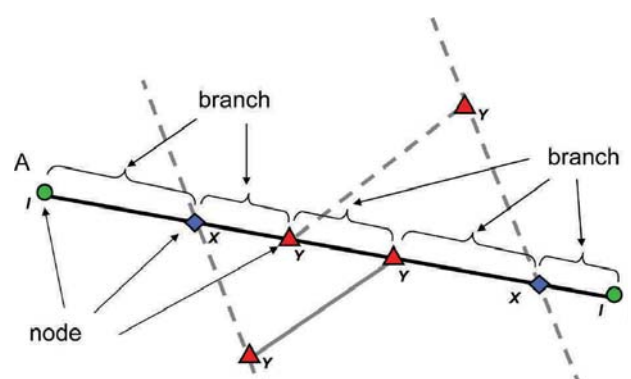

(adapted from Sanderson and Nixon, 2015)

The proportion of nodes may be represented on a ternary plot. Sanderson and Zhang (1999) compared three natural fracture networks with stochastic line simulations (fig below). The Pag system is juxtaposed on this ternary plot and it has an isolated topological character for the system as a whole.

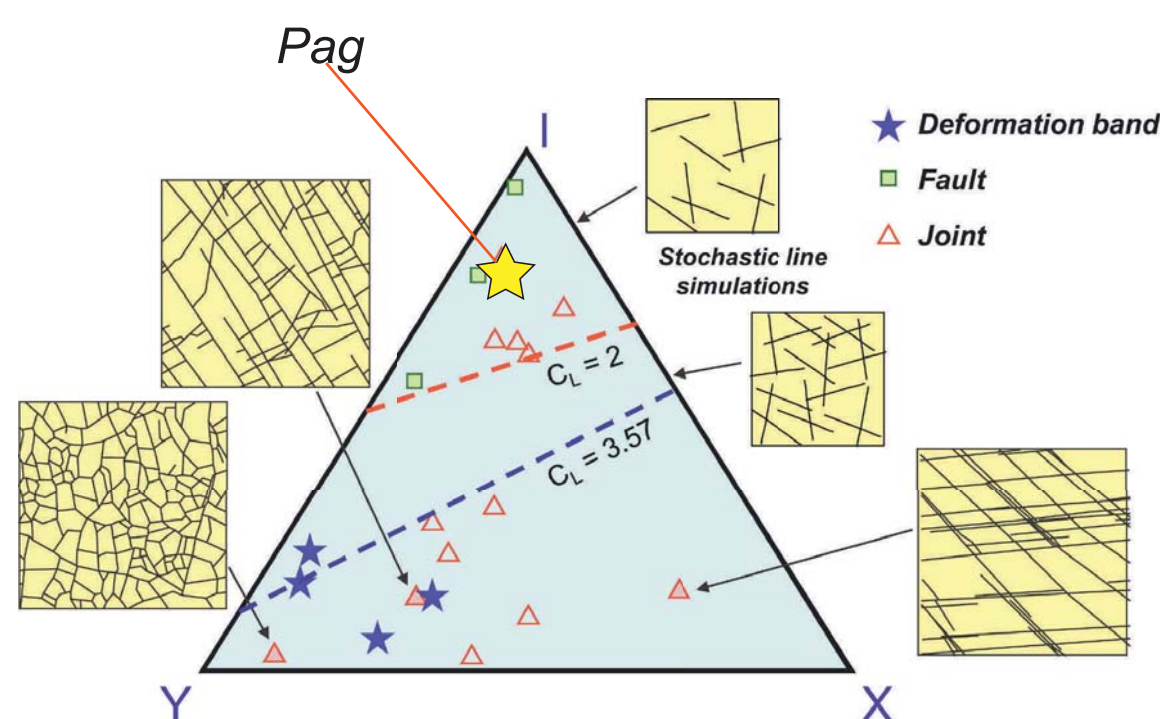

(adapted from Sanderson and Nixon, 2015)

FRACTURE INTENSITY MEASURES

