

## Thermal Management on IGBT Power Electronic Devices and Modules

Qian, Cheng; Mirza Gheytaghi, Amir; Fan, Jiajie; Tang, Hongyu; Sun, Bo; Ye, Huaiyu; Zhang, GuoQi

**DOI**

[10.1109/ACCESS.2018.2793300](https://doi.org/10.1109/ACCESS.2018.2793300)

**Publication date**

2018

**Document Version**

Final published version

**Published in**

IEEE Access

**Citation (APA)**

Qian, C., Mirza Gheytaghi, A., Fan, J., Tang, H., Sun, B., Ye, H., & Zhang, G. (2018). Thermal Management on IGBT Power Electronic Devices and Modules. *IEEE Access*, 6, 12868-12884. <https://doi.org/10.1109/ACCESS.2018.2793300>

**Important note**

To cite this publication, please use the final published version (if applicable). Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

Received November 15, 2017, accepted January 2, 2018, date of publication January 15, 2018, date of current version March 19, 2018.

Digital Object Identifier 10.1109/ACCESS.2018.2793300

# Thermal Management on IGBT Power Electronic Devices and Modules

CHENG QIAN<sup>1</sup>, (Member, IEEE), AMIR MIRZA GHEITAGHY<sup>2</sup>, JIAJIE FAN<sup>3,4</sup>, (Senior Member, IEEE), HONGYU TANG<sup>1,2,4</sup>, (Student Member, IEEE), BO SUN<sup>2,4</sup>, HUAIYU YE<sup>1,2,5</sup>, (Member, IEEE), AND GUOQI ZHANG<sup>2,6</sup>, (Fellow, IEEE)

<sup>1</sup>School of Reliability and Systems Engineering, Beihang University, Beijing 100191, China

<sup>2</sup>Electronic Components, Technology and Materials, Delft University of Technology, 2628 CD Delft, The Netherlands

<sup>3</sup>College of Mechanical and Electrical Engineering, Hohai University, Changzhou 213022, China

<sup>4</sup>Changzhou Institute of Technology Research for Solid State Lighting, Changzhou 213161, China

<sup>5</sup>Key Laboratory of Optoelectronic Technology and Systems, Education Ministry of China, and College of Optoelectronic Engineering, Chongqing University, China

<sup>6</sup>State Key Laboratory of Solid State Lighting, Institute of Semiconductors, Chinese Academy of Sciences, Beijing 100083, China

Corresponding author: Huaiyu Ye, Guoqi Zhang (h.ye@tudelft.nl, g.q.zhang@tudelft.nl)

This work was supported in part by the National Natural Science Foundation of China under Grant 51706029 and in part by the National High Technology Research and Development Program of China (863 Program) under Grant 2015AA033304.

**ABSTRACT** As an increasing attention towards sustainable development of energy and environment, the power electronics (PEs) are gaining more and more attraction on various energy systems. The insulated gate bipolar transistor (IGBT), as one of the PEs with numerous advantages and potentials for development of higher voltage and current ratings, has been used in a board range of applications. However, the continuing miniaturization and rapid increasing power ratings of IGBTs have remarkable high heat flux, which requires complex thermal management. In this paper, studies of the thermal management on IGBTs are generally reviewed including analyzing, comparing, and classifying the results originating from these researches. The thermal models to accurately calculate the dynamic heat dissipation are divided into analytical models, numerical models, and thermal network models, respectively. The thermal resistances of current IGBT modules are also studied. According to the current products on a number of IGBTs, we observe that the junction-to-case thermal resistance generally decreases inversely in terms of the total thermal power. In addition, the cooling solutions of IGBTs are reviewed and the performance of the various solutions are studied and compared. At last, we have proposed a quick and efficient evaluation judgment for the thermal management of the IGBTs depended on the requirements on the junction-to-case thermal resistance and equivalent heat transfer coefficient of the test samples.

**INDEX TERMS** Power electronics, IGBT, thermal management, cooling, qualifications.

## I. INTRODUCTION

Power electronic (PE) systems have been widely applied in both industrial and domestic applications in modern society for use of controlling and converting electrical energy [1]. Besides, the usage of PE systems have resulted in energy savings and compact structures on electric cars, trains, automated manufacturing systems, power generation, and etc. [2] With the characteristics of excellent performance, low cost, high reliability, low weight and size, power semiconductors including insulated-gate bipolar transistors (IGBTs) dominate the market of power converters [3], [4]. As one of the most important power converter devices, the IGBTs have been invented in 1982 [5] and accelerated the applications of bipolar devices to the high voltage and current markets. Since appearance of the first commercial product in 1988 [6], [7], IGBTs have gained significant importance as one of

major carrier devices in both discrete and module markets. It is expected that the IGBT market will be booming from 2014 to 2020, archiving 6.6 billion US\$, at a Compound Annual Growth Rate 10% in the segmentation of renewable energy, UPS, motor drive, rail traction, motor drive, EV/HEV, consumer electronics, and others (Figure 1). These trends have exacerbated issues pertaining to the increasing demands from consumer electronics, low carbon emission system, acceleration of replacement of petrol vehicles and deployment of smart grids.

IGBTs are required for applications operated over a broad spectrum of current and voltage levels as shown in Figure 2. The current ratings for the IGBTs increase with the increasing voltage rating in these applications except for the smart grid. The smart grid application is unique in requiring very high voltage devices with low current ratings. In the case of silicon

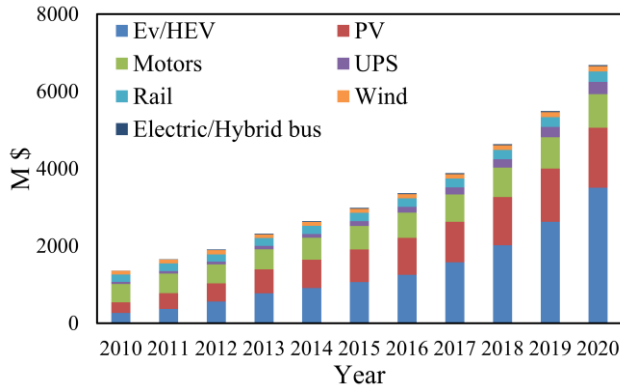


FIGURE 1. IGBT market split by applications [8], [9].

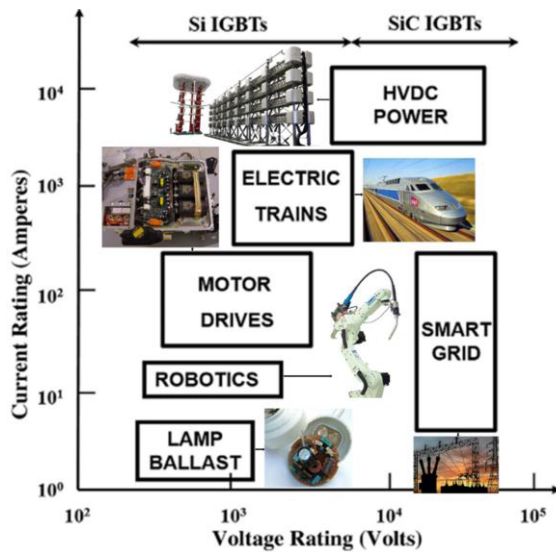


FIGURE 2. Application spectrum for IGBTs [10].

IGBTs, this issue is tackled by resorting to multichip press-pack modules. A more advanced solution is to use SiC-based IGBTs which can operate at higher frequencies than their silicon counterparts. Rapid evolution of the IGBTs technology enhances induces high power density on the chips, with higher and higher speed and compact package. Typically, more complex and bulky cooling solutions are significantly required.

**A. DEVELOPMENT OF IGBTs**

The IGBT technical progress and development trend for industrial applications is primarily driven by five aspects influenced among each other to an extent, which are operating temperature, efficiency, dimension, reliability and cost, in the last thirty years. The power density of the IGBTs is lifted from 35 kW/cm<sup>2</sup> from the very beginning to 250 kW/cm<sup>2</sup> expected in 2020s as shown in Fig.3, thanks to innovative assembly and interconnection techniques. On the other hand, as a result of a high voltage and current, the total heat dissipation is continued to increase as well. Nowadays, the power outputs

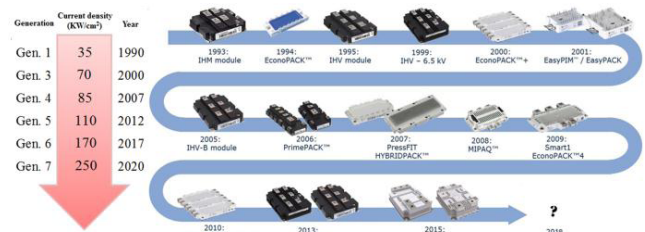


FIGURE 3. Development power density in generation of IGBTs.

of typical commercial IGBTs are reaching an extremely high value of more than ten thousand watts. IGBTs of 600V/650V up to currents of 600 A, 1200 V up to currents of 3600 A, 1600V/1700V up to currents of 3600 A, 3300 V up to currents of 1500 A, 4500 V up to currents of 1200 A and 6500 V up to currents of 750 A have been shown on the market today and those more than 10 kV device are under test [11]. Shown as an example, features of the commercial IGBTs from Fuji Electric, Fairchild Semiconductor, STMicroelectronics, Infineon Technologies, Mitsubishi Electric, and IXYS Power are illustrated in Figure 4. In future, the semiconductor industry is expected to continuously raise the power outputs of IGBTs owing to new developments. Similarly, for reliability reasons, the cooling technology will also be advanced to catch up with the development of IGBTs.

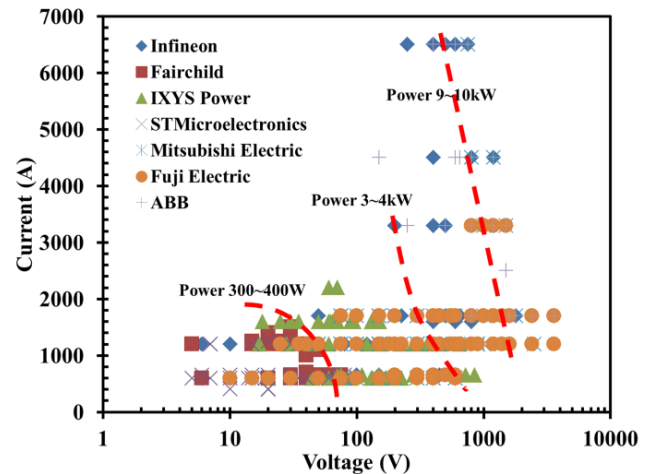


FIGURE 4. Power range of commercially available IGBTs.

**B. THERMAL CHALLENGES OF IGBTs**

Thermal management and cooling solutions is a growing concern for IGBTs due to the increased heat losses in their widely applications [12]–[16]. These heat losses can be further divided into two categories, i.e. conduction losses and switching losses. The conduction losses occur during the on-state voltage drop across the IGBTs depending on the conducted current. Whereas the switching power losses occur during on and off stages of the IGBTs depending on the current, duty cycle, switching voltage and switching frequency. Figure 5 demonstrates a typical IGBT heat flux

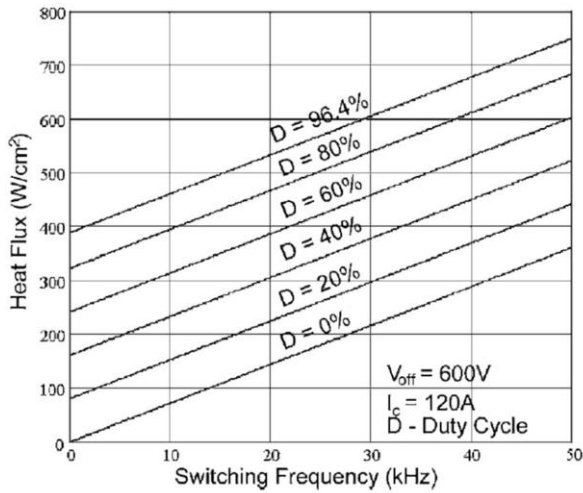


FIGURE 5. Heat flux versus switching frequency in different duty cycle for a typical IGBT ( $V_{off} = 600\text{ V}$ ,  $I_c = 120\text{ A}$ ) [18].

caused by the power loss in terms of frequency in different duty cycles with careful analysis on the turn-on and turn-off curves. The height of the total setup amounts to about 9 mm within a  $1.2 \times 1.2\text{ cm}^2$  test sample of a thermal resistance of 0.087 K/W [17].

Currently, IGBT chips can dissipate no more than 10 kW of power and are associated in parallel in a single package to obtain desired rated current and the module (Figure 4). The heat flux of the IGBT used in hybrid electric vehicles is now at the level of 100-150 W/cm<sup>2</sup> during normal situation. With increasing current capacity and switching frequency, a heat flux up to 500 W/cm<sup>2</sup> is definitely expected in the future [19]–[23]. As to temperature junction, the limit value for silicon IGBT devices is ~150 °C for 6 kV voltage [24], [25], but wide band gap semiconductors such as SiC and GaN can survive from higher temperatures. However, with consideration of structural components, solder materials, reliability and costs, the junction temperature is limited to ~175 °C constrained with the available packaging technologies [16], [26], [27]. Thus generating major discussions on the alternative liquid cooling, two-phase cooling, micro channeling cooling, impinging jets, spray cooling and other novel solutions in an attempt to mitigate such issues. Several reports have been published in recent years to review the state of the art of power electronics including IGBTs and the thermal management challenges in power electronics are involved. Lostetter *et al.* [3] explained the concept of Integrated Power Modules (IPMs). A single compact standardized module includes the electronic control circuitry and the converter for high power electronics, with the baseplate for supporting, cooling and electric interconnecting. Sheng *et al.* [28] focused on the different electro-thermal models based on various circuit conditions, structures and thermal considerations which are the basis for thermal management of IGBTs. Mohammed *et al.* [7] briefly reviewed the applications for power systems, in which IGBT is most

common used power electronic devices. SiC, having low thermal resistance, was approved to be the future materials for realizing high temperature operation and better thermal management.

TABLE 1. Thermal failure sites, causes, stresses, modes, and mechanisms of IGBT packages.

Failure sites	Causes	Stresses	Modes	Mechanisms
Bond pad	High temperature	Thermal overstress	Open circuit	Metallization reconstruction[30]
Bonding wire: bond	CTE mismatch between die and wire by temperature excursion	Thermomechanical stress	Bond wire liftoff	Fatigue [31]
Bonding wire: heel	Expansion and contraction of bond wire due to temperature change	Thermomechanical stress	Bond wire heel cracking	Fatigue [32]
Bonding wire: body	High temperature	-Thermoelectrical stress -Thermomechanical stress under corrosive environment	-Open wire -Wire burnout	-Electromigration [33] -Stress corrosion - Joule heating
Solder joint	-CTE mismatch by temperature excursion -Transformation in solder microstructure at high temperature	Thermomechanical stress	Solder joint cracks	Fatigue or grain growth [34][35]
Ceramic substrate	Thermal shock	Thermomechanical stress	Delamination	Delamination of metallization [36]

### C. THERMAL FAILURES OF IGBTs

Long term failures of power modules which are operating within their predesigned range are caused by thermal problems. A variety of failures such as solder joint cracks, delamination of bonded surfaces, heel cracks and lift-off of wire bonds emerge gradually with the increase of power cycle counts. These types of failures are exacerbated by thermal cycling. As the failure grows, for example a crack propagated from a solder joint edge, the conduction of heat through the layered stack deteriorates due to less area available for heat transfer. This results in an increase in the thermal resistance between the device and the cooler. The higher component operating temperature results in thermal cycles of larger amplitude, leading to high thermal-mechanical stresses and crack growth rates, ultimately the total failure of the IGBT by overheating [29]. Table 1 summarizes potential failure sites, causes, stresses, modes, and mechanisms of IGBTs. Most frequently reported failure mechanisms are fatigue, latch-up, electrostatic discharge, radiation-induced effect, and ceramic substrate fracture as a result of high temperatures. Thus, it is urgent to achieve good thermal management for long term reliability. In those reports, emphasis is placed upon the

applications and developing trends of IGBTs and it is lack of direct investigations on thermal management.

Several hundred papers have been published on thermal analysis and management of IGBTs since the 1990s [37]–[40]. In this paper, the work on thermal management of IGBTs are reviewed, analyzed, compared and organized. Firstly, in Section II, to estimate the semiconductor rating, evaluate the long-term reliability and archive efficient heat sink design strategy, those different approaches include analytical, numerical, and RC models to perform thermal analysis are given. Secondly, Section III presents the thermal resistance on IGBTs which is the one of the most design parameters for thermal management. We have discussed the different available and future thermal solutions in Section IV and compared the thermal effectiveness of them. Finally, the concluding remarks of our reviewing research are given in Section V.

## II. THERMAL MODELS FOR IGBTs

The thermal analysis of PE systems is imperative as the power density and switching frequency continuously increase. Consequently, optimization of thermal performance of IGBTs is required by effective and robust electro-thermal models. An electro-thermal analysis is attractive to predict heat generation in IGBTs. Especially, the dynamic electro-thermal model gives in-situ evaluation for the potential of electric changes, consisting of the resistivity, dielectric constant, dissipation factor, material properties and elucidation of structure. In those analyses, the thermal models are important to calculate the junction temperature under certain power dissipation with the input of thermal power of the IGBTs.

Most of the thermal models in electro thermal analysis published since 1993 are listed chronologically in Table 2 with the first author and publication year. Numerous modeling and analysis methods have been established during the past decades. Typically, three types of methods are used to build the thermal model of PEs. The first category “analytical models” are based on the heat diffusion equations including device chips, packages, modules and heat sinks and solving those physics equations with mainly discretization of analytical expressions describing each component. To emulate IGBT behaviors, the expressions are widely implemented into various simulators with integrating of the electric equations for various applications. Those methods, which mainly provide a Fourier series solution by solving the heat diffusion equations, are much quicker than numerical methods. Moreover, the imperfect contact has not been considered which may induce considerable prediction errors. The second method is related to numerical models, which mainly include the computational fluid dynamics (CFD) and the finite-element method (FEM) for steady and transient thermal analysis. Those numeric models simulate the thermal performance with boundary conditions and heat resources by a large number of finite elements which has higher accuracy with the detailed material properties and the exact physical dimensions than the analytical model but requires much more time.

TABLE 2. Thermal analysis in electro-thermal models for IGBTs.

Method category	First author	Year	Merits	Limits and drawbacks
Analytical models	Dorkel [41]	1996		•Simplified assumption for boundary and initial conditions
	Khatir [42]	2001	•Improved trade-off between the accuracy and computing speed compared to the numerical methods	•Not suitable to implement in real-time simulator
	Hocine [43]	2003		•Do not consider the imperfect contact
	Ishiko [44]	2007		
	Ibrahim [45]	2007		
	Castellazzi [46]	2008		
	Du [47][48]	2008,2010		
	Musallam [49]	2010		
	Reichl [50]	2015		
	Sarkar [51]	2017		
Numerical models	Lakhsasi [52]	2001	•Exact solution	•Time consuming
	Drofenik [53]	2007	•Modeling any device geometry	•Evaluating the junction temperature variation under arbitrary load profiles
	Dehbi [54]	2008	•Good for structure optimization	
	Riccio [55]-[57]	2010,2011,2012	•Fatigue analysis	
	d’Alessandro [58]	2013		
	Wu [59]	2014		
	Greco [60]	2014		
	Xu [61]	2016		
	Hefner [62]-[64]	1990, 1993,1994		
	Mantooth [38][65]	1993,1997		
Thermal network models (i.e. compact thermal models)	Turkes [65]	1998		•Less accuracy than numerical models especially for those models with complex 3D structure
	Ammous [66]	2000		
	Igic [68]	2001		
	Yun [69]	2001		
	Rodriguez [70]	2002		
	Carubelli [71]	2003	•Easy to integrate into existing circuit simulator	
	Azar [72]	2004	•Short calculation time	
	Kojima [73]-[75]	2004, 2006,2007	•Easy to include temperature-dependent properties	
	Luo [76]	2004		
	Ciappa [77]	2005		
	Trigkidis [78]	2006		
	Castellazzi [79]-[83]	2006,2007,2008		
	Zhou [84]	2008		
	Senturk [85][86]	2011,2012		
	Gragger [87]	2012		
Moussoudji [88][89]	2013			
Yin [90]	2013			
Nejadpak [91]	2013			
Wang [92]	2015			
Alnajjar [93]	2015			
Batard [94]	2015			
Alavi [95]	2017			
F. D. Napoli [96]	2017			

Therefore, they are nearly impossible to be applied for evaluating the junction temperature variation under arbitrary load profiles or under a real duty cycle in the operating condition, which are more important for the reliability analysis of the system. Also, these methods cannot coexist with an electrical simulation, making dynamic electro-thermal models impossible. The last, and also most widely used method is the thermal network model (also called compact thermal model), derived by a resistor-capacitor (RC) thermal network. It produces an accurate and computationally efficient thermal model that can be easily realized in circuit simulators to estimate the instantaneous junction temperature in a long-term dynamic simulation. The thermal network model discretizes the whole structure of IGBTs into a network of heat diffusion elements and convection heat transfer elements, and then calculate the temperatures of network nodes by using heat diffusion and convection equations.

### A. ANALYTICAL MODELS

Several early thermal models of IGBTs were based on mathematical equations, for fast thermal modeling and integrated power circuits, and this kind of method was continually developed until recent years. Dorkel et al. [41] built efficient computation tools by implementing the two-port network theory with the fast Fourier transform algorithms with highly

efficiency in calculating for temperature and heat flux distributions in plane multilayered systems. They gave several examples to calculate the temperature rise and heat flux map with assumed effective thermal conductivity for the interface under cooper and assumed heat transfer coefficient of water cooling. In 2001, the analysis method was proposed by Khatir and Lefebvre [42], which used the boundary element method (BEM) to simulate a high power IGBT (i.e. 3300V-1200A) with power cycling. The BEM significantly reduced the geometrical complexity and solved the transient heat conduction in packages with complex multilayers. Hocine *et al.* [43] conducted the thermal analysis for an IGBT with 1200 A, 3.3 kV by 3D Transmission Line Matrix which was based on the differential equation of heat conduction. This method was approved to be accurate with comparing of the results by experiments, semi-numerical 3D thermal simulation and FEM. Ishiko *et al.* [44] proposed a compact calculation method of dynamic electro-thermal behavior of IGBT PWM inverter modules. Ibrahim *et al.* [45] published the work on the IGBTs with the electro thermal simulation, using VHDL-AMS language to couple electrical and thermal models. Their approach for the thermal model is the “Diffusive Representation” method for the dynamic thermal analysis. Castellazzi and Ciappa [46] explored a coupled 3D electro-thermal modeling approach to construct the details such as chip, substrate, heat sink, aspect ratio and shape integrating analytical compact models. Their work was widely used in general purpose circuit simulators (e.g., Saber, Simplorer) and the realistic control and drive signals were added, enabling a more accurate and in-depth characterization of assembled devices. More recently, Du *et al.* [47], [48] developed the new thermal model based on Fourier series expansion method for dynamic thermal analysis. It is approved that their model has high accuracy and efficiency compared to FEM. Moreover, it is favorable dynamic thermal characterization caused by the high switching. A real-time reduced-order compact thermal model was developed by Musallam and Johnson [49]. In their work, the internal behavior of the electro-thermal effects of the PEs was in situ monitored and can be utilized as part of a prognostic tool for thermal cycling assessment and health management of PEs together with the thermo-mechanical wearout models. The 3D Finite difference methods (FDM) were also used to solve the heat conduction equation for multilayer, and multichip thermal component model by Reichl *et al.* [50]. Sarkar and Issac [51] investigated the heat transfer mechanism inside the Thermal Interface Material (TIM) layer in between an IGBT and heat sink by developing a heat propagation speed model within the TIM layer. By virtue of their model, it is possible to optimize the TIM geometry based on operating conditions of the IGBT and heat dissipation properties of the heat sink.

## B. NUMERICAL MODELS

Finite Element Method (FEM), as a numerical simulation method, obtained high accurate temperature distribution of the simulated models based on the detailed structure and

material properties. It was applied more frequently on the electro thermal model of IGBTs in recent years as the rising calculation ability of the computers. The power loss and operation temperature of IGBT PWM (Pulse-Width Modulation) was predicted by Lakhsasi *et al.* [52] using partially coupled approaches for estimation of accurate peak junction temperature under dynamic operation. Drofenik *et al.* [53] demonstrated a 3D FEM model of a 3300V/1200A HiPak IGBT power module and analyzed the sensitivity of model parameters on the simulation results. Dehbi *et al.* [54] used ANSYS Workbench to develop an accurate 3D FEM thermal model and simplified the model by employing MOR and finally performed electro thermal simulation in CASPOC circuits simulator. A series of researches on IGBTs were proposed by Riccio *et al.* [55]–[57], based on two coupled systems: a three dimensional thermal simulator and a one dimensional temperature-dependent electrical-physical model of single IGBT cell. The electro thermal simulations were performed in unclamped inductive switching conditions of a high power trench IGBT. d’Alessandro *et al.* [58] presented accurate, 3-D simulation strategy devised for the Unclamped Inductive Switching analysis of multicellular power transistors with very fast 3-D simulations by FEM through adoption of smart mesh-refinement strategies. Wu *et al.* [59] used ANSYS/Icepak FEM with an advanced physics-based PSpice model to simulate the electro thermal performance of IGBTs, achieving an unprecedented fast and accurate method. It is successfully archived that considerable faster computational speed and high accurate results compared to the traditional double physics simulations according to this method. Greco *et al.* [60] studied the electro-thermal model to retrieve voltages and temperatures with PSpice-like simulator. The thermal layer synthesis process was performed via a PSpice-like circuit which was generated by using an Electronic Design Automation tool. Xu *et al.* [61] proposed a thermal analysis method consisting of two steps. Firstly, power losses of each key components in the IGBT were analytically calculated respectively. Then these information was imported as inputs to a finite element model of the IGBT to perform an accurate thermal simulation for an optimization design of the cooling fan.

## C. THERMAL NETWORK MODELS

The thermal network model was widely used for steady-state and dynamic thermal analysis for power electronics with the basic elements of thermal resistance (R) and thermal capacitance (C). Since 1990, Hefner Jr [64] firstly developed a complete 1D analytical, charge controlled model suitable for circuit simulator implementation of IGBTs. The electro thermal behavior of PE circuits and systems was then studied [62], [63]. In the thermal network models, the R and C are based upon a discretization of the heat diffusion equation for various 3D coordinate system symmetry conditions and the simulator calculate the temperature distribution over the semiconductor devices, packages, and heat sinks in analogy with the calculation of currents and voltages over the

electrical network. The thermal network was also coupled to the electrical network through the electro thermal models for the IGBTs with instantaneous power dissipation and boundary conditions. This method boosted for its advances of easy connection to electric network and external thermal network, accurate results with temperature depended parameters, and fast dynamic calculations.

Mantooth and Hefner Jr [38], [65] reported the work on thermal network models in the electro thermal modeling of IGBTs. The Saber circuit simulator was used to model the electric performance and coupled the thermal network models for the power device silicon chips, packages, and heat sinks. The dynamic thermal response was shown and the thermal response of the silicon chips determined the IGBT temperature rise during the device switching cycle. Turkes and Sigg [66] proposed a methodology for the development of physics based models of PEs. The thermal network of IGBTs was derived from the physical structure and the parameters which were strongly dependent on the temperature were extracted by experiments. Rodríguez *et al.* [70] developed the thermal component models for (IGBT) PE modules which were associated high-power converter heat sinks. The models were parameterized in terms of structural and material parameters and were supposed to be developed a library of component models for the various commercially available PE modules. An accurate thermal network model of IGBT chip was done by Azar *et al.* [72]. The silicon drift region was decomposed into slices and each slice was modeled as an individual R-C stage, and the optimized results were achieved with a total of 16 stages. The electrical model needs to consider the temperature variation, in order to accurately predict the power loss density in IGBTs. Trigkidis *et al.* [78] predicted the temperature variation of the device under transient condition to within 3°C with the developed thermal network models.

A high power IGBT models (4500V-1800A press-pack pairs) were applied in the wind turbine described by Senturk *et al.* [85], [86]. The static thermal model was based on the physical placement of the press-pack IGBT diode pairs, the aluminum nitride-ceramic cooling plates and the cooling plates supplying double-sided cooling by water flows. Moussodji *et al.* [88], [89] presented a new distributed electro-thermal model to analyze the electrical and thermal mappings of PEs during critical operations. The thermal model was based on a nodal method with a three dimensional RC thermal network. Material layers were discretized into volume elements which are characterized by the thermal capacitance and the thermal resistances in 3D. Yin *et al.* [90] proposed the Foster RC network which was used for thermal modeling and coupled with the electrical modeling by the interaction between the power loss and the junction temperatures. Depending on the measurement and the parameters extraction of datasheets, both static and dynamic models are formulated by the curve fitting. Wang *et al.* [92] proposed the thermal network model with the substrate solder cracks inside the IGBTs.

The effective heat propagation path was used to adapt the RC parameter of the thermal network to qualify the impact of the substrate solder cracks. Recently, Alnajjar and Gerling [93] established the loss model of the three level neutral point clamped rectifier to calculate the exact conduction losses and switching losses of IGBT. The temperature distribution of the IGBTs and the diodes were calculated based on the RC equivalent equations which represented the temperature differences between the junctions of the devices and the heat sink that used the liquid cooling. A lumped three dimensional thermal network was developed by Batard *et al.* [94], which consisted of a three dimensional network of RC cells constructed for time dependent operation, to precisely determine the temperature excursion of the diodes and transistors subsequent to time-dependent the power losses. Alavi *et al.* compared the thermal impedances of a 600V/150A IGBT calculated by using Foster and Cauer RC networks [95]. They confirmed that the time dependent thermal impedance curves calculated by one-order Cauer network model and four-order Foster network model were almost the same, but the one-order Cauer network model saved a lot of computational time. Napoli *et al.* [96] developed a situ junction temperature measurement technique for an IGBT device. And based on the on-line measured junction temperatures they proposed a dynamic compact thermal model (DCTM) to calculate the time dependent thermal impedance curves of the IGBT. As a real time processing method, their model can be further used in on-line health monitoring of IGBTs.

The models to establish the thermal networks were depended on the physical properties of the inner parts of the IGBTs. however, it was impossible to dismantle the IGBTs to analyze the thermal resistance and the thermal capacitance. To conduct non-destructive method to build the thermal network models, there were mainly two ways: experimental methods and numerical simulations. Igic *et al.* [68] presented the electro thermal models by transforming the electric device models to the thermal node. They used a deconvolution method to extract the RC thermal network parameters from the thermal transient response function of the device. Besides, the FEM was also applied to obtain the thermal transient response. Kojima [73]–[75] proposed a novel thermal network model of IGBT modules for the automotive applications. They introduced a simple parameter model for PEs by thermal impedance. Besides, the thermal resistance and thermal capacitance were also calculated by using the transient heat FEM.

An extraction method that relied on transient thermal impedance from junction to case and transient thermal impedance from case to ambient to determine the thermal network parameters introduced by Luo *et al.* [76]. The thermal aspects in the electro thermal modeling were experimentally analyzed by Castellazzi *et al.* [79]–[83]. The junction-to-ambient thermal impedance was used to characterize the IGBT components or system and to generate the thermal equivalent network model. They also developed two different approaches for simulations on a short time scale

and for simulations on larger time scales. Each node of the thermal network corresponded to a physical location of the chip and the 3.3 kV, 6.5 kV IGBTs, different temperature dependencies were introduced for the equations describing different regions of the IGBTs and diodes. Gragger et al. [87] simulated the junction temperature of the inverter module with thermal networks representing an IGBT and a diode placed on common substrates with the cooling systems. The thermal impedances between junction and case of the semi-conductors were used by collecting in the data sheet of the inverter module.

The thermal networks based on the finite element method (FEM) were widely applied due to the high accuracy of FEM and low time consuming of the RC networks. Ammous et al. [67] developed the two-dimensional thermal networks equivalent to a discretization of the heat equations by the FEM and coupled to the electric model to give an adequate model of the IGBT. Yun et al. [69] analyzed the static and dynamic thermal behaviors of IGBTs mounted on a water cooling heat sink. They extract thermal resistances and time constants for a thermal network from the FEM results. It was approved that the dynamic behavior predicted by the thermal network was equivalent to numerical solutions of the FEM and RC network quickly offered insight into the physical layers of the components and provided useful information in a few minutes. An implementation of a thermal modeling method applied to a multichip module used as a power converter was presented by Carubelli and Khatir [71]. From the 3D thermal simulations and experimental validations using direct chip temperature measurements, the analytical functions of thermal impedances were developed. Ciappa et al. [77] made a new approach to extract accurate thermal network models from FEM of the converter including the module and the heat sink for fast electro thermal simulations of IGBTs using for hybrid electric vehicles. The FEM model was calibrated by static experiments and the transient 3D FEM simulation was used to extract the thermal impedance. Their methods brought advantages in terms of increased reliability, reduction of the costs, and shortening of the design cycle with the adapted treatment of thermal systems with a non-negligible lateral heat spreading. Zhou et al. [84] shown a compact thermal model of a three-phase IGBT inverters which was assembled from R and C according to the data extracted from FEM by FLOTHERM. Nejadpak and Mohammed [91] presented an algorithm to simulate the temperature dependent characteristics of SiC IGBTs. In this method, parameters of the model were extracted from the 3D FEM for computation of the transient thermal impedance.

### III. THERMAL RESISTANCE ON IGBTs

In order to solve the junction temperature limitation, a huge improvement has been made on the thermal management to reduce the junction temperature or enhance the heat dissipation from the chip, package, module up to assembly over the past two decades [97]–[103]. At first, industry has pushed

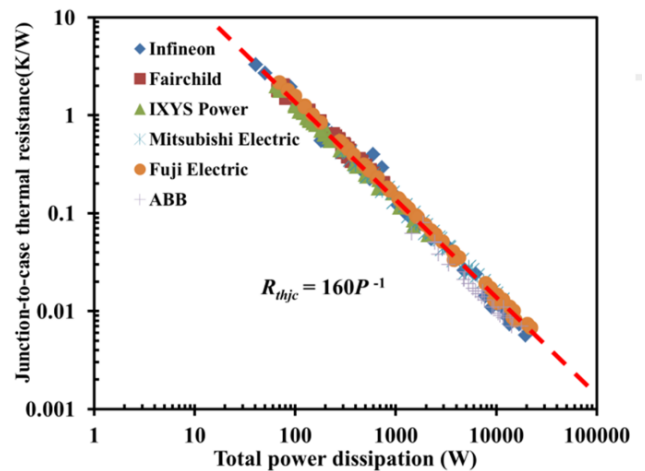


FIGURE 6. Typical thermal appearance of commercial IGBT modules.

power devices with decreasing thermal resistance from low power to high power [104]. The junction-to-case thermal resistance ( $R_{thjc}$ ) is the most important key parameter for thermal management on the module level. Figure 6 shows a general trend on thermal resistances of the current commercial IGBTs as a function of total power dissipation. It is very interesting to find that the  $R_{thjc}$  is decreasing reversely with the rise of power dissipation. The higher dissipated power requires lower thermal resistance, pushing the industry to keep improving the thermal performance of IGBTs to reach the desirable junction temperature. However, it is a real challenge for the chip design, packaging material and etc. as the total power is continuously increasing. Besides, the technology of die and substrate attach, interconnection and encapsulation are also facing challenge.



FIGURE 7. The development of packaging technology for IGBT modules [9].

Advanced packaging and cooling have also been developed to improve the thermal performance designs for the IGBT modules (in Figure 7). New products have been conducted to increase the yield and reliability of PE modules, especially for the common failure locations, die and substrate attach, interconnection and encapsulation. Shown as



examples, the soldering technology is progressively losing the market share, replaced by the nanosintering materials, in order to improve the interfaces. Standard wire bonding has been evolved as well using ribbon or ball bonding to increase the contact surface. As the high temperature needed for the PEs, encapsulation technologies must be improved to handle high operating temperatures. And new materials which can bear high temperature are also needed to replace the standard silicone gel or epoxy.

## IV. THERMAL MANAGEMENT ON IGBTs

### A. COOLING SOLUTIONS

#### 1) AIR COOLING

There are a wide variety of passive cooling options for IGBTs among which air cooling is the simplest and reliable one with low cost. Normally, to suit the applications, bulk materials with high thermal conductivities, like aluminum or copper, and fin arrays or other extruded surfaces are used to exchange the heat between dies and environment. The passive cooling also includes more complex systems with phase change and natural convection. The use of these complex passive systems is to reduce the thermal resistance between the IGBTs and the ambient. Most of the passive cooling solutions choose the air cooling plan to release the heat to ambient, by transporting heat from the heat sources within the IGBT to the surface where the heat can be taken away via air convection. Then the heat exchange between the solid materials and air is mainly depended on the contact area. For the case that the heat spreading area to exchange and dissipate heat is small, there will be a bottleneck between the terminal heat sink and the ambient. Therefore, no such a complex solution will help to avoid the use of active cooling in this case.

Another reason why air is a less favorable option in many cases is because it provides a much lower cooling efficiency compared to the liquid counterparts such as water [105]. However, in some cases forced air may still be a good choice, where water is limited. The heat transfer of forced air cooling can be enhanced in much the same ways as with water. For instance, Howes *et al.* [106] utilized an air-cooled extruded aluminum heat sink whose equivalent heat transfer coefficient is about  $1406 \text{ W/m}^2 \cdot \text{K}$  to cool the IGBT. Castagno *et al.* [12] tested an IGBT-stack prototype with 6 1200 V rated IGBTs in series. Cooling has been provided by forced air (approximately 100–200 Cubic Feet per Minute airflow at 25 °C) between the heat sinks for a horizontal cross flow with the equivalent heat transfer coefficient about  $328 \text{ W/m}^2 \cdot \text{K}$ . The design for heat sink depends not only on the architectures but also the materials which are very attractive with low cost, low density, high thermal conductivity and high surface area.

#### 2) DIRECT LIQUID COOLING

A number of single-phase or two-phase liquid-cooling solutions, including the micro-channel heat sink cooling solution, spray cooling solution, jet impingement cooling solution etc., are capable to provide very high heat transfer


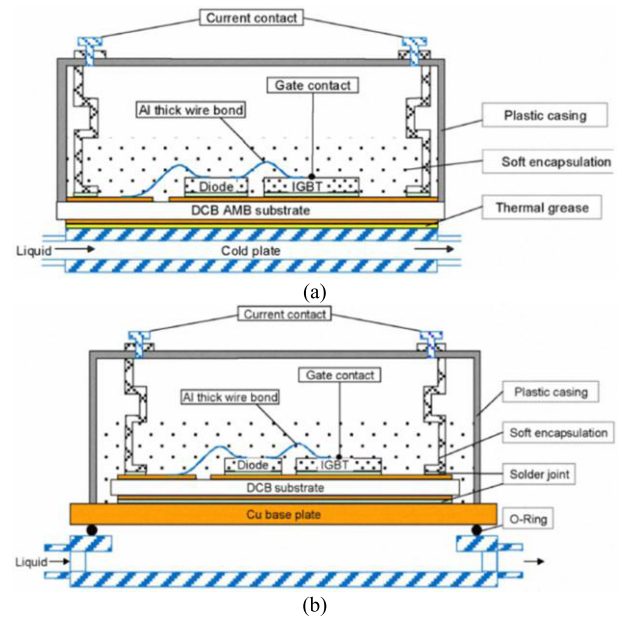


FIGURE 8. (a) Indirect liquid cooling versus (b) direct liquid cooling [108].

coefficients and low thermal resistances to the IGBT [4]. Conventional power module is mounted to the heat sink with the thermal grease. Most of heat from chip loss is dissipated from the bottom through the direction of the undersurface of chip to heat sink. There is relatively big thermal resistance of the insulating substrate and thermal grease in such a heat dissipating path. Since heat dissipation is limited by the contact part of the module and the heat sink, it becomes difficult to attain a downsizing even if it makes thermal resistance of the module itself small [16]. Therefore, direct cooling structure has been widely used to replace the conventional indirect cooling way. The direct cooling structure discards a base plate and the adhering thermal grease compared to the indirect cooling structure as shown in Figure 8 [111]. Some papers [14], [16], [107] found the thermal performance of IGBTs has improved significantly through direct liquid cooling. The direct cooling structure is capable to reduce thermal resistance up to 30% compared to the conventional indirect liquid cooling type.

#### 3) MICRO-CHANNEL HEAT SINKS

A micro-channel heat sink boast for many unique attributes, such as superior cooling characteristics, compactness, and minimal coolant usage. They are ideally suitable for cooling electronics, especially when the phase change of the coolant occurs in the heat sink. The micro-channel heat sinks are well-suited to many electronic applications due to the ability of removing a large amount of heat from a small area. In Figure 9, the typical micro channel heat sink design is designed to use an integral structure that incorporates the micro channels into the bottom copper layer of the ceramic substrate as a direct liquid cooling [109]. Yun *et al.* [69] analyzed the thermal performance of the total

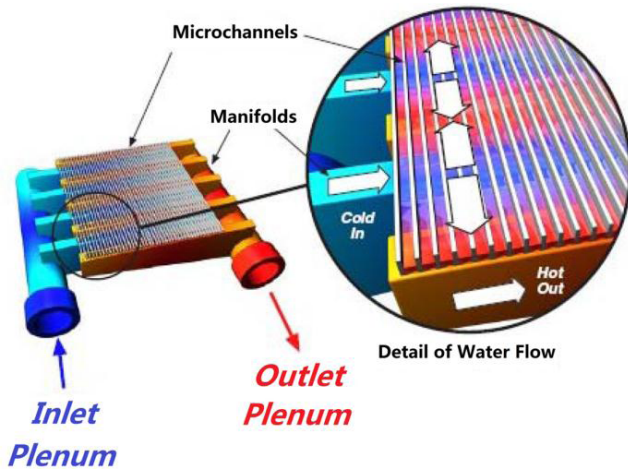

**FIGURE 9.** Schematic view of a heat sink design with micro channels, including micro-channels, manifolds and plenums [109].

system, which consists of 1200 A, 3.3 kV IGBT and the cooling system. The module has 6 subassemblies on the common base plate, which was mounted on the heat sink. While the heat sink was cooled by forced water convection through the micro channels. The equivalent heat transfer coefficient of the cooling system was about  $557.6 \text{ W/m}^2 \text{ K}$ . Liu *et al.* [110] studied the thermal effects of IGBT power module with direct liquid cooling design. The micro-channel cold plate, bonded with direct bonded copper (DBC) substrate directly, was used in direct liquid cooling. It can reduce thermal resistance and cooler size of IGBT power module effectively due to its high equivalent heat transfer coefficient of about  $2951 \text{ W/m}^2 \text{ K}$ . In addition, the micro-channel cold plate contributed to decrease the warpage and increase reliability of IGBT power module.

#### 4) TWO-PHASE FORCED CONVECTION COOLING

Two-phase cooling designs offer significant advantages compared to their single-phase counterparts in the heat sinks, since the single-phase heat sinks have the key drawback of large temperature gradient. Two-phase heat sinks are capable to increase the convective heat transfer coefficient inside the heat sink and helps maintain device surface temperature uniformity which is based on latent heat exchange and decided mostly by the coolant saturation temperature. Using PF-5060 as the working fluid of two-phase spray cooling, the heat transfer coefficient can reach to  $24\,000 \text{ W/m}^2 \text{ K}$  [111]. Two-phase systems and comparative performance data were illustrated for air-, water-, and vaporizable dielectric fluid-cooled systems by using fluids of water, FC-72, R-134a and similar refrigerants in pumped [23], [110], [112], [113]. Use of such high-efficiency two-phase liquid cooling systems provided improvements in space utilization by reducing needed physical volumes, allowing for more compact system designs, and improving efficiency of waste heat removal for higher overall system performance.

There are a number of studies dealing with two-phase flow in micro channels. Gillot *et al.* [40] assessed the


feasibility of single and two-phase micro heat exchangers applied to the cooling of IGBTs. The experimental measurements were compared to the predictions of the thermal and hydraulic performance with water and the inert fluorocarbon liquid as coolant fluids. Lee and Mudawar [114], [115] designed an R134a-cooled two-phase micro-channel heat sink which is capable of providing a heat transfer coefficient up to  $50\,000 \text{ W/m}^2 \text{ K}$ . However, appreciable pressure drop and corresponding increase in power consumption was undesirable in electronic systems due to the small hydraulic diameter of a micro-channel.

#### 5) JET IMPINGEMENT AND SPRAY COOLING


The jet impingement cooling is to incorporate the jet nozzles to form liquid jet on the surface of the base plate. This technology provides high heat transfer coefficients as well as eliminates the presence of thermal resistance between the chips and the cooling fluid. It can achieve very low thermal resistances (generally  $10^{-5} - 10^{-6} \text{ K m}^2/\text{W}$ ) [116] through the usage of impinging liquid jets. Because of the very thin thermal boundary layer, which is formed in the stagnation zone and extends radially outwards from the jet, the jet impingement cooling is capable of extracting a large amount of heat. For the thermal management of an inverter module in a hybrid vehicle, Bhunia and Chen [117] presented a study of liquid jet impingement cooling technique and its system level implementation. The thermal analysis results showed that more than 10% of the total heat dissipation at 1600 W level through impingement cooling, and approximately 1.8 times improvement over forced convection liquid cooling in the most advanced pin fin cold plate. Natarajan and Bezama [118] developed that a single-phase water submerged jet that reached an equivalent heat transfer coefficient as high as  $52\,000 \text{ W/m}^2 \text{ K}$ . Parida *et al.* [119] illustrated the direct liquid jet impingement cooling of power converter module in Figure 10. There were several structures with the separating walls to enhance the effective surface area and the jet nozzles to attain a much higher heat transfer rate.

Over the last decade, jet impingement has become one of the best cooling solutions for high-powered electronic and photonic modules. It is always desirable to use an array of jets to cool larger surfaces due to the heat transfer coefficient decreases rapidly with distance from the jet. But it may arise disturbances when water from one jet meets the water from the neighboring jet, which is difficult to be modeled accurately but have been shown to decrease the overall heat transfer drastically [120], [121]. Spray cooling is the other attractive technology explored for high heat flux applications, which is shown in Figure 11. The structure of the spray cooling can fully make use of the ability of the phase change process to remove large heat loads via the latent heat of vaporization of the liquid [122], which is mainly affected by the forced convection, impinging spray droplets and the boiling of the liquid on the sprayed surface [123].

In 1989, Tilton *et al.* [124] proved that evaporative spray cooling can handle high heat fluxes of  $1000 \text{ W/cm}^2$  with only

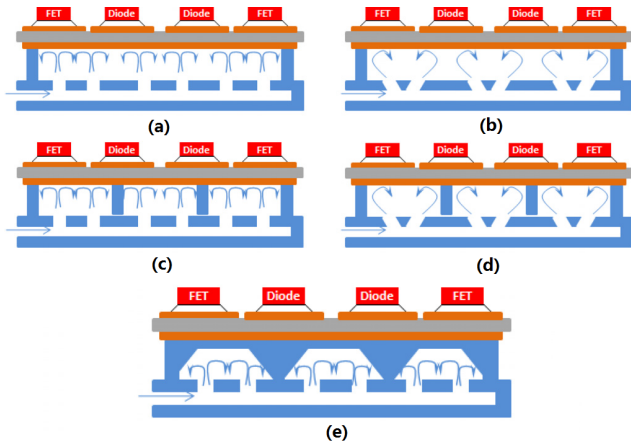

**FIGURE 10.** Liquid jet impingement cooling of power converter module [119]. (a) Conventional normally impinging jet based design. (b) Inclined impinging jet based design. (c) Conventional jet impingement on a finned base-plate based design. (d) Inclined jet impingement on a finned base-plate based design (Swirl-Impingement-Fin based design). (e) Conventional jet impingement on an angled base-plate based design.

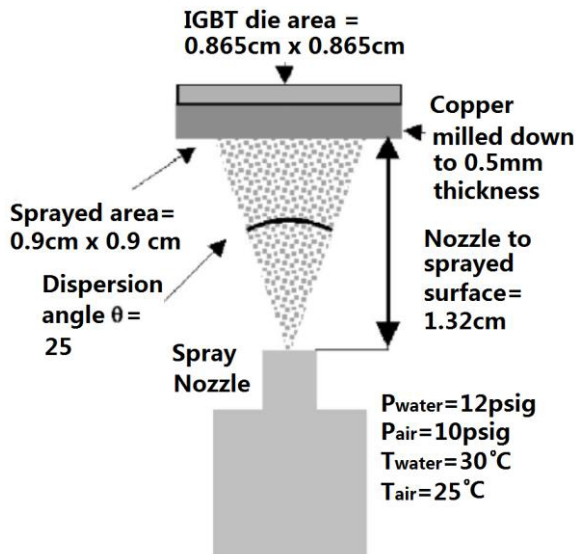

**FIGURE 11.** Principle behind spray cooling [18].

a relatively small temperature difference between the sprayed surface and the liquid from experiments. It demanded lower mass flow rates of liquid than that of single phase convective cooling. Fabbri *et al.* [125] demonstrated that a single-phase spray-cooling system with the water as the working fluid can achieve a heat transfer coefficient of  $15000 \text{ W/m}^2 \text{ K}$ . In 2002, Shaw *et al.* [126] used spray cooling techniques to cool the IGBTs by using high powered AC motors driven by IGBTs with high-power dissipation achieved flux density as high as  $130 \text{ W/cm}^2$  at the die with the very low water flow rates. Besides, three types of cooling were explored in this investigation by Mertens' group [18]: single-phase convection with water, spray cooling with air-water and spray cooling with steam-water. The clear advantages of air-water spray cooling IGBTs over other cooling technologies were showed by experiments.

## 6) HYBRID SOLID AND LIQUID COOLING


When the high heat flux cooling solutions mentioned above applied on the back side of the DBC substrate and designed for thermal management of the entire IGBT, these cannot solve the problem of the non-uniform temperature distribution on the individual IGBTs [127]. Therefore, it has to be found a new and novel cooling solution into the high power PE system for isothermalization of IGBTs. More and more advanced technologies focusing on the high-flux cooling solutions for the microprocessors and electro-optic components have been taken into great consideration. Such as, advanced thermoelectric (TE) solid-state cooling technology, based on polycrystalline miniaturized TE cooler (TEC) [128], [129], minicontact enhancement technology [130], [131], silicon and germanium substrate self-cooling [132], [133], and nanostructured superlattice TEC [134], [135]. Wang *et al.* [4] integrated the cold plate liquid and TE solid-state cooling technologies together to propose a hybrid solid/liquid cooling solution for a  $10 \times 10 \text{ mm}^2$  IGBT chip at a heat flux of  $100 \sim 200 \text{ W/cm}^2$ . As shown in Figure 12, the heat in the IGBT module is majorly dissipated through the cold plate in which the thin-film TEC was placed for isothermalization of the individual chips. The results demonstrated that the hybrid solid and liquid cooling with thin-film superlattice TEC works perfectly by eliminating 94% of the temperature nonuniformity for the  $100 \text{ W/cm}^2$  IGBT chip and 91% for  $200 \text{ W/cm}^2$  IGBT chip.

## 7) DOUBLE-SIDE COOLING

Most of the conventional packages of power modules are based on DBC substrate technology. But some parts of module, like brazed layers, interfaces and heat exchange between heat sink and ambient represent a great part of the total thermal resistance. There are reliability problems such as breaking, crack, or fatigue of the wire bonds due to thermal cycling. Therefore, Gillot *et al.* [136] developed a new technique for the packaging of IGBTs, in which the components were sandwiched between two DBC substrates with AlN and wire bonds were replaced with flip chip solder bumps. This structure allowed cool components on both sides for better thermal managements. Micro-channel heat sinks were directly integrated in the package to decrease the thermal resistance of the module from both sides, increasing power dissipation by 76% compared to one-sided cooling. Steiner and Sittig [17] experimented with double-sided cooling using micro-channels with water coolant and direct surface contact with the IGBT die to achieve  $312 \text{ W/cm}^2$  per side and  $624 \text{ W/cm}^2$  at the base. The junction-to-case thermal resistance was reduced from  $0.312 \text{ K/W}$  to  $0.087 \text{ K/W}$ .

## B. DISCUSSION

Cooling of power semiconductor devices is imperative when to design automotive, electrical vehicle systems using IGBT. The cooling system should be appropriate to keep the cell temperature low as well as uniform, but be simple

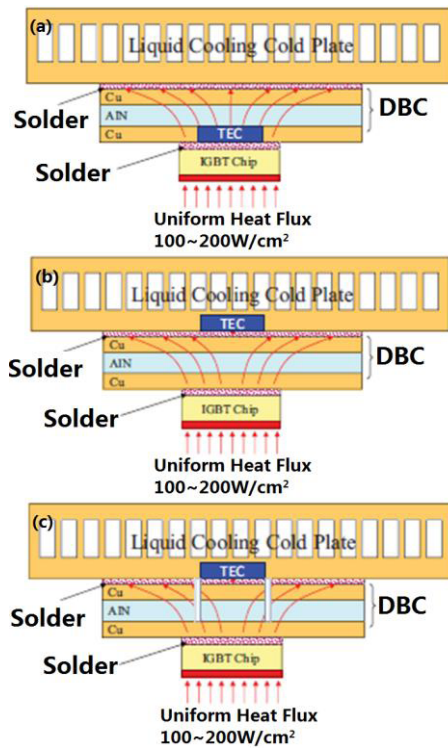

**FIGURE 12.** Hybrid solid- and liquid-cooling designs for IGBT isothermalization. (a) Thin-film TEC embedded in the copper layer of the DBC substrate. (b) Thin-film TEC embedded in the cold plate base. (c) Thin-film TEC embedded in the cold plate base and enhanced with trench structure in the DBC substrate [4].

and reliable. An overview of various methods that can be employed for cooling of IGBTs is presented in this works. The major thermal design considerations for cooling of IGBTs are one side cooling and double side cooling. Compared to the one-side cooling solution, more than 76% of the heat can be dissipated by the double-sided cooling solution. However, the normal used wire bond chips can hardly be fit to the requirement of double-side cooling. Therefore, the press-pack IGBT are the most suitable candidates with their high reliability and high thermal conductivity from the both sides [85], [86]. Currently, most of the cooling solutions, such as the passive system, forced air cooling and single-phase liquid cooling, are applied on one-side cooling. A wide variety of passive cooling options are available, but if the area available for heat spreading is small, no such complex solutions will help to avoid the use of active cooling. Single-phase or two-phase liquid-cooling solutions, such as micro-channel heat sink cooling, spray cooling, and jet impingement cooling, can provide very high heat transfer coefficients and low thermal resistance. Besides, the hybrid solid/liquid cooling solution, which combine cold plate liquid cooling and TE solid-state cooling can successfully isothermalize IGBT chip.

In order to compare the efficiency of each cooling method directly, we compare the equivalent heat transfer coefficient of each cooling apparatus. The equivalent heat transfer

**TABLE 3.** Cooling solutions and the effective heat transfer coefficient.

Authors	Description	Way of Heat dissipation	Power (W)	Heated area	Equivalent $h$ ( $W/m^2 K$ )
Liu et.al [15]	600 V, 450 A IGBT power module	Liquid cooling with AlN DBC and Cu plate	1250	9.8 cm × 5.1 cm	6252.5
Ishiko et al. [137]	1200 V and 60 A NPT-type IGBT	Aluminum alloy cooling block + water	700	(Chip) 1cm <sup>2</sup>	12000
Castagno [12]	600 V, 200 A INFINEON IGBTs (SIGC100T6 0R3)	Forced air cooling (100–200 CFM)	180	5.15 in × 3 in	328
L. Dupont [138]	600 V, 200 A INFINEON IGBTs (SIGC100T6 0R3)	Water cooling	93.7	9730μm × 1023 μm	11074
Howes et al. [106]	1200 VAC, 450 A IGBT devices	Air-cooled extruded aluminum heat sink, common geometry	600	122 mm × 62 mm	1406
		Water-cooled standard extruded aluminum liquid cold plate	736	N/A	2592
		Water-cooled aluminum liquid cold plate, custom; tubing circuit aligned to die locations	1070	N/A	3777
		Water-cooled aluminum liquid cold plate, custom design	1040	N/A	3573
		VDF-cooled copper cold plate, custom design (450A devices).	1461	N/A	14689
Lee [139]	600 V, 600 A	VDF-cooled copper cold plate, custom design (225A devices)	1184	N/A	16526
		Liquid cooling	1200	9.8 cm × 5.1 cm	6002
Liu et al. [110]	600V, 450A	Indirect Liquid Cooling	1250	N/A (ASSUME D 122mm in length and 62mm in width)	2015
T. Hitachi et al.[14]	N/A	Direct liquid cooling with microchannel	1250		2951
		Round pin fin	289*6	105 mm × 108 mm	1996
Morozumi et al. [140]	N/A	Square pin fin	289*6	105 mm × 108 mm	2153
		Direct Liquid Cooling	230*6	97 mm × 99 mm	1690
Gillot et al.[136]	1600 V, 50 A	Indirect Liquid Cooling	230*6	97 mm × 99 mm	1481
		One-sided cooling	1200	N/A	100000
Ayadi et al.[141]	1200 V, 75 A	Two-sided cooling	1200	N/A	100000*2
		Water-cooling	N/A	120 mm × 45 mm (assumed)	N/A
Turek et al.[122]	450 VDC, 400 A	50/50 WPG spray cooling	N/A	N/A	61111
Ivanova et al. [142]	N/A	Water cooling	110	(Heat pipe) 80 mm × 30 mm	5000
Steiner et al.[17]	N/A	Micro-heat sink for double sided fluid cooling	900	13.4 cm <sup>2</sup>	8395

coefficient  $h$  is calculated through (1).

$$h = \frac{Q}{A \times (T_s - T_\infty)} = \frac{q}{(T_s - T_\infty)} \quad (1)$$


where  $Q$  is heat transfer rate (W), or thermal power per unit area  $q = dQ/dA$  ( $W/m^2$ ),  $h$  is heat transfer coefficient ( $W/(m^2 K)$ ),  $(T_s - T_\infty)$  is the difference in temperature between the solid surface and surrounding (fluid) area (K) and  $A$  is the heat spreader area or the module bottom contact the cooling solutions rather than the chip size or the heat sink surface. The calculated  $h$  of different ways of heat dissipation in references are listed in Table 3 and Table 4. It is obviously found that the spray cooling has a great potential for use in IGBTs.

**TABLE 4. Cooling solutions and the effective heat transfer coefficient – cont'D.**

Authors	Description	Way of Heat dissipation	Power (W)	Heated area	Equivalent $h$ (W/m <sup>2</sup> K)
Gillot, et al.[40]	600 V, 450 A	Water(30ml/min)			23750
		Water(60ml/min)	300	N/A	25840
		FC 72 (300ml/min)			13320
		FC 72 (600ml/min)			15490
Xu et al.[143]	N/A	Water ethylene glycol (WEG) cooling loop	6000	57 mm × 57 mm	21553
		Water 228 l/h	300 W/cm <sup>2</sup>		57692
Mertens et al.[18]	650 V, 70 A	Water-steam spray cooling 5.65 l/h	510 W/cm <sup>2</sup>	0.9 cm × 0.9 cm	98076
		Air-water spray cooling water 3.65 l/h,air 567 l/h	587W/cm <sup>2</sup>		234800
		Spray cooling	1371		34079
		Spray cooling without polyimide on chips	1393		44695
G. Mitic et al.[144]	600 V, 180 A	Direct liquid baseplate flow convection	1198	7.368 cm <sup>2</sup>	29243
Yun et al.[69]	N/A	N/A	223.57	15 cm × 11 cm	557.6
Wang et al.[23]	N/A	R134a-cooled two-phase cold plate			4157
		Ethylene glycol (EGW)-cooled single-phase cold plate	2400	216 mm × 81 mm	3015
		Air cooled aluminum extruded heat sink	600	N/A	N/A
		Water-cooled extruded aluminium cold plate	736	N/A	N/A
Saums et al.[113]	1700 V, 450 A	Water-cooled aluminium cold plate with copper cooling circuit aligned to die locations	1070	N/A	N/A
		Water-cooled vacuum-brazed high performance aluminum cold plate	1040	N/A	N/A
		VDF pumped R-134a convoluted copper cold plate	1461	N/A	N/A
Vasiliev et al.[145]	N/A	N/A	900	N/A	N/A
Wang et al.[4]	N/A	Hybrid solid-and liquid-cooling	100 W/cm <sup>2</sup>		10000
			200 W/cm <sup>2</sup>	N/A	10000
Campbell et al. [112]	N/A	two-phase cooling method using the R134a refrigerant	1201	N/A	N/A

In opposite to the junction-to-case thermal resistance in Figure 6, the equivalent heat transfer coefficient of different ways of heat dissipation in references is increasing exponentially by rising the power density in Figure 13. To maintain the performance and reliability of IGBT, it is indispensable to have exponentially decreasing thermal resistance and exponentially increasing cooling ability of thermal solutions by the rising heat dissipation. It is obvious that air cooling can rarely be used and liquid cooling are widely applied on IGBT. The spray cooling solutions can handle very high heat flux according to the experimental results.

For making sure the IGBT could work stably under practical operating conditions for a long term, the thermal management is usually conservatively designed with a large margin. For instance, a larger heat sink, a reduced driving current or a reduced switching frequency will be considered when designing the IGBT module. However, all these choices

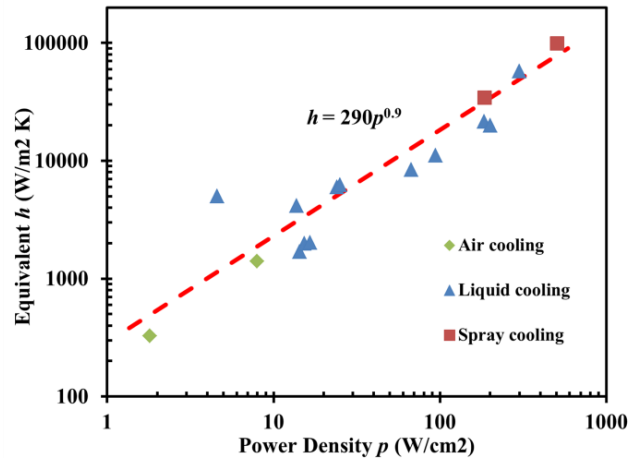

**FIGURE 13. The equivalent h of different ways of heat dissipation in references.**

that reduce the performance of the system increase the price of IGBT on the other hand. For reaching a more optimal balance between the IGBT performance and price, one should have a precise understanding on the temperature distribution inside the IGBT under existing operating conditions. For this reason, thermal analysis within electro-thermal modeling can be regarded as a fundamental step to design the power conversion systems. Along with the thermal analysis, thermal management of the IGBT and cooling solutions is the next requirement. Then a number of design variants such as long term reliability, functionality of the device, structural optimization and heat sink determination can be further performed based on the thermal analysis results. According to this review, we have proposed relative simple judgment for fast estimating and designing. To achieve an effective thermal management for IGBT, the two rules should be simply followed:

- 1) The junction-to-case thermal resistance ( $R_{thjc}$ , K/W) of IGBT on a heat spread is on or below the line of the following equation.

$$R_{thjc} = 160P^{-1} \tag{2}$$

where P is the total thermal power (W).

- 2) The equivalent heat transfer coefficient ( $h$ , W/m<sup>2</sup> K) of the integrated metal plate of IGBT is on or above the line of the following equation.

$$h = 290P^{0.9} \tag{3}$$

where p is the power density (W/cm<sup>2</sup>).

## V. CONCLUSION

In this paper, researches of thermal management of IGBT published in literature are reviewed, analyzed, discussed and classified into different categories. The thermal analyses using analytical models, numerical models and thermal network models are discussed respectively. Those thermal

models are part of electro-thermal models to accurately calculate the dynamic heat dissipation which is one of the most important parameters for overall thermal design. The thermal network models can obtain the tradeoff between the computational time and dynamic performance, and therefore gain the most attention in the electro-thermal analysis that couples electric behavior and temperature-dependent properties.

As to the current cooling studies for IGBTs, single-phase or two-phase liquid-cooling solutions, such as micro-channel heat sink cooling, spray cooling, and jet impingement cooling, can provide very high heat transfer coefficients and low thermal resistances of the modules. With the double-sided cooling technique, an improvement of 76% power dissipation can be achieved compared to the one-sided cooling technique. Moreover, the relationship between the junction-to-case thermal resistance and total power dissipation and the growing trend between the equivalent heat transfer coefficient and the power density are obtained based on the investigation in this paper.

At last, we conclude a relative simple strategy for fast estimating and designing for an effective thermal management of IGBT by two parameters, which are the junction-to-case thermal resistance ( $R_{thjc}$ , K/W) and equivalent heat transfer coefficient ( $h$ , W/m<sup>2</sup> K) respectively.

## REFERENCES

- [1] S. Chakraborty, B. Kramer, and B. Kroposki, "A review of power electronics interfaces for distributed energy systems towards achieving low-cost modular design," *Renew. Sustain. Energy Rev.*, vol. 13, pp. 2323–2335, Dec. 2009.
- [2] N. Mohan and T. M. Undeland, *Power Electronics: Converters, Applications, and Design*. Hoboken, NJ, USA: Wiley, 2007.
- [3] A. B. Lostetter, F. Barlow, and A. Elshabini, "An overview to integrated power module design for high power electronics packaging," *Microelectron. Rel.*, vol. 40, no. 3, pp. 365–379, 2000.
- [4] P. Wang, P. McCluskey, and A. Bar-Cohen, "Hybrid solid- and liquid-cooling solution for isothermalization of insulated gate bipolar transistor power electronic devices," *IEEE Trans. Compon., Packag., Manuf. Technol.*, vol. 3, no. 4, pp. 601–611, Apr. 2013.
- [5] B. J. Baliga, M. S. Adler, P. V. Gray, R. P. Love, and N. Zommer, "The insulated gate rectifier (IGR): A new power switching device," in *Proc. Int. Electron Devices Meeting*, vol. 28, Dec. 1982, pp. 264–267.
- [6] S. Bernet, "Recent developments of high power converters for industry and traction applications," *IEEE Trans. Power Electron.*, vol. 15, no. 6, pp. 1102–1117, Nov. 2000.
- [7] S. A. Mohammed, M. A. Abdel-Moamen, and B. Hasanin, "A review of the state-of-the-art of power electronics for power system applications," *Quest J. Electron. Commun. Eng. Res.*, vol. 1, no. 1, pp. 43–52, 2013.
- [8] *Power Packaging Technology Trends and Market Expectations*, Yole Développement, Lyon, France, 2015.
- [9] *Power Electronics Overview: What are the Markets and Trends*, Yole Développement, Lyon, France, 2015.
- [10] B. J. Baliga, *The IGBT Device: Physics, Design and Applications of the Insulated Gate Bipolar Transistor*. Norwich, NY, USA: William Andrew, 2015.
- [11] B. K. Bose, "Power electronics and motor drives recent progress and perspective," *IEEE Trans. Ind. Electron.*, vol. 56, no. 2, pp. 581–588, Feb. 2009.
- [12] S. Castagno, R. D. Curry, and E. Loree, "Analysis and comparison of a fast turn-on series IGBT stack and high-voltage-rated commercial IGBTs," *IEEE Trans. Plasma Sci.*, vol. 34, no. 5, pp. 1692–1696, Oct. 2006.
- [13] P. Wang, P. McCluskey, and A. Bar-Cohen, "Evaluation of two-phase cold plate for cooling electric vehicle power electronics," in *Proc. ASME Int. Mechan. Eng. Congr. Expo.*, 2011, pp. 823–835.
- [14] T. Hitachi, H. Gohara, and F. Nagaune, "Direct liquid cooling IGBT module for automotive applications," *Fuji Electr. Rev.*, vol. 58, no. 2, pp. 55–59, 2012.
- [15] C.-K. Liu et al., "600 V, 450 A IGBT power module for 50 kw electrical vehicle," in *Proc. 4th IEEE Int. Symp. Power Electron. Distrib. Generat. Syst. (PEDG)*, Jul. 2013, pp. 1–5.
- [16] A. Morozumi, H. Hokazono, Y. Nishimura, Y. Ikeda, Y. Nabetani, and Y. Takahashi, "Direct liquid cooling module with high reliability solder joining technology for automotive applications," in *Proc. 25th Int. Symp. Power Semiconductor Devices ICs (ISPSD)*, May 2013, pp. 109–112.
- [17] T. Steiner and R. Sittig, "IGBT module setup with integrated micro-heat sinks," in *Proc. 12th Int. Symp. Power Semiconductor Devices ICs*, May 2000, pp. 209–212.
- [18] R. G. Mertens et al., "Spray cooling of IGBT devices," *J. Electron. Packag.*, vol. 129, no. 3, pp. 316–323, 2007.
- [19] R. J. McGlen, R. Jachuck, and S. Lin, "Integrated thermal management techniques for high power electronic devices," *Appl. Thermal Eng.*, vol. 24, nos. 8–9, pp. 1143–1156, 2004.
- [20] A. Bhunia, S. Chandrasekaran, and C. L. Chen, "Performance improvement of a power conversion module by liquid micro-jet impingement cooling," *IEEE Trans. Compon. Packag. Technol.*, vol. 30, no. 2, pp. 309–316, Jun. 2007.
- [21] I. Mudawar, D. Bharathan, K. Kelly, and S. Narumanchi, "Two-phase spray cooling of hybrid vehicle electronics," *IEEE Trans. Compon. Packag. Technol.*, vol. 32, no. 2, pp. 501–512, Jun. 2009.
- [22] A. G. Pautsch, A. Gowda, L. Stevanovic, and R. Beaupre, "Double-sided microchannel cooling of a power electronics module using power overlay," in *Proc. ASME Thermal Manage.-Compon. Level Thermal Manage.*, 2009, pp. 427–436.
- [23] P. Wang, P. McCluskey, and A. Bar-Cohen, "Two-phase liquid cooling for thermal management of IGBT power electronic module," *J. Electron. Packag.*, vol. 135, no. 2, p. 021001, Mar. 2013.
- [24] S. S. Kang, "Advanced cooling for power electronics," in *Proc. 7th Int. Conf. Integr. Power Electron. Syst. (CIPS)*, Mar. 2012, pp. 1–8.
- [25] S. Linder, "Potentials, limitations, and trends in high voltage silicon power semiconductor devices," in *Proc. 9th Int. Seminar Power Semiconductors*, 2008, pp. 11–20.
- [26] J. Biela, M. Schweizer, S. Waffler, B. Wrzecionko, and J. W. Kolar, "SiC vs. Si—Evaluation of potentials for performance improvement of power electronics converter systems by SiC power semiconductors," *Mater. Sci. Forum*, vols. 645–648, pp. 1101–1106, Apr. 2010.
- [27] H. Gohara, Y. Nishimura, A. Morozumi, P. Dietrich, E. Mochizuki, and Y. Takahashi, "Next-gen IGBT module structure for hybrid vehicle with high cooling performance and high temperature operation," in *Proc. Int. Exhib. Conf. Power Electron., Intell. Motion, Renew. Energy Manage.*, 2014, pp. 1–8.
- [28] K. Sheng, B. W. Williams, and S. J. Finney, "A review of IGBT models," *IEEE Trans. Power Electron.*, vol. 15, no. 6, pp. 1250–1266, Nov. 2000.
- [29] H. Oh, B. Han, P. McCluskey, C. Han, and B. D. Youn, "Physics-of-failure, condition monitoring, and prognostics of insulated gate bipolar transistor modules: A review," *IEEE Trans. Power Electron.*, vol. 30, no. 5, pp. 2413–2426, May 2015.
- [30] M. Ciappa, "Selected failure mechanisms of modern power modules," *Microelectron. Rel.*, vol. 42, nos. 4–5, pp. 653–667, Apr./May 2002.
- [31] Y. Celnikier, L. Benabou, L. Dupont, and G. Coquery, "Investigation of the heel crack mechanism in Al connections for power electronics modules," *Microelectron. Rel.*, vol. 51, pp. 965–974, May 2011.
- [32] Y. Celnikier, L. Dupont, E. Hervé, G. Coquery, and L. Benabou, "Optimization of wire connections design for power electronics," *Microelectron. Rel.*, vol. 51, pp. 1892–1897, Sep. 2011.
- [33] *Failure Mechanisms and Models for Semiconductor Devices*, J.S.S.T. Assoc., Arlington, VA, USA, 2009.
- [34] A. Micol, C. Martin, O. Dalverny, M. Mermet-Guyennet, and M. Karama, "Reliability of lead-free solder in power module with stochastic uncertainty," *Microelectron. Rel.*, vol. 49, no. 6, pp. 631–641, 2009.
- [35] V. N. Le, L. Benabou, V. Etgens, and Q. B. Tao, "Micromechanical model for describing intergranular fatigue cracking in a lead-free solder alloy," in *Proc. 21st Eur. Conf. Fracture*, Cantania, Italy, 2016, pp. 2614–2622.
- [36] L. Dupont, Z. Khatir, S. Lefebvre, and S. Bontemps, "Effects of metallization thickness of ceramic substrates on the reliability of power assemblies under high temperature cycling," *Microelectron. Rel.*, vol. 46, pp. 1766–1771, Nov. 2006.

- [37] E. Farjah, C. Schaeffer, and R. Perret, "Simulation of hybrid power components: A new electrothermal model," in *Proc. Conf. Rec. IEEE Ind. Appl. Soc. Annu. Meeting*, Oct. 1992, pp. 1089–1093.
- [38] H. A. Mantooth and A. R. Hefner, Jr., "Electro-thermal simulation of an IGBT PWM inverter," in *Proc. 24th Annu. IEEE Power Electron. Specialists Conf. (PESC)*, 1993, pp. 75–84.
- [39] P. R. Ponnappan, J. E. Leland, J. E. Beam, G. Fronista, and J. A. Weimer, "Efficient cooling of MCT and IGBT using venturi flow," in *Proc. Amer. Soc. Mech. Eng.*, New York, NY, USA, 1995, p. 798.
- [40] C. Gillot, L. Meysenc, C. Schaeffer, and A. Bricard, "Integrated single and two-phase micro heat sinks under IGBT chips," *IEEE Trans. Compon., Packag., Technol.*, vol. 22, no. 3, pp. 384–389, Sep. 1999.
- [41] J.-M. Dorkel, P. Tounsi, and P. Leturcq, "Three-dimensional thermal modeling based on the two-port network theory for hybrid or monolithic integrated power circuits," *IEEE Trans. Compon., Packag., Manuf. Technol.*, A, vol. 19, no. 4, pp. 501–507, Dec. 1996.
- [42] Z. Khatir and S. Lefebvre, "Thermal analysis of power cycling effects on high power IGBT modules by the boundary element method," in *Proc. 17th Annu. IEEE Symp. Semiconductor Thermal Meas. Manage.*, Mar. 2001, pp. 27–34.
- [43] R. Hocine, A. B. Stambouli, and A. Saidane, "A three-dimensional TLM simulation method for thermal effect in high power insulated gate bipolar transistors," *Microelectron. Eng.*, vol. 65, no. 3, pp. 293–306, 2003.
- [44] M. Ishiko, T. Kondo, M. Usui, and H. Tadano, "A compact calculation method for dynamic electro-thermal behavior of IGBTs in PWM inverters," in *Proc. IEEE Power Convers. Conf.-Nagoya*, Apr. 2007, pp. 1043–1048.
- [45] T. Ibrahim, B. Allard, H. Morel, and S. Mrad, "VHDL-AMS model of IGBT for electro-thermal simulation," in *Proc. Eur. Conf. IEEE Power Electron. Appl.*, Sep. 2007, pp. 1–10.
- [46] A. Castellazzi and M. Ciappa, "Multi-level electro-thermal modeling for circuit simulation of packaged power devices," in *Proc. 11th Workshop Control Modeling Power Electron. (COMPEL)*, Aug. 2008, pp. 1–6.
- [47] B. Du, J. L. Hudgins, E. Santi, A. T. Bryant, P. R. Palmer, and H. A. Mantooth, "Transient thermal analysis of power devices based on Fourier-series thermal model," in *Proc. IEEE Power Electron. Specialists Conf. (PESC)*, Jun. 2008, pp. 3129–3135.
- [48] B. Du, J. L. Hudgins, E. Santi, A. T. Bryant, P. R. Palmer, and H. A. Mantooth, "Transient electrothermal simulation of power semiconductor devices," *IEEE Trans. Power Electron.*, vol. 25, no. 1, pp. 237–248, Jan. 2010.
- [49] M. Musallam and C. M. Johnson, "Real-time compact thermal models for health management of power electronics," *IEEE Trans. Power Electron.*, vol. 25, no. 6, pp. 1416–1425, Jun. 2010.
- [50] J. Reichl, J. M. Ortiz-Rodríguez, A. Hefner, and J.-S. Lai, "3-D thermal component model for electrothermal analysis of multichip power modules with experimental validation," *IEEE Trans. Power Electron.*, vol. 30, no. 6, pp. 3300–3308, Jun. 2015.
- [51] A. Sarkar and B. Issac, "Geometry optimization of thermal interface material with the help of heat propagation speed subjected to a pulsed heat source," *Int. J. Thermal Sci.*, vol. 117, pp. 100–107, Jan. 2017.
- [52] A. Lakhssasi, Y. Hamri, and A. Skorek, "Partially coupled electro-thermal analysis for accurate prediction of switching devices," in *Proc. Can. Conf. Elect. Comput. Eng.*, vol. 1, May 2001, pp. 375–380.
- [53] U. Drogenik, D. Cottet, A. Müsing, J.-M. Meyer, and J. W. Kolar, "Modelling the thermal coupling between internal power semiconductor dies of a water-cooled 3300 V/1200 A HiPak IGBT module," in *Proc. Conf. Power Electron., Intell. Motion, Power Quality (PCIM)*, Nuremberg, Germany, May 2007, pp. 22–24.
- [54] A. Dehbi, W. Wondrak, E. B. Rudnyi, U. Killat, and P. van Duijzen, "Efficient electrothermal simulation of power electronics for hybrid electric vehicle," in *Proc. Int. Conf. Thermal, Mech. Multi-Phys. Simulation Experm. Microelectron. Micro-Syst. (EuroSimE)*, 2008, pp. 1–7.
- [55] M. Riccio, M. Carli, L. Rossi, A. Irace, G. Breglio, and P. Spirito, "Compact electro-thermal modeling and simulation of large area multicellular trench-IGBT," in *Proc. 27th Int. Conf. Microelectron. (MIEL)*, May 2010, pp. 379–382.
- [56] M. Riccio, A. Irace, G. Breglio, P. Spirito, E. Napoli, and Y. Mizuno, "Electro-thermal instability in multi-cellular trench-IGBTs in avalanche condition: Experiments and simulations," in *Proc. IEEE 23rd Int. Symp. Power Semiconductor Devices ICs (ISPSD)*, May 2011, pp. 124–127.
- [57] M. Riccio et al., "3D electro-thermal simulations of wide area power devices operating in avalanche condition," *Microelectron. Rel.*, vol. 52, pp. 2385–2390, Oct. 2012.
- [58] V. d'Alessandro et al., "Analysis of the UIS behavior of power devices by means of SPICE-based electrothermal simulations," *Microelectron. Rel.*, vol. 53, pp. 1713–1718, Sep. 2013.
- [59] R. Wu, F. Iannuzzo, H. Wang, and F. Blaabjerg, "Fast and accurate Icepak-PSpice co-simulation of IGBTs under short-circuit with an advanced PSpice model," in *Proc. 7th IET Int. Conf. Power Electron., Mach. Drives (PEMD)*, 2014, pp. 1–5.
- [60] G. Greco, G. Vinci, G. Bazzano, A. Raciti, and D. Cristaldi, "Layered electro-thermal model of high-end integrated power electronics modules with IGBTs," in *Proc. 40th Annu. Conf. IEEE Ind. Electron. Soc. (IECON)*, Nov. 2014, pp. 1575–1580.
- [61] S.-Z. Xu, Y.-F. Peng, and S.-Y. Li, "Application thermal research of forced-air cooling system in high-power NPC three-level inverter based on power module block," *Case Stud. Thermal Eng.*, vol. 8, pp. 387–397, Sep. 2016.
- [62] A. R. Hefner and D. L. Blackburn, "Simulating the dynamic electrothermal behavior of power electronic circuits and systems," *IEEE Trans. Power Electron.*, vol. 8, no. 4, pp. 376–385, Oct. 1993.
- [63] A. R. Hefner, Jr., "A dynamic electro-thermal model for the IGBT," *IEEE Trans. Ind. Appl.*, vol. 30, no. 2, pp. 394–405, Apr. 1994.
- [64] A. R. Hefner, "Analytical modeling of device-circuit interactions for the power insulated gate bipolar transistor (IGBT)," *IEEE Trans. Ind. Appl.*, vol. 26, no. 6, pp. 995–1005, Nov. 1990.
- [65] H. A. Mantooth and A. R. Hefner, Jr., "Electro-thermal simulation of an IGBT PWM inverter," *IEEE Trans. Power Electron.*, vol. 12, no. 3, pp. 474–484, Mar. 1997.
- [66] P. Türkes and J. Sigg, "Electro-thermal simulation of power electronic systems," *Microelectron. J.*, vol. 29, no. 11, pp. 785–790, 1998.
- [67] A. Ammous et al., "Electrothermal modeling of IGBTs: Application to short-circuit conditions," *IEEE Trans. Power Electron.*, vol. 15, no. 4, pp. 778–790, Jul. 2000.
- [68] P. M. Iqic, P. A. Mawby, M. S. Towers, and S. Batcup, "Dynamic electro-thermal physically based compact models of the power devices for device and circuit simulations," in *Proc. 17th Annu. IEEE Symp. Semiconductor Thermal Meas. Manage.*, Mar. 2001, pp. 35–42.
- [69] C.-S. Yun, P. Malberti, M. Ciappa, and W. Fichtner, "Thermal component model for electrothermal analysis of IGBT module systems," *IEEE Trans. Adv. Packag.*, vol. 24, no. 3, pp. 401–406, Aug. 2001.
- [70] J. Rodriguez et al., "Thermal component models for electro thermal analysis of multichip power modules," in *Proc. 37th IAS Annu. Meeting Conf. Rec. Ind. Appl. Conf.*, vol. 1, 2002, pp. 234–241.
- [71] S. Carubelli and Z. Khatir, "Experimental validation of a thermal modelling method dedicated to multichip power modules in operating conditions," *Microelectron. J.*, vol. 34, no. 12, pp. 1143–1151, Dec. 2003.
- [72] R. Azar et al., "Advanced electrothermal Spice modelling of large power IGBTs," *IEE Proc.-Circuits, Devices Syst.*, vol. 151, no. 3, pp. 249–253, Jun. 2004.
- [73] T. Kojima, Y. Yamada, M. Ciappa, M. Chiavarini, and W. Fichtner, "A novel electro-thermal simulation approach of power IGBT modules for automotive traction applications," in *Proc. 16th Int. Symp. Power Semiconductor Devices ICs (ISPSD)*, 2004, pp. 289–292.
- [74] T. Kojima et al., "Novel electro-thermal coupling simulation technique for dynamic analysis of HV (hybrid vehicle) inverter," in *Proc. 37th IEEE Power Electron. Specialists Conf. (PESC)*, Jun. 2006, pp. 1–5.
- [75] T. Kojima, Y. Yamada, Y. Nishibe, and K. Torii, "Novel RC compact thermal model of HV inverter module for electro-thermal coupling simulation," in *Proc. IEEE Power Convers. Conf.-Nagoya (PCC)*, Apr. 2007, pp. 1025–1029.
- [76] Z. Luo, H. Ahn, and M. A. E. Nokali, "A thermal model for insulated gate bipolar transistor module," *IEEE Trans. Power Electron.*, vol. 19, no. 4, pp. 902–907, Jul. 2004.
- [77] M. Ciappa, W. Fichtner, T. Kojima, Y. Yamada, and Y. Nishibe, "Extraction of accurate thermal compact models for fast electro-thermal simulation of IGBT modules in hybrid electric vehicles," *Microelectron. Rel.*, vol. 45, pp. 1694–1699, Sep. 2005.
- [78] G. Trigkidis, A. Bousbaine, and R. Thorn, "Thermal modelling of IGBT devices," in *Proc. 41st Int. Univ. Power Eng. Conf. (PEC)*, vol. 2, Sep. 2006, pp. 584–588.
- [79] A. Castellazzi, M. Ciappa, W. Fichtner, G. Lourdel, and M. Mermet-Guyennet, "Compact modelling and analysis of power-sharing unbalances in IGBT-modules used in traction applications," *Microelectron. Rel.*, vol. 46, pp. 1754–1759, Nov. 2006.

- [80] A. Castellazzi, M. Ciappa, W. Fichtner, J. Urresti-Ibañez, and M. Mermet-Guyennet, "Integrated compact modelling of a planar-gate non-punch-through 3.3 kV-1200 A IGBT module for insightful analysis and realistic interpretation of the failure mechanisms," in *Proc ISPSD*, vol. 133, May 2007, pp. 133–136.
- [81] A. Castellazzi, M. Ciappa, W. Fichtner, E. Batista, J. Dienot, and M. Mermet-Guyennet, "Electro-thermal model of a high-voltage IGBT module for realistic simulation of power converters," in *Proc. ESSDERC*, 2007, pp. 155–158.
- [82] A. Castellazzi, M. Ciappa, W. Fichtner, G. Lourdelb, and M. Mermet-Guyennet, "Comprehensive electro-thermal compact model," in *Proc. POWERENG*, Apr. 2007, pp. 405–410.
- [83] A. Castellazzi, E. Batista, M. Ciappa, J.-M. Dienot, M. Mermet-Guyennet, and W. Fichtner, "Full electro-thermal model of a 6.5 kV field-stop IGBT module," in *Proc. IEEE Power Electron. Specialists Conf. (PESC)*, Jun. 2008, pp. 392–397.
- [84] Z. Zhou, P. Holland, and P. Igic, "Compact thermal model of a three-phase IGBT inverter power module," in *Proc. 26th Int. Conf. Microelectron. (MIEL)*, 2008, pp. 167–170.
- [85] O. S. Senturk, L. Helle, S. Munk-Nielsen, P. Rodriguez, and R. Teodorescu, "Converter structure-based power loss and static thermal modeling of the press-pack IGBT three-level ANPC VSC applied to multi-MW wind turbines," *IEEE Trans. Ind. Appl.*, vol. 47, no. 6, pp. 2505–2515, Nov./Dec. 2011.
- [86] O. S. Senturk, L. Helle, S. Munk-Nielsen, P. Rodriguez, and R. Teodorescu, "Power capability investigation based on electrothermal models of press-pack IGBT three-level NPC and ANPC VSCs for multimegawatt wind turbines," *IEEE Trans. Power Electron.*, vol. 27, no. 7, pp. 3195–3206, Jul. 2012.
- [87] J. V. Gragger, C. J. Fenz, H. Kernstock, and C. Kral, "A fast inverter model for electro-thermal simulation," in *Proc. 27th Annu. IEEE Appl. Power Electron. Conf. Expo. (APEC)*, Feb. 2012, pp. 2548–2555.
- [88] J. Moussodji, T. Kociniewski, and Z. Khatir, "Distributed electro-thermal model of IGBT chip—Application to top-metal ageing effects in short circuit conditions," *Microelectron. Rel.*, vol. 53, pp. 1725–1729, Sep. 2013.
- [89] J. Moussodji, T. Kociniewski, and Z. Khatir, "Top-metal ageing effects on electro-thermal distributions in an IGBT chip under short circuit conditions," in *Proc. 15th Eur. Conf. IEEE Power Electron. Appl. (EPE)*, Sep. 2013, pp. 1–9.
- [90] S. Yin, T. Wang, K.-J. Tseng, J. Zhao, and X. Hu, "Electro-thermal modeling of SiC power devices for circuit simulation," in *Proc. 39th Annu. Conf. IEEE Ind. Electron. Soc. (IECON)*, Nov. 2013, pp. 718–723.
- [91] A. Nejadpak and O. A. Mohammed, "A physics-based, dynamic electro-thermal model of silicon carbide power IGBT devices," in *Proc. 28th Annu. IEEE Appl. Power Electron. Conf. Expo. (APEC)*, Mar. 2013, pp. 201–206.
- [92] Z. Wang, W. Qiao, B. Tian, and L. Qu, "An effective heat propagation path-based online adaptive thermal model for IGBT modules," in *Proc. 29th Annu. IEEE Appl. Power Electron. Conf. Expo. (APEC)*, Mar. 2014, pp. 513–518.
- [93] M. Alhajjar and D. Gerling, "Electrothermal model of IGBT three-level neutral-point-clamped rectifier for synchronous reluctance generator in wind power application," in *Proc. Int. Conf. Renew. Energy Res. Appl. (ICRERA)*, 2015, pp. 167–172.
- [94] C. Batard, N. Ginot, and J. Antonios, "Lumped dynamic electrothermal model of IGBT module of inverters," *IEEE Trans. Compon., Packag., Manuf. Technol.*, vol. 5, no. 3, pp. 355–364, Mar. 2015.
- [95] O. Alavi, M. Abdollah, and A. H. Viki, "Assessment of thermal network models for estimating IGBT junction temperature of a buck converter," in *Proc. 8th Power Electron., Drive Syst. Technol. Conf. (PEDSTC)*, Feb. 2017, pp. 14–16.
- [96] F. D. Napoli et al., "On-line junction temperature monitoring of switching devices with dynamic compact thermal models extracted with model order reduction," *Energies*, vol. 10, p. 189, Feb. 2017.
- [97] R. Skuriat and C. Johnson, "Direct substrate cooling of power electronics," in *Proc. 13th Eur. Conf. Power Electron. Appl. (EPE)*, 2009, pp. 1–10.
- [98] H. Zhang, L. M. Tolbert, and B. Ozpineci, "Impact of SiC devices on hybrid electric and plug-in hybrid electric vehicles," *IEEE Trans. Ind. Appl.*, vol. 47, no. 2, pp. 912–921, Mar./Apr. 2011.
- [99] N. Luther-King, M. Sweet, and E. M. S. Narayanan, "Clustered insulated gate bipolar transistor in the super junction concept: The SJ-TCIGBT," *IEEE Trans. Power Electron.*, vol. 27, no. 6, pp. 3072–3080, Jun. 2012.
- [100] P. Ning, Z. Liang, F. Wang, and L. Marfino, "Power module and cooling system thermal performance evaluation for HEV application," in *Proc. 27th Annu. IEEE Appl. Power Electron. Conf. Expo. (APEC)*, Feb. 2012, pp. 2134–2139.
- [101] Z. Xu, M. Li, F. Wang, and Z. Liang, "Investigation of Si IGBT operation at 200 °C for traction applications," *IEEE Trans. Power Electron.*, vol. 28, no. 5, pp. 2604–2615, May 2013.
- [102] K. Vladimirova, J.-C. Crebier, Y. Avenas, and C. Schaeffer, "Drift region integrated microchannels for direct cooling of power electronic devices: Advantages and limitations," *IEEE Trans. Power Electron.*, vol. 28, no. 5, pp. 2576–2586, May 2013.
- [103] J. Jordán et al., "A comparative performance study of a 1200 V Si and SiC MOSFET intrinsic diode on an induction heating inverter," *IEEE Trans. Power Electron.*, vol. 29, no. 5, pp. 2550–2562, May 2014.
- [104] G. Chen et al., "Transient thermal performance of IGBT power modules attached by low-temperature sintered nanosilver," *IEEE Trans. Device Mater. Rel.*, vol. 12, no. 1, pp. 124–132, Mar. 2012.
- [105] A. D. Kraus and A. Bar-Cohen, *Design and Analysis of Heat Sinks*. New York, NY, USA: Wiley, 1995.
- [106] J. C. Howes, D. B. Levett, S. T. Wilson, J. Marsala, and D. L. Saums, "Cooling of an IGBT drive system with vaporizable dielectric fluid (VDF)," in *Proc. 24th Annu. IEEE Semiconductor Thermal Meas. Manage. Symp.*, Mar. 2008, pp. 9–15.
- [107] T. Kimura et al., "High-power-density inverter technology for hybrid and electric vehicle applications," *Hitachi Rev.*, vol. 63, pp. 42–47, Mar. 2014.
- [108] J. Schulz-Harder, K. Exel, and A. Meyer, "Direct liquid cooling of power electronics devices," in *Proc. 4th Int. Conf. Integr. Power Syst. (CIPS)*, 2006, pp. 1–6.
- [109] L. D. Stevanovic, R. A. Beaupre, A. V. Gowda, A. G. Pautsch, and S. A. Solovitz, "Integral micro-channel liquid cooling for power electronics," in *Proc. 25th Annu. IEEE Appl. Power Electron. Conf. Expo. (APEC)*, Feb. 2010, pp. 1591–1597.
- [110] C.-K. Liu et al., "Direct liquid cooling For IGBT power module," in *Proc. 9th Int. Microsyst., Packag., Assembly Circuits Technol. Conf. (IMPACT)*, 2014, pp. 41–44.
- [111] E. A. Silk, J. Kim, and K. Kiger, "Investigation of enhanced surface spray cooling," in *Proc. ASME Int. Mechan. Eng. Congr. Expo.*, 2004, pp. 685–690.
- [112] J. B. Campbell, L. M. Tolbert, C. W. Ayers, B. Ozpineci, and K. T. Lowe, "Two-phase cooling method using the R134a refrigerant to cool power electronic devices," *IEEE Trans. Ind. Appl.*, vol. 43, no. 3, pp. 648–656, May 2007.
- [113] D. L. Saums, "Vaporizable dielectric fluid cooling for IGBT power semiconductors," in *Proc. 6th Int. Conf. IEEE Integr. Power Electron. Syst. (CIPS)*, Mar. 2010, pp. 1–7.
- [114] J. Lee and I. Mudawar, "Two-phase flow in high-heat-flux micro-channel heat sink for refrigeration cooling applications: Part I—Pressure drop characteristics," *Int. J. Heat Mass Transf.*, vol. 48, no. 5, pp. 928–940, 2005.
- [115] J. Lee and I. Mudawar, "Two-phase flow in high-heat-flux micro-channel heat sink for refrigeration cooling applications: Part II—Heat transfer characteristics," *Int. J. Heat Mass Transf.*, vol. 48, no. 5, pp. 941–955, 2005.
- [116] W. M. Rohsenow, J. P. Hartnett, and Y. I. Cho, *Handbook of Heat Transfer*. New York, NY, USA: McGraw-Hill, 1998.
- [117] A. Bhunia and C.-L. Chen, "Jet impingement cooling of an inverter module in the harsh environment of a hybrid vehicle," in *Proc. ASME Summer Heat Transf. Conf. Collocated Pacific Rim Tech. Conf. Exhib. Integr. Packag. (MEMS)*, 2005, pp. 561–567.
- [118] G. Natarajan and R. J. Bezama, "Microjet cooler with distributed returns," *Heat Transf. Eng.*, vol. 28, nos. 8–9, pp. 779–787, 2007.
- [119] P. R. Parida, S. V. Ekkad, and K. Ngo, "Impingement-based high performance cooling configurations for automotive power converters," *Int. J. Heat Mass Transf.*, vol. 55, pp. 834–847, Jan. 2012.
- [120] B. W. Webb and C.-F. Ma, "Single-phase liquid jet impingement heat transfer," *Adv. Heat Transf.*, vol. 26, pp. 105–217, Apr. 1995.
- [121] D.-Y. Lee and K. Vafai, "Comparative analysis of jet impingement and microchannel cooling for high heat flux applications," *Int. J. Heat Mass Transf.*, vol. 42, pp. 1555–1568, May 1999.
- [122] L. J. Turek, D. P. Rini, B. A. Saarloos, and L. C. Chow, "Evaporative spray cooling of power electronics using high temperature coolant," in *Proc. 11th Intersoc. Conf. Thermal Thermomechan. Phenom. Electron. Syst. (ITHERM)*, 2008, pp. 346–351.



- [123] L. C. Chow, M. S. Schmbey, and M. R. Pais, "High heat flux spray cooling," *Annu. Rev. Heat Transf.*, vol. 8, no. 8, pp. 291–318, 1997.
- [124] D. E. Tilton, J. H. Ambrose, and L. C. Chow, "Closed-system, high-flux evaporative spray cooling," in *Proc. SAE, Aerosp. Technol. Conf. Expo.*, 1989, p. 1.
- [125] M. Fabbri, S. Jiang, and V. K. Dhir, "A comparative study of cooling of high power density electronics using sprays and microjets," *J. Heat Transf.*, vol. 127, no. 1, pp. 38–48, 2005.
- [126] M. C. Shaw et al., "Enhanced thermal management by direct water spray of high-voltage, high power devices in a three-phase, 18-hp AC motor drive demonstration," in *Proc. 8th Intersoc. Conf. Thermal Thermomechan. Phenom. Electron. Syst. (ITHERM)*, 2002, pp. 1007–1014.
- [127] A. Bhunia and C. L. Chen, "On the scalability of liquid microjet array impingement cooling for large area systems," *J. Heat Transf.*, vol. 133, no. 6, p. 064501, 2011.
- [128] V. Semenyuk, "Miniature thermoelectric modules with increased cooling power," in *Proc. 25th Int. Conf. Thermoelect. (ICT)*, 2006, pp. 322–326.
- [129] V. Semenyuk, *Thermoelectric Cooling of Electro-Optic Components*. Boca Raton, FL, USA: CRC Press, 2006, pp. 51–58.
- [130] P. Wang, A. Bar-Cohen, and B. Yang, "Enhanced thermoelectric cooler for on-chip hot spot cooling," in *Proc. ASME InterPACK Conf. Collocated ASME/JSME Thermal Eng. Heat Transf. Summer Conf.*, 2007, pp. 249–258.
- [131] P. Wang, B. Yang, and A. Bar-Cohen, "Mini-contact enhanced thermoelectric coolers for on-chip hot spot cooling," *Heat Transf. Eng.*, vol. 30, no. 9, pp. 736–743, Mar. 2009.
- [132] P. Wang, A. Bar-Cohen, B. Yang, G. L. Solbrekken, and A. Shakouri, "Analytical modeling of silicon thermoelectric microcooler," *J. Appl. Phys.*, vol. 100, p. 014501, May 2006.
- [133] P. Wang and A. Bar-Cohen, "Self-cooling on germanium chip," *IEEE Trans. Compon., Packag., Manuf. Technol.*, vol. 1, no. 5, pp. 705–713, May 2011.
- [134] A. Bar-Cohen and P. Wang, "Thermal management of on-chip hot spot," *J. Heat Transf.*, vol. 134, no. 5, p. 051017, 2012.
- [135] A. Shakouri, "Nanoscale Thermal Transport and Microrefrigerators on a Chip," *Proc. IEEE*, vol. 94, no. 8, pp. 1613–1638, Aug. 2006.
- [136] C. Gillot, C. Schaeffer, C. Massit, and L. Meysenc, "Double-sided cooling for high power IGBT modules using flip chip technology," *IEEE Trans. Compon., Packag., Technol.*, vol. 24, no. 4, pp. 698–704, Dec. 2001.
- [137] M. Ishiko and T. Kondo, "A simple approach for dynamic junction temperature estimation of IGBTs on PWM operating conditions," in *Proc. Power Electron. Specialists Conf. (PESC)*, 2007, pp. 916–920.
- [138] L. Dupont, Y. Avenas, and P.-O. Jeannin, "Comparison of junction temperature evaluations in a power IGBT module using an IR camera and three thermosensitive electrical parameters," *IEEE Trans. Ind. Appl.*, vol. 49, no. 4, pp. 1599–1608, Jul. 2013.
- [139] T.-Y. Lee, "Design optimization of an integrated liquid-cooled IGBT power module using CFD technique," *IEEE Trans. Compon. Packag. Technol.*, vol. 23, no. 1, pp. 55–60, Mar. 2000.
- [140] A. Morozumi, H. Hokazono, Y. Nishimura, Y. Ikeda, Y. Nabetani, and Y. Takahashi, "Direct liquid cooling module with high reliability solder joining technology for automotive applications," in *Proc. 25th Int. Symp. Power Semiconductor Devices ICs (ISPSD)*, May 2013, pp. 109–112.
- [141] M. Ayadi, M. Fakhfakh, M. Ghariani, and R. Neji, "Electro-thermal simulation of a three phase inverter with cooling system," *J. Model. Simul. Syst.*, vol. 1, pp. 163–170, May 2010.
- [142] M. Ivanova, Y. Avenas, C. Schaeffer, J.-B. Dezord, and J. Schulz-Harder, "Heat pipe integrated in direct bonded copper (DBC) technology for cooling of power electronics packaging," *IEEE Trans. Power Electron.*, vol. 21, no. 6, pp. 1541–1547, Nov. 2006.
- [143] Z. Xu, D. Jiang, M. Li, P. Ning, F. Wang, and Z. Liang, "Si IGBT phase-leg module packaging and cooling design for operation at 200°C in hybrid electrical vehicle applications," in *Proc. 27th Annu. IEEE Appl. Power Electron. Conf. Expo. (APEC)*, Feb. 2012, pp. 483–490.
- [144] G. Mitic et al., "Spray cooling of IGBT electronic power modules," in *Proc. Thermal Challenges Next Generat. Electron. Syst.*, 2002, pp. 147–153.
- [145] L. Vasiliev et al., "Loop heat pipe for cooling of high-power electronic components," *Int. J. Heat Mass Transf.*, vol. 52, pp. 301–308, Jan. 2009.




**CHENG QIAN** (M'16) received the B.S. and M.S. degrees in materials science and technology from the Beijing Institute of Technology in 2003 and 2006, respectively, and the Ph.D. degree in aerospace engineering from the Delft University of Technology in 2013. He was a Program Manager with the Changzhou Institute of Technology Research for Solid State Lighting, China. He held a post-doctoral fellowship position at the State Key Laboratory of Solid State Lighting, Institute of Semiconductors, Chinese Academy of Science. He is currently an Associate Professor with Beihang University. His is currently involved in LED package/luminaire failure analysis and simulations, the development of accelerating test techniques for LED luminaires, lifetime predictions on photonic and chromatic parameters of the LED package/luminaire. His research interests include designing reliability of LED luminaires and systems using combined knowledge of multi-physics numerical simulations and statistical theories.




**AMIR MIRZA GHEITAGHY** received the B.S. degree from the Ferdowsi University of Mashhad and the M.A. and Ph.D. degrees in mechanical engineering from the Iran University of Science and Technology. In 2016, he spent 10 months as a Visiting Researcher with the Microelectronics Department, TU Delft, where he was involved in thermal management. In 2017, he continued collaboration with TU Delft as a Post-Doctoral Researcher. His research interest includes two-phase heat transfer, nanoscale thermal transport, and micro/nanostructured surfaces.



**JIAJIE FAN** (S'12–M'14–SM'17) received the B.S. degree in inorganic materials science and engineering from the Nanjing University of Technology, Nanjing, China, in 2006, the M.S. degree in material science and engineering from the East China University of Science and Technology, Shanghai, China, in 2009, and the Ph.D. degree in industrial and systems engineering from The Hong Kong Polytechnic University, Hong Kong, in 2014. He is currently an Associate Professor with the College of Mechanical and Electrical Engineering, Hohai University, Changzhou, China. He is also a Post-Doctoral Research Fellow with the Delft University of Technology, Beijing Research Centre, and the State Key Laboratory of Solid State Lighting, China. He is a register of certified Six Sigma Green Belt, Hong Kong Society for Quality. His main research interests include lifetime estimation for LEDs, failure diagnosis and prognosis for electric devices and system, prognostics and health management for LED lightings, and advanced electronic packaging and assembly.



**HONGYU TANG** (S'16) received the B.S. and M.S. degrees in microelectronic packaging technology from the Guilin University of Electronic Technology, Guilin, China, in 2010 and 2013, respectively. She is currently pursuing the Ph.D. degree with the Faculty of Electrical Engineering Mathematics and Computer Science, Delft University of Technology, Delft, The Netherlands. She has been a Thermal Engineer with the State Key Laboratory of Solid State Lighting, Changzhou, China, since 2013. Her current research interests include thermal management of high power devices, and advanced material (micro-/nano-material) applications.



**BO SUN** received the B.S. degree in microelectronics from the South China University of Technology, Guangzhou, China in 2008, the M.S. degree in electrical engineering from Lamar University, Beaumont, Texas, USA, in 2011, and the Ph.D. degree in electrical engineering from the Delft University of Technology, Delft, The Netherlands, in 2017.

He has been a Reliability Engineer with the State Key Laboratory of Solid State Lighting, China, since 2012. He is currently a Researcher with the College of Information Engineering, Guangdong University of Technology. His current research interests include the reliability of RF and MM-wave device packaging, the failure analysis and accelerating testing of semiconductor devices, and the reliability and lifetime prediction of optical and electronic devices and systems by using the integrated electronics, thermo-mechanics, and statistics methodologies.



**HUAIYU YE** (M'15) received the B.S. degree from Shanghai Jiao Tong University, China, and the M.A. and Ph.D. degrees from the Delft University of Technology, The Netherlands. He was with the Materials Innovation Institute (M2i) and Netherlands Organization for Applied Scientific Research (TNO) as a Researcher from 2010 to 2014. He has been a Senior Researcher with the Delft University of Technology since 2014. His research interests include physical and biological

sensors, computational fluid dynamics, thermal management in high power density electronic devices, microscale/nanoscale non-equilibrium thermodynamics, and microscale/nanoscale energy transport and conversion. He received the One-hundred Talent Program Scholars of Chongqing University in 2016.



**GUOQI ZHANG** (M'03–F'14) received the Ph.D. degree in aerospace engineering from the Delft University of Technology, Delft, The Netherlands, in 1993. He was with Philips, Eindhoven, and The Netherlands for 20 years, where he was a Principal Scientist from 1994 to 1996, a Technology Domain Manager from 1996 to 2005, the Senior Director of Technology Strategy from 2005 to 2009, and a Philips Fellow from 2009 to 2013. He was a Professor with the Technical University of

Eindhoven, Eindhoven, The Netherlands, from 2002 to 2005, and a Chair Professor with the Delft University of Technology from 2005 to 2013. He has been a Chair Professor with the Department of Microelectronics, Delft University of Technology, since 2013. He has authored over 350 papers, including over 140 journal papers, three books, and 17 book chapters, and holds over 100 patents. His current research interests include heterogeneous micro/nanoelectronics packaging and system integration and reliability.

Dr. Zhang is one of the pioneers in developing the More than Moore (MtM) strategy when he served as the Chair with the MtM Technology Team, European's Nanoelectronics Platform in 2005. He received the Outstanding Contributions to Reliability Research by the European Center for Micro/Nanoreliability, Berlin, Germany, in 2007, the Excellent Leadership Award at EuroSimE, the Special Achievement Award at ICEPT, and the IEEE CPMT Outstanding Sustained Technical Contribution Award in 2015.

• • •