

Agent-Based Modeling of a Thermal Energy Transition in the Built Environment

Guerrero, Graciela del Carmen Nava; Korevaar, Gijsbert; Hansen, Helle Hvid; Lukszo, Zofia

DOI

[10.3390/en12050856](https://doi.org/10.3390/en12050856)

Publication date

2019

Document Version

Final published version

Published in

Energies

Citation (APA)

Guerrero, G. D. C. N., Korevaar, G., Hansen, H. H., & Lukszo, Z. (2019). Agent-Based Modeling of a Thermal Energy Transition in the Built Environment. *Energies*, 12(5), Article 856.
<https://doi.org/10.3390/en12050856>

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Article

Agent-Based Modeling of a Thermal Energy Transition in the Built Environment

Graciela del Carmen Nava Guerrero ^{*}, Gijsbert Korevaar , Helle Hvid Hansen  and Zofia Lukszo 

Faculty of Technology, Policy and Management, Delft University of Technology, 2628 BX Delft, The Netherlands; G.Korevaar@tudelft.nl (G.K.); H.H.Hansen@tudelft.nl (H.H.H.); Z.Lukszo@tudelft.nl (Z.L.)

* Correspondence: g.d.c.navaguerrero@tudelft.nl; Tel.: +31-15-278-2040

Received: 15 January 2019; Accepted: 25 February 2019; Published: 5 March 2019



Abstract: To reduce greenhouse gas emissions to 80% below 1990 levels by 2050, an energy transition is taking place in the European Union. Achieving these targets requires changes in the heating and cooling sector (H&C). Designing and implementing this energy transition is not trivial, as technology, actors, and institutions interact in complex ways. We provide an illustrative example of the development and use of an agent-based model (ABM) for thermal energy transitions in the built environment, from the perspective of sociotechnical systems (STS) and complex adaptive systems (CAS). In our illustrative example, we studied the transition of a simplified residential neighborhood to heating without natural gas. We used the ABM to explore socioeconomic conditions that could support the neighborhoods' transition over 20 years while meeting the neighborhoods' heat demand. Our illustrative example showed that through the use of STS, CAS, and an ABM, we can account for technology, actors, institutions, and their interactions while designing for thermal energy transitions in the built environment.

Keywords: built environment; residential; thermal; technology; insulation; complex adaptive systems; socio-technical systems; ABM

1. Introduction

An energy transition is ongoing in the European Union (EU) [1]. Since 2011, the EU has aimed at reducing greenhouse gas emissions to 80% below 1990 levels by 2050, including to 60% by 2040 and to 40% by 2030. One way to achieve these goals is to increase the share of renewable energy resources (RES) in the energy system. However, this change would not be trivial. Due to the intermittent nature of many RES, the energy system would have to be able to ensure stability and security of supply under variable generation [2]. Energy systems that are able to meet this and other challenges are conceptualized as “smart energy systems” [3,4].

Accounting for the heating and cooling sector (H&C) is key to the design and implementation of smart energy systems [5]. This sector, which provides energy to warm and cool the built environment, is the largest single energy consumer of the EU. In 2016, it accounted for 50% of the EU's annual energy consumption, 13% of oil, 59% of gas, and 68% of gas imports [1]. As is the case in other sectors and infrastructures, designing and implementing changes in the H&C sector is challenging. The involvement of multiple individuals and organizations in decisions regarding technological changes is required [6], and institutions and technology need to be harmonized [3]. Therefore, designing for an energy transition in the H&C sector requires an approach that accounts for technology, individuals and organizations, and rules and regulations.

In this paper, we provide an illustrative example of the development and use of agent-based model (ABMs) of thermal energy transitions in the built environment from the perspective of sociotechnical

systems (STS) and complex adaptive systems (CAS). ABMs are computational models that can be used to represent and explore the complexity of systems where individuals and organizations, and technology interact in complex ways through rules and regulations. These models can also be used to design interventions in these systems. Our example addresses the transition of a residential neighborhood towards natural gas-free heating.

The remainder of this article is structured as follows. In Section 2, we elaborate on the conceptual framework, including STS and CAS and the basic notions of agent-based modeling. In Section 3, we present the materials and methods that we used for the illustrative example, which we describe in Section 4. In Section 5, we report and discuss results. Finally, in Section 6, we reflect on the use of ABM, STS, and CAS in our example and introduce future work.

2. Definition of the Conceptual Framework

The perspectives of STS and CAS, and agent-based modeling can be used to design energy transitions. In Reference [7], we elaborated on a conceptual framework that is based on STS and CAS and provided two examples of its application. The first example was a study of biodiesel production in Germany. The second example was a study regarding the concept “Car as a Power Plant”. Additionally, we introduced future case studies regarding the next generation of thermal energy systems in the built environment, coordination control of microgrids, and flexibility through demand response aggregation. This paper is a follow-up of our work in Reference [7] in the context of thermal energy transitions in the built environment.

2.1. Sociotechnical Systems (STS)

Through the lens of STS, thermal energy systems in the built environment can be described as networks of *technology* interacting with networks of *actors* in complex ways, through *institutions* [6,8,9]. *Technology* is the physical component of a system. *Actors* are individuals, organizations or other social entities who are able to either make decisions that affect the system or influence other actor decisions [10]. When actors behave rationally, they aim at optimizing their own objectives; however, their rationality may be bounded [11,12]. Actors’ objectives may vary from one actor to another, and they may converge, overlap or conflict. As a result, actors may modify their decisions and can engage in cooperation or competition [13]. Finally, *institutions* are rules and regulations that govern interactions between actors and between actors and technology [14].

2.2. Complex Adaptive Systems (CAS)

Thermal energy systems in the built environment can also be described through the lens of CAS. According to Holland [15,16], CAS are systems whose structure and behavior emerges from interactions between its low-level autonomous components, known as agents. In these systems, a large number of changing agents act, interact with each other, and react to their dynamic environment. These agents have bounded rationality, are able to learn, may to some extent anticipate the future, and act in parallel in a network. As opposed to systems with central control, in CAS, system behavior arises from the aggregated competition and cooperation of individual agents, and therefore, conventional mathematical tools are insufficient to explain their behavior.

2.3. Basic Notions of Agent-Based Modeling

Agent-based modeling, also known as individual-based modeling [17], is a method for computational simulation that builds on CAS [18,19]. ABMs are used to explore possible states of a system to understand plausible futures, trends, tendencies, and behaviors that can occur under specific circumstances [20]. Through computational simulation with ABMs, the complex and nonlinear changes that characterize CAS can be studied [19]. Properties of CAS, such as emergence, adaptation, anticipation of the future, and the lack of central control, can be represented with this method.

Through agent-based modeling, the representation of a system is based on knowledge of the behavior, or assumed behavior, of individual agents whose interactions generate complex system structures and dynamics [21]. This is possible for systems where agents have a certain degree of autonomy, their environment is dynamic, and social interaction takes place between agents [22]. In Reference [23], for instance, a probabilistic ABM of electric vehicle charging demand takes advantage of the possibility to simulate heterogeneous agents whose individual actions impact the distribution network.

The main components of an ABM are *agents*, the *environment*, and *time* [24]. First, in the context of STS, *agents* are software representations of actors, i.e., real-world entities able to make decisions [22]. Agents are problem solvers with clear boundaries and interfaces, exist within an environment, have objectives and behave rationally, control their own behavior, and are able to act in anticipation [25]. At any given time, an agent is described by a set of parameters known as their state [26]. New states may result from agents' decisions and changes in behavior, which are based on agents' rules [27]. While agents are rational and their decision rules are in place for agents to achieve their objectives, their rationality may be bounded [19]. Second, the *environment* consists of information and structure, may contain multiple agents and their information, and may be static or dynamic [24]. Through their actions and interactions, agents may influence their environment, which in turn may influence the behavior of agents [24]. Finally, *time* is ubiquitous in ABMs because these models are used to conduct computational simulations, which represent changes in a system over discrete time [24]. Changes take place during each time step. These changes and their outcomes can be influenced by the previous state of the agents and the system, and in turn, can influence their future states.

Since ABMs are representations of systems and not the systems themselves, they rely on assumptions and simplifications of the actual system [28]. Decisions regarding which assumptions to include and which simplifications to make can be derived from collaborations with stakeholders from the actual system that is being modeled [24]. It is also possible to use agent-based modeling as a tool for adaptive and participatory research, as is the case in companion modeling [29]. In all cases, agent-based modeling requires transparency regarding assumptions and simplifications so that the implications of its results can be discussed in the light of those assumptions and simplifications [24].

Agent-based modeling is a proven method for studying STS as CAS. In [30], the author reviewed some of the recent progress in modeling dynamical processes in complex sociotechnical systems. Using diffusion and contagion phenomena as a prototypical example, he explained that the introduction of agent-based modeling has allowed the integration of large amounts of data and the generation of results with unprecedented level of detail. In [24], the authors presented an approach to agent-based modeling of sociotechnical systems. This approach has already been applied to a large number of cases, some of which are available in [24]. More specifically, reviews of computational models for energy transitions show that agent-based modeling is a relevant method to address these types of problems. In [31], a review of sociotechnical energy transition models included ABMs, and in [32], a review of ABMs of the adoption of energy efficient technologies by households was presented.

3. Materials and Methods

In Sections 4 and 5, we present an illustrative example of the development of an ABM of a thermal energy transition in the built environment. Our example addresses the transition to heating systems without natural gas in residential neighborhoods.

Two main reasons substantiate our choice of illustrative example. First, reducing fossil fuel consumption is a current societal challenge, as explained in Section 1. In the Netherlands, reducing natural gas consumption is part of this challenge, as explained in Section 4. Second, agent-based modeling is a suitable method to study this problem. In [25], the authors reviewed 23 agent-based modeling studies that addressed the adoption of energy efficient technologies by households. First, they provided an overview of barriers to and policies for the adoption of those technologies, as well as an overview of

energy efficiency model types. Then, they identified the technologies, policies, and decision-making theories used in the reviewed agent-based modeling studies, as well as the use of empirical data in those studies. They concluded that opportunities remain for other AB studies to address different residential technologies, barriers to, and policies for their adoption.

Our illustrative example is our first step towards our application of STS and CAS in the development and use of an ABM in the context of a case study. Therefore, the problem that we present in Section 4 is intentionally simplified. The model that we conceptualized, developed, and used is an illustrative model. This model, which can be modified and extended, is a sketch that will guide the development of forthcoming case studies. The model contains both assumptions regarding input data and simplifications regarding technology, agents, and institutions.

In the following subsections, we explain the main methods used in the illustrative example. In Section 3.1, we elaborate on model development and reporting. In Section 3.2, we explain how we used the model for computational simulations. In Section 3.3, we present our approach to analyzing simulation results.

3.1. Model Development

We developed an ABM based on the approach proposed by the authors of [24]. This approach proposes 10 steps to guide the development of ABMs of sociotechnical systems. The steps are (1) problem formulation and actor identification, (2) system identification and decomposition, (3) concept formalization, (4) model formalization, (5) software implementation, (6) model verification, (7) experimentation, (8) data analysis, (9) model validation, and (10) model use. We followed steps 1 to 8. Steps 9 and 10 will be addressed in forthcoming case studies.

In Section 4, the description of our ABM is based on the overview, design concepts, and details (ODD) protocol by the authors of [33]. We based our description on the ODD protocol for two of its known advantages: It can be used for a wide range of ABM applications in different fields, and it clarifies the features that were and were not included in the model, which can serve as input for further discussions and research [33].

Several modeling toolkits are available to build ABMs, including NetLogo [34] and GAMA [35]. We chose NetLogo (Version 6.0.4, Center for Connected Learning and Computer-Based Modeling, Northwestern University, Evanston, IL, USA) because this software is “free, well-written, easy-to-install, easy-to-use, easy-to-extend, and easy-to-publish-online” [36] (p. 7).

3.2. Computational Simulations

After building and verifying the model, we used it for experimentation. Our experiments simulated changes that could occur in a neighborhood as a result of the behavior of agents, the environment, and their interactions. To simulate these changes, we changed the model’s input parameters and observed changes over a fixed simulation time. Each unique set of input parameters of the model is an experimental scenario. In a simulation run, an experimental scenario is used to start up the model, and changes occur through a series of time steps based on the model code.

We simulated each experimental scenario once, as our model was deterministic. Simulation runs of experimental scenarios were conducted through the Behavior Space of NetLogo [34], a built-in simulation tool. Experiments took less than one minute to complete in a processor Intel(R) Core(TM) i7-6600U with 8GB RAM.

3.3. Analysis of Results

In order to analyze results, we collected data from each time step of each simulation run. These data were exported by NetLogo [34] in a CSV file. To visualize and analyze results, we used the statistical computing software R project (version 3.5.1, R Core Team, R Foundation for Statistical Computing, Vienna, Austria) [37] and R studio (version 1.1.463, RStudio Team, RStudio, Inc., Boston, MA, USA) [38], with the packages dplyr (version 0.7.8) [39], sqldf (version 0.4-11) [40], ggplot2

(version 3.1.0) [41], and car (version 3.0-2) [42]. We relied on a nonparametric statistical test and visual inspection of plots and tables to describe and analyze results. When a model has undergone validation, further statistical analyses of its results can be conducted.

4. Illustrative Example: from Natural Gas-Based to Natural Gas-Free Heating in Residential Neighborhoods

In the Netherlands, a large share of the built environment relies on natural gas for heating [43], but in the future, this is likely to change. In March 2018, the national government announced its decision to end natural gas extraction from the Groningen field by 2030 [44]. The Groningen field is the largest in Europe and is located in the North of the Netherlands [45]. Moreover, since July 2018, new buildings that are small consumers, such as houses and small commercial buildings, have had to be built without a connection to the gas grid [46]. As a result of these changes, the built environment in the Netherlands has the challenging task to organize heat supply that is naturally gas-free. At the local level, municipalities are responsible for taking control of the thermal energy transition [47].

We focused our illustrative example on the transition of the Dutch built environment to heating systems that do not use natural gas. For the purpose of simplicity, we only considered residential buildings. Our research question was: *Which socioeconomic conditions support Dutch neighborhoods' transition to natural gas-free heat supply until 2040 while meeting the neighborhoods' heat demand?*

While there can be multiple and complex objectives of thermal energy transitions (e.g., maintaining user comfort, public participation, acceptability of projects), this work focused on two key performance indicators (KPIs) related to reduced fossil fuel use: The neighborhood's *annual natural gas consumption* (MWh) and the cumulative costs of the transition (thousands of Euros), including investments, maintenance, and energy costs.

The remaining parts of this section are structured as follows. In Section 4.1, we describe the thermal energy transition through the lenses of STS and CAS. In Section 4.2, we define the modeling questions and present the model overview, based on the ODD protocol. In Section 4.3, we describe the experimental design for the computational simulation. Results are presented and discussed in Section 5.

4.1. The Thermal Energy Transition through the Lenses of STS and CAS

The transition towards natural gas-free heating in residential neighborhoods is complex. While local governments in the Netherlands are in charge of taking control of the thermal energy transition, the transition cannot be achieved only through top-down technological decisions. From the perspectives of STS and CAS, neighborhoods can be seen as networks of individual actors who own technology, interact with each other, and are able to make their own decisions.

Our simple conceptualization of the neighborhood considers each household to be an actor. Each household is assumed to live in a single dwelling, and the dwelling's insulation and heating system are considered to be the technologies of interest to the model. For the sake of simplicity, we assumed that all households can make capital investment decisions for their dwelling. Each household was assumed to initially own a natural gas boiler and to be able to decide to keep their boiler or replace it with an alternative. The heating systems that were assumed to be available were micro-CHPs (micro combined heat and power), electric radiators, aerial heat pumps, and geothermal heat pumps. While micro-CHPs consume gas, we assumed that they are available for agents to purchase. The household can also decide to keep their dwelling's current insulation level unchanged or to improve it. A higher insulation level results in lower heat demand. Some households are influenced by the decisions of other households after observing how many households in the neighborhood have improved their insulation or replaced their heating system. Since each household is able to make its own decisions and these decisions can vary from one household to the next one, the neighborhood's transition depends on households' individual decisions. This is the CAS notion of system outcomes being the result of individual decisions rather than of centralized control.

Households can make decisions in different ways. Some take action to reduce natural gas consumption and prioritize natural gas reduction over costs minimization, while other do not. Some households are influenced by observations regarding the number and type of heating systems and the dwelling insulation levels in their neighborhood, while others are not. Some households have better information regarding costs of technology options than others. All households have budget constraints that affect their investment decisions.

Following the review in [25], we integrated notions from structural, economic, behavioral, and social-behavioral barriers to explore the adoption of residential heating systems. We assumed that households do not have knowledge of future retail energy prices, do not always have sufficient capital to make an investment, have to pay upfront capital costs, are bounded by their own desired payback period and by their ability to compare combinations of heating systems and insulation, and can be influenced by other households' inactivity or investment decisions.

While natural gas reduction in the neighborhood depends on individual decisions by households, the cost of the transition is also influenced by external factors that cannot be controlled by households. These include the investment cost of insulation measures, investment and maintenance costs of heating systems, and electricity and natural gas prices, which influence the operation costs of heating systems. While households have access to present market costs, future costs are uncertain, and households have no access to data of past prices. Therefore, while households can estimate the financial performance of their preferred insulation and heating system options, their actual financial performance is uncertain until after the fact.

Institutions also play a role in the transition to natural gas-free residential heating. Our conceptualization includes changes in energy prices, the sunseting of natural gas boilers, and the effect of better information in the investment decisions that households make. We assumed that the electricity price changes annually and at a constant rate, and that the natural gas price also changes annually and at its own constant rate. Furthermore, we assumed that it is no longer possible for households to purchase new natural gas boilers. Finally, we assumed that an information campaign that informs households about cost-effective investments in technology is sometimes in place.

4.2. Model Overview

We based our ABM on the simple conceptualization from Section 4.1. The model represents a neighborhood in which households use their heating systems to meet their heat demand and can choose to invest in replacing their heating system or improving their dwelling's insulation level. We used the model to simulate experimental scenarios that represent variations between households' decision rules and external factors. The purpose was to identify the conditions under which the transition was achieved and gain insights on the costs of such a transition and on the changes in household technologies that took place. We operationalized this objective, based on the research question, into the following modeling questions:

1. Under which socioeconomic conditions did the neighborhood transition fully to natural gas-free heating?
2. What were the costs of the transition?
3. Which changes in household insulation and heating systems took place during these transitions?

4.2.1. Model Entities, State Variables, and Scale

Entities in our model are either *agents* or *objects* who exist in the *environment* with a *temporal scale*. Agents represent households, are able to make decisions, and are described by state variables. Objects represent heating systems, are described by properties (such as capital costs and thermal efficiency), and are simply used by agents. The environment represents information that is external to agents and objects. Below, we elaborate on agents, their state variables, the environment, and the temporal scale. Objects' properties are specified in Appendix A.

Each *agent* has nine state variables that describe the agent at any point in time: Insulation level, heating system, annual natural gas consumption, cumulative costs, time horizon (HRZ), investment (INV), value orientation (ORI), social threshold (THR), and ability to compare combined investments (ACCI). Insulation level and heating system describe the technology that an agent owns. Cumulative costs and annual natural gas consumption are outputs from the use of heating systems by agents, from their investment decisions, and from external factors. HRZ, INV, ORI, THR, and ACCI are inputs for agents' investment decisions. Agents' states are listed in Table 1 and explained further in the following paragraphs.

Table 1. States of households.

Variable	Units	Description	Possible Values
Insulation level	Dimensionless	Insulation level of a dwelling	Low, Medium or High
Heating system	Dimensionless	Type of heating system	Natural gas boiler, electric radiator, micro-CHP, aerial heat pump, geothermal heat pump
Annual natural gas consumption	[MWh]	Gas consumption in one year	Positive real numbers
Cumulative costs	Thousands of Euros	Investment, maintenance and operation costs	Positive real numbers
HRZ	Years	Time horizon	Positive integers
INV	Years	Indicates the number of years left before a time equal to the agent's HRZ has passed since the agent's last investment	Positive integers
ORI	Dimensionless	Value orientation	Environmental, Social, Financial
THR	Dimensionless	Threshold after which socially oriented agents will make a decision	$0 \leq \text{Fraction} \leq 1$
ACCI	Dimensionless	Ability to compare combined investments	$0 \leq \text{Fraction} \leq 1$

Agents have an *insulation level* and own a *heating system*. Three *insulation levels* are possible, with the lowest level representing poorly insulated dwellings, and the highest, quasi-passive dwellings. Five *heating systems* are possible, two of which consume electricity, i.e., electric radiator, aerial heat pump, and geothermal heat pump. When an agent invests in a new technology, one or both of these state variables are updated.

Cumulative costs are the thousands of Euros that an agent has spent over a simulation run. When agents invest in technology, the capital costs of that technology increase the agent's cumulative costs. Similarly, maintenance and use of heating systems also increase the agent's cumulative costs. Thermal efficiency and capital and maintenance costs vary between heating systems, and capital costs vary between insulation levels, as specified in Appendix A. In addition, cumulative costs are influenced by energy prices. While agents cannot control the costs of technology, the thermal efficiency of heating systems, or the energy prices, agents can influence their own cumulative costs through their investment decisions in technology.

Annual natural gas consumption results from the use of a heating system by an agent. It is influenced by the type of heating system that the agent owns and the agent's insulation level. Each heating system uses either natural gas or electricity and has its own thermal efficiency, and each insulation level results in a different heat demand. While agents cannot control whether a type of heating system uses natural gas or electricity, or the heat demand that results from each insulation level, agents can influence their own annual natural gas consumption from the following year through their investment decisions in technology in the present year.

Each agent's *time horizon* (HRZ) is the payback period that an agent considers when assessing whether an investment would be cost-effective. For example, when an agent's HRZ = 5, they estimate the cumulative natural gas consumption and the cumulative costs of each investment option over a 5-year period, including investment, maintenance, and energy costs (Equations (1) to (5), below). Then, the agent selects the cheapest option that they believe minimizes cumulative natural gas consumption or the option that they believe minimizes cumulative costs, depending on the agent's ORI. After making an investment, an agent will only consider new investments after HRZ has passed, this is, when the state variable *investment* (INV) is equal to or lower than zero.

$$\text{Cumulative natural gas consumption} = \text{Cumulative heat demand} / \text{Thermal efficiency} \quad (1)$$

$$\text{Cumulative costs} = \text{Energy costs} + \text{Maintenance costs} + \text{Investment costs} \quad (2)$$

$$\text{Cumulative heat demand} = \text{Annual heat demand} * \text{HRZ} \quad (3)$$

$$\text{Energy costs} = (\text{Cumulative heat demand} / \text{Thermal efficiency}) * \text{Retail energy price} \quad (4)$$

$$\text{Maintenance costs} = \text{Annual maintenance costs} * \text{HRZ} \quad (5)$$

- Equation (1) applies to technologies that consume natural gas and not electricity.
- In Equation (2), information regarding maintenance costs and investment costs is part of the environment and is available to agents.
- In Equation (3), annual demand is retrieved from the environment. See Appendix A, Table A3.
- In Equation (4), retail electricity or natural gas price of the present year are used, depending on the technology.
- In Equation (5), annual operation costs are retrieved from the environment. See Appendix A, Table A2.

The *value orientation* (ORI) of the agent is set to either “environmental”, “financial”, or “social”. Environmental agents aim to minimize their natural gas consumption. When faced with multiple alternatives that would reduce natural gas consumption to zero, environmental agents select the alternative that would minimize their cumulative costs. Financial agents focus exclusively on minimizing cumulative costs. Social agents also aim at minimizing cumulative costs, but they are only willing to replace their heating system or improve their insulation after a given fraction of all households owns either a heating system or insulation level different than their own. This fraction is specified by the *social threshold* (THR) state of the agent. If the fraction of total agents with either a different heating system or insulation level than their own is not higher than a social agent’s THR, the social agent would not invest in new technology. When social agents observe agents in the neighborhood, they observe their states from the end of the previous year.

The agent’s *ability to compare combined investments* (ACCI) is a proxy for the impact of an information campaign about cost-effective investments in heating systems and insulation measures. We assumed that, after being reached by an information campaign, agents can compare all possible combinations of insulation levels and heating systems when making an investment decision. ACCI is represented as a binary variable that indicates whether the agent has been reached by the information campaign (ACCI = 1) or not (ACCI = 0). For example, when an agent with a natural gas boiler and low insulation has an ACCI = 0, they only consider investment options 1 to 7 from the list below. If the same agent has an ACCI = 1, they also consider options 8 to 15. We assumed that agents never choose an insulation level lower than their existing one.

1. Business as usual (natural gas boiler and low insulation)
2. Micro-CHP and low insulation
3. Electric radiator and low insulation
4. Aerial heat pump and low insulation
5. Geothermal heat pump and low insulation
6. Natural gas boiler and medium insulation
7. Natural gas boiler and high insulation
8. Micro-CHP and medium insulation
9. Micro-CHP and high insulation
10. Electric radiator and medium insulation
11. Electric radiator and high insulation
12. Aerial heat pump and medium insulation
13. Aerial heat pump and high insulation
14. Geothermal heat pump and medium insulation

15. Geothermal heat pump and high insulation

In the model, agent rationality is bounded. First, individual agents' estimates are constrained by their HRZ and ACCI. Agents with longer HRZ are willing to choose technologies with higher investment costs and lower maintenance and energy costs, while agents with shorter HRZ prefer options with lower investment costs. Therefore, it is possible for choices of agents with longer HRZ to result in lower annualized costs. Similarly, when agents have an ACCI = 0, they are not able to compare all investment options that are available to them, as described above. Second, agents have imperfect information regarding their environment. While they have perfect knowledge of investment and annual maintenance costs of each heating system, agents assume that electricity and natural gas prices do not change. Agent estimates are thus only correct in scenarios where prices remain constant. As a result, an agent can have lower or higher heating costs than expected. Finally, agents are subject to path dependency: Their present decisions condition their future options. When the cumulative costs of an investment decision differ from their estimated costs, agents may not have the capital to change their technology according to the new natural gas and electricity prices, as reflected by the variable INV. In the current version of the model, HRZ, ORI, THR, and ACCI do not change during a simulation.

The *environment* consists of external factors and information about the state of the neighborhood. First, external factors are prices of electricity and natural gas and the prices and technical specifications of available technologies. We assumed that prices of electricity and natural gas can change every year, that installed technology does not age, and that, with one exception, prices and technical specifications of technology remain constant. This means that the efficiency of installed technology remains constant, as well as the specifications of technologies available in the market. An exception is made for micro-CHPs. While we assumed that installed micro-CHPs do not age, we simulated a decrease on their market price based on [48] in [49]. Second, information about the state of the neighborhood consists of the neighborhood's annual natural gas consumption and cumulative costs, the number of each type of heating systems installed, and the number of dwellings with each insulation level in the neighborhood. While agents cannot influence external factors, agent decisions influence the state of the neighborhood: The neighborhood's natural gas consumption is the sum of the natural gas consumption of all households, and the neighborhood's cumulative costs is the sum of cumulative costs of all households.

In the model, the *time scale* is defined as one year per time step, and no spatial scale is defined. Agents are assumed to live in the same neighborhood. At all times during a simulation run, each agent knows the number of agents that, by the end of the previous year, had each type of heating system and had each level of insulation.

4.2.2. Process Overview and Scheduling

In each year of the model, external factors change; agents' variable INV is updated to reflect the passage of time since their last investment; all agents give maintenance to their heating systems and use them to produce heat; and agents who are able to invest make investment decisions. Maintaining and operating their heating systems generates costs for agents and may require natural gas. These costs and natural gas consumption, when applicable, are added to agents' cumulative costs and natural gas consumption, respectively. Every agent who is able to invest selects their preferred insulation level and heating system, based on their individual decision rules. An investment generates costs for the agent, which are added to their cumulative costs. The neighborhood's cumulative expenses and annual natural gas consumption are calculated.

4.3. Experimental Design

We used the model to represent a neighborhood in which, initially, all households had natural gas boilers and low insulation levels. We initialized the model with 24 agents that were not able to invest

during the first 5 years. The number of agents and years before their first opportunity to invest were chosen arbitrarily and aimed at maintaining the simplicity of our illustrative example. The inability of agents to invest at the beginning of the simulation was designed to represent past investments and the potential need of agents to save before their next investment.

We used the model to simulate experimental scenarios over 20 years. The number of simulated years was chosen to be consistent with EU targets to reduce greenhouse gas emissions over the next few decades and the decision of the Netherlands to end natural gas extraction in Groningen in 2030. Additional details regarding initialization and input data for heating systems, insulation levels, and market prices are available in Appendix A.

Experimental scenarios represented variations in the environment and between agents. An experimental scenario consisted of five experimental variables, described in Table 2. The first two variables defined the environment: The annual percentage change in retail natural gas price (dgp) and the annual percentage change in the retail electricity price (dep). For example, in an experimental scenario with constant dgp (dgp = 0) and a dep of +4% (dep = 0.04), natural gas price remained constant, and electricity price increased by 4% every year. These variables can be considered to be proxies for both relevant market forces and policies, such as taxes or subsidies. The last three variables of an experimental scenario defined a population of agents: The fraction of agents in the model with an ACCI = 1 (popACCI), the HRZ shared by all agents (popHRZ), and the proportion of agents with each value orientation (popORI). PopORI consists of three fractions: First, the fraction of agents who are environmentally oriented; second, the fraction of agents who are socially oriented; third, the fraction of agents who are financially oriented. For example, in a population with popACCI = 1.00, popHRZ = 5, and popORI = [0.50, 0.25, 0.25], all households were able to compare combined investments, all households had a time horizon of 5 years, 50% of households were environmentally oriented, 25% were socially oriented, and 25% were financially oriented.

Table 2. Experimental variables.

Variable	Units	Description	Possible Values
dgp	%/year	Annual percentage change in the retail natural gas price	Real numbers
dep	%/year	Annual percentage change in the retail electricity price	Real numbers
popACCI	Dimensionless	Fraction of households in the population that is able to compare combined investments.	$0 \leq \text{Fraction} \leq 1$
popHRZ	Dimensionless	Time horizon shared by all households in the population, in years.	Positive integers
popORI	Dimensionless	Fraction of households in the population with each value orientation: Environmental (Env), social (Soc) and financial (Fin).	$0 \leq \text{Env, Soc, Fin} \leq 1$ [Env, Soc, Fin] Env + Soc + Fin = 1

We used the model to simulate 756 experimental scenarios, which is the count of all possible combinations of variables in Table 3. Simplifications were made in the choice of variable values in order to maintain the simplicity of the illustrative example. In all experimental scenarios, all agents had the same HRZ, so that popHRZ = HRZ for all agents. Similarly, all agents had ACCI = 0 or ACCI = 1, so that popACCI = ACCI for all agents. Furthermore, a limited number of values for popORI, popACCI, popHRZ, dgp, and dep were tested. In the future, when using this model for a case study, the choice of values for experimental variables in scenarios should be modified based on the type of problem and modeling questions.

Results from experimental scenarios are available as supplementary material: “DataSet S1: Behavior space results (NetLogo 6.0.4)”.

Table 3. Values of variables in experimental scenarios.

Type of Variation	Groups of Variations
dgp	−0.04, 0, 0.04
dep	−0.04, 0, 0.04
popORI	1 = [0.33, 0.33, 0.33]
	2 = [0.50, 0.25, 0.25]
	3 = [0.25, 0.50, 0.25]
	4 = [0.25, 0.25, 0.50]
	5 = [1, 0, 0]
	6 = [0, 1, 0]
	7 = [0, 0, 1]
popACCI	0 and 1
popHRZ	1, 5, 10, 15, 20, 30

5. Results and Discussion from the Illustrative Example

To analyze simulation results and answer the research question and modeling questions, we analyzed the KPIs resulting from our 756 simulation runs: The annual natural gas consumption at the last time step of a simulation run and the cumulative costs of the neighborhood in the model. Figure 1 is a scatterplot of these KPIs. In Figure 1, we observed that both annual natural gas consumption and cumulative costs varied between experimental scenarios. The transition to a natural gas-free neighborhood was considered to be fully achieved when none of the agents consumed natural gas by year 20. In our simulation runs, this transition was achieved with different cumulative costs, as indicated in Figure 1 by multiple dots over the vertical axis where annual natural gas consumption equals zero. Because of our simple experimental design and deterministic nature of our model, multiple experimental scenarios led to the same annual natural gas consumption and cumulative expenses. As a result, a single dot in Figure 1 and in the following plots could represent multiple overlapping dots.

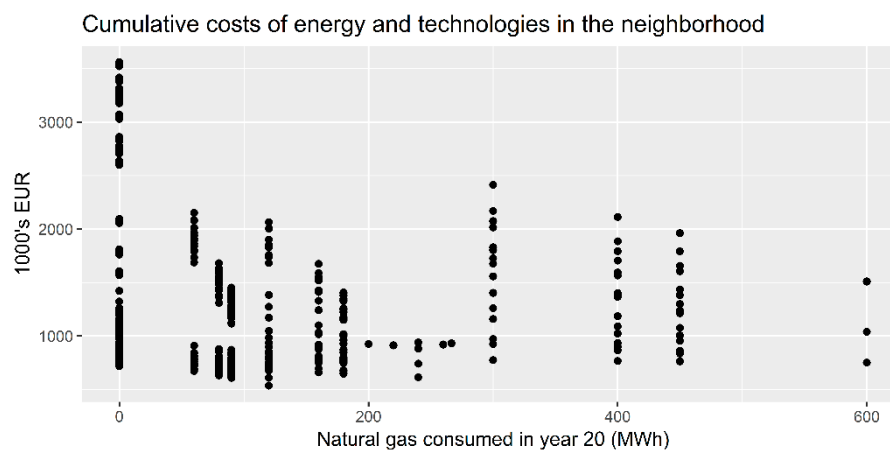


Figure 1. Scatterplot of cumulative costs of energy and technologies in the neighborhood as a function of natural gas consumed in year 20, for all-simulation-runs. A single dot may represent multiple dots that overlap.

We divided the set of results from all simulation runs in two subsets: “gas-free-subset” and “gas-dependent-subset”. The gas-free-subset consisted of results from experimental scenarios where the transition was fully achieved. The gas-dependent-subset consisted of results from all other simulation runs. We named the complete set of results “all-simulations-runs”.

A different approach would have been to study all experimental scenarios in which a given fraction of agents still consumed natural gas by the end of the simulation run. This would have allowed the analysis of conditions that led to a partial transition. This approach would be sensible

when the model has stochasticity. Another approach would have been to study the entire data set. Because of the deterministic nature of our model, limited number of agents, and simple experimental design, we chose to study only experimental scenarios in which the transition was fully achieved.

As seen in Table 4, a complete transition occurred in only 128 (gas-free-subset) out of 756 simulation runs (all-simulation-runs), which accounts for less than 17.0% of all-simulation-runs. In the following subsections, we refer back to the subsets from Table 4 while answering the modeling questions.

Table 4. Definition of dataset and subsets of results from simulations.

Subset	Number of Scenarios	Definition
All-simulation-runs	756	Results from all simulation runs.
Gas-dependent-subset	628	Subset of all-simulation-runs in which the neighborhood consumed natural gas in year 20, and thus did not achieve the transition to a gas-free neighborhood.
Gas-free-subset	128	Subset of all-simulation-runs in which did not consume natural gas in year 20, and thus fully achieved the thermal energy transition to a gas-free neighborhood.

5.1. Modeling Question 1: Socioeconomic Conditions

Figure 2 shows the neighborhood's annual natural gas consumption by year 20 for all-simulation-runs. The boxplots from popORI = 1, 2, 3, 4, and 7 (see Table 3) show outliers with high ending natural gas consumption. These points belong to simulation runs from two types of experimental scenarios: First, those where popHRZ = 1, and second, those where popHRZ = 5 and natural gas price decreased. The horizontal line in popORI = 5 indicates that natural gas consumption in year 20 was always zero for simulation runs in this group, and therefore always in the gas-free-subset. Similarly, for popORI = 6, natural gas consumption was the same in every simulation run, and always in the gas-dependent-subset. In the remaining groups (popORI = 1, 2, 3, 4, and 7), the transition was fully achieved only when the popHRZ was 5 or 10 years, natural gas prices increased, and electricity price decreased. These findings are summarized in Table 5, where we present two sets of sufficient scenario conditions for simulation runs to be in the gas-free-subset.

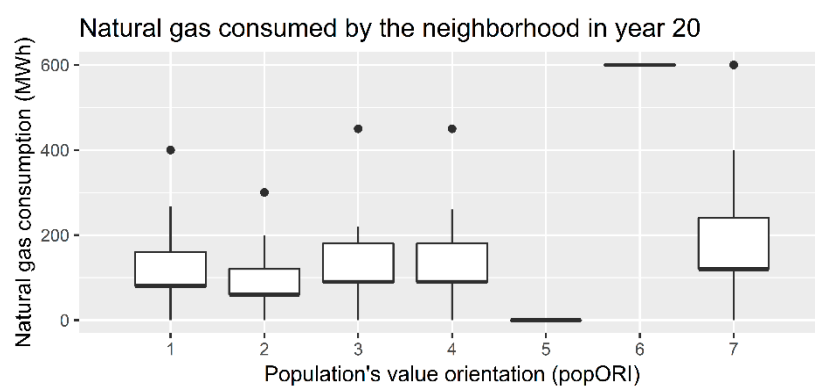


Figure 2. Boxplots of natural gas consumed by the neighborhood in year 20 in all-simulation-runs, classified in population groups according to value orientation. PopORI: 1 = [0.33, 0.33, 0.33], 2 = [0.50, 0.25, 0.25], 3 = [0.25, 0.50, 0.25], 4 = [0.25, 0.25, 0.50], 5 = [1, 0, 0], 6 = [0, 1, 0], 7 = [0, 0, 1].

Table 5. Sets of sufficient scenario conditions for simulation runs to be part of the gas-free-subset.

Type of Variation	Set 1	Set 2
popORI	5	1, 2, 3, 4, 7
popHRZ	-	5, 10
dgp	-	increasing
dep	-	decreasing

In set 1, the transition was always achieved because all agents decided to replace their boilers for gas-free alternatives, as they were programmed to be environmentally oriented. In all scenarios in set 2, some agents aimed to minimize their costs rather than their natural gas consumption, as they were financially oriented. In these simulation runs, by the time that agents chose natural gas-free technologies, natural gas price had increased, and electricity price had decreased. As a result, agents estimated that an option involving a natural gas-free technology would be cheaper. However, simulation runs that also had $\text{popHRZ} > 10$ were not part of the gas-free-subset, even when there were increasing natural gas prices and decreasing electricity prices. In those cases, agents were not able to make a second investment before the end of the simulation run: After making an investment, agents waited for a period equal to their HRZ before considering a new investment.

5.2. Modeling Question 2: Cost of the Transition

To determine how the transition would affect the costs of heating in the neighborhood, we calculated the neighborhood's cumulative costs of the gas-dependent-subset and gas-free-subset. Table 6 shows higher average and median cumulative costs for the gas-free-subset than for the gas-dependent-subset, and Figure 3, a wide range of values within the gas-free-subset. A Wilcoxon rank sum test showed that the median of the cumulative costs of the gas-free subset was significantly higher than the median of the cumulative costs of the gas-dependent subset. We selected the Wilcoxon rank sum, a nonparametric test, because the assumption of normality, needed for a student-T test, was not met. Results from the Wilcoxon rank sum test and Shapiro-Wilk normality test are provided in Table 7.

Table 6. Cumulative costs by the neighborhood in year 20 (thousands of Euros).

Group	Number of Scenarios	Mean	Standard Deviation	Median	IQR *
All-simulation-runs	756	1238	640	1040	760
Gas-dependent-subset	628	1105	420	1040	676
Gas-free-subset	128	1889	1027	1495	2126

* IQR = Interquartile range

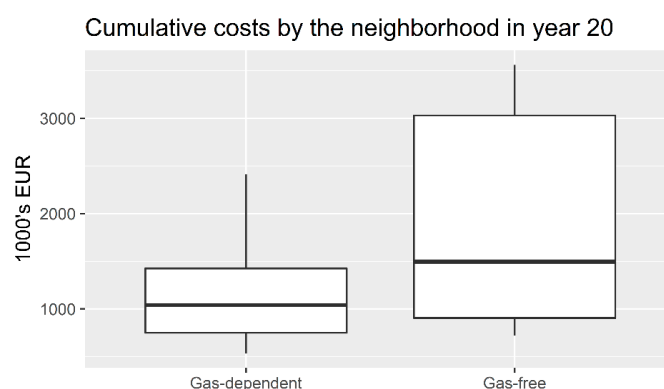


Figure 3. Cumulative costs by the neighborhood in year 20, for all-simulation-runs, classified in gas-dependent and gas-free.

Table 7. Results from statistical tests for all-simulation-runs, grouped as gas-free or gas-dependent.

Test	Results	Conclusion
Wilcoxon rank sum test	W = 22403 p-value = 2.745e-15	Groups' medians are significantly different
Shapiro-Wilk normality test	W = 0.96395 p-value = 1.077e-12	Sample deviates from normality

Because of the limited number of agents, our simple experimental design and the deterministic nature of the model, we limited further analyses to visual inspection of the plots. Figure 4 shows cumulative costs of the gas-free-subset, grouped by (a) popORI, (b) popACCI, and (c) popHRZ. Figure 4b,c shows the outliers. In Figure 4b, outliers belong to simulation runs where popORI = 5 and popHRZ = 1. The three groups of outliers were produced by the three variations in the change of electricity price (increasing, constant, or decreasing). In Figure 4c, outliers belong to simulation runs where popORI = 5 and popACCI = 0.00.

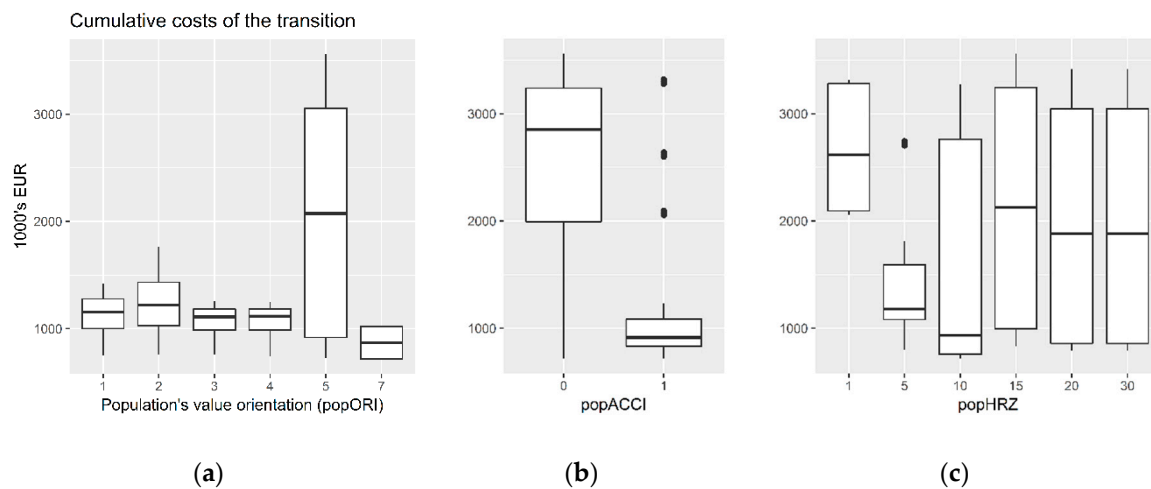


Figure 4. Cumulative costs of the transition: Gas-free-subset, grouped by (a) popORI; (b) popACCI, and (c) popHRZ.

In Figure 4a, the boxplot for popORI = 5 shows a wider range of values than all other groups of popORI. A similar pattern can be observed in Figure 4c, where groups with popHRZ = 10, 15, 20, and 30 have a wider range of values. A possible and partial explanation for this wider range for simulation runs where popORI = 5 is that all simulation runs in this group are part of the gas-free subset (108 simulation runs), as opposed to four simulation runs with each of the other groups with different popORI (popORI = 1, 2, 3, 4, and 7). Finally, external factors may have also contributed to these differences, as in all simulation runs in the gas-free-subset where popORI \neq 5 had increasing natural gas prices (positive dgp) and decreasing electricity prices (negative dep). Boxplots of the gas-free-subset grouped by these experimental variables are presented in Figure 5.

Interaction effects between experimental variables could have resulted in different ranges of values between groups. Figure 6 is a grid of plots in which simulation runs from the gas-free-subset are classified according to popACCI, popORI, and popHRZ. Each plot in the grid displays cumulative costs for scenarios with a unique combination of popACCI and popORI. Within the same plot, simulation runs are grouped by popHRZ with a boxplot for each popHRZ. Plots for popORI \neq 5 show points only for popHRZ = 5 and 10, as only simulation runs from these scenarios were part of the gas-free-subset, as summarized in Table 5.

Visual inspection of Figure 6 suggested that when popACCI = 0.00, a longer popHRZ resulted in higher cumulative costs. By contrast, when popACCI = 1.00, a longer popHRZ resulted in lower cumulative costs. These trends can be observed more clearly in the plots for popORI = 5 (fifth row from top to bottom). In Figure 4, the boxplot for popORI = 5 displays a wide range of values without revealing interaction effects of popHRZ and popACCI. By contrast, visual inspection of Figure 6 suggested that the interaction between popHRZ and popACCI influenced cumulative costs.

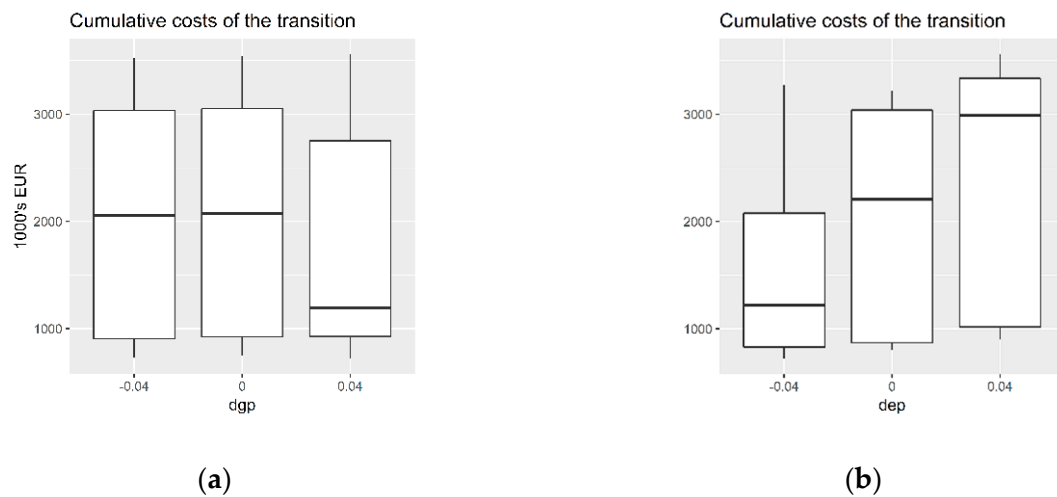


Figure 5. Cumulative costs of the transition: Gas-free-subset, grouped by (a) dgp and (b) dep.

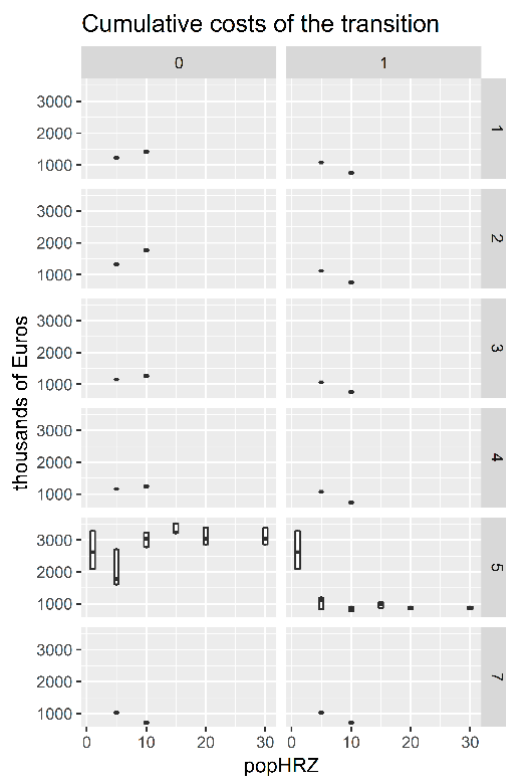


Figure 6. Cumulative costs of the transition (gas-free-subset). Each plot displays results from simulation runs with a unique combination of popACCI (grey labels on top of each column) and popORI (grey labels to the right of each row). In each plot, a boxplot is displayed for simulation runs with the same popHRZ, e.g., the plot in the top right corner displays simulation runs in which popACCI = 1.00 and popORI = 1, the first boxplot corresponds to popHRZ = 5, and the second one, to popHRZ = 10.

The combined effects of popACCI and popHRZ resulted from the modeling choices. When all agents were able to compare costs of combined investment options, agent’s decisions may have more cost-effective results than when popACCI = 0.00. When popACCI = 1.00, agents could replace both their heating system and improve their insulation level at the same time. As a result, during the course of a simulation run, the combination of insulation and heating system that they chose could potentially keep the agents’ costs lower than when agents were only able to choose either a change in insulation

or a change in heating system. Since agents were not able to make a new investment before their HRZ elapsed, agents unable to make combined investment decisions would have no choice but to use a heating system and keep an insulation level that could result in higher costs.

5.3. Modeling Question 3: Changes in Technology and Insulation

By the end of each simulation run, agents in all experimental scenarios of the gas-free-subset had either aerial heat pumps or radiators. Geothermal heat pumps were never chosen because they were perceived by agents as less cost-effective. Simulations where agents had either boilers or micro-CHPs in year 20 were always excluded from the gas-free-subset, as both heating systems used natural gas.

While all agents in all simulation runs in the gas-free subset had natural gas-free heating systems in the last time step, agents may have made multiple investment decisions before investing in the aerial heat pump or radiator that they had by year 20. Therefore, we considered the “pathways” of technological changes that occurred in the transition of each simulation run in the gas-free-subset. The “heating systems’ pathway” recorded the series of all changes in the number of heating systems of each type that took place in the neighborhood over time in a simulation run. Similarly, the “insulation pathway” recorded the series of all changes in the number of dwellings with each insulation level that took place in the neighborhood during the simulation.

Figures 7 and 8 are grids of line plots of heating system and insulation pathways, respectively, of the gas-free-subset. In each grid, scenarios in the gas-free-subset are classified according to popHRZ and a combination of dgp, popACCI, and dep. The graph on the top right corner of Figure 7, for instance, shows the number of dwellings with each heating system over time in simulation runs where popHRZ = 30, dgp = -0.04, popACCI = 0.00, and dep = -0.04. In Figure 7, plots with a black frame indicate simulation runs where agents replaced their heating system more than once. In all but four line plots in each figure, the plots display results from only one simulation run, where popORI = 5. The four line plots with a blue frame each contain results from six simulation runs with the same dep, dpg, popHRZ, and popACCI but different popORI. Results in these plots correspond to simulation runs that met set 2 of sufficient scenario conditions from Table 5. Because each of these line plots displays results for more than one simulation run, their lines overlap or cross. Therefore, Figure 9 provides a zoom-in on these plots from both Figures 7 and 8.

Visual inspection of Figures 7 and 8 led to conclusions regarding choices in technology. Figure 7 suggests that under longer popHRZ, agents preferred aerial heat pumps, while in shorter ones, they preferred radiators. When popHRZ < 20, after an initial investment in year 5, agents were able to invest again before the end of the simulation run. In exceptional cases, agents chose to invest again in a heating system before the end of the simulation run. When agents considered an investment, they had no knowledge of future energy prices. As a result, their estimated costs were incorrect in simulation runs where energy prices changed. Agents could then decide to replace their technology for one that was more financially attractive after energy prices had changed. In turn, Figure 8 suggests that agents with ACCI = 1 tended to improve their insulation from low to high level early in the simulation run and that medium insulation was chosen in some cases by agents with shorter HRZ.

Simulation runs in which not all agents had the same popORI led to more complicated results than simulation runs where agents had the same popORI. Figure 9 shows heating system and insulation pathways for experimental scenarios with popORI = 1, 2, 3, 4, 5, and 7. Line plots for popORI = 1, 2, 3, and 4 display more changes in technology and insulation than line plots for popORI = 5. Agents with different popORI made different decisions.

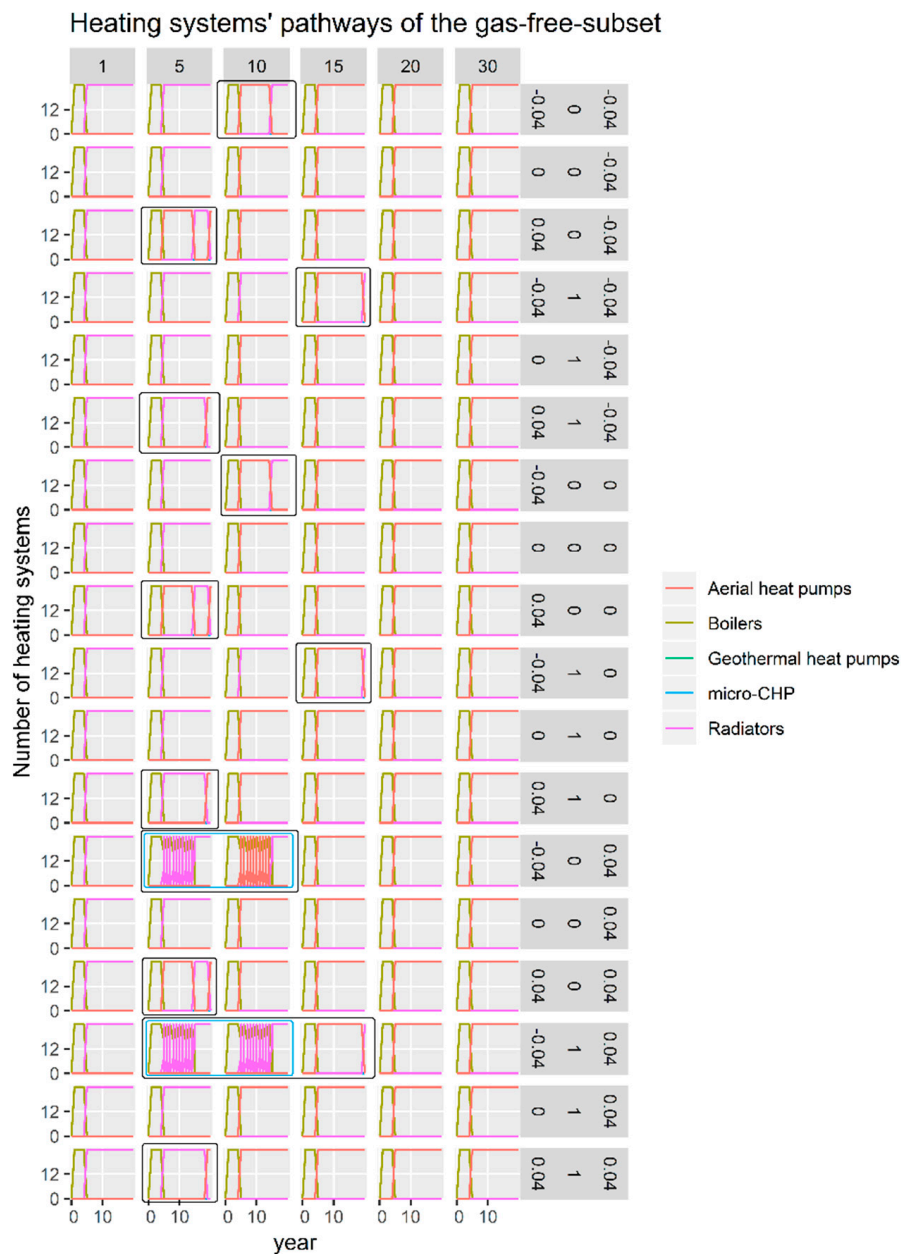


Figure 7. Heating system pathways of the gas-free-subset, classified by popHRZ (grey labels on top of each column) and a unique combination of dp, popACCI, and dep (labels in the right side of each row). Each line plot shows the number of dwellings with each heating system over time. Blue frames indicate pathways from simulation runs where popORI = 1, 2, 3, 4, 5, or 7. Each plot without a blue frame contains only the pathway for popORI = 5. Black frames indicate pathways in which agents invested in heating systems more than one time during the simulation run.

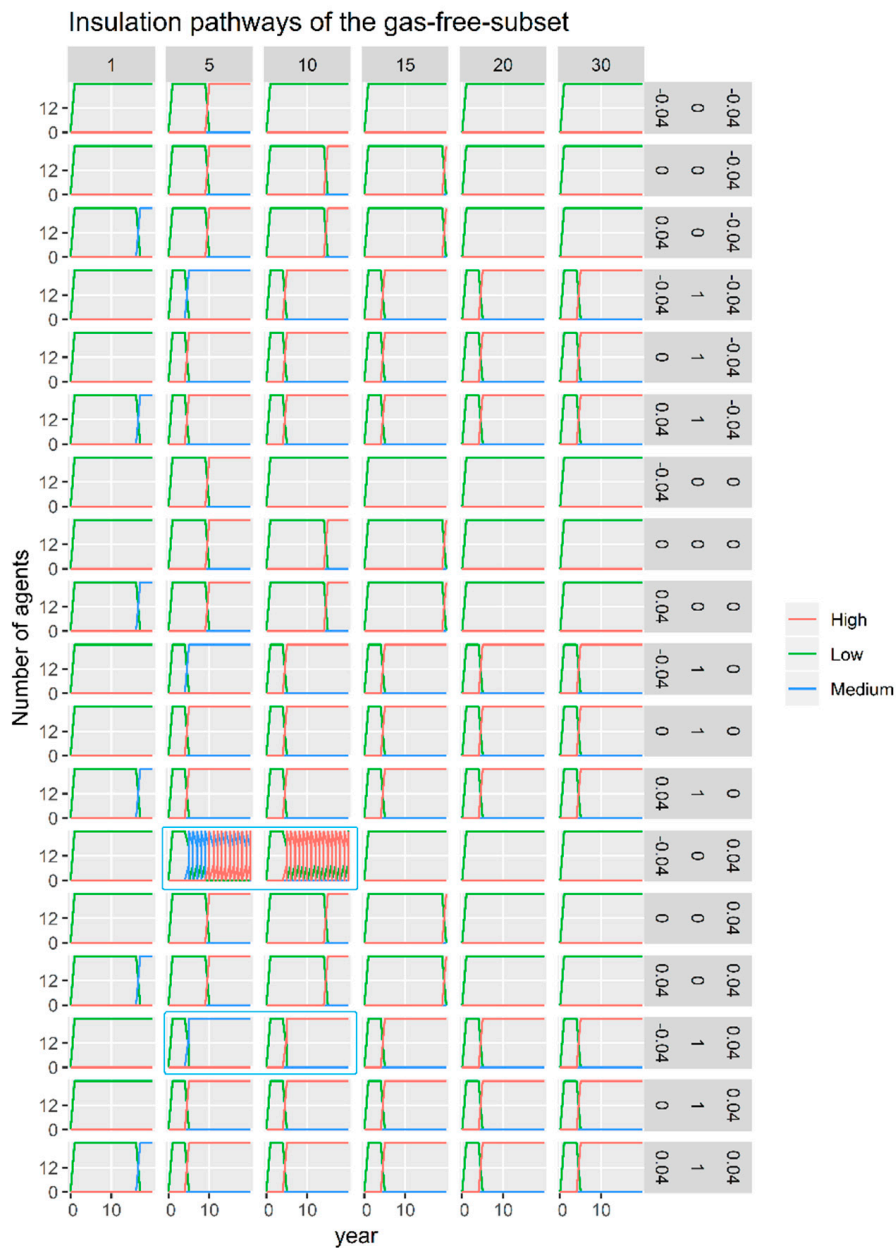


Figure 8. Insulation pathways of the gas-free-subset, classified by popHRZ (grey labels on top of each column) and a unique combination of dgp, popACCI, and dep (labels in the right side of each row). Each line plot shows the number of dwellings with each insulation level over time. Blue frames indicate pathways from simulation runs where popORI = 1, 2, 3, 4, 5, or 7. Each plot without a blue frame contains only the pathway for popORI = 5.

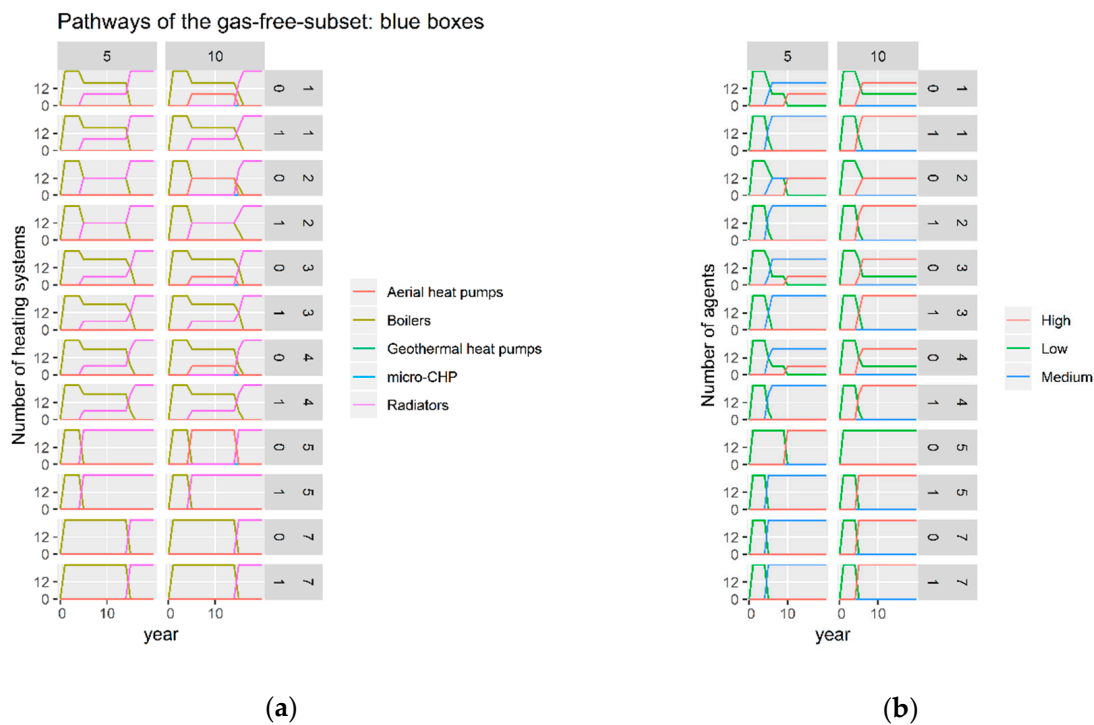


Figure 9. Pathways of the gas-free-subset when $\text{popHRZ} = 5$ or 10 , $\text{dgp} = 0.04$, and $\text{dep} = -0.04$, classified by popHRZ (grey labels on top of each column) and a unique combination of popORI and popACCI (labels in the right side of each row). Each line plot shows the number of dwellings with each heating system over time (a) or with each insulation level over time; (b). These plots are a zoom-in on the content of the blue frames in Figures 7 and 8.

5.4. Integration and Discussion

As an illustrative example of the development and use of ABMs of thermal energy transitions in the built environment, we studied a residential neighborhood's transition to natural gas-free heating from the perspectives of STS and CAS. The research question was: *Which socioeconomic conditions support Dutch neighborhoods' transition to natural gas-free heat supply until 2040 while meeting the neighborhoods' heat demand?* We operationalized this research question into the following three modeling questions.

First, *in which scenarios did the neighborhood transition fully to natural gas-free heating?* In Section 5.1, we identified the simulation runs in which the neighborhood transitioned fully to natural gas-free heating. This transition occurred in simulation runs where all agents were environmentally oriented, and in simulation runs where four conditions were met: At least 25% of the agents were financially oriented, their time horizon was equal to 5 or 10 years, the natural gas price increased, and the electricity price decreased over time.

Second, *what is the cost of the transition in these scenarios?* In Section 5.2, we found that the median of the cumulative costs of the transition was higher than the median of the cumulative costs in simulation runs where the neighborhood continued to use natural gas. We found indication of the costs of the transition being higher when agents were environmentally oriented. However, we also found indication of a wider range of values in the group of simulation runs of the gas-free-subset where all agents were environmentally oriented. A possible explanation of these differences is that in most experimental scenarios of the gas-free-subset, all agents were environmentally oriented, which meant that simulation runs where some agents were socially or financially oriented were underrepresented. A complementary explanation is the combined effect of agent ability to compare combined investments and their time horizon. When they were able to select more cost-effective alternatives, they enjoyed their benefits throughout the simulation run. When agents could only make less cost-effective choices, they were financially burdened.

Third, *which changes in insulation and heating systems took place during these transitions?* In Section 5.3, we found indication that agents with longer time horizons preferred heat pumps, while those with shorter time horizons preferred radiators. Agents with ACCI = 1 tended to change their insulation level from low to high early in the simulation run. Experimental scenarios in which not all agents had the same popORI led to more complicated results at the level of the neighborhood, as agents made different decisions regarding heating systems and insulation.

We limited our analysis to simulation runs where no natural gas was consumed in the neighborhood by year 20. This choice excluded experimental scenarios where, potentially, the majority of agents were using natural gas-free technologies. Alternative approaches would have been to select a threshold for natural gas consumption and study simulation runs below this threshold, or to study all results. In a future case study, this choice could be based on the research question and subquestions. Furthermore, our results included multiple ties. When using a model with agent heterogeneity and stochasticity, we would expect fewer ties in the results and more continuous distributions of results. Further statistical analysis would then be relevant while analyzing results.

Choices regarding the experimental design also influenced the conclusions that could be drawn from the study. First, to simplify our example, we explored limited and discrete variations of each experimental variable. Instead, continuous variations could reveal thresholds on which the behavior of the model would change. Second, the experimental variables remained constant over each simulation run. This implied that agents did not learn from their decisions, from other agents, or from the environment. If time horizon, value orientation, or ability to compare combined investments changed over a simulation run, different behavior could be observed. Similarly, different changes in electricity and natural gas prices every year would reflect the uncertain nature of these factors. Third, agents in the same experimental scenario were rather homogeneous. Their only difference, in some scenarios, was their value orientation. Agents also had the same heating system and insulation level at the beginning of all simulation runs. Instead, the model could be used to simulate heterogeneity between and within simulation runs. The simulation time also affected the results. Agents with time horizons longer than 15 years were not able to invest more than one time. A longer simulation time could lead to a larger gas-free-subset.

Additional assumptions and simplifications concerned agents and technology. Agents were not able to forecast market prices: They compared their investment options using prices from the present year. Ability to make forecasts about market prices could be included. After an investment, agents did not invest during a period equal to their time horizon. This means that agents in the model could go as long as 20 years without an investment. This could be modified to allow agents to invest after shorter periods. Social agents were influenced by other households through a basic representation of a social effect. Instead, a network structure and decision-making theories could be integrated in the model, and special scales could be explicitly defined. This would allow the spatial location of agents to play a role in the information that the agent is able to access. At any time during a simulation run, agents had knowledge regarding technologies and insulation levels in the neighborhood from the end of the previous year. Incomplete information about the neighborhood could be included. Technologies did not age and agents had no incentive to replace an old heating system for a new heating system of the same type. Including a decrease on the performance of heating systems would be a way of representing an incentive for such a change. Similarly, only four types of technologies were available to agents, and any type of technology could be used in any dwelling. Additional constraints could be added to represent conditions such as heat pumps requiring higher insulation levels. Moreover, the only technology with a changing price in the model was micro-CHPs. However, different prices could be accounted for. Demand in the model was constant and not influenced by consumer behavior. The effect of household behavior on heat demand could be represented. Lastly, the model was deterministic. Stochastic elements could be included to represent uncertainty. In a case study, these assumptions and simplifications could be explored further, and sensitivity analyses could be conducted.

Finally, the main question of this case study was: Which socioeconomic conditions support the Dutch neighborhoods' transition from natural gas-based to natural gas-free heat supply until 2040 while meeting the neighborhoods' heat demand? Natural gas-free heating was achieved when replacing natural gas technologies was the first priority and when the time horizon was 5 or 10 and electricity price decreased, and natural gas decreased. The ability to compare combinations of insulation and heating systems made room for more cost-effective decisions. When households had this ability, longer time horizons resulted in lower costs, and when agents did not have this ability, longer time horizons resulted in higher costs. These results could serve as input for the design of a case study.

6. Conclusions

We presented an illustrative example of agent-based modeling of thermal energy transitions in the built environment. We developed and used this model from the perspective of STS and CAS. In the illustrative example, we observed natural gas consumption and cumulative costs in a residential neighborhood. The neighborhood's natural gas consumption and cumulative costs changed as a function of individual decisions of households. Households could improve their dwellings' insulation or replace their heating system. Actors were households, technology consisted of dwellings' insulation level and heating systems, and institutions were implicit in changes in energy prices, the sunsetting of natural gas boilers, and households' ability to compare combinations of heating systems and insulation levels.

While the illustrative example and its model were intentionally simple and its results were straightforward, they contained key elements of agent-based modeling. First, agents had bounded rationality: They were not always able to select cost-effective alternatives and they did not have knowledge of future energy price or technology prices. Second, a social network effect was incorporated in a simple way: Social agents reacted after observing their neighbors' actions when some conditions were met. Third, the system had no central control: Transition at the level of the neighborhood depended on individual choices of households. Finally, agents reacted to their environment and influenced it: Changes in prices influenced agent decisions and, in turn, their decisions influenced the neighborhood's transition.

By developing and using ABMs from the perspective of STS and CAS, we can gain insights regarding the interactions between actors, institutions, and technology. Forthcoming work will address case studies of thermal energy transitions in the built environment. Our illustrative model can be used as a starting point to collaborate with stakeholders and modify simplifications, assumptions, experimental design, and analysis of results.

Supplementary Materials: The following are Available online at <http://www.mdpi.com/1996-1073/12/5/856/s1>, DataSet S1: Behavior space results (NetLogo 6.0.4).

Author Contributions: Conceptualization, G.d.C.N.G., G.K., H.H.H. and Z.L.; Data curation, G.d.C.N.G.; Formal analysis, G.d.C.N.G.; Investigation, G.d.C.N.G.; Methodology, G.d.C.N.G., G.K., H.H.H. and Z.L.; Project administration, G.d.C.N.G., G.K., H.H.H. and Z.L.; Resources, Z.L.; Software, G.d.C.N.G.; Supervision, G.K., H.H.H. and Z.L.; Validation, G.d.C.N.G.; Visualization, G.d.C.N.G., G.K., H.H.H. and Z.L.; Writing—original draft, G.d.C.N.G.; Writing—review and editing, G.d.C.N.G., G.K., H.H.H. and Z.L.

Funding: This research was supported by the NWO project "Modeling Lab for smart grids, smart policies, smart entrepreneurship" (Project number: 14183), which is Project E within the Smart Energy Systems in the Built Environment (SES-BE), funded by the Netherlands Organization for Scientific Research (NWO).

Acknowledgments: The authors would like to acknowledge feedback from the User Committee from the NWO SES-BE Program and Project E, from the ABMUS 2018 Workshop on Agent-based Modeling of Urban Systems, and from the 4th International Conference on Smart Energy Systems and 4th Generation District Heating.

Conflicts of Interest: The authors declare no conflict of interest.

Appendix A. Additional Description of the ABM, Based on the ODD Protocol

Appendix A.1. Design Concepts

- *Basic principle*: The neighborhood's cumulative costs and annual natural gas consumption results from individual decisions of households to use and replace their technology. Those decisions are based on some of agents' state variables and external factors.
- *Emergence*: The neighborhood's cumulative costs, annual natural gas consumption, number of heating systems of each type, and insulation levels.
- *Adaptation*: While households use current retail energy prices to select the heating system and insulation level that best meets their objectives, their state variables HRZ, ORI, THR, and ACCI remain constant during a simulation run.
- *Objectives*: Households are either natural gas minimizers (environmentally oriented) or cumulative cost minimizers (financially and socially oriented). Socially-oriented agents act only if a fraction of their peers has acted.
- *Learning/prediction*: Households do not use learning mechanisms nor forecasting. They assume that the current retail energy prices will remain constant.
- *Sensing*: Households are assumed to know the present price of heating systems, insulation levels, electricity and natural gas, and the number of heating systems of each type, and insulation levels in the neighborhood by the end of the previous year.
- *Interaction*: Socially-oriented households consider replacing their heating systems or improving their insulation only when a fraction of their peers has also made changes.
- *Stochasticity*: While the model is initialized stochastically, all properties of households but one are assigned deterministically (value orientation: ORI). Therefore, households are identical except for their value orientation. As a result, stochastic initialization does not have an effect on model outcomes.
- *Collectives*: The model does not account for aggregations between households. An example of aggregation would be multiple households investing together in one heating system to meet their heat demand.
- *Observation*: The neighborhood's cumulative costs, annual natural gas consumption, number of heating systems of each type, and insulation levels are the variables used for observing system level behavior.

Appendix A.2. Initialization

A total of 24 households with low insulation level and 24 natural gas boilers are initialized. While dwellings are conceptualized as objects, for simplicity, in the NetLogo [34] implementation, insulation level is a state of each household.

Throughout the simulation, agents have the same HRZ, ORI, THR, and ACCI. In all scenarios, THR has a value of 0.30. Depending on the experimental scenario, different fractions of those households are environmentally, financially, or socially oriented (ORI).

Appendix A.3. Input Data

The model uses input data for retail energy prices (Table A1), heating systems (Table A2) and insulation levels (Table A3).

Table A1. Input data for retail energy prices from year 2016.

Parameter	Value	Source
Retail natural gas prices for the first year [Euro/kWh]	0.08	Based on [50]
Retail electricity prices for the first year [Euro/kWh]	0.16	Based on [51]

Table A2. Input data for technologies, per technology: Natural gas boiler, micro-CHP, electric radiators, aerial heat pumps, and geothermal heat pumps.

Parameter	Value for Each Type of Technology	Source
Thermal efficiency [dmnl]	1, 0.60, 1, 2.6, 3.3	Assumptions and [49]
Electrical efficiency [dmnl]	0, 0.28, 0, 0, 0	Assumptions and [49]
Capital costs [€/kW]	0, 2100, 300, 1130, 1675	Assumptions and [49]
Annual operation costs [€ per kw/year]	11.18, 42, 10, 22.6, 33.5	Assumptions and [49]

Table A3. Input data for insulation levels, per dwelling: Low, medium and high.

Parameter	Value for Each Level	Source
Capacity required from a technology to meet demand [kW]	15, 8, 5	Assumptions
Capital costs when dwellings have low level [€]	NA *, 5500, 10000	Assumptions
Capital costs when dwellings have medium level [€]	NA *, NA *, 6000	Assumptions
Heat demand [kWh]	25000, 10000, 5000	Assumptions

* NA: not applicable

References

- European Commission. Press Release: Towards a Smart, Efficient and Sustainable Heating and Cooling Sector. Available online: http://europa.eu/rapid/press-release_MEMO-16-311_en.htm#_ftnref1 (accessed on 2 February 2019).
- Holtinnen, H.; Tuohy, A.; Milligan, M.; Lannoye, E.; Silva, V.; Müller, S.; Söder, L. The flexibility workout: Managing variable resources and assessing the need for power system modification. *IEEE Power Energy Mag.* **2013**, *11*, 53–62. [CrossRef]
- Mathiesen, B.V.; Lund, H.; Connolly, D.; Wenzel, H.; Østergaard, P.A.; Möller, B.; Nielsen, S.; Ridjan, I.; Karnøe, P.; Sperling, K.; et al. Smart Energy Systems for coherent 100% renewable energy and transport solutions. *Appl. Energy* **2015**, *145*, 139–154. [CrossRef]
- Lund, H.; Andersen, A.N.; Østergaard, P.A.; Mathiesen, B.V.; Connolly, D. From electricity smart grids to smart energy systems—A market operation based approach and understanding. *Energy* **2012**, *42*, 96–102. [CrossRef]
- Lund, H.; Werner, S.; Wiltshire, R.; Svendsen, S.; Thorsen, J.E.; Hvelplund, F.; Mathiesen, B.V. 4th Generation District Heating (4GDH). *Energy* **2014**, *68*, 1–11. [CrossRef]
- Herder, P.M.; Bouwmans, I.; Dijkema, G.P.J.; Stikkelman, R.M.; Weijnen, M.P.C. Designing Infrastructures from a Complex Systems Perspective. *ResearchGate* **2008**, *7*, 17–34.
- Moncada Escudero, J.A.; Nava Guerrero, G.D.C.; Park Lee, H.K.; Okur, Ö.; Chakraborty, S.T.; Lukszo, Z. Complex Systems Engineering: Designing in sociotechnical systems for the energy transition. *EAI Endorsed Trans. Energy Web* **2017**, *17*. [CrossRef]
- Cooper, R.; Foster, M. Sociotechnical systems. *Am. Psychol.* **1971**, *26*, 467–474. [CrossRef]
- Trist, E.L. *The Evolution of Socio-Technical Systems: A Conceptual Framework and an Action Research Program*; Ontario Ministry of Labour, Ontario Quality of Working Life Centre: Toronto, ON, Canada, 1981.
- Enserink, B.; Kwakkel, J.; Bots, P.; Hermans, L.; Thissen, W.; Koppenjan, J. *Policy Analysis of Multi-Actor Systems*; Eleven International Publishing: The Hague, The Netherlands, 2010.
- March, J.G. Bounded Rationality, Ambiguity, and the Engineering of Choice. *Bell J. Econ.* **1978**, *9*, 587–608. [CrossRef]
- Simon, H.A. *Models of Bounded Rationality: Empirically Grounded Economic Reason*; MIT Press: Cambridge, MA, USA, 1997.
- Bengtsson, M.; Kock, S. Cooperation and competition in relationships between competitors in business networks. *J. Bus. Ind. Mark.* **1999**, *14*, 178–194. [CrossRef]
- North, D.C. Institutions. *J. Econ. Perspect.* **1991**, *5*, 97–112. [CrossRef]
- Holland, J.H. The Global Economy as an Adaptive Process. In *The Economy as an Evolving Complex System*; CRC Press: Boca Raton, FL, USA, 1988.
- Waldorp, M. *Complexity: The Emerging Science at the Edge of Order and Chaos*; Simon and Schuster: New York, NY, USA, 1992.

17. Grimm, V.; Railsback, S.F. *Individual-Based Modeling and Ecology*; Princeton University Press: Princeton, NJ, USA, 2004.
18. Railsback, S.F.; Grimm, V. *Agent-Based and Individual-Based Modeling: A Practical Introduction*, 2nd ed.; Princeton University Press: Princeton, NJ, USA, 2019.
19. North, M.J.; Macal, C.M. *Managing Business Complexity: Discovering Strategic Solutions with Agent-Based Modeling and Simulation*; Oxford University Press: Oxford, UK, 2007.
20. Nikolic, I.; Kasmire, J. Theory. In *Agent-Based Modelling of Socio-Technical Systems*; van Dam, K.H., Nikolic, I., Lukszo, Z., Eds.; Agent-Based Social Systems; Springer Netherlands: Dordrecht, The Netherlands, 2013; pp. 11–71.
21. Borshchev, A.; Filippov, A. From System Dynamics and Discrete Event to Practical Agent Based Modeling: Reasons, Techniques, Tools. In Proceedings of the 22nd international conference of the system dynamics society, Oxford, UK, 25–29 July 2004.
22. van Dam, K. Capturing Socio-Technical Systems with Agent-Based Modelling. Ph.D. Thesis, Delft University of Technology, Delft, The Netherlands, 2009.
23. Olivella-Rosell, P.; Villafila-Robles, R.; Sumper, A.; Bergas-Jané, J. Probabilistic Agent-Based Model of Electric Vehicle Charging Demand to Analyse the Impact on Distribution Networks. *Energies* **2015**, *8*, 4160–4187. [[CrossRef](#)]
24. *Agent-Based Modelling of Socio-Technical Systems*; van Dam, K.H.; Nikolic, I.; Lukszo, Z. (Eds.) Agent-Based Social Systems; Springer Netherlands: Dordrecht, The Netherlands, 2013.
25. Jennings, N.R. On agent-based software engineering. *Artif. Intell.* **2000**, *117*, 277–296. [[CrossRef](#)]
26. Wooldridge, M.; Jennings, N.R. Intelligent agents: Theory and practice. *Knowl. Eng. Rev.* **1995**, *10*, 115. [[CrossRef](#)]
27. Holland, J.H. *Hidden Order: How Adaptation Builds Complexity*; Addison-Wesley: New York, NY, USA, 1995.
28. Nikolic, I. Co-Evolutionary Method for Modelling Large Scale Socio-Technical Systems Evolution. Ph.D. Thesis, Delft University of Technology, Delft, The Netherlands, 2009.
29. *Companion Modelling: A Participatory Approach to Support Sustainable Development*; Etienne, M., Ed.; Springer: Dordrecht, The Netherlands, 2014.
30. Vespignani, A. Modelling dynamical processes in complex socio-technical systems. *Nat. Phys.* **2012**, *8*, 32–39. [[CrossRef](#)]
31. Li, F.G.N.; Trutnevyte, E.; Strachan, N. A review of socio-technical energy transition (STET) models. *Technol. Forecast. Soc. Chang.* **2015**, *100*, 290–305. [[CrossRef](#)]
32. Hesselink, L.X.W.; Chappin, E.J.L. Adoption of energy efficient technologies by households—Barriers, policies and agent-based modelling studies. *Renew. Sustain. Energy Rev.* **2019**, *99*, 29–41. [[CrossRef](#)]
33. Grimm, V.; Berger, U.; DeAngelis, D.L.; Polhill, J.G.; Giske, J.; Railsback, S.F. The ODD protocol: A review and first update. *Ecol. Model.* **2010**, *221*, 2760–2768. [[CrossRef](#)]
34. Wilensky, U. *Center for Connected Learning and Computer-Based Modeling*; Northwestern University: Evanston, IL, USA, 1999.
35. Grignard, A.; Taillandier, P.; Gaudou, B.; Vo, D.A.; Huynh, N.Q.; Drogoul, A. GAMA 1.6: Advancing the Art of Complex Agent-Based Modeling and Simulation. In *PRIMA 2013: Principles and Practice of Multi-Agent Systems*; Boella, G., Elkind, E., Savarimuthu, B.T.R., Dignum, F., Purvis, M.K., Eds.; Springer: Berlin/Heidelberg, Germany, 2013; pp. 117–131.
36. Sklar, E. NetLogo, a Multi-agent Simulation Environment. *Artif. Life* **2007**, *13*, 303–311. [[CrossRef](#)] [[PubMed](#)]
37. R Core Team. *R: A Language and Environment for Statistical Computing*; R Foundation for Statistical Computing: Vienna, Austria, 2018.
38. RStudio. *RStudio: Integrated Development Environment for R*; RStudio: Boston, MA, USA, 2018.
39. Wickham, H.; François, R.; Henry, L.; Müller, K. *dplyr: A Grammar of Data Manipulation*; 2019. Available online: <https://CRAN.R-project.org/package=dplyr> (accessed on 1 March 2019).
40. Grothendieck, G. *SQLDF: Manipulate R Data Frames Using SQL*; 2017. Available online: <https://CRAN.R-project.org/package=sqldf> (accessed on 1 March 2019).
41. Wickham, H.; Chang, W.; Henry, L.; Pedersen, T.L.; Takahashi, K.; Wilke, C.; Woo, K. *ggplot2: Create Elegant Data Visualisations Using the Grammar of Graphics*; 2018. Available online: <https://CRAN.R-project.org/package=ggplot2> (accessed on 1 March 2019).

42. Fox, J.; Weisberg, S.; Price, B.; Adler, D.; Bates, D.; Baud-Bovy, G.; Bolker, B.; Ellison, S.; Firth, D.; Friendly, M.; et al. CAR: Companion to Applied Regression; 2018. Available online: <https://CRAN.R-project.org/package=car> (accessed on 1 March 2019).
43. Beurskens, L.W.M.; Menkveld, M. Renewable heating and cooling in the Netherlands. D3 of WP2 from the RES-H Policy project. In *Duurzame Warmte en Koude in Nederland. D3 van WP2 van het RES-H Policy Project*; Energieonderzoek Centrum Nederland (ECN): Petten, The Netherlands, 2009.
44. Ministerie van Economische Zaken en Klimaat Kamerbrief over Gaswinning Groningen-Kamerstuk-Rijksoverheid.nl. Available online: <https://www.rijksoverheid.nl/documenten/kamerstukken/2018/03/29/kamerbrief-over-gaswinning-groningen> (accessed on 4 February 2019).
45. The Groningen Gas Field. Available online: <http://www.geoexpro.com/articles/2009/04/the-groningen-gas-field> (accessed on 10 February 2019).
46. Aardgasvrij | RVO.nl. Available online: <https://www.rvo.nl/onderwerpen/duurzaam-ondernemen/duurzame-energie-opwekken/aardgasvrij> (accessed on 20 February 2019).
47. Ministerie van Economische Zaken; Ministerie van Infrastructuur en Energieagenda: Naar een CO₂-Arme Energievoorziening-Rapport-Rijksoverheid.nl. Available online: <https://www.rijksoverheid.nl/documenten/rapporten/2016/12/07/ea> (accessed on 4 February 2019).
48. Technology Data for Energy Plants. Individual Heating Plants and Energy Transport (Technical Report) | ETDEWEB. Available online: <https://www.osti.gov/etdeweb/biblio/1049406> (accessed on 19 February 2019).
49. Fleiter, T.; Steinbach, J.; Ragwitz, M.; Arens, M.; Aydemir, A.; Elsland, R.; Naegeli, C. Mapping and analyses of the current and future (2020–2030) heating/cooling fuel deployment (fossil/renewables). *Work Package 2: Assessment of the Technologies for the Year 2012*. 2016. Available online: https://ec.europa.eu/energy/sites/ener/files/documents/mapping-hc-final_report-wp2.pdf (accessed on 1 March 2019).
50. Eurostat Gas Prices by Type of User. Available online: <https://ec.europa.eu/eurostat/tgm/table.do?tab=table&init=1&language=en&pcode=ten00118&plugin=1> (accessed on 2 February 2019).
51. Eurostat. Electricity Prices by Type of User. Available online: <https://ec.europa.eu/eurostat/tgm/table.do?tab=table&init=1&language=en&pcode=ten00117&plugin=1> (accessed on 2 February 2019).



© 2019 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).