

**Pilot-Scale Polyhydroxyalkanoate Production from Organic Waste  
Process Characteristics at High pH and High Ammonium Concentration**

Mulders, Michel; Tamis, Jelmer; Abbas, Ben; Sousa, João; Dijkman, Henk; Rozendal, René; Kleerebezem, Robbert

**DOI**

[10.1061/\(ASCE\)EE.1943-7870.0001719](https://doi.org/10.1061/(ASCE)EE.1943-7870.0001719)

**Publication date**

2020

**Document Version**

Accepted author manuscript

**Published in**

Journal of Environmental Engineering (United States)

**Citation (APA)**

Mulders, M., Tamis, J., Abbas, B., Sousa, J., Dijkman, H., Rozendal, R., & Kleerebezem, R. (2020). Pilot-Scale Polyhydroxyalkanoate Production from Organic Waste: Process Characteristics at High pH and High Ammonium Concentration. *Journal of Environmental Engineering (United States)*, 146(7), Article 04020049. [https://doi.org/10.1061/\(ASCE\)EE.1943-7870.0001719](https://doi.org/10.1061/(ASCE)EE.1943-7870.0001719)

**Important note**

To cite this publication, please use the final published version (if applicable).  
Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights.  
We will remove access to the work immediately and investigate your claim.

# Pilot-Scale Polyhydroxyalkanoate Production from Organic Waste: Process Characteristics at High pH and High Ammonium Concentration

Michel Mulders<sup>1</sup>, Jelmer Tamis<sup>2</sup>, Ben Abbas<sup>3</sup>, João Sousa<sup>4</sup>, Henk Dijkman<sup>5</sup>, René Rozendal<sup>6</sup>, and Robbert Kleerebezem<sup>7</sup>

<sup>1</sup>Ph.D. Candidate, Dept. of Biotechnology, Delft Univ. of Technology, Van der Maasweg 9, 2629 HZ, Delft, Netherlands (corresponding author). ORCID: <https://orcid.org/0000-0003-4810-5656>. Email: [m.mulders@tudelft.nl](mailto:m.mulders@tudelft.nl)

<sup>2</sup>Process Specialist, Paques BV, Tjalke de Boerstritte 24, 8561 EL, Balk, Netherlands. Email: [j.tamis@paques.nl](mailto:j.tamis@paques.nl)

<sup>3</sup>Research Technician, Dept. of Biotechnology, Delft Univ. of Technology, Van der Maasweg 9, 2629 HZ, Delft, Netherlands. Email: [b.a.abbas@tudelft.nl](mailto:b.a.abbas@tudelft.nl)

<sup>4</sup>Head of Emerging Technology, Paques BV, Tjalke de Boerstritte 24, 8561 EL, Balk, Netherlands. Email: [j.sousa@paques.nl](mailto:j.sousa@paques.nl)

<sup>5</sup>Senior Process Specialist, Paques BV, Tjalke de Boerstritte 24, 8561 EL, Balk, Netherlands. Email: [h.dijkman@paques.nl](mailto:h.dijkman@paques.nl)

<sup>6</sup>Chief Technology Officer, Paques BV, Tjalke de Boerstritte 24, 8561 EL, Balk, Netherlands. Email: [r.rozendal@paques.nl](mailto:r.rozendal@paques.nl)

<sup>7</sup>Assistant Professor, Dept. of Biotechnology, Delft Univ. of Technology, Van der Maasweg 9, 2629 HZ, Delft, Netherlands. Email: [r.kleerebezem@tudelft.nl](mailto:r.kleerebezem@tudelft.nl)

## Abstract

A polyhydroxyalkanoate (PHA) accumulating microbial enrichment was established on a volatile fatty acids (VFA) containing leachate derived from the organic fraction of municipal solid waste (OFMSW). The enrichment was based on a 12 h feast-famine batch cycle and an exchange ratio of 50% in which VFA were completely consumed in less than 50 minutes during stable periods of operation. No pH control was applied

in the system and the pH went as high as 9 due to the presence of amongst others ammonia ( $500 \text{ mg}\cdot\text{L}^{-1}$  total ammonia nitrogen (TAN) on average). The degree of enrichment was evaluated with fluorescence in situ hybridization (FISH) and a yet unknown genus of large (3-5  $\mu\text{m}$  diameter) beta-proteobacteria appeared dominant in the culture. A method for estimating the fraction of PHA accumulating active biomass in the total VSS was established: results indicated an increase of this fraction from 25 to 56% after implementing two modifications in the operational protocol: (i) a pretreatment of the substrate removing virtually all settleable solids and (ii) a settling phase in the enrichment reactor after the feast phase, selectively removing non-settleable solids and slowly degradable substrates. The PHA accumulation potential of the culture was  $77 \pm 18 \text{ wt}\%$  PHA ( $n=3$ ) after 3 h in batch accumulation experiments. The results suggest the potential feasibility of PHA production under conditions that were previously considered economically favourable but technically difficult.

## Introduction

In the Netherlands around 1.4 Mton of the organic fraction of municipal solid waste (OFMSW) was generated in 2017 (CBS, 2018). Roughly  $\frac{2}{3}$  of this waste was directly being processed aerobically to compost and used as soil fertilizer. The remaining  $\frac{1}{3}$  of OFMSW was anaerobically digested to methane before being processed into compost. In the anaerobic digestion (AD) process, OFMSW is first hydrolysed to yield monomeric compounds of proteins, carbohydrates and lipids. Secondly, volatile fatty acids (VFA) are produced from the monomeric compounds via fermentation. In the last 2 phases, the produced VFA are further degraded via acetic acid,  $H_2$  and  $CO_2$  to methane containing biogas. An interesting alternative to compete with biogas production while treating OFMSW could be the production of PHA bioplastic (Kleerebezem and van Loosdrecht 2007).

The production of PHA from wastewater with open microbial communities has been widely studied (Colombo et al. 2017; Johnson et al. 2009; Korkakaki et al. 2016b), both in the lab and in various pilot studies (Bengtsson et al. 2008; Tamis et al. 2014, 2018; Valentino et al. 2018). A common strategy to enrich for PHA producing organisms is the application of a feast-famine regime. Lab studies have reported biomass with PHA contents of more than 85 wt% ( $gPHA \cdot gVSS^{-1} \cdot 100\%$ ) on synthetic wastewater (Johnson et al. 2009; Marang et al. 2013). More variable and, in general, lower PHA contents (29-75 wt%) have been reported when using real wastewater in lab and pilot studies (Korkakaki et al. 2016b; Tamis et al. 2018). Commonly, these numbers are lower because of non-PHA solids in the wastewater and/or the presence of organic substrates not suitable for PHA production.

One interesting stream for the production of PHA is solid organic waste; but information about the suitability of this substrate is scarce until now, and it is worthwhile to investigate in more detail (Colombo et al. 2017; Valentino et al. 2018). The use of a liquid stream (leachate) derived from organic waste could pose difficulties for microbial PHA production due to its variation over seasons and its complex unknown structure. In this study, a leachate was investigated that was derived from organic waste for the production of methane containing biogas according to the Biocel process (Ten Brummeler 2000). Characteristics for this

type of leachate are a high  $\text{NH}_3$  content, high alkalinity, presence of undefined soluble compounds and undefined particulate solids. Previous PHA production pilot studies were conducted on wastewater from a candy bar factory and papermill wastewater (Tamis et al. 2014, 2018). These wastewaters typically have a high chemical oxygen demand (COD) to nitrogen ratio and low amounts of undefined (particulate) organic compounds. Furthermore, these pilot studies were operated in a reactor system with pH control and an operating pH of 7. In this study, the leachate had a high alkalinity, rendering pH control expensive. The relatively harsh conditions encountered when using organic waste leachate are reflected in the results from a lab study conducted on similar leachate (Korkakaki et al. 2016b), which yielded a poor PHA accumulating potential (29 wt%). Only when the microbial enrichment was established on an artificial VFA mixture, high PHA contents (78 wt%) could be achieved when fed with leachate during accumulation.



**Figure 1. Impression of the pilot plant. The open container contained the selector and accumulator bioreactor (red bracket). In the front, there is an IBC sedimentation tank (orange bracket). Behind the sedimentation tank, the influent buffer vessel was located (yellow bracket). (Image by Michel Mulders.)**

In this study, a PHA producing feast-famine enrichment without pH control was investigated on pilot-scale, an impression of the pilot is shown in figure 1. The substrate was leachate derived from the OFMSW collected on site at ‘Orgaworld Vergisting Biocel’ in Lelystad, the Netherlands. In this work we do not aim for maximization of the PHA production per unit of OFMSW treated, because the main fraction of

VFA will be converted to methane containing biogas. The main research question of this study was whether a good overall PHA production process could be established with a complex feedstock like the leachate of OFMSW. The main criteria used to identify the process performance were the overall PHA production yield ( $\text{gPHA} \cdot \text{gCOD}^{-1}$ ), the PHA content of the product ( $\text{gPHA} \cdot \text{gVSS}^{-1}$ ) and the process stability.

## **Materials and methods**

A pilot plant situated at the ‘Orgaworld Vergisting Biocel’ located in Lelystad, the Netherlands, was operated for a period of 757 days. A period of 188 days will be elaborated in which the pilot plant was operated under a modified version of the standard feast-famine operation as described by (Johnson et al. 2009). The modified version included a settling phase of 60 minutes after depletion of the rapidly degradable chemical oxygen demand.

### **Substrate production**

The leachate used in this study was produced at the ‘Orgaworld Vergisting Biocel’ located in Lelystad. At this site, the source separated OFMSW is treated in anaerobic tunnel digesters. Fresh OFMSW is batch-wise mixed with digested OFMSW from the previous batch, which serves as seeding material. The OFMSW is anaerobically digested to methane containing biogas (Ten Brummeler 2000). Leachate from the tunnels is collected centrally and recirculated over the OFMSW tunnels continuously to enhance transport of substrates between zones in the bed with more or less methanogenic activity. Leachate for feeding the PHA pilot was withdrawn from the central point where leachate was collected.

The collected leachate for the PHA pilot plant was first stored in a 1 m<sup>3</sup> intermediate bulk container (IBC). The leachate was stored for at least 24 hours to allow settling of particulate material; after this period the supernatant (ca. 500 L) was pumped in a buffer vessel of the pilot plant. Finally, the leachate was diluted 2-3 times towards a final concentration of soluble COD ( $\text{COD}_{\text{sol}}$ ) of 6  $\text{gCOD}_{\text{sol}} \cdot \text{L}^{-1}$ . The buffer vessel was 1500 L and kept at  $35 \pm 5$  °C, the substrate was not mixed promoting further settling of solids, thus minimizing solids entering the bioreactors. Diluted leachate was in the buffer vessel for roughly 3 days, after which the

buffer vessel was completely emptied and cleaned before being filled again with new substrate, minimizing methanogenic activity in the buffer vessel.

### **Enrichment reactor**

Enrichment of a PHA producing microbial community was conducted in an aerobic reactor. This reactor had a working volume of 180 L and was inoculated with a mixture of a lab enrichment, dominated by *P. acidivorans*, and activated sludge from a domestic wastewater treatment plant (Dokhaven, Rotterdam, The Netherlands). Air was supplied via a fine bubble diffuser at a rate of 100 L·min<sup>-1</sup> to prevent oxygen limitation and ensure mixing of the reactor broth. The reactor was kept at 30 ± 3 °C through a warm water jacket on the outside of the reactor. The pH of the system was only monitored and not controlled.

A selective environment that favors PHA production was created using a feast-famine regime. The sequential batch reactor (SBR) was operated using a cycle length of 12 hours and a solid retention time (SRT) of 24 hours and a hydraulic retention time (HRT) of 17 hours. A cycle consisted of the following phases:

1. *Feed phase (0-16 min)*

During the feed phase 125 L of substrate was supplied from the buffer vessel to the reactor for 16 min resulting in a working volume of 177 L. In the leachate, the COD<sub>Sol</sub>:P ratio was 275 (gCOD<sub>Sol</sub>:gPO<sub>4</sub>-P) and phosphorus was assumed to be limiting. Even though all nutrients (except phosphate) were present in excess in the wastewater, additional growth nutrients were supplied in order to make sure that no nutrient limitation would occur. Nutrients were dosed to the reactor, 80-100 mL cycle<sup>-1</sup>, throughout all phases, except for the settling phase. The nutrient mix consisted out of the following components: 3 M urea-N, 0.3 M phosphate, 0.3 M MgSO<sub>4</sub>, 0.2 M K<sub>2</sub>SO<sub>4</sub>, 64 mM FeCl<sub>3</sub>, 3 mM ZnSO<sub>4</sub>, 2.7 mM H<sub>3</sub>BO<sub>3</sub>, 2.1 mM NiCl<sub>2</sub>, 1.5 mM CoSO<sub>4</sub>, 0.6 mM CuSO<sub>4</sub>, 0.8 mM Na<sub>2</sub>MoO<sub>4</sub>.

2. *Reaction phase (16-50 min)*

The reaction phase followed the feed phase. In this phase the microorganisms had the opportunity to consume all readily biodegradable substrate aerobically.

3. *Settling phase (50-110 min)*

50 min after the cycle initialization, a settling phase started. During this phase aeration was turned off for 60 min. After 60 min settling, the top half of the liquid (86 L) was removed from the middle of the reactor.

4. *Growth reaction phase (110-705 min)*

After effluenting the top half of the liquid, the aeration was turned back on for the remainder of the cycle. No substrate was added to the reactor.

5. *Effluent phase (705-720 min)*

At the end of the cycle, around half of the remaining reactor broth was withdrawn (40 L). This biomass containing effluent was used optionally in the subsequent accumulation step.

### **Accumulation reactor**

A separate reactor was used to maximize the PHA content. This reactor had a maximum working volume of 180 L. The reactor was inoculated with 10 L mixed broth from the enrichment reactor. Subsequently, the reactor was filled with 170 L of substrate from the influent buffer tank. Aeration was similar to the enrichment reactor:  $100 \text{ L}\cdot\text{min}^{-1}$ , the temperature was kept at  $30 \pm 2 \text{ }^\circ\text{C}$ . After 4 hours, the PHA-rich biomass was harvested using a pilot-scale centrifuge, processing a flow of  $200 \text{ L}\cdot\text{h}^{-1}$  at 3000 g.



## Sampling and analytical methods

**Table 1.** Overview of the samples withdrawn, from each vessel/reactor and its frequency.

Measurement	Sample point	Sample Time	Frequency	Method
TSS/VSS <sup>a</sup>	Buffer vessel	SoC <sup>g</sup>	Daily	Wet- / Dry- / Ash- weight
	Enrichment reactor	EoC <sup>h</sup> , EoF <sup>i</sup>		
SVI30 <sup>b</sup>	Enrichment reactor	EoC, EoF	Daily	Imhoff cone
COD <sup>c</sup>	Buffer vessel	SoC	Daily	Spectrophotometric (Hach-Lange)
	Enrichment reactor	EoC, EoF		
Alcohol/VFA <sup>d</sup>	Buffer vessel	SoC	Daily	GC
	Enrichment reactor	EoC, EoF		
PHA <sup>e</sup>	Enrichment reactor	EoC, EoF	Daily	GC
NH <sub>4</sub> <sup>+</sup>	Buffer vessel	SoC	Every other day	Spectrophotometric (Hach-Lange)
	Enrichment reactor	EoC, EoF		
Conductivity	Buffer vessel	SoC	Daily	Handmeter
	Enrichment reactor	EoC, EoF		
pH	Buffer vessel	Continuous	Online	Ag/AgCl electrode
	Enrichment reactor	Continuous		
DO <sup>f</sup>	Enrichment reactor	Continuous	Online	LDO Sensor

<sup>a</sup> TSS/VSS stands for total suspended solids and volatile suspended solids

<sup>b</sup> SVI30 stands for sludge volume index 30

<sup>c</sup> COD stands for chemical oxygen demand

<sup>d</sup> VFA stands for volatile fatty acids

<sup>e</sup> PHA stands for polyhydroxyalkanoates

<sup>f</sup> DO stands for dissolved oxygen

<sup>g</sup> SoC stands for start of cycle

<sup>h</sup> EoC stands for end of cycle

<sup>i</sup> EoF stands for end of feast

Data was collected over a period of 188 days according to the sampling and measurement scheme shown in table 1. Furthermore, to gain more insight in the process, multiple detailed sampling campaigns were executed. During these campaigns the number of samples withdrawn from the reactor was increased (every 10 minutes during the feast period, every hour for 2-3 hours in the famine period and accumulation reactor).

Samples withdrawn from the reactor for volatile fatty acid (VFA),  $COD_{Sol}$  and TAN content were filtered before measurement (0.45  $\mu m$  pore size, PVDF membrane, Millipore, Ireland). TAN and  $COD_{Sol}$  were measured using a commercially available spectrophotometric test cuvette kit provided by Hach-Lange. LCK302 was used to quantify the TAN and LCK014 was used for  $COD_{sol}$ . The VFA content of the samples were measured using gas chromatography (GC). The GC was equipped with a ZB-WAXplus column (20 m length  $\times$  0.18 mm internal diameter, 0.18  $\mu m$  film) and a flame ionization detector (FID), as described in (Cabrera-Rodríguez et al. 2017), though in this study iso-hexanoic acid was used as internal standard instead of anisole. Total suspended solids (TSS) and volatile suspended solids (VSS) were analyzed according to standard methods (Clesceri et al. 1999). The SVI30 was determined as follows: the SV30 was obtained in an imhoff cone according to standard methods (Clesceri et al. 1999), the SV30 was then divided by the corresponding TSS of the sample minus the TSS of the influent. The PHA content of the dried matter was analyzed according to the method described by (Johnson et al. 2009). The PHA content was extracted and esterified using a mixture of propanol:HCL (4:1) (1.5 mL) and dichloroethane as solvent (1.5 mL) for 3 hours at 100 °C. After separation of the solvent phase from the water phase the PHA content (in the solvent phase) was quantified using a GC (model 6890N, Agilent, U.S.A.) equipped with a FID on a HP Innowax column.

### Data analysis

The VFA fraction of the total soluble COD ( $COD_{VFA}$ ) concentration was determined as the sum of the individual COD concentrations of acetate, propionate, iso-butyrate, butyrate, iso-valerate and valerate. The amount of catalytic biomass was estimated by subtracting the amount of PHA and inert VSS from the total amount of VSS measured in the bioreactor. The VSS present in the pretreated leachate was assumed to be inert VSS. For practical purposes it was assumed that  $Y_{VFA}^{X_{PHA}}$  equals  $Y_{BOD}^{X_{other}}$ .

Therewith, the fraction of PHA producing biomass in the total catalytic biomass and the amount of catalytic biomass could be approximated as follows:

$$f_{X_{PHA}} = \frac{\Delta COD_{VFA}}{\Delta COD_{sol}} \quad (1)$$

$$VSS_{catalytic} = (VSS_{EOC} - PHA_{EOC} - VSS_{inf}) \cdot V_{EOC} \quad (2)$$

$$BOD_{other} = \Delta COD_{sol} - \Delta COD_{VFA} \quad (3)$$

The amount of PHA producers was estimated by using the fraction of COD being consumed by the PHA producing biomass ( $f_{X_{PHA}}$ ) multiplied with the approximated amount of catalytic biomass.

The expression calculating the amount of PHA producers  $X_{PHA}$  is formulated below. Furthermore, it was assumed no growth occurred using particulate COD.

$$X_{PHA} = f_{X_{PHA}} \cdot VSS_{catalytic} \quad (4)$$

The VFA specific substrate uptake rate  $q_{VFA}$  ( $gCOD_{VFA} \cdot gX_{PHA}^{-1} \cdot h^{-1}$ ) for the PHA producing biomass was estimated as follows:

$$q_{VFA} = \frac{\Delta COD_{VFA}}{X_{PHA} \cdot feastphase} \quad (5)$$

The VFA specific substrate uptake of all the VSS  $q_{VFA}^*$  ( $gCOD_{VFA} \cdot gVSS^{-1} \cdot h^{-1}$ ) was estimated as follows:

$$q_{VFA}^* = \frac{\Delta COD_{VFA}}{VSS_{EOC} \cdot V_{EOC} \cdot feastphase} \quad (6)$$

The overall substrate uptake rate of all the VSS  $q_{sCOD}^*$  ( $gCOD_{sol} \cdot gVSS^{-1} \cdot h^{-1}$ ) was estimated as follows:

$$q_{sCOD}^* = \frac{\Delta COD_{sol}}{VSS_{EOC} \cdot V_{EOC} \cdot feastphase} \quad (7)$$

For the accumulation experiments, the amount of VSS was measured at the beginning of the accumulation experiment to obtain the specific substrate uptake rates. Furthermore, instead of the length of the feast phase, the duration of the experiment was used.

The overall biomass production yield ( $\text{gVSS} \cdot \text{gCOD}_{\text{sol}}^{-1}$ ) was estimated as follows:

$$Y_{\text{SCOD}}^x = \frac{(VSS_{\text{EoC}} - PHA_{\text{EoC}} - VSS_{\text{inf}}) \cdot \text{Volume}_{\text{EoC}}}{\Delta \text{COD}_{\text{sol}}} \quad (8)$$

The overall PHA production yield was calculated using the method proposed in (Bengtsson et al. 2008). First the amount of PHA biomass ( $X_{\text{PHA}}^*$ ) that could be produced from 1  $\text{kgCOD}_{\text{sol}}$  was calculated. Next, the amount of PHA (PHA\*) required to reach the target wt% PHA could be calculated using ( $X_{\text{PHA}}^*$ ). Finally, the amount of PHA\* was used to calculate the amount of  $\text{COD}_{\text{sol}}$  required for its production, which was added to the 1  $\text{kgCOD}_{\text{sol}}$  used for biomass production, resulting in an overall PHA production yield.

$$X_{\text{PHA}}^* = 1 \text{ kgCOD}_{\text{sol}} \cdot Y_{\text{SCOD}}^x \quad (9)$$

$$PHA^* = \frac{X_{\text{PHA}}^*}{1 - PHA \text{ (wt\%)}} - X_{\text{PHA}}^* \quad (10)$$

$$Y_{\text{Overall PHA production}} = \frac{PHA^*}{PHA^* \cdot \frac{1}{\frac{PHA}{Y_{\Delta \text{COD}_{\text{VFA}}}}} + 1 \text{ kgCOD}_{\text{sol}}} \quad (11)$$

### **Microbial community analysis: gDNA extraction, Cloning and sequencing of full 16S-rRNA genes**

Full 16S-rRNA genes (~1500bp), for the purpose of the development of specific FISH probes, were generated by performing a full gene amplification on a sample from the PHA enrichment reactor (May 2017). The first step was extraction of the genomic DNA by using the UltraClean Microbial DNA Isolation Kit (Mobio Inc. USA) according to manufacturer's protocol, except a combination of heating (65 °C) and beat beating was used (minibeater-16, Biospec, USA). Following extraction, a PCR amplification was done by using the primers GM3 and GM4 (Muyzer et al. 1995). The amplified fragments were checked and quantified

using an agarose gel, purified using QIAquick PCR purification kit (QIAGEN, Germany) and used for TOPO TA Cloning (Thermo Fisher Scientific, USA). In total 48 clones were picked from plate and used for direct PCR on the plasmid using the primers MF, MR. The final product was checked on an agarose gel and all clones yielded near 1600bp fragments. All these clones were sent for (bi-directional Sanger) sequencing to Baseclear, Leiden, the Netherlands. The sequences were aligned and quality trimmed using CodonCode aligner v.4.2.7. software (Codoncode Corp. USA) resulting in complete 16S-rRNA genes with the primers sites removed. The final consensus sequences were exported and imported into ARB (v5.2) software (Ludwig et al. 2004) and redundant, identical, sequences were removed. The resulting 12 sequences, which were near identical (>99%), were used for probe development (implemented in the ARB software package). Several probes were developed with different properties on various positions. In the end probe JT01 was most specific (matching only the imported sequences) after optimization. The unambiguous clone JT01 which represented all twelve clones was submitted to genbank (NCBI) under the accession number MK575517

The microbial community composition was analysed microscopically using Fluorescent In Situ Hybridization (FISH) with a mixture of the probes JT01, UCB823 and EUB338I-III. A more detailed version of performing this FISH technique can be found in (Johnson et al. 2009). Commercially synthesized probes with either 5' FLUOS or the sulfoindocyanine dyes Cy5 and Cy3 (Thermo Hybrid interactive, Ulm, Germany) were used, summarized in table 2.

**Table 2.** Oligonucleotides probes used for FISH analysis used in this study.

Code	Sequence (5' -3')	specificity	Reference
EUB338 I	gctgctcccgtaggagt	Bacteria	(Amann et al. 1990)
EUB338 II	gcagccaccgtaggtgt	Bacteria	(Daims et al. 1999)
EUB338 III	gctgccaccgtaggtgt	Bacteria	(Daims et al. 1999)
UCB823	cctccccaccgtccagtt	<i>P. acidivorans</i>	(Johnson et al. 2009)
JT01	tccacacagctattcacgca	Clone JT01	This study

## Results

### Characterization of the substrate

Pretreatment of the substrate aimed at minimizing suspended solids concentrations in the influent. To this end, the OFMSW-leachate used in this study was stored at ambient temperatures for at least 24 hours in a 1 m<sup>3</sup> IBC vessel prior to usage. After storage, the upper fraction was stored in the substrate buffer vessel. The leachate had a COD<sub>Sol</sub> concentration of 16.6 gCOD<sub>Sol</sub>·L<sup>-1</sup> ± 5.6 gCOD<sub>Sol</sub>·L<sup>-1</sup> (average ± standard deviation; n = 75) and this was diluted with tap water to 6 gCOD<sub>Sol</sub>·L<sup>-1</sup> before being used in the PHA production pilot. A summary of the substrate properties as measured in the influent buffer vessel (after dilution) is shown in table 3.


**Table 3.** Summary of the pilot influent characteristics.

	Influent buffer tank (after dilution)	Unit
TSS	1.49 ± 0.77 (n=122)	gTSS·L <sup>-1</sup>
VSS	0.89 ± 0.52 (n=122)	gVSS·L <sup>-1</sup>
COD <sub>Sol</sub>	5.78 ± 1.13 (n=127)	gCOD <sub>Sol</sub> ·L <sup>-1</sup>
BOD <sub>other</sub>	0.70 ± 0.07 (n=117)	gCOD <sub>other</sub> ·gCOD <sub>Sol</sub> <sup>-1</sup>
VFA	0.50 ± 0.13 (n=114)	gCOD <sub>VFA</sub> ·gCOD <sub>Sol</sub> <sup>-1</sup>
Even VFA	0.56 ± 0.12 (n=114)	gCOD <sub>VFA</sub> ·gCOD <sub>VFA</sub> <sup>-1</sup>
Odd VFA	0.44 ± 0.12 (n=114)	gCOD <sub>VFA</sub> ·gCOD <sub>VFA</sub> <sup>-1</sup>
TAN	622 ± 159 (n=77)	mgN·L <sup>-1</sup>
Phosphate	20.9 ± 10.8 (n=77)	mgPO <sub>4</sub> -P·L <sup>-1</sup>
pH	7.53 ± 0.42 (Online data August 2017)	
Alkalinity	70 ± 10	meq·L <sup>-1</sup>

Here TAN represent the total ammonia nitrogen, which was ammonia (NH<sub>3</sub>) + ammonium (NH<sub>4</sub><sup>+</sup>). The alkalinity of the substrate was estimated to be around 70 meq·L<sup>-1</sup> using the measured concentrations of TAN and VFA and estimating a pCO<sub>2</sub> of 9%. (see Appendix-I)

## Selector characterization


Reactor operation was started in January 2016 and data collection started on 29<sup>th</sup> of March 2016. The enrichment was monitored for a period of 667 d. Within 13 d after start-up of the reactor, typical feast-famine dynamics were observed (figure 3). The length of the feast phase was identified using the dissolved oxygen (DO) profile during the cycle. Multiple stable periods were observed during the operation of the PHA producing pilot plant. A stable period comprised all cycles with a feast length below 50 min with the condition that the standard deviation of the feast length of the period including the surrounding 3 days (7 days in total) was below 15 min. Furthermore, specific days were included that would not pass the qualifications due to for example technical difficulties. An overview of the stable periods is given in figure 2.

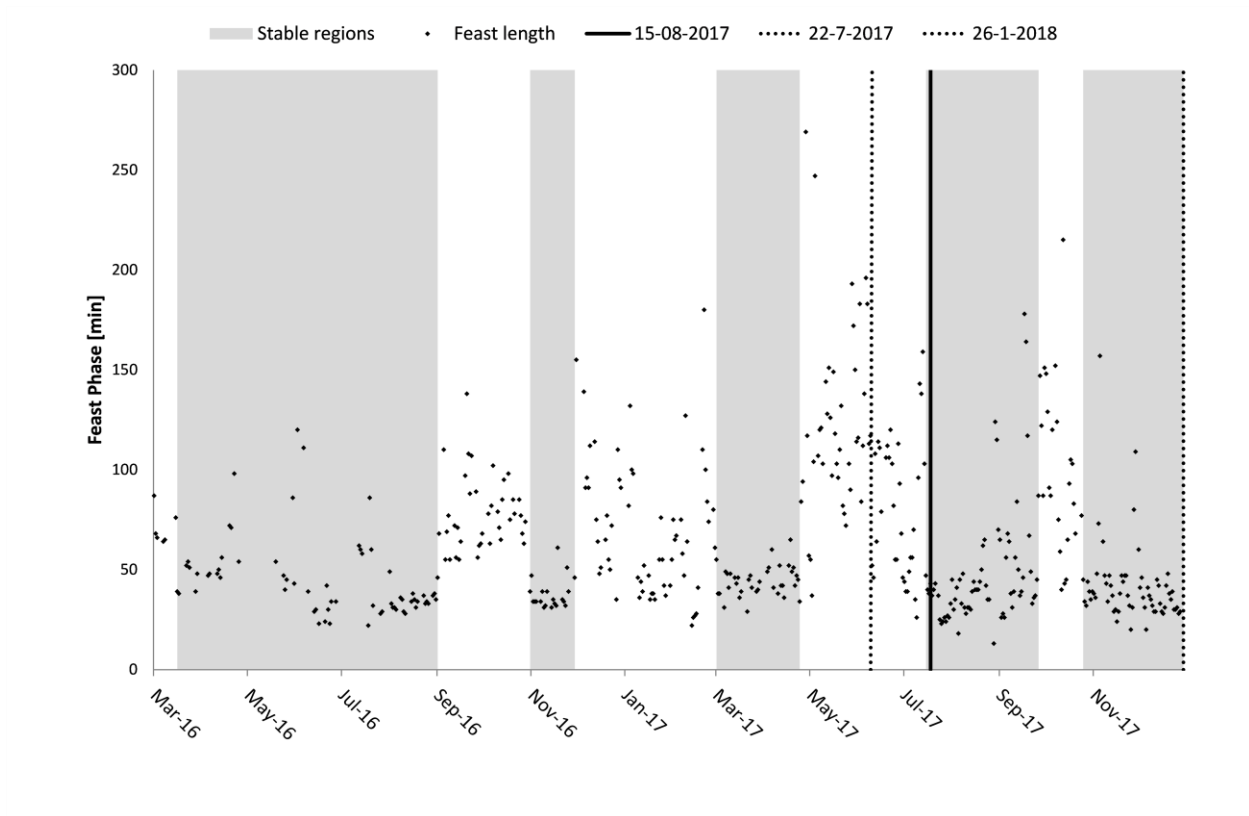

**Figure 2.** Overview of the performance of the enrichment reactor in terms of the length of the feast phase.

In this study, we describe in detail the period from the 22<sup>nd</sup> of July 2017 until 26<sup>th</sup> of January 2018 (188 operational days). During this period, the operational settings of the systems were kept constant, providing a representative overview of the system performance.

During this period a DO pattern typical for the enrichment of PHA producing microorganisms using a feast-famine regime was observed. This typical pattern consisted out of two phases; the first phase, called the feast phase, in which a high oxygen respiration rate was observed; the second phase, called the famine phase, in which the oxygen respiration rate was lower (figure 3, operational day: 29-08-2017).

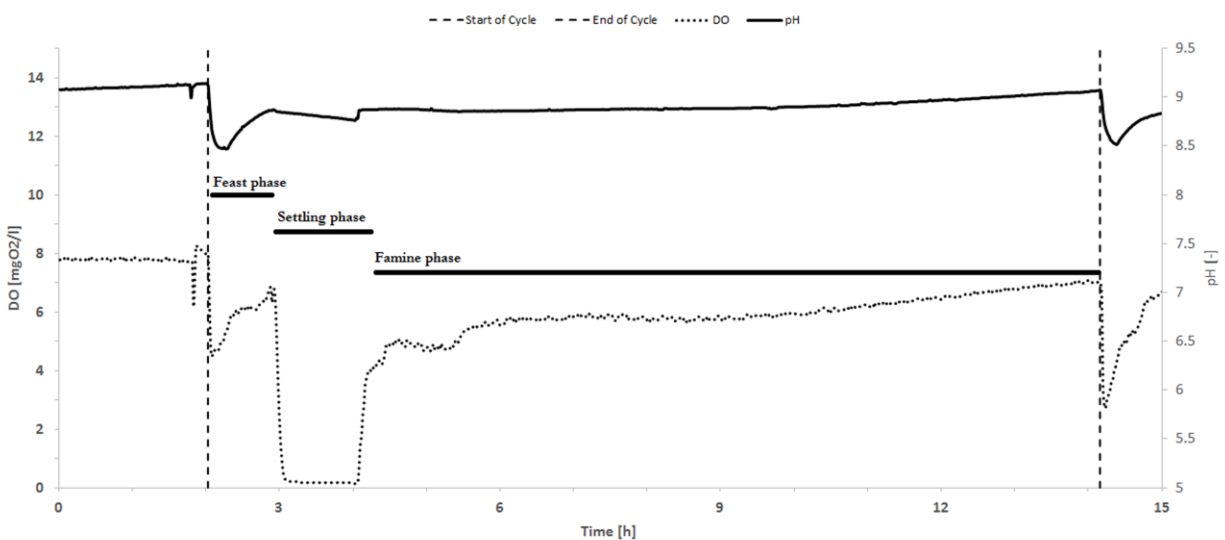

**Figure 3.** Dissolved oxygen profile and pH profile in the enrichment reactor in a stable period, from operational day 29-07-2017.

The pH dropped during the feeding phase (duration: 16 min); once the feeding was completed the pH gradually increased due to VFA uptake. System characteristics of the enrichment reactor are summarized in table 4.

**Table 4.** Characteristics of the enrichment reactor averaged over time.

	Enrichment reactor	Unit
PHA (end of cycle)	$0.04 \pm 0.03$ (n=27)	$\text{gPHA} \cdot \text{gTSS}^{-1}$
TSS (end of cycle)	$4.56 \pm 1.57$ (n=119)	$\text{gTSS} \cdot \text{L}^{-1}$



VSS (end of cycle)	$3.45 \pm 1.16$ (n=118)	$\text{gVSS}\cdot\text{L}^{-1}$
SVI30 (end of feast)	$66 \pm 38$ (n=120)	$\text{mL}\cdot\text{gTSS}^{-1}$
PHA (end of feast)	$0.26 \pm 0.09$ (n=109)	$\text{gPHA}\cdot\text{gTSS}^{-1}$
TSS (end of feast)	$3.48 \pm 1.12$ (n=121)	$\text{gTSS}\cdot\text{L}^{-1}$
VSS (end of feast)	$2.64 \pm 0.84$ (n=120)	$\text{gVSS}\cdot\text{L}^{-1}$
$q_{VFA}$	$4.2 \pm 1.9$ (n=108)	$\text{gCOD}_{VFA}\cdot\text{gX}_{PHA}^{-1}\cdot\text{h}^{-1}$
$q_{VFA}^*$	$2.4 \pm 1.2$ (n=108)	$\text{gCOD}_{VFA}\cdot\text{gVSS}^{-1}\cdot\text{h}^{-1}$
$\frac{PHA}{Y_{VFA}}$	$0.44 \pm 0.14$	$\text{gPHA}\cdot\text{gCOD}_{VFA}^{-1}$
$\frac{X}{Y_{SCOD}}$	$0.25 \pm 0.08$	$\text{gVSS}\cdot\text{gCOD}_{Sol}^{-1}$

---

During the settling phase the DO dropped to zero; and all settleable biomass settled to the bottom part of the reactor. After the settling phase and removal of the supernatant, the aeration was turned on again entering the famine phase. The DO was slowly increasing in this phase, indicating the depletion of the intracellular PHA; non-PHA VSS increased concurrently, indicating growth. The pH in this phase was also slowly increasing from 8.5 to 9, likely due to the stripping of CO<sub>2</sub>.

### Microbial community analysis

FISH microscopy was used to investigate microscopically the diversity of the enriched culture. Initial 16S rRNA (NGS) analysis indicated that an unknown species was present in the enrichment. A specific probe targeting the *uncultured Rhodocyclaceae bacterium clone JT01* was designed as described in the material and methods section. Three different probes for FISH analysis used were, EUB338I-III (Cy5) binding to all prokaryotic bacteria, UCB823 (Fluos) this probe bind to *P. acidivorans*, and JT01 (Cy3) targeting clone JT01. Over the period described in this study multiple FISH slides were prepared and in all of them clone JT01 seemed to be the dominating microorganism in the enrichment. The bacteria appeared to be a large betaproteobacteria, sizes varied and bacteria as large as 3-5  $\mu\text{m}$  were observed. The bacteria species belonged to a yet unknown species and genus, the closest related species was the *Thauera* genus as shown in figure 4.

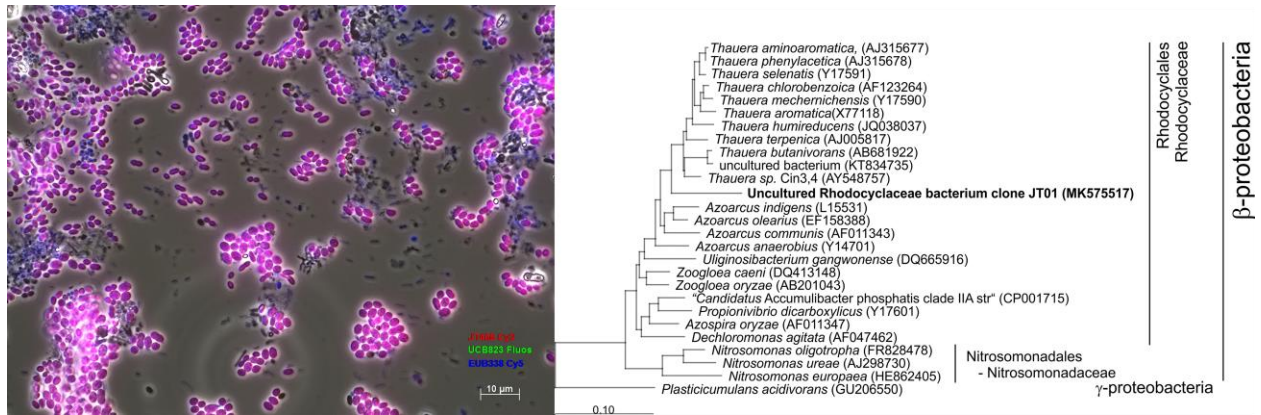


Figure 4. FISH microscopy picture of the enriched culture on diluted leachate at pilot scale, using the following probes: Cy3 JT01, Fluos UCB823, Cy5 EUB 338. This phylogenetic tree was constructed off near full length 16S-rRNA genes from clone library and reference database (SSURef\_NR99\_128\_SILVA\_07\_09\_16\_opt) using NeighborHood Joining algorithm implemented in ARBv5.2. In total 1206 positions were taken for calculation. A position filter, SSU-Ref: bacteria was applied to select for most common positions in the bacterial 16S-rRNA alignment. The scale bar shows 10% base-pair difference. Two species of the Thermotoga genus were used as outgroup but later pruned from the tree.

### Accumulation

To assess the PHA accumulation potential of the enrichment, batch experiments were performed. The experiments were started with a small inoculum containing 10 L of mixed effluent from the enrichment reactor (containing 33 gVSS), and 170 L of influent containing on average 440 gCOD<sub>VFA</sub>. The average COD<sub>VFA</sub>:P:N ratio was 1:4:108 (gCOD<sub>VFA</sub>:mgP:mgN) suggesting that the accumulations were performed in the presence of nutrients. Data obtained during an accumulation experiment conducted on the 15<sup>th</sup> of August 2017 is shown in figure 5 as an example. In this experiment, virtually all VFA were consumed in less than three hours, and a PHA content of 0.61 gPHA·gVSS<sup>-1</sup> was reached. The polyhydroxybutyrate (PHB) content was 0.43 gPHB·gVSS<sup>-1</sup> and the polyhydroxyvalerate (PHV) content was 0.18 gPHV·gVSS<sup>-1</sup>.

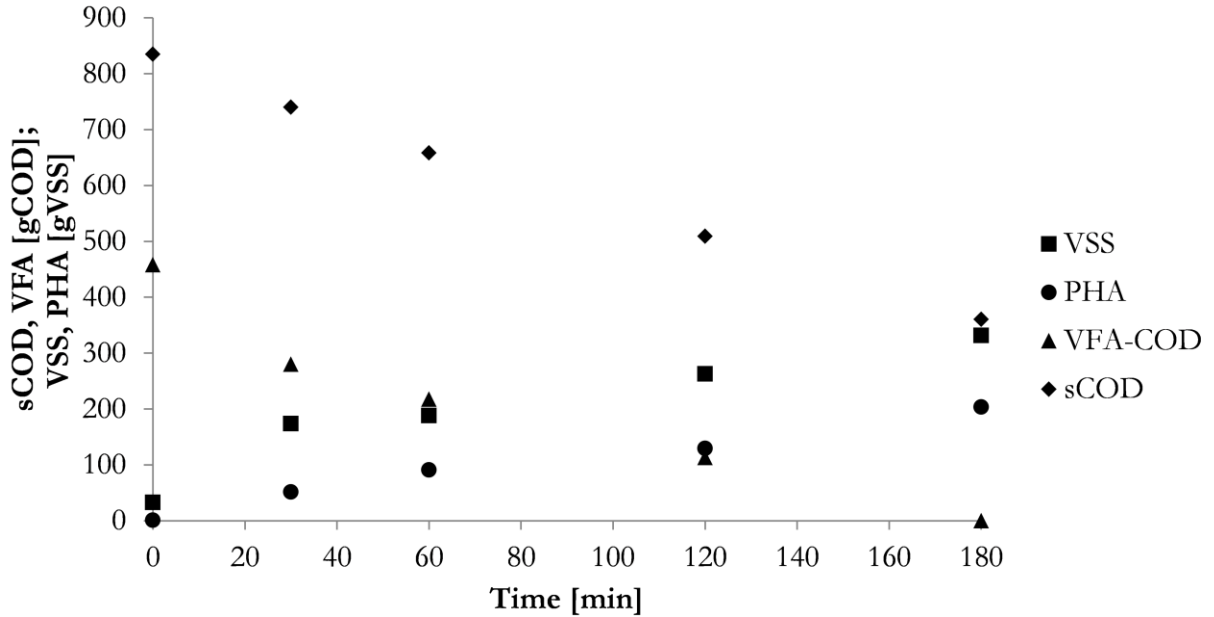


Figure 5. Detailed characterization of a PHA accumulation potential experiment (15-08-2017). Illustrating the evolution of  $COD_{Sol}$ ,  $COD_{VFA}$ , PHA and VSS over time in absolute amounts.

There were two mechanisms assumed for non-PHA VSS contribution in the process: (i) inert particulate solids in the influent, and (ii) biomass growth in the accumulation bioreactor. The initial increase in VSS represents the inert VSS part of the influent added during filling up the reactor and simultaneous production of PHA. After the feeding was finished a constant PHA production rate was observed, resulting in an increase of VSS. Determining the  $X_{PHA}$  present in the system as described in the material and methods section, a cellular PHA content of  $0.86 \text{ gPHA} \cdot X_{PHA}^{-1}$  was estimated. Furthermore, the COD consumption during the accumulation period was for 95% due to the consumption of VFA thus almost no  $BOD_{other}$  was consumed. Process characteristics were obtained from the measured data to interpret the performance of the system, these are summarized in table 5. The specific uptake rates for the PHA producer ( $q_{VFA}$ ) obtained in the accumulation were higher than those obtained during the cycle characterization.

Table 5. Characteristics from the PHA producing enrichment exposed to excess substrate in a batch process.

Accumulation reactor	Unit
$\frac{PHA}{Y_{VFA}}$	0.44 $\text{gPHA} \cdot \text{gCOD}_{VFA}^{-1}$

$q_{VFA}$	7.5	$\text{gCOD}_{VFA} \cdot \text{gX}_{PHA}^{-1} \cdot \text{h}^{-1}$
$q_{VFA}^*$	4.7	$\text{gCOD}_{VFA} \cdot \text{gVSS}^{-1} \cdot \text{h}^{-1}$
$q_{sCOD}^*$	4.9	$\text{gCOD}_{Sol} \cdot \text{gVSS}^{-1} \cdot \text{h}^{-1}$

---

Over the period described in this study multiple accumulations were performed. The enrichment was exposed to substrate for at least 3 hours and subsequently settled for 30 minutes prior to sampling. A maximum amount of 0.88  $\text{gPHA} \cdot \text{gVSS}^{-1}$  was measured. On average a PHA content of  $0.61 \text{ gPHA} \cdot \text{gTSS}^{-1} \pm 0.14$  (n=7) expressed per TSS and  $0.77 \pm 0.18 \text{ PHA} \cdot \text{gVSS}^{-1}$  (n=3) expressed per VSS was obtained. The PHB content was on average  $0.38 \pm 0.13 \text{ gPHB} \cdot \text{gVSS}^{-1}$  (n=3) and the PHV content was on average  $0.38 \pm 0.09 \text{ gPHV} \cdot \text{gVSS}^{-1}$  (n=3).

## Discussion

### Enrichment performance

The microbial community established in this work was able to consume the supplied VFA with an estimated PHA specific biomass substrate uptake rate of  $4.2 \pm 1.9 \text{ gCOD}_{\text{VFA}} \cdot \text{gX}_{\text{PHA}}^{-1} \cdot \text{h}^{-1}$  (n=108). This  $q_{\text{VFA}}$  was in a range comparable to lab studies (Albuquerque et al. 2011; Jiang et al. 2011; Johnson et al. 2009; Marang et al. 2013). In lab studies, biomass maximum specific uptake rates of  $5.6 \text{ gCOD} \cdot \text{gX}_{\text{PHA}}^{-1} \cdot \text{h}^{-1}$  were reported for cultures enriched using acetate and  $10.6 \text{ gCOD} \cdot \text{gX}_{\text{PHA}}^{-1} \cdot \text{h}^{-1}$  for cultures enriched on butyrate (assuming  $\text{C}_1\text{H}_{1.8}\text{O}_{0.5}\text{N}_{0.2}$  corresponding to  $25 \text{ gX} \cdot \text{cmolX}^{-1}$ ) (Beun et al. 2002; Jiang et al. 2011; Marang et al. 2013). In this study a mixture of different linear VFA was present, of which acetate was the most abundant  $0.44 \pm 0.11 \text{ gCOD}_{\text{Ace}} \cdot \text{gCOD}_{\text{VFA}}^{-1}$ .

This study also showed the importance of estimating the PHA producing culture as fraction of the VSS in order to estimate a  $q_S$  value. The  $q_{\text{VFA}}^*$  was  $2.4 \pm 1.2 \text{ gCOD}_{\text{Sol}} \cdot \text{gVSS}^{-1} \cdot \text{h}^{-1}$  (n=108) which was almost 50% lower than the  $q_{\text{VFA}}$ . The data clearly suggest that influent solids and non-PHA producing biomass lowered the fraction of PHA producers significantly. The concentration of free ammonia (FA) was around  $240 \text{ mgNH}_3\text{-N} \cdot \text{L}^{-1}$  using the equilibrium constant of  $\text{NH}_3/\text{NH}_4^+$ . This FA concentration is above the inhibition range compared to conventional wastewater treatment inhibition concentrations of FA (Liu et al. 2019). Despite these high FA concentrations  $q_{\text{VFA}}$  values obtained in this work were comparable to those observed previously, which demonstrates the capacity of the process to adapt to unfavourable environmental conditions.

An overall VSS yield on  $\text{COD}_{\text{Sol}}$  of  $Y_{\text{scOD}}^{\text{X}} = 0.25 \text{ gVSS} \cdot \text{gCOD}_{\text{Sol}}^{-1}$  was observed and this was lower than values reported in literature for comparable systems:  $Y_{\text{scOD}}^{\text{X}} = 0.30 \text{ gVSS} \cdot \text{gCOD}^{-1}$  (Tamis et al. 2018). The data suggest that the high pH and/or TAN concentration did not significantly affect the biomass specific uptake rate, but reduced the efficiency of biomass production. Furthermore, the presence of unstable periods indicated that the process was susceptible for unknown compounds present in the substrate. The leachate of


organic waste is such a complex mixture making it virtually impossible to identify the cause of the unstable periods.

Despite the potentially adverse conditions, the obtained microbial culture appeared highly effective with respect to PHA production. According to the FISH picture as shown in figure 4 the microbial community was dominated by one species. The dominant bacterium was a large betaproteobacteria most closely related to *Thaueria Cin3,4*. The species found in the bioreactor had comparably high substrate uptake rates and oxygen respiration rates which are known for the *Plasticicumulans* genus, even though, both genera are phylogenetically not related. The *uncultured Rhodocyclaceae bacterium clone JT01* described in this work belongs to the betaproteobacteria, family of *Rhodocyclaceae*, whereas *Plasticicumulans* is a gammaproteobacteria. Both bacteria have functional and morphologically similar properties: the bacteria are large, rapid VFA consumers and the ability to store PHA up to high wt%. The results demonstrate that high respiration rates and high PHA storing capabilities are distributed over different sections of the phylogenetic tree.

PHA production from leachate derived from OFMSW required multiple levels of understanding of the production process. The  $COD_{Sol}$  present in the stream contained VFA that would result in PHA producers, but the stream also contained  $COD_{Sol}$  resulting in non-PHA producers. Furthermore, the leachate contained non-biodegradable (inert) solids, that were divided in settleable solids and non-settleable solids. The settleable solids were removed by a pretreatment method in which 60% of the solids were removed. The non-settleable solids entered the reactor with the influent and were observed in comparable concentrations in the reactor effluent suggesting that they were not incorporated into the settling biomass in significant amounts. The fraction of  $COD_{Sol}$  consumed by the PHA producer in the bioreactor was on average 82% based upon the VFA consumed compared to  $\Delta COD_{Sol}$ . The impact of  $BOD_{other}$  resulting in side population was minimized by introduction of a settling phase shortly after all VFA were depleted as proposed in (Korkakaki et al. 2016a).

## Solid partitioning

In an operational cycle, multiple phases could be identified, which influenced the final composition of the VSS. We assumed that three main components contribute to the final VSS composition: (i) the  $\text{COD}_{\text{VFA}}$  which resulted via the production and conversion of PHA in PHA producing biomass, (ii)  $\text{BOD}_{\text{other}}$  consumption resulting in a non-PHA producing side population and (iii) inert VSS present in the substrate. Four time points during a cycle were evaluated (figure 6).

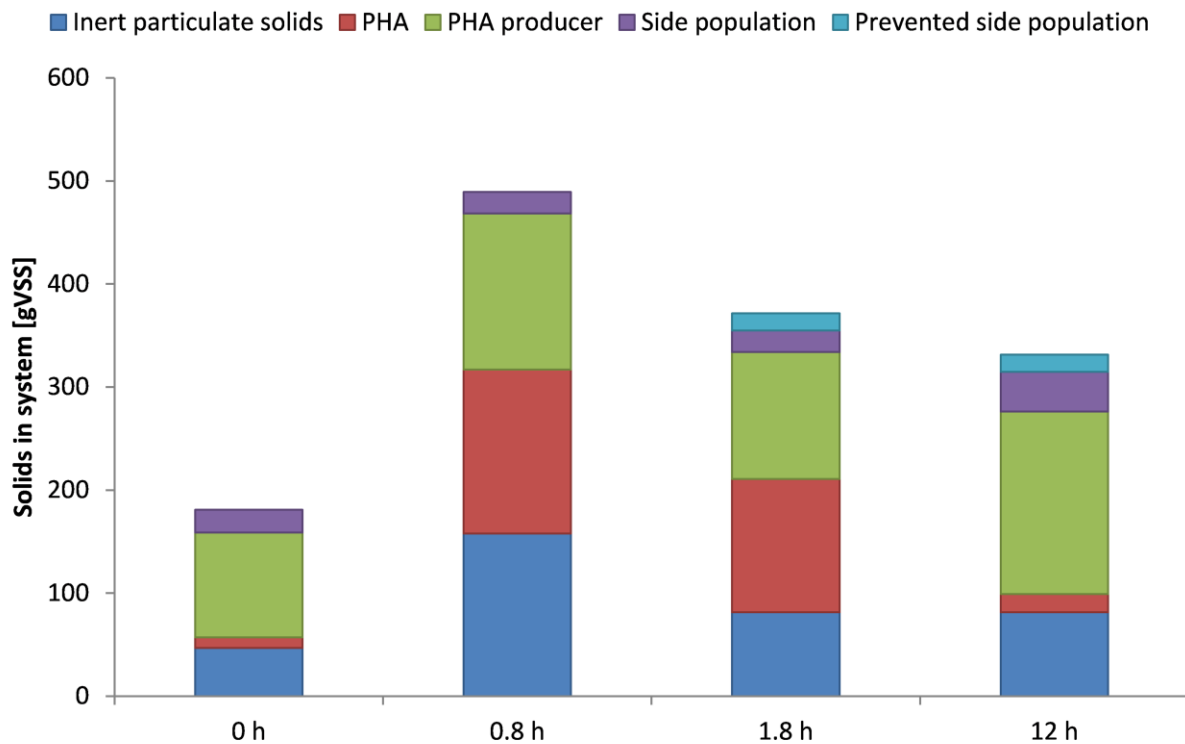

**Figure 6. The solid partition over the cycle. Here 0h represented the beginning of the cycle, 0.8 h represented the time point in the cycle when all VFA were consumed, 1.8 h was the solid composition in the reactor after 1 h settling and removal of the supernatant. Finally, 12 h represents the end of the cycle**

The starting point of each cycle ( $t = 0$  h) is after biomass removal at the end of the previous cycle. After  $t = 0$ , the reactor was filled with substrate adding  $\text{COD}_{\text{Sol}}$ , nutrients and inert particulate solids in the system. Next, the culture consumed the VFA, resulting in VSS production as PHA and PHA producing biomass. On average  $0.82 \text{ gCOD}_{\text{VFA}} \cdot \text{gCOD}_{\text{consumed}}^{-1}$  was consumed in the entire cycle, this value was used as  $f_{\text{X,PHA}}$  (as explained in the method section). After all VFA had been depleted (0.8 h) a settling phase was

scheduled lasting from 0.8 h – 1.8 h. In this phase, solids could settle to the bottom of the bioreactor for 60 minutes after which the supernatant (86 L) was removed from the system. With the supernatant at least 2 compounds were removed from the system: (i) inert solids that were not incorporated in biomass and (ii) half of the slowly degradable  $BOD_{other}$  that was not degraded in the feast phase. In the famine phase lasting from 1.8 h – 12 h the PHA was consumed and  $X_{PHA}$  was produced. Furthermore, during the famine phase  $BOD_{other}$  was consumed which resulted in the production of side population. The side population ( $f_{X,other}$ ) was calculated using the amount  $BOD_{other}$  consumed. Finally, the  $BOD_{other}$  that was present in the supernatant could be converted to biomass equivalents using the VSS production yield. This potential biomass removed after settling was classified as prevented side population. In the set-up used in this study, the fraction of PHA producer present in the VSS was  $0.56 \text{ gX}_{PHA} \cdot \text{gVSS}^{-1}$ . The portion of PHA producers would have been  $0.25 \text{ gX}_{PHA} \cdot \text{gVSS}^{-1}$  without a settling phase and no pretreatment of the substrate. The higher fraction of PHA producing biomass in the set-up with settling, implicates that higher PHA content may be reached:  $0.77 \text{ gPHA} \cdot \text{gVSS}^{-1}$  with the settling vs.  $0.61 \text{ gPHA} \cdot \text{gVSS}^{-1}$  without settling.

### **Accumulation potential**

The PHA accumulation potential of the enrichment was assessed by doing multiple batch experiments to determine the maximum PHA content that could be achieved. One factor that was important enabling the relatively high PHA content was the pretreatment of the influent removing undesired settleable solids. After pretreatment by settling, the substrate still contained  $1.5 \pm 0.8 \text{ gTSS} \cdot \text{L}^{-1}$  (n=122) of non-settling solids. In the accumulation experiment shown in figure 5 this contributed for 30% of the TSS concentration at the end of the accumulation. In several accumulations it was shown that high apparent PHA wt% such as PHA percentages between 70% and 80% could be established after settling and removal of the supernatant at the end of the accumulation. These experiments showed an additional advantage of the settling technique besides selective removal of side population. Having a settleable culture made it possible to achieve high apparent PHA wt% in a complex environment containing non-settling solids.



Generally, achieving more than  $0.60 \text{ gPHA}\cdot\text{gTSS}^{-1}$  and usage of mixed cultures requires defined environments. The PHA content achieved in this study was higher than the PHA content reached on similar leachate in the lab ( $0.29 \text{ gPHA}\cdot\text{gVSS}^{-1}$ ), (Korkakaki et al. 2016b). In Korkakaki et al. (2016b) it was suggested that an unsuccessful enrichment resulted in poor PHA storing capabilities. Remarkably, in the Korkakaki et al. (2016b) study, a culture enriched on synthetic medium was capable of accumulating up to  $0.78 \text{ gPHA}\cdot\text{VSS}^{-1}$  in batch experiments using a similar type of leachate as substrate. That study, performed at pH 7, indicated that in the short term the complex medium (in the leachate) was not significantly inhibiting PHA production, though long-term cultivation on leachate resulted in enrichment of biomass with poor PHA accumulating abilities. This phenomena of obtaining a bad enrichment at prolonged exposure to this complex substrate seemed absent in this study, because an enrichment with good PHA accumulating capability was obtained. Possibly, better control of nitrogen and phosphorus availability (by measuring these concentrations on a daily basis, and making sure that they are not limiting) could explain the difference. This would make sense since the limitation of N or P during enrichment will give a competitive advantage to microorganisms with high N or P uptake rate instead of high PHA production capability (Johnson et al. 2010b).

To reach a high PHA content a nutrient limited stream is preferred, because of the growth limiting condition created which favors the PHA purity at the end of the accumulation (Johnson et al. 2010a; Korkakaki et al. 2017). PHA storing potentials using streams containing nutrients were generally lower than those obtained with nutrient limitation. A culture enriched on fermented wastewater treatment plant (WWTP) sludge as substrate for PHA accumulation which was not nutrient limited reached  $0.39 \text{ gPHA}\cdot\text{gVSS}^{-1}$  (Morgan-Sagastume et al. 2015). Leachate as used in this study comprised not only conditions where growth was possible, but also other adverse conditions such as a high pH after aeration and containing a high total ammonia nitrogen content. Despite these conditions  $0.61 \text{ gPHA}\cdot\text{gTSS}^{-1} \pm 0.14$  (n=7) and expressed per organic content  $0.77 \pm 0.18 \text{ gPHA}\cdot\text{gVSS}^{-1}$  (n=3) was obtained, highlighting the importance of having a good inoculum (enrichment).

### **Industrial implementation of PHA production**


**Table 6.** Overview of achieved PHA percentages and PHA production yields on different types of wastestreams.

PHA percentage	Yield	Substrate	Scale	Reference
gPHA·gVSS <sup>-1</sup>	kgPHA·kgCOD <sup>-1</sup>			
0.29	0.07	Leachate of OFMSW	lab	(Korkakaki et al. 2016b)
0.39		Fermented WWTP Sludge	pilot	(Morgan-Sagastume et al. 2015)
0.46		OFMSW-SS mixture	Pilot	(Valentino et al. 2019)
0.48		Leachate of OFMSW	lab	(Colombo et al. 2017)
0.49	0.11	Fermented organic residues	pilot	(Bengtsson et al. 2017)
0.55		Leachate of OFMSW	pilot	(Valentino et al. 2018)
0.76	0.18	Fermented candy bar factory water	pilot	(Tamis et al. 2014)
<b>0.77</b>	<b>0.14</b>	<b>Leachate of OFMSW</b>	<b>pilot</b>	<b>This study</b>
0.80	0.20	Fermented papermill wastewater	pilot	(Tamis et al. 2018)
0.89		Synthetic medium	lab	(Johnson et al. 2009)

The production of PHA on different types of wastewater has been investigated on pilot scale in several studies as shown in table 6. The high PHA contents reported, suggest that PHA producing microorganisms have been effectively enriched on different wastestreams. One way of evaluating PHA production from OFMSW was done via the overall PHA production yield. Using an adapted method for obtaining an overall process yield as defined by (Bengtsson et al. 2008), the overall PHA production yield on COD<sub>Sol</sub> in the wastewater was determined. At the Biocel, a VFA-rich stream was present, thus no pretreatment and COD losses in this step were taken into account for the determination of the overall PHA yield. An overall PHA production yield of 0.14 kgPHA·kgCOD<sub>Sol</sub><sup>-1</sup> was obtained using the following parameters and visualized in figure 7:

- A biomass production yield of 0.25 kg VSS·kgCOD<sub>VFA</sub><sup>-1</sup>
- A PHA production yield of 0.44 kgPHA·kgCOD<sub>VFA</sub><sup>-1</sup>
- A PHA purity at the end of the accumulation of 0.77 kgPHA·kgVSS<sup>-1</sup> (table 6)

- A VFA fraction in substrate of  $0.50 \text{ kgCOD}_{\text{VFA}} \cdot \text{kgCOD}_{\text{Sol}}^{-1}$

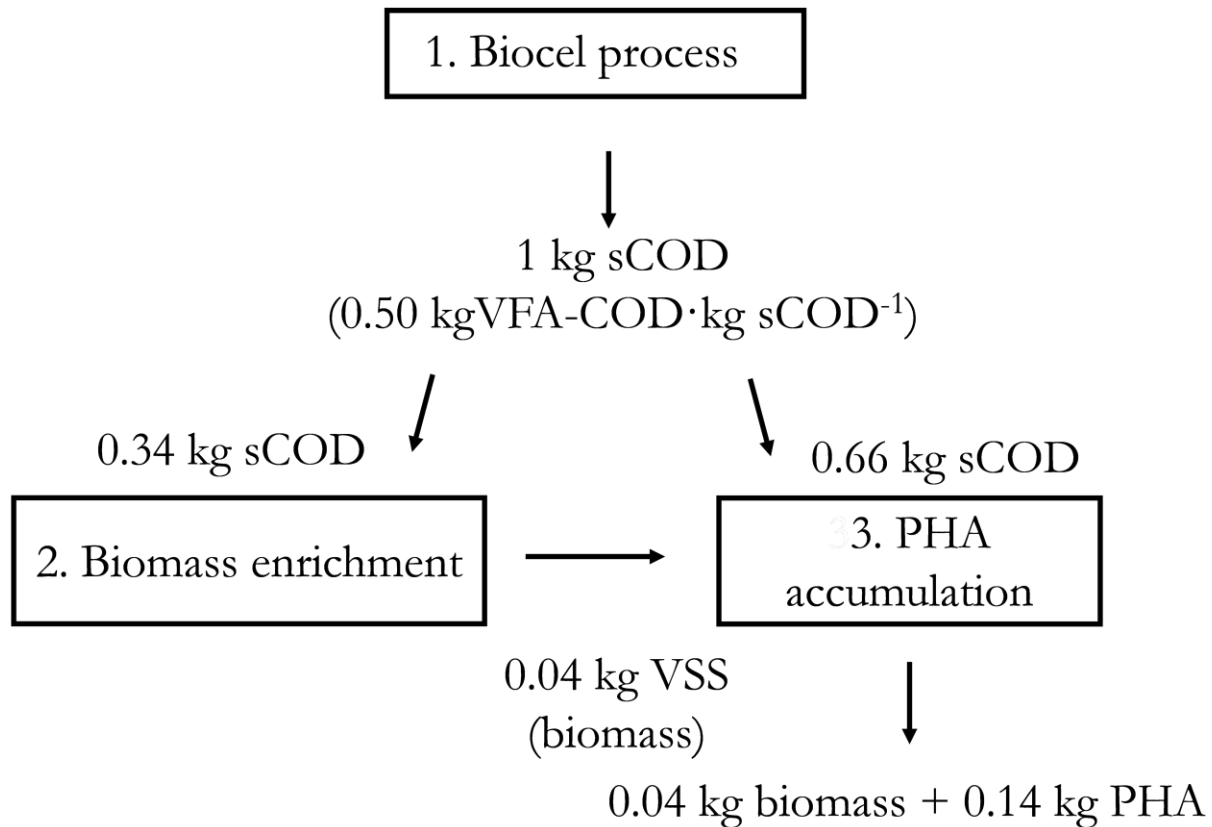

**Figure 7. COD partitioning for the enrichment and accumulation reactor, from  $1 \text{ kgCOD}_{\text{Sol}}$  of leaching product obtained from the biocel process.**

This yield was lower than the PHA production yield obtained in several other studies shown in table 6. The PHA production yield expressed per  $\text{kgCOD}_{\text{VFA}}$  is much higher and equals  $0.29 \text{ kgPHA} \cdot \text{kgCOD}_{\text{VFA}}^{-1}$  because the VFA fraction of the  $\text{COD}_{\text{Sol}}$  was 50%. It should be noted that a large part of the remaining COD was inert COD.

The main upstream operational expenses originate from aeration of the reactors and acid/base dosage (Tamis et al. 2018). This study is a case for potentially eliminating one of these cost factors namely, the acid/base dosage. For the enrichment and accumulation in this study no acid or base was used, while both an adequate enrichment of PHA producing biomass, and a high PHA content at the end of an accumulation were achieved. A previous study has shown the economical potential of producing PHA from a stream like

leachate instead of biogas (Kleerebezem et al. 2015). One of the key criteria in the economic model is that the operational expenses should be kept low, which can be pursued when pH control is absent. If pH control is not a prerequisite for PHA production from wastewater the overall process becomes economical more feasible.

In this study the substrate used for the pilot plant was diluted 2-3 times with tap water, preventing oxygen limitation in the selector. Besides the COD, other compounds such as ammonium were diluted as well. In a full-scale situation the dilution will be done with effluent recirculation of the PHA process if necessary, to avoid oxygen limitation. The dilution performed with effluent instead of tap water will result in that the ammonia no longer will be diluted and will likely reach 1-2 gN·L<sup>-1</sup>. At operational pH-values of 9 these ammonium concentrations may give rise to inhibition. In a full-scale process, nitrogen removal using the anammox process can be implemented to remove (partly) nitrogen and thus alkalinity from the system after the PHA process. The VFA fraction in kgCOD<sub>VFA</sub>·kgCOD<sub>Sol</sub><sup>-1</sup> was low in this study due to the origin of the substrate from a methanogenic OFMSW digester, implying the effective removal of VFA by methanogens. Evidently, eventual implementation of the PHA production from OFMSW is anticipated to be based on a hydrolysis pilot that maximizes VFA production and aims for minimization of methane production. This will evidently increase the overall effectiveness of the PHA production process from OFMSW.

## **Conclusion**

This study shows the successful enrichment of a functional PHA accumulating microbial community grown on OFMSW-leachate without pH control on pilot scale. After accumulation for maximization of the cellular PHA content a maximum PHA content of  $0.77 \pm 0.18$  gPHA·gVSS<sup>-1</sup> (n=3) was achieved within 3 hours of accumulation. Detailed mass balance analysis demonstrated that the actual PHA content in VFA grown cells was highly comparable to previous studies, and the eventual lower PHA content was the resultant from particulates in the influent and growth of non-PHA producers on substrates other than VFA. This demonstrates the technological feasibility of PHA production in conditions formerly considered unfavourable for PHA production, such as a pH of 8.5-9 and high ammonium concentrations. Herewith this work

contributes to the extension of the operational window of the wastewater based PHA production process and demonstrates that the hoarding strategy based on PHA production is widely distributed in the microbial world.

## Appendix-I

### Leachate alkalinity calculations

The alkalinity of the leachate was estimated using the  $pCO_2$ , pH, total TAN and the known VFA concentration. The  $pCO_2$  in the digestion tunnels was unknown, to estimate the  $pCO_2$  the following assumption was made: At the end of a cycle in the enrichment reactor the  $pCO_2$  was estimated to be 0.1% close to atmospheric values as the broth was aerated for 12 hours. At this point in the cycle the pH reached 9.1. This pH and  $pCO_2$  was used as input for the leachate to obtain the alkalinity of the system. The alkalinity of the system was calculated as follows:



$$Alkalinity = [OH^{-1}] + [VFA^{-1}] + [HCO_3^{-1}] + 2 \cdot [CO_3^{-2}] \quad (A1)$$

- Alkalinity was the calculated alkalinity expressed in  $meq \cdot L^{-1}$  of the leachate
- $[OH^{-1}]$  was the concentration of hydroxide (mM) in the leachate
- $[VFA^{-1}]$  was the averaged concentration of VFA (mM) in the leachate
- $[HCO_3^{-1}]$  was the concentration of bicarbonate (mM) in the leachate
- $[CO_3^{-2}]$  was the concentration of carbonate (mM) in the leachate

The Henry coefficient for  $CO_2$  ( $H^{CO_2}$ ) used was  $2.98 \cdot 10^{-2} \text{ mol} \cdot L^{-1} \cdot atm^{-1}$  for 30 °C. The  $pK_a$  values for each compound contributing to the overall alkalinity are summarized in Table 7.

**Table 7.**  $pK_a$  values used in this study to estimate the alkalinity of the leachate.

$pK_a$	Chemical reaction
6.38	$H_2CO_3 \leftrightarrow HCO_3^- + H^+$



The alkalinity of the leachate was found to be  $70 \pm 10 \text{ meq}\cdot\text{L}^{-1}$ . The pH of the substrate was continuously measured when stored in the buffer vessel and was  $7.53 \pm 0.42$ . The alkalinity obtained at pH of 9.1 and a  $\text{pCO}_2$  of 0.1 % should be similar to the alkalinity at a pH of 7.5 as measured in the buffer vessel. Using a pH of 7.5 and an alkalinity of  $70 \text{ meq}\cdot\text{L}^{-1}$  a partial pressure for  $\text{CO}_2$  of 9% was found.

### Data Availability Statement

All data, models, and code generated or used during the study appear in the published article.

### Acknowledgements

This research was funded by the Dutch Applied Science foundation (NWO-TTW) and Paques BV through the VFA-platform program (Project No. 12998) and is gratefully acknowledged. The authors are grateful to Orgaworld for offering their facilities to run the pilot.

### Notation

The following symbols are used in this paper:

- $\text{BOD}_{\text{other}}$  ( $\text{gCOD}_{\text{other}}$ ) was the amount of other biodegradable oxygen demand consumed by the side population
- Feastphase (h) is the duration in a cycle when VFA were present
- $f_{\text{XPHA}}$  was the fraction of PHA producing biomass
- $\text{PHA}_{\text{EoC}}$  ( $\text{gPHA}\cdot\text{L}^{-1}$ ) was the PHA concentration at the EoC
- $V_{\text{EoC}}$  (L) was the volume of the bioreactor at the EoC
- $\text{VSS}_{\text{catalytic}}$  (gVSS) was the amount of catalytic biomass present at the end of cycle (EoC)
- $\text{VSS}_{\text{EoC}}$  ( $\text{gVSS}\cdot\text{L}^{-1}$ ) was the VSS concentration at the EoC

- $VSS_{inf}$  ( $gVSS \cdot L^{-1}$ ) was the amount of VSS in the influent buffer tank. The  $VSS_{inf}$  was assumed to be inert.
- $X_{other}$  ( $gVSS$ ) was the amount of non-PHA producers (side-population)
- $X_{PHA}$  ( $gVSS$ ) was the amount of PHA producers
- $\Delta COD_{VFA}$  ( $gCOD_{VFA}$ ) was the amount of  $COD_{VFA}$  consumed in a cycle
- $\Delta COD_{sol}$  ( $gCOD_{sol}$ ) was the amount of  $COD_{sol}$  consumed in a cycle

## References

- Albuquerque, M. G. E., Martino, V., Pollet, E., Avérous, L., and Reis, M. A. M. (2011). "Mixed culture polyhydroxyalkanoate (PHA) production from volatile fatty acid (VFA)-rich streams: Effect of substrate composition and feeding regime on PHA productivity, composition and properties." *Journal of Biotechnology*, 151(1), 66–76.
- Amann, R. I., Binder, B. J., Olson, R. J., Chisholm, S. W., Devereux, R., and Stahl, D. A. (1990). "Combination of 16S rRNA-targeted oligonucleotide probes with flow cytometry for analyzing mixed microbial populations." *Applied and environmental microbiology*, 56(6), 1919–25.
- Bengtsson, S., Karlsson, A., Alexandersson, T., Quadri, L., Hjort, M., Johansson, P., Morgan-Sagastume, F., Anterrieu, S., Arcos-Hernandez, M., Karabegovic, L., Magnusson, P., and Werker, A. (2017). "A process for polyhydroxyalkanoate (PHA) production from municipal wastewater treatment with biological carbon and nitrogen removal demonstrated at pilot-scale." *New Biotechnology*, Elsevier B.V., 35, 42–53.
- Bengtsson, S., Werker, A., and Welander, T. (2008). "Production of polyhydroxyalkanoates by glycogen accumulating organisms treating a paper mill wastewater." *Water Science and Technology*, 58(2), 323–330.
- Beun, J. J., Dircks, K., Van Loosdrecht, M. C. M., and Heijnen, J. J. (2002). "Poly- $\beta$ -hydroxybutyrate metabolism in dynamically fed mixed microbial cultures." *Water Research*, 36(5), 1167–1180.
- Ten Brummeler, E. (2000). "Full scale experience with the BIOCEL process." *Water Science and Technology*, 41(3), 299–304.

- Cabrera-Rodríguez, C. I., Paltrinieri, L., de Smet, L. C. P. M., van der Wielen, L. A. M., and Straathof, A. J. J. (2017). “Recovery and esterification of aqueous carboxylates by using CO<sub>2</sub>-expanded alcohols with anion exchange.” *Green Chemistry*, The Royal Society of Chemistry, 19(3), 729–738.
- CBS. (2018). “Gemeentelijke afvalstoffen; hoeveelheden.” <<https://opendata.cbs.nl/statline/#/CBS/nl/dataset/83558NED/table?ts=1517301287014>> (Nov. 20, 2018).
- Colombo, B., Favini, F., Scaglia, B., Sciarria, T. P., D’Imporzano, G., Pognani, M., Alekseeva, A., Eisele, G., Cosentino, C., and Adani, F. (2017). “Enhanced polyhydroxyalkanoate (PHA) production from the organic fraction of municipal solid waste by using mixed microbial culture.” *Biotechnology for Biofuels*, 10(1), 1–15.
- Daims, H., Brühl, A., Amann, R., Schleifer, K. H., and Wagner, M. (1999). “The domain-specific probe EUB338 is insufficient for the detection of all bacteria: Development and evaluation of a more comprehensive probe set.” *Systematic and Applied Microbiology*, 22(3), 434–444.
- Jiang, Y., Marang, L., Kleerebezem, R., Muyzer, G., and van Loosdrecht, M. C. M. (2011). “Polyhydroxybutyrate production from lactate using a mixed microbial culture.” *Biotechnology and Bioengineering*, 108(9), 2022–2035.
- Johnson, K., Jiang, Y., Kleerebezem, R., Muyzer, G., and Van Loosdrecht, M. C. M. (2009). “Enrichment of a mixed bacterial culture with a high polyhydroxyalkanoate storage capacity.” *Biomacromolecules*, 10(4), 670–676.
- Johnson, K., Kleerebezem, R., and van Loosdrecht, M. C. M. (2010a). “Influence of ammonium on the accumulation of polyhydroxybutyrate (PHB) in aerobic open mixed cultures.” *Journal of Biotechnology*, Elsevier B.V., 147(2), 73–79.
- Johnson, K., Kleerebezem, R., and van Loosdrecht, M. C. M. (2010b). “Influence of the C/N ratio on the performance of polyhydroxybutyrate (PHB) producing sequencing batch reactors at short SRTs.” *Water Research*, Pergamon, 44(7), 2141–2152.
- Kleerebezem, R., Joosse, B., Rozendal, R., and Van Loosdrecht, M. C. M. (2015). “Anaerobic digestion without biogas?” *Reviews in Environmental Science and Biotechnology*, Springer Netherlands, 14(4), 787–801.
- Kleerebezem, R., and van Loosdrecht, M. C. (2007). “Mixed culture biotechnology for bioenergy production.” *Current Opinion in Biotechnology*, 18(3), 207–212.



- Korkakaki, E., van Loosdrecht, M. C. M., and Kleerebezem, R. (2016a). "Survival of the fastest: Selective removal of the side population for enhanced PHA production in a mixed substrate enrichment." *Bioresource Technology*, 216, 1022–1029.
- Korkakaki, E., van Loosdrecht, M. C. M., and Kleerebezem, R. (2017). "Impact of phosphate limitation on PHA production in a feast-famine process." *Water Research*, Elsevier Ltd, 126, 472–480.
- Korkakaki, E., Mulders, M., Veeken, A., Rozendal, R., van Loosdrecht, M. C. M., and Kleerebezem, R. (2016b). "PHA production from the organic fraction of municipal solid waste (OFMSW): Overcoming the inhibitory matrix." *Water Research*, 96, 74–83.
- Liu, Y., Ngo, H. H., Guo, W., Peng, L., Wang, D., and Ni, B. (2019). "The roles of free ammonia (FA) in biological wastewater treatment processes: A review." *Environment International*, 123, 10–19.
- Ludwig, W., Strunk, O., Westram, R., Richter, L., Meier, H., Yadhukumar, Buchner, A., Lai, T., Steppi, S., Jobb, G., Förster, W., Brettske, I., Gerber, S., Ginhart, A. W., Gross, O., Grumann, S., Hermann, S., Jost, R., König, A., Liss, T., Lüßmann, R., May, M., Nonhoff, B., Reichel, B., Strehlow, R., Stamatakis, A., Stuckmann, N., Vilbig, A., Lenke, M., Ludwig, T., Bode, A., and Schleifer, K. (2004). "ARB: a software environment for sequence data." *Nucleic Acids Research*, Narnia, 32(4), 1363–1371.
- Marang, L., Jiang, Y., van Loosdrecht, M. C. M., and Kleerebezem, R. (2013). "Butyrate as preferred substrate for polyhydroxybutyrate production." *Bioresource Technology*, Elsevier Ltd, 142, 232–239.
- Morgan-Sagastume, F., Hjort, M., Cirne, D., Gérardin, F., Lacroix, S., Gaval, G., Karabegovic, L., Alexandersson, T., Johansson, P., Karlsson, A., Bengtsson, S., Arcos-Hernández, M. V., Magnusson, P., and Werker, A. (2015). "Integrated production of polyhydroxyalkanoates (PHAs) with municipal wastewater and sludge treatment at pilot scale." *Bioresource Technology*, 181, 78–89.
- Muyzer, G., Teske, A., Wirsén, C. O., and Jannasch, H. W. (1995). "Phylogenetic relationships of *Thiomicrospira* species and their identification in deep-sea hydrothermal vent samples by denaturing gradient gel electrophoresis of 16S rDNA fragments." *Archives of Microbiology*, Springer-Verlag, 164(3), 165–172.
- Tamis, J., Lužkov, K., Jiang, Y., Loosdrecht, M. C. M. va., and Kleerebezem, R. (2014). "Enrichment of *Plasticicumulans*

acidivorans at pilot-scale for PHA production on industrial wastewater.” *Journal of Biotechnology*, 192(Part A), 161–169.

Tamis, J., Mulders, M., Dijkman, H., Rozendal, R., van Loosdrecht, M. C. M., and Kleerebezem, R. (2018). “Pilot-Scale Polyhydroxyalkanoate Production from Paper Mill Wastewater: Process Characteristics and Identification of Bottlenecks for Full-Scale Implementation.” *Journal of Environmental Engineering*, 144(10), 04018107.

Valentino, F., Gottardo, M., Micolucci, F., Pavan, P., Bolzonella, D., Rossetti, S., and Majone, M. (2018). “Organic fraction of municipal solid waste recovery by conversion into added-value polyhydroxyalkanoates and biogas.” *ACS Sustainable Chemistry & Engineering*, acssuschemeng.8b03454.

Valentino, F., Moretto, G., Lorini, L., Bolzonella, D., Pavan, P., and Majone, M. (2019). “Pilot-Scale Polyhydroxyalkanoate Production from Combined Treatment of Organic Fraction of Municipal Solid Waste and Sewage Sludge.” *Industrial and Engineering Chemistry Research*.