



Delft University of Technology

Numerical study on the transition between river bar regimes due to varying discharge

Montijn, Roline; Mosselman, E.; Sloff, Kees

Publication date
2021

Document Version
Final published version

Citation (APA)
Montijn, R., Mosselman, E., & Sloff, K. (2021). *Numerical study on the transition between river bar regimes due to varying discharge*. 80-81. Poster session presented at NCR DAYS 2021. <https://kbase.ncr-web.org/outputs/rivers-in-an-uncertain-future/>

Important note
To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright
Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy
Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

*This work is downloaded from Delft University of Technology.
For technical reasons the number of authors shown on this cover page is limited to a maximum of 10.*

Green Open Access added to TU Delft Institutional Repository

'You share, we take care!' - Taverne project

<https://www.openaccess.nl/en/you-share-we-take-care>

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

Book of abstracts

Rivers in an uncertain future

NCR days 2021 | Enschede, February 11-12



Jord J. Warmink, Anouk Bomers,
Vasileios Kitsikoudis, R. Pepijn van
Denderen & Fredrik Huthoff (eds.)

NCR publication: 46-2021

Netherlands
Centre for
River studies **NCR**

NCR Days 2021

Rivers in an uncertain future

Jord J. Warmink, Anouk Bomers, Vasileios Kitsikoudis, R. Pepijn
van Denderen & Fredrik Huthoff (eds.)

Organising partner:

UNIVERSITY OF TWENTE.

Co-sponsored by:



Organising partner

University of Twente
P.O. 217
7500 AE Enschede
The Netherlands

telephone: +31 53 489 35 46
e-mail: secretariat-mfs-et@utwente.nl
www: <https://www.utwente.nl>

Contact NCR

dr. ir. K.D. Berends (programme Secretary)
Netherlands Centre for River Studies
c/o Deltares
P.O. 177
2600 MH Delft
The Netherlands

telephone: +31 6 21 28 74 61
e-mail: secretary@ncr-web.org
www: <https://www.ncr-web.org>

Cite as: Warmink, J.J., Bomers, A., Kitsikoudis, V., van Denderen, R.P., Huthoff, F. (2021), *Rivers in an uncertain future: NCR Days proceedings*. Netherlands Centre for River Studies, publication 46-2021

Photo credits cover: IJssel river from Bureau Beeldtaal Filmmakers (2018)

Copyright © 2021 Netherlands Centre for River Studies

All rights reserved. No parts of this document may be reproduced in any form by print, photo print, photo copy, microfilm or any other means, without permission of the publisher: Netherlands Centre for River Studies.

Numerical study on the transition between river bar regimes due to varying discharge

Roline Montijn^{a,b,*}, Kees Sloff^a, Erik Mosselman^a

^aDeltares, P.O. Box 177, 2600 MH, Delft, The Netherlands

^bDelft University of Technology, Department of Hydraulic Engineering, Faculty of Civil Engineering and Geosciences, P.O. Box 5048, 2600 GA, Delft, The Netherlands

Keywords — River morphodynamics, River bars, Morphological timescales, Discharge variability, Numerical modelling

Introduction

River bars are large-scale bedforms, formed by the local deposition of sediments. They create suitable habitats for aquatic fauna and riparian vegetation, which makes them valuable in river restoration projects. Understanding the dynamics of river bars is required for a proper design of the restoration project and for the development of a sustainable management scheme.

The channel width-to-depth ratio is the key controlling parameter for the formation of bars. Based on early described stability analyses, a resonance point and critical width-to-depth ratio have been defined, which mark the transition between different types of bar regimes (Colombini et al., 1987). By widening a river section to a width-to-depth ratio above its critical value, migrating bars develop. When they are fixed to a local perturbation, the bars show a pattern subcritically damped in downstream direction. By further increasing the width-to-depth ratio towards its resonance point, the celerity of the migrating bars becomes zero. This results in a pattern of steady bars, which are referred to as an unstable bar regime.

Due to the natural variability of river discharge, the width-to-depth ratio varies over time. The objective of this research is to give insights into the transition between river bar regimes due to a varying discharge. Therefore, insight in the timescale of adaptation to new flow conditions is necessary.

Methodology

A straight river channel is modelled in Delft3D, with non-erodible banks, starting with a flat bed. The geometry and the discharge hydrograph are roughly based on the Dutch river 'Grensmaas'. A fixed perturbation by means of a groyne is applied, which obstructs 20% of the channel width. A relatively small sediment size is applied to model morphological changes in

the total discharge regime.

In the uniform analysis, the upstream boundary condition is a steady discharge, with magnitudes between 50 and 1250 m³/s. The damping length and wavelength of the river bars are compared with theoretically obtained values to validate the numerical model and to determine the resonance point of the river model. Furthermore, the time to develop the river bars from a flat bed is assessed. This value is compared to existing morphodynamic timescales.

The transition between the river bar regimes around the resonance point (unstable to subcritically damped and vice versa) is modelled by means of a steady increasing and decreasing discharge, starting with a fully developed bed. The response of the river bars to the varying discharge is coupled to the timescale of development based on the uniform analysis.

Results

Three types of river bars are shown in Figure 1, being a. Unstable, b. Subcritically damped, and c. Supercritically damped. The corresponding discharge is 100, 150, and 1000 m³/s, equivalent to width-to-depth ratios of 42, 32 and 9 respectively. The damping length and wavelength show good agreement with the values determined by the theory of Crosato and Mosselman (2009), which is based on the theory developed by Struiksmas et al. (1985). The resonance point is at a width-to-depth ratio of 37-38.

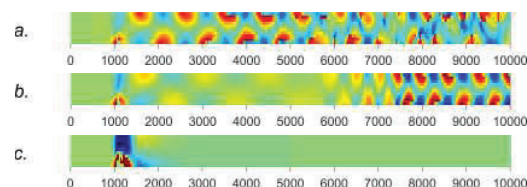


Figure 1: Unstable (a), subcritically damped (b), and supercritically damped (c) river bar regimes.

From the numerical simulations, two timescales have been defined. First, the development of migrating bars towards their final amplitude (Figure 2a). Secondly, the time

*Corresponding author

Email address: roline.montijn@deltares.nl
(Roline Montijn)

to reach the final bed topography, which is in the unstable and subcritically damped bar regime a pattern of steady bars. The timescale of the development of migrating bars shows good agreement to the timescale defined by Taal (1989), which is inversely proportional to the sediment transport rate. The timescale to the final bed topography is 4-6 times greater.

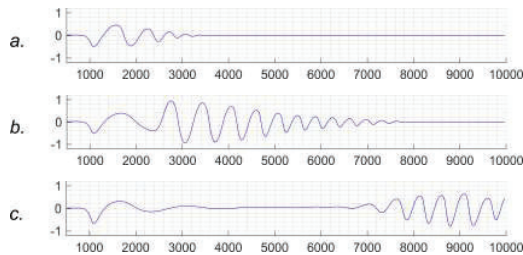


Figure 2: Bed levels along river bank, starting from a flat bed. a. Migrating bars develop from the fixed perturbation ($t = 20$ days). b. & c. A pattern of steady bars, damped in downstream direction, develops ($t = 2$ & 8 months).

The transition between an unstable to a subcritically damped bar regime is shown in Figure 3; vice versa in Figure 4. In both figures, bed levels are plotted for the width-to-depth ratios between 35 to 41, which captures the resonance point of the river. The same colour in the two figures corresponds to the same width-to-depth ratio. A qualitative description of the transition is given.




Figure 3: Bed levels along river bank, in the transition from an unstable to a subcritically damped bar regime.

From unstable to subcritically damped (Figure 3): The amplitude of the bars decreases towards a constant amplitude in downstream direction, and in this process the river bars are slowly migrating. Starting from the fixed perturbation, a new pattern of steady bars with a damped character develops (t_4). The bars migrate faster than the development of steady bars starting from the perturbation. Therefore, new migrating bars develop at the tail of the steady bars.

From subcritically damped towards unstable (Figure 4): At the tail of the subcritically damped steady bars, migrating bars develop. This bed instability slowly moves upstream. The pattern of steady bars becomes steeper with shorter wavelengths.




Figure 4: Bed levels along river bank, in the transition from a subcritically damped to an unstable bar regime.

Conclusion and recommendations

Based on the uniform analysis, a distinction in timescales of development of migrating and steady bars is made, with a shorter (4-6 times) timescale of development for migrating bars. This results in a different response of migrating and steady bars to a varying discharge. When the bed becomes unstable due to an increasing width-to-depth ratio, migrating bars develop. A pattern of steady bars follows, developing in downstream direction from the fixed perturbation.

The development of migrating bars in the idealized case of a straight river limits the validity of the results for real rivers, as their migration can be limited by other local perturbations, like a local widening or curvature.

Recommendations for further research are towards the effect of varying sediment sizes on the timescale of development and response of river bars to varying discharge.

Acknowledgements

Astrid Blom (Delft University of Technology), Ralph Schielen (RWS and Delft University of Technology) and Robert Jan Labeur (Delft University of Technology) contributed by valuable remarks. The full MSc thesis is accessible at the online repository of the TU Delft.

References

- Struiksmas, N., Olesen, K., Flokstra, C., de Vriend, H., 1985. Bed deformation in curved alluvial channels. *Journal of Hydraulic Research* 23, 57–79.
- Crosato, A., Mosselman, E., 2009. Simple physics-based predictor for the number of river bars and the transition between meandering and braiding. *Water Resources Research* 45.
- Taal, M.C., 1989. Time-dependent near-bank bed-deformation in meandering rivers. (MSc Thesis). Delft University of Technology
- Colombini, M., Seminara, G., Tubino, M., 1987. Fini-amplitude alternate bars. *Journal of Fluid Mechanics* 181, 213-232.