

## Robustness Analysis of Platoon Control for Mixed Types of Vehicles

Wang, Yixia; Lin, Shu; Wang, Yibing; Schutter, Bart De; Xu, Jungang

**DOI**

[10.1109/TITS.2022.3213413](https://doi.org/10.1109/TITS.2022.3213413)

**Publication date**

2023

**Document Version**

Final published version

**Published in**

IEEE Transactions on Intelligent Transportation Systems

**Citation (APA)**

Wang, Y., Lin, S., Wang, Y., Schutter, B. D., & Xu, J. (2023). Robustness Analysis of Platoon Control for Mixed Types of Vehicles. *IEEE Transactions on Intelligent Transportation Systems*, 24(1), 331-340. <https://doi.org/10.1109/TITS.2022.3213413>

**Important note**

To cite this publication, please use the final published version (if applicable).  
Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights.  
We will remove access to the work immediately and investigate your claim.

***Green Open Access added to TU Delft Institutional Repository***

***'You share, we take care!' - Taverne project***

**<https://www.openaccess.nl/en/you-share-we-take-care>**

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

# Robustness Analysis of Platoon Control for Mixed Types of Vehicles

Yixia Wang<sup>1</sup>, Student Member, IEEE, Shu Lin<sup>2</sup>, Member, IEEE, Yibing Wang<sup>3</sup>, Senior Member, IEEE, Bart De Schutter<sup>4</sup>, Fellow, IEEE, and Jungang Xu, Senior Member, IEEE

**Abstract**—Currently, with the development of driving technologies, driverless vehicles gradually are becoming more and more available. Therefore, there would be a long period of time during which self-driving vehicles and human-driven vehicles coexist. However, for a mixed platoon, it is hard to control the formation due to the existence of the manual vehicles resulting in weak robustness and slow consensus rate on this system of platoons because of uncertainties caused by human factors for manual vehicles. In order to solve this problem, we establish models of mixed platoons with mixed types of connected and automated vehicles (CAVs), human-driven vehicles (HDVs) and HDVs without the vehicle awareness device (HDVWs). We subsequently design  $\mathcal{H}_\infty$  controllers for the mixed platoons to realize the formation consensus. In addition, we use the  $\mathcal{H}_\infty$  norm of mixed platoons as the control objective investigating the robustness of the control algorithms in alleviating the platoon uncertainties. Furthermore, conditions are proved to maintain the stability of the mixed platoons, and the stability is analyzed based on the variation of the penetration rate of the manual vehicles. Finally, we formulate conditions for parameters according to the definition of string stability to avoid the collisions of vehicles. The results in this study are tested with simulations and suggest that the presented controllers can ensure the consensus of mixed platoons under uncertainties.

**Index Terms**—Traffic network control, mixed traffic flow,  $\mathcal{H}_\infty$  control.

## I. INTRODUCTION

WITH the development of urbanization and the popularization of vehicles, the number of motor vehicles is continuing to increase. Meanwhile, three major problems in the field of public transport including traffic safety, congestion and pollution, are becoming increasingly serious. In order to

address these problems, automobiles are made to be electric, intelligent, network-connected and shared. With the innovation of computer control technologies, more and more automatic control technologies have been applied to automobiles. Driverless cars emerged with the demands of security, environmental-friendliness and higher cost performance. In other words, driverless cars will be popular in the future. But there will be a transition stage between manned and driverless vehicles [1].

A platoon is a group of vehicles in close proximity that improves the efficiency of transportation. Based on platoon driving pattern, driving experience can become safer and more comfortable [2]. Due to this is a special stage, we focus on heterogeneous vehicular platoon, i.e., mixed platoon. For example, the scenarios in [3], [4], [5], [6], [7], and [8] described the mixed platoons including two types of vehicles: CAVs and HDVs. However, the third vehicle, i.e., HDVWs are neglected in these scenarios.

The goal of the platoons is to achieve consensus which means every vehicle drives at the same velocity and an expected position. For this control, controllers were established to coordinate the vehicles in platoons by integrating the feedback of neighborhood information in [9]. It is found that the control frameworks of platoons can be classified into centralized control and distributed control [2], [10], [11], [12], [13], [14], [15]. The former is more complex in computation. As such, it may not be suitable for large vehicle platoons. However, the distributed control, such as adaptive sliding model control [11] and distributed model predictive control (DMPC) [12], designs individual controllers for each vehicles, and realizes the platoon coordination through information exchange among vehicles.

In addition, robustness and string stability are the two crucial points during designing the platoon control protocols [16], [17]. In view of the changes in working conditions, external interference and modeling errors, it is difficult to model actual platoons accurately, and various failures of the system will also increase uncertainties of the models. In platoons, uncertainties bring instability to other vehicles. How to design a controller to make the uncertain objects meet the control quality requirements to achieve the robust control, has become a key research topic for researchers [3], [18]. In [19], the authors utilized the neural network to tackle uncertain vehicle dynamics. Unfortunately, this method is not suitable for the linear systems. Among the reported controllers,  $\mathcal{H}_\infty$  control is more commonly used [20].  $\mathcal{H}_\infty$  control is used in the

Manuscript received 24 September 2021; revised 18 January 2022, 10 May 2022, and 16 July 2022; accepted 13 September 2022. Date of publication 21 November 2022; date of current version 26 January 2023. This work was supported in part by the National Key Research and Development Program of China under Grant 2018YFB1600500, in part by the National Science Foundation of China under Grant 61673366 and Grant 61620106009, in part by the European COST Action TU1102, and in part by the Fundamental Research Funds for the Central Universities. The Associate Editor for this article was S. Santini. (Corresponding author: Shu Lin.)

Yixia Wang, Shu Lin, and Jungang Xu are with the School of Computer Science and Technology, University of Chinese Academy of Sciences, Beijing 101408, China (e-mail: wangyixia19@mails.ucas.ac.cn; slin@ucas.ac.cn; xujg@ucas.ac.cn).

Yibing Wang is with the College of Civil Engineering and Architecture, Zhejiang University, Hangzhou 310027, China (e-mail: wangyibing@zju.edu.cn).

Bart De Schutter is with the Delft Center for System and Control, Delft University of Technology, 2628 CD Delft, The Netherlands (e-mail: b.deschutter@tudelft.nl).

Digital Object Identifier 10.1109/TITS.2022.3213413

linear oscillation system in [21], because it almost meets the  $L_2$  string stability condition and can provide a choice between vehicle following performance and string stability.

When designing controllers for platoons, another particular difficulty is known as string instability [22]. A platoon is considered as string unstable, if small disturbances within the platoon amplify and cause a traffic jam in the end. To solve this problem, the property of string stability has been widely studied. Ever since the original definition of string was proposed, a number of definitions for string stability was given, such as strong frequency-domain string stability [23], input-to-state string stability [24],  $L_p$  string stability [25], [26], head-to-tail stability (HTS) [27], [28] and so on. In particular, HTS was introduced in mixed traffic [29], by which the vehicles in a platoon travel with the same velocity and maintain constant headways when the platoon system is HTS. The platoon system is HTS, if the function of outputs, denoted as  $G$ , satisfies  $\|G\|_{\mathcal{H}_\infty} \leq 1$ .

As mentioned above, there will be a long period of time for mixed platoons, that is, the coexistence of human-driven and driverless vehicles [30] until the human-driven vehicles are completely replaced by the driverless vehicles. However, a few researchers consider the third vehicles. This type of vehicles can exchange information with other vehicles and roadside controllers like the autonomous vehicles. Furthermore, their behaviors are controlled by the drivers instead of driving automatically. During the transition phase, an important issue is how to deal with various kinds of vehicles to get different vehicles coordinate with each other, and how to improve the driving efficiency of the traffic networks.

In this paper, we establish a mathematical model for mixed platoons composed of different kinds of vehicles, including CAVs, HDVs and HDVWs. This model called formation consensus, which is suitable for avoiding inter-vehicular collisions [31]. Based on this model, we design control laws to adapt the velocity difference and the position difference between adjacent vehicles to achieve smooth and efficient platoon driving. Moreover, we propose a method to quantify the control effects of platoons against the platoon uncertainties with an  $\mathcal{H}_\infty$  norm based on graph-theoretic notions and Vehicle to Vehicle (V2V) technology [32]. In addition, the effect of manual-driving vehicles on the robustness of mixed platoon control is analyzed. Although the above methods ensure the consistency of vehicle behavior, the distance between vehicles are becoming increased because of the existence of the HDVWs. To solve this problem, the conditions for HTS are deduced.

The paper is organized as follows. We start by introducing our notations in Section II, and in Section III, the model of mixed platoons of formation consensus is presented. In Section IV, bounds on the robustness metrics of the models above are analyzed. The results are tested by simulation in Section V. Finally, the simulation results and conclusions are summarized in Section VI.

## II. NOTATIONS AND DEFINITIONS

Let  $\mathbb{R}$  and  $\mathbb{N}$  be the sets of real and natural numbers, respectively. The topology of a multi-vehicle system can be characterized by an undirected graph  $\mathcal{G} = (\mathcal{V}, \mathcal{E}, \mathcal{W})$  with

node set  $\mathcal{V} = \{ve_1, ve_2, \dots, ve_N\}$ , edge set  $\mathcal{E} \subseteq \mathcal{V} \times \mathcal{V}$  and adjacency matrix  $A = [a_{ij}] \in \mathbb{R}^{n \times n}$  satisfies  $a_{ij} > 0$  if and only if  $(ve_i, ve_j) \in \mathcal{E}$ . Otherwise,  $a_{ij} = 0$ . The weighted degree matrix of a graph  $\mathcal{G}$  is therefore denoted by  $D = \text{diag}\{d_1, d_2, \dots, d_n\} \in \mathbb{R}^{n \times n}$ . The degree of node  $ve_i$  is denoted by  $d_i = \sum_{j=1}^n A_{ij}$ . The Laplacian matrix of the graph is given by  $L = D - A$ .

In this article, all of the networks are analyzed as undirected graphs. Then the order of nodes in  $\mathcal{E}$  is irrelevant and the corresponding adjacency matrix is symmetric. The set of neighbors of agent  $i$  is defined by  $\mathcal{N}_i = \{ve_j \in \mathcal{V} | (ve_j, ve_i) \in \mathcal{E}\}$ . For a given set of nodes  $S \subset V$ , the ground Laplacian induced by  $S$  is given by  $L_g$  [33], which is obtained by removing the rows and columns of  $L$  corresponding to the nodes (namely grounded nodes) of  $S$ . In this paper, the grounded nodes represent reference vehicles. For a given set of nodes  $I$ , the number of cardinality of the set is denoted by  $|I|$  (which we call cardinal number).  $A^*$  is the conjugate transpose matrix of  $A$ . The symbol  $\otimes$  denotes Kronecker product [34].

## III. PROBLEM STATEMENT

In this paper, we consider a network consisting of  $N$  vehicles, where the network corresponds to a platoon with a number of vehicles. In a platoon, each vehicle  $v_i \in \mathcal{V}$  is either a follower vehicle  $v_i \in \mathcal{F}$  or a reference vehicle  $v_i \in \mathcal{R}$ . A reference vehicle is the vehicle that can receive the control signals and communicate with some of the other vehicles, and the followers are the vehicles that are receiving the signals from the reference vehicles. In particular, a mixed platoon may include three kinds of vehicles, i.e. CAVs, HDVs, and HDVWs. In detail, CAVs could not only communicate information with other vehicles, but they can also make the driving decisions automatically. HDVs can only transmit information with others, but they cannot drive automatically. HDVWs are the normal vehicles that cannot be controlled automatically, which can be considered as disturbances in a platoon due to the uncertainty of the behavior of the HDVWs and the number of HDVWs. Compared with CAVs and HDVs, the HDVWs can neither be detected through information exchange, nor be controlled by the order given by the leader of the platoon or the traffic center. Due to this reason, the HDVWs is undetectable and uncontrollable in mixed vehicle platoons. Therefore, uncertainties are introduced into mixed vehicle platoons.

Normally, during manual driving, if the speed of a front car changes, the driver of the rear car needs to observe the variation of the distance between the front car and the rear car by eyes. According to the distance between the front car and rear car judged by the driver, the speed and acceleration are adapted manually. But, for human drivers, there is a long reaction time compared to the CAVs. So a large safe distance should be maintained from the front car for the consideration of driving safety. Even with the help of intelligent auxiliary systems, the decision maker is still human in the end, which means a certain reaction time is required. In a platoon, if all the vehicles can drive with the same speed and coordinate with each other, then the distance between vehicles can be reduced, and the traffic capacity and transport efficiency on a road can

TABLE I  
VEHICULAR PARAMETERS OF PLATOON FORMATION CONSENSUS

Variable	Description
$q_{ve_i}$	gain of position of the $i$ th follower-vehicle
$q_{ve_i-RC}$	gain of position of the $i$ th follower-vehicle if the sender of information of this follower-vehicle is a CAV/HDV or a reference vehicle
$q_{ve_i-HDVW}$	gain of position of the $i$ th follower-vehicle if the sender of information of this follower-vehicle is an HDVW
$d_{ve_i}$	gain of velocity of the $i$ th follower-vehicle
$d_{ve_i-RC}$	gain of velocity of the $i$ th follower if the sender of information of this follower-vehicle is a CAV/HDV or reference vehicle
$d_{ve_i-HDVW}$	gain of velocity of the $i$ th follower-vehicle if the former of this follower-vehicle is an HDVW
$q_{HDVW}$	gain of position if the former of this follower-vehicle is an HDVW
$d_{HDVW}$	gain of velocity if the former of this follower-vehicle is an HDVW

be improved [35]. However, in this paper, we consider a mixed platoon with multiple vehicles, including CAVs, HDVs, and HDVWs. For a mixed platoon, the dynamics of HDVWs is uncertain factor that are hard to predict and control. In such a circumstance, we build a platoon model taking the HDVWs as disturbances, and we investigate the control method aiming at achieving formation consensus under the coexistence of these uncertainties. Therefore, this paper will consider controlling the vehicle speed and position in a platoon to make the vehicles maintain a constant speed and constant distance in such an uncertain environment. Before describing the models, some assumptions are clarified: Because we focus on consensus control for a mixed platoon, lane change behavior is prohibited. In addition, in view of the rapid development of modern communication technology, communications are assumed to be perfect.

#### A. Basic Model

The dynamics of the reference vehicles are given by

$$\dot{v}_0(t) = 0, \quad (1)$$

where  $v_0$  is the velocity of reference vehicles in the platoon. In order to improve the traffic flow,  $v_0$  is given as a control command by upper controllers such as roadside controllers.

The dynamics of each follower vehicles are governed by

$$\dot{v}_i(t) = a_i(t), \quad (2)$$

where  $a_i(t)$  and  $v_i(t)$  are the acceleration and velocity of the  $i$ th follower-vehicle.

#### B. The Models of Different Types of Vehicles

In order to control the vehicles in a platoon to achieve the constant speed and constant distance in the platoon, formation consensus, i.e. in which vehicles finally have not only the same velocity but also the same distance between front vehicles and rear vehicles, will be explored in this paper. Thus, in this subsection, we will consider different models for this cases. To facilitate the presentation of the proposed model, all of the vehicular parameters throughout this paper are listed in Table I.

In this scenario, the goal of all of the followers is to reach not only the expected speed but also the same distance between neighbors. The acceleration dynamics of follower-vehicles are as follows:

$$\begin{aligned} \dot{v}_i(t) = a_i(t) = & \sum_{j \in \mathcal{N}_i} [q_{ve_i} (p_j(t) - p_i(t) + \Delta_{ij})] \\ & + \sum_{j \in \mathcal{N}_i} [d_{ve_i} (v_j(t) - v_i(t))], \end{aligned} \quad (3)$$

where  $v_i(t)$  and  $p_i(t)$  are the velocity and position of the  $i$ th follower-vehicle,  $\Delta_{ij}$  is a specific constant distance between the  $i$ th follower vehicle and the  $j$ th follower vehicle, which should satisfy  $\Delta_{ij} = p_i^* - p_j^*$  where  $p_i^*$  is the desired position of the  $i$ th follower-vehicle. Moreover,  $q_{ve_i}$  is the gain of position of the  $i$ th follower-vehicle, and  $d_{ve_i}$  is a gain of velocity of the  $i$ th follower-vehicle. Likewise, refining the formula (3) yields the following:

$$\begin{aligned} \dot{v}_i(t) = & \sum_{j_1 \in \mathcal{R}_i} [q_{ve_i-RC} (p_{j_1}(t) - p_i(t) + \Delta_{ij_1})] \\ & + \sum_{j_1 \in \mathcal{R}_i} [d_{ve_i-RC} (v_{j_1}(t) - v_i(t))] \\ & + \sum_{j_2 \in \mathcal{H}_i} [q_{ve_i-HDVW} (e_{j_2}(t) - p_i(t) + \Delta_{ij_2})] \\ & + \sum_{j_2 \in \mathcal{H}_i} [d_{ve_i-HDVW} (\dot{e}_{j_2}(t) - v_i(t))] \\ & + \sum_{j_3 \in \mathcal{C}_i} [q_{ve_i-RC} (p_{j_3}(t) - p_i(t) + \Delta_{ij_3})] \\ & + \sum_{j_3 \in \mathcal{C}_i} [d_{ve_i-RC} (v_{j_3}(t) - v_i(t))], \end{aligned} \quad (4)$$

where  $e_j$  represents the position of the HDVWs. The gains of position ( $q_{ve_i-RC}$ ,  $q_{ve_i-HDVW}$ ) and the gains of velocity ( $d_{ve_i-RC}$ ,  $d_{ve_i-HDVW}$ ) in (4) are listed in Table I.

#### C. The Model of Mixed Platoons

In the previous subsection, we presented the acceleration model for each vehicle. In this subsection, the acceleration model of vehicles will be applied to a model of a platoon. Before modeling, we need some explanations for the HDVWs. HDVWs are distinctive compared to CAVs and HDVs. The reasons are as follows: On the one hand, HDVWs are hard to be affected by other vehicle through information exchange; on the other hand, the existence of HDVWs has uncertainty in dynamics of HDVWs in the platoon. Accordingly, HDVWs are considered as the disturbances in platoons.

In this subsection, we will focus on models of mixed platoons, which have three kinds of vehicles, i.e. CAVs, HDVs and HDVWs, for the formation consensus.

Position errors are defined compared with the desired position as  $\tilde{p}_i = p_i - p_i^*$ . (4) is rewritten as follows:

$$\dot{\tilde{\mathbf{x}}}(t) = B\tilde{\mathbf{x}}(t) + Fr_{HDVW}\tilde{\mathbf{E}}(t), \quad (5)$$

where

$$\tilde{\mathbf{x}}(t) = [\tilde{p}_1(t) \ \tilde{p}_2(t) \ \dots \ \tilde{p}_n(t) \ \dot{\tilde{p}}_1(t) \ \dot{\tilde{p}}_2(t) \ \dots \ \dot{\tilde{p}}_n(t)]^T,$$



$$\begin{aligned}\tilde{\mathbf{E}}(t) &= [\tilde{\mathbf{e}}(t) \dot{\tilde{\mathbf{e}}}(t)]^T, \\ B &= B_1 + B_2, \\ F &= \begin{bmatrix} 0_{|\mathcal{F}| \times 1} & 0_{|\mathcal{F}| \times 1} \\ \bar{I}_j & \bar{I}_j \end{bmatrix}, \\ r_{\text{HDVW}} &= \begin{bmatrix} d_{\text{ve}_i} - \text{HDVW} \\ q_{\text{ve}_i} - \text{HDVW} \end{bmatrix},\end{aligned}$$

which

$$\begin{aligned}B_1 &= \begin{bmatrix} 0_{|\mathcal{F}| \times |\mathcal{F}|} & I_{|\mathcal{F}| \times |\mathcal{F}|} \\ 0_{|\mathcal{F}| \times |\mathcal{F}|} & 0_{|\mathcal{F}| \times |\mathcal{F}|} \end{bmatrix}, \\ B_2 &= - \begin{bmatrix} 0_{|\mathcal{F}| \times |\mathcal{F}|} & I_{|\mathcal{F}| \times |\mathcal{F}|} \\ B_{21} & B_{22} \end{bmatrix}, \\ B_{21} &= \text{diag}(q_{\text{ve}_1}, \dots, q_{\text{ve}_n}) \times L_g, \\ B_{22} &= \text{diag}(d_{\text{ve}_1}, \dots, d_{\text{ve}_n}) \times L_g.\end{aligned}$$

Note that  $\bar{I}_j$  is a matrix in which each element is either 0 or 1, and the value of 0 or 1 corresponds to the positions of the HDVWs: When the front vehicle of the  $i$ th follower-vehicle is an HDVW, then the element value is 1; when a front vehicle of the  $i$ th vehicle is a CAV or an HDV, then the element value is 0.

#### IV. ROBUSTNESS OF PLATOON FORMATION CONSENSUS

In this section, we provide a condition to evaluate the robustness of the network formation dynamics.

The transfer function of (5) is:

$$G_f(s) = (s^2 I + B_{22}s + B_{21})^{-1} (d_{\text{HDVW}} \bar{I}_j s + q_{\text{HDVW}} \bar{I}_j); \quad (6)$$

see the Appendix A for the details.

Note that the column vector  $\bar{I}_j$  contains two elements that are either 0 or 1. Actually, the  $b$ th element in the transfer function matrix is the sum of the elements of the inverse matrix in the  $b$ th row and certain columns. The certain columns equal to rows to which nonzero element located in vector  $\bar{I}_j$ .

The presence of HDVWs leads to the uncertainty of the platoon, because HDVWs neither send driving information to other vehicles nor receive driving information from the reference vehicles and the front vehicle. Thus, it is indispensable to estimate the impact of HDVWs on the system state (i.e. platoon speed and position). Accordingly, the  $\mathcal{H}_\infty$ -norm of the defined transfer function is adopted as the control performance. Suppose the certain relationship between two coefficients ( $d_{\text{HDVW}}$ , the velocity coefficient of the HDVWs and  $q_{\text{HDVW}}$ , the position coefficient of the HDVWs) is as follows:

$$d_{\text{HDVW}} = a_1 q_{\text{HDVW}}, \quad (7)$$

where  $a_1$  is a constant value; in this paper we choose  $a_1 = 1$  since the drivers of the HDVWs have the same level of response ratio to the position error and the velocity error.

Let

$$\begin{aligned}\mathbf{D}_q &= \text{diag}(q_{\text{ve}_1}, \dots, q_{\text{ve}_n}), \\ \mathbf{D}_d &= \text{diag}(d_{\text{ve}_1}, \dots, d_{\text{ve}_n}),\end{aligned}$$

then

$$(s^2 I + B_{22}s + B_{21})^{-1} = (s^2 I + \mathbf{D}_d L_g s + \mathbf{D}_q L_g)^{-1}. \quad (8)$$

The subsequent analysis is based on the premise that there are two kinds of vehicles in platoon, i.e. CAVs and HDVs are considered as C vehicles. Then the following two matrices are constant matrices:

$$\begin{aligned}\mathbf{D}_q &= q_c \otimes \mathbf{I}, \\ \mathbf{D}_d &= d_c \otimes \mathbf{I}.\end{aligned}$$

By rewriting (8) we have

$$(s^2 I + B_{22}s + B_{21})^{-1} = (s^2 I + q_c L_g s + d_c L_g)^{-1}, \quad (9)$$

and (9) can be put in diagonal form as:

$$\begin{aligned}(s^2 I + B_{22}s + B_{21})^{-1} &= (s^2 I + d_c L_g s + q_c L_g)^{-1} \\ &= Q(s^2 I + (d_c s + q_c) \Lambda)^{-1} Q^T,\end{aligned} \quad (10)$$

where  $Q$  is a matrix formed by the eigenvectors of  $L_g$ , and  $\Lambda$  is a diagonal matrix in which the elements are as follows:

$$G_{fi}(s) = \frac{1}{s^2 + d_c \lambda_i(L_g)s + q_c \lambda_i(L_g)}, i \in \{1, 2, \dots, |\mathcal{C}|\}. \quad (11)$$

where  $|\mathcal{C}|$  is the total number of CAVs and HDVs. Note that parameters  $d_c$  and  $q_c$  are proportional to each other, i.e.  $d_c = C q_c$ . When the variation of vehicle speed is more sensitive than the variation of vehicle location,  $C$  is larger than 1.

*Theorem 1:* For a mixed platoon that contains three kinds of vehicles, i.e. CAVs, HDVs and HDVWs, the velocities and positions error of all the vehicles in the platoon will converge to the reference velocity and the reference positions error under the control law in (5), and the platoon system is robust to the uncertainties (i.e. the HDVWs), if the following condition is satisfied.

$$\frac{d_{\text{HDVW}}}{D} \leq 1, \quad (12)$$

where

$$\begin{aligned}D &= 2\sqrt{-\frac{D_1}{d_c^2} + D_2 + 1} + \frac{D_1}{d_c^2 - q_c^2} - D_2 - 2, \\ D_1 &= \frac{9q_c^4}{d_c^2(d_c^2 - q_c^2)}, \\ D_2 &= \frac{6q_c^3}{d_c^2(d_c^2 - q_c^2)},\end{aligned}$$

and  $C^2 q_c > \frac{3}{2}$ ,  $d_c = C q_c$ .

*Proof:* From (6) and (7), the transfer function of (5) can be rewritten as follows:

$$G_f(s) = d_{\text{HDVW}}(s^2 I + B_{22}s + B_{21})^{-1}(\bar{I}_j s + \bar{I}_j). \quad (13)$$

The subsystem of  $G_f$  is not disturbed by HDVWs if the element in  $\bar{I}_j$  is 0. In order to explore robustness, we pay more attention to the case where the element in  $\bar{I}_j$  is 1.

The amplitude of (13) satisfies:

$$|G_f(j\omega)|^2 = \frac{d_{HDVW}^2(\omega^2 + 1)}{\omega^4 + (d_C^2\lambda_i^2 - 2q_C\lambda_i)\omega^2 + q_C^2\lambda_i^2}.$$

Let  $x = \omega^2$ ,  $g(x) = \frac{1}{|G_f(j\omega)|^2}$ . More exactly,

$$\begin{aligned} g(x) &= \frac{x+1}{d_{HDVW}^2} + \frac{q_C^2\lambda_i^2 - d_C^2\lambda_i^2 + 2q_C\lambda_i + 1}{d_{HDVW}^2(x+1)} \\ &\quad + \frac{d_C^2\lambda_i^2 - 2q_C\lambda_i - 2}{d_{HDVW}^2} \\ &\geq 2\sqrt{\frac{q_C^2\lambda_i^2 - d_C^2\lambda_i^2 + 2q_C\lambda_i + 1}{d_{HDVW}^4}} + \frac{d_C\lambda_i^2 - 2q_C\lambda_i - 2}{d_{HDVW}^2} \\ &= \frac{2\sqrt{q_C^2\lambda_i^2 - d_C^2\lambda_i^2 + 2q_C\lambda_i + 1} + d_C\lambda_i^2 - 2q_C\lambda_i - 2}{d_{HDVW}^2}. \end{aligned} \quad (14)$$

In order to obtain the minimum value of (14),  $\lambda_i$  is considered as an independent variable.

Let

$$h(\lambda_i) = 2\sqrt{q_C^2\lambda_i^2 - d_C^2\lambda_i^2 + 2q_C\lambda_i + 1} + d_C\lambda_i^2 - 2q_C\lambda_i - 2, \quad (15)$$

and then take the derivative of this equation as follows:

$$h'(\lambda_i) = \frac{(q_C^2 - d_C^2)\lambda_i + 2q_C}{\sqrt{(q_C^2 - d_C^2)\lambda_i^2 + 2q_C\lambda_i + 1}} + d_C\lambda_i - q_C. \quad (16)$$

Then we make (16) equal to 0. We can acquire a solution by solving this equation as follows:

$$\lambda_i^* = \frac{3q_C^2}{d_C^2(d_C^2 - q_C^2)}. \quad (17)$$

$\lambda_i = \lambda_i^*$  may be an extreme point of  $h(\lambda_i)$ . To further confirm whether it is an extreme point, the secondary derivative of  $h(\lambda_i)$  is calculated as follows:

$$h''(\lambda_i) = \frac{-d_C^2}{(\sqrt{(q_C^2 - d_C^2)\lambda_i^2 + 2q_C\lambda_i + 1})^3} + d_C^2. \quad (18)$$

Therefore,

$$\begin{aligned} h''(\lambda_i^*) &= \frac{-d_C^2}{(\sqrt{(q_C^2 - d_C^2)\lambda_i^{*2} + 2q_C\lambda_i^* + 1})^3} + d_C^2 \\ &= d_C^2 \cdot \frac{(\sqrt{(q_C^2 - d_C^2)\lambda_i^{*2} + 2q_C\lambda_i^* + 1})^3 - 1}{(\sqrt{(q_C^2 - d_C^2)\lambda_i^{*2} + 2q_C\lambda_i^* + 1})^3}, \end{aligned} \quad (19)$$

where  $d_C^2 > 0$ ,  $(\sqrt{(q_C^2 - d_C^2)\lambda_i^{*2} + 2q_C\lambda_i^* + 1})^3 > 0$ .

Accordingly, if  $C^2q_C > \frac{3}{2}$  and  $d_C = Cq_C$ , then

$$(q_C^2 - d_C^2)\lambda_i^{*2} + 2q_C\lambda_i^* + 1 - 1 = \frac{9 - 6C^2q_C}{C^4q_C^2(1 - C^2)} > 0. \quad (20)$$

It is straightforward that  $h''(\lambda_i^*) > 0$ . Consequently,  $\lambda_i^*$  is a minimum point. Then, replacing  $\lambda_i$  in (15) with  $\lambda_i^*$  gives (12) in Theorem 1 can be derived.  $\square$

Although a platoon achieves the consensus based on Theorem 1, it does not guarantee the absence of increasing spacing. Theorem 2 below provides the conditions according to string stability. Therefore, using the peak magnitude of spacing error  $\tilde{p}_i(t)$ , we define the string stability as below:

*Definition 1 [36]: For a system of a platoon containing  $n$  vehicles, it is string stable if and only if*

$$\left\| \frac{\tilde{P}_i(j\omega)}{\tilde{P}_{i-1}(j\omega)} \right\|_\infty < 1, \forall \omega > 0, \quad (21)$$

where  $\tilde{P}_i(s)$  is the Laplace transform of  $\tilde{p}_i(t)$ .

*Theorem 2: For a mixed platoon that contains two kinds of vehicles, i.e. C vehicles and HDVWs, the string stability based on different cases is guaranteed if the following conditions are met.*

*Case 1: If the front vehicle of the C vehicle is a leader, and the rear vehicle is a C vehicle, the parameters of the C vehicle satisfy the following condition:*

$$\begin{aligned} w_1^3 d_C^2 + (q_C^2 + 3d_C^4 - 4d_C^2 q_C)w_1^2 \\ + (6q_C^2 d_C^2 - 4q_C^3)w_1 + 3q_C^4 > 0, \end{aligned} \quad (22)$$

where  $w_1 = \frac{\sqrt{4q_C^3 d_C^2 + q_C^4} - q_C^2}{d_C^2}$ .

*Case 2: If the front vehicle of the C vehicle is a C vehicle, and the rear vehicle is a C vehicle, the parameters of the C vehicle satisfy the following condition:*

$$\begin{aligned} w_2^3 d_C^2 + (q_C^2 + 5d_C^4 - 6d_C^2 q_C)w_2^2 \\ + (10q_C^2 d_C^2 - 6q_C^3)w_2 + 5q_C^4 > 0, \end{aligned} \quad (23)$$

where  $w_2 = \frac{\sqrt{6q_C^3 d_C^2 + q_C^4} - q_C^2}{d_C^2}$ .

*Case 3: If the front vehicle of the C vehicle is an HDVW, and the rear vehicle is a C vehicle, the parameters of the C vehicle satisfy the following condition:*

$$\begin{aligned} w_2^3 d_C^2 + (q_C^2 - 6d_C^2 q_C)w_2^2 - (12q_C^2 d_C^2 \\ + 6q_C^3)w_2 > 0. \end{aligned} \quad (24)$$

*Case 4: If the front vehicle of the C vehicle is a C vehicle, and the rear vehicle is an HDVW, the parameters of the C vehicle satisfy the following condition:*

$$\begin{aligned} 4w_2^3 d_C^2 + (4q_C^2 + 27d_C^4 - 24d_C^2 q_C)w_2^2 \\ + (54q_C^2 d_C^2 - 24q_C^3)w_2 + 27q_C^4 > 0. \end{aligned} \quad (25)$$

*Case 5: If the front vehicle of the last vehicle (the C vehicle) is a C vehicle, the parameters of the last vehicle satisfy the following condition:*

$$\begin{aligned} w_1^3 d_C^2 + (q_C^2 + 3d_C^4 - 4d_C^2 q_C)w_1^2 \\ + (6q_C^2 d_C^2 - 4q_C^3)w_1 + 3q_C^4 > 0. \end{aligned} \quad (26)$$

TABLE II  
THE INITIAL STATES OF THE TWO PLATOONS

$i$ th	types of the vehicle	$\tilde{p}_i(0)$ (km)	$\tilde{v}_i(0)$ (km/h)
1th	C	-0.01	2.49
2th	C	-0.03	1.00
3th	C	-0.04	0.82
4th	C	-0.03	-2.91
5th	C	-0.06	0.06
6th	HDVW		
7th	C	-0.07	-0.26
8th	C	-0.10	2.86
9th	C	-0.17	0.97
10th	C	-0.27	-1.14
11th	C	-0.30	0.93
12th	C	-0.33	-1.45
13th	C	-0.35	5.32
14th	C	-0.40	-1.50
15th	C	-0.45	3.79
16th	HDVW		
17th	C	-0.40	4.50
18th	C	-0.50	-2.85
19th	C	-0.60	-1.58
20th	C	-0.70	-2.69

Case 6: If the front vehicle of the C vehicle is an HDVW, and the rear vehicle is an HDVW, the parameters of the C vehicle satisfy the following condition:

$$4w_2^3d_C^2 + (4q_C^2 + 9d_C^4 - 24d_C^2q_C)w_2^2 + (22q_C^2d_C^2 - 24q_C^3)w_2 + 9q_C^4 > 0. \quad (27)$$

*Proof:* See the Appendix B for the details.  $\square$

## V. CASE STUDY SIMULATIONS

To verify the derived conclusions, in this section, the verification for the robustness of the platoon controllers is carried out under different scenarios. In addition, the robustness of the platoon controllers is analyzed by changing the penetration rate of the HDVWs. The simulations are performed via the Matlab (R2019a).

In this subsection, we first verify Theorem 1 with 2 predefined platoon scenarios. Then, the robustness of the controller is investigated by changing the penetration rate of the HDVWs. The safe distance between vehicle and in front of it should be maintained to reduce the risk of collision, and the vehicle spacing is constrained as follows:

$$p_i(t) - p_{i-1}(t) > \alpha_{\text{safe}}, \quad (28)$$

where  $p_i(t)$  is the position of the  $i$ th vehicle at time  $t$ , and  $\alpha_{\text{safe}}$  is the minimum safety distance.

### A. Verification

In this subsection, we show the validation of effectiveness of Theorem 1 based on the two contrasting scenarios by defining different styles of communication in platoons. The initial states (speed errors, position errors and order) of the two platoons are the same, as shown in Table II, but the references are different. In Scenario 1, the coefficients satisfy the conditions in Theorem 1 and Theorem 2, while the coefficients in Scenario 2 do not satisfy these conditions. Specifically, the values of these coefficients are listed in Table III. In addition, the ideal distance between two adjacent vehicles is 40m.

TABLE III  
LIST OF SYSTEM MODEL AND CONTROLLER PARAMETERS IN THE MODEL OF PLATOON FORMATION CONSENSUS USED FOR THE CASE STUDY

Symbol	Scenario 1	Scenario 2
$d_{\text{HDVW}}$	0.002	0.002
$d_C$	70.03	10
$q_C$	70	5

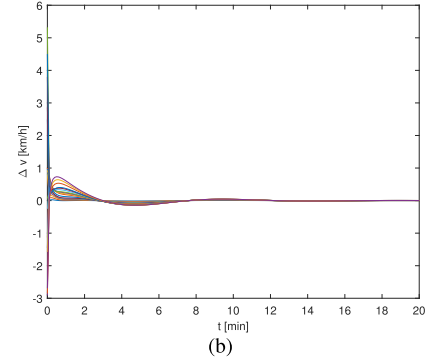
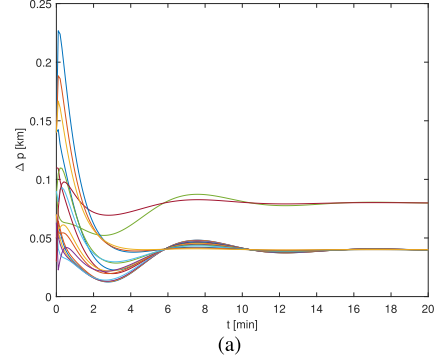


Fig. 1. Performances of the platoon satisfying Theorem 1 and Theorem 2: (a) the vehicle position errors varying with time; the vehicle velocity errors varying with time.

Note that the position errors  $\Delta p$  is the position error between the  $i$ th and  $(i - 1)$ th vehicles. It can be seen from Fig. 1 that the position errors between the  $i$ th and  $(i - 1)$ th vehicles converge to 40m, in which the final values of 80m are because the front vehicles of the 7th and the 17th are the HDVWs, and the velocity errors and position errors of all the vehicles tend to 0 in the first scenario. For the second scenario as shown in Fig. 2, although the velocity errors seem to converge to 0, the oscillations are more obvious than in Fig. 1. At the same time, the values of displacement errors in Fig. 2 are negative, which means that there is a collision in this platoon. The results verify that the given platoon system becomes unstable when Theorem 1 is not satisfied.

Fig. 3 and 4 display the trends of the position errors between the  $N$ th and  $(N - 1)$ th sampling moments for the followers satisfying or not satisfying Theorems 1 and 2 ( $N$  values from 1 to 200). In general, the performance of the Fig.3 is better than that of the Fig.4. Because the convergence speed of the platoon satisfying Theorems 1 and 2 in Fig.3(a) is better than that of the platoon not satisfying Theorems 1 and 2 in Fig.4(a), and the values of the position errors (except the



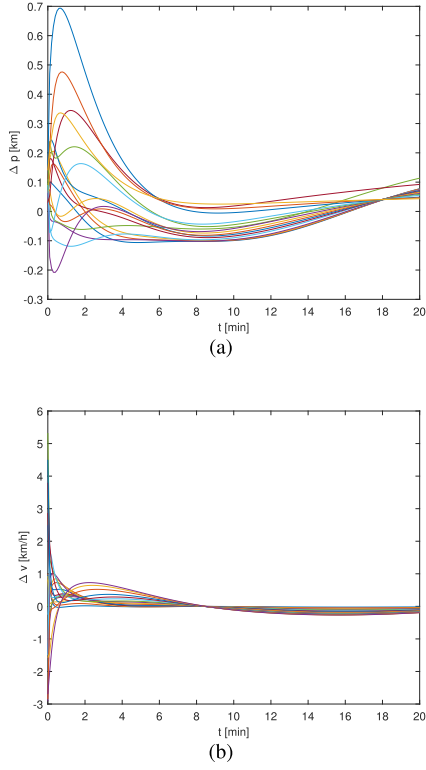


Fig. 2. Performances of the platoon not satisfying Theorem 1 and Theorem 2: (a) The vehicle position errors varying with time; (b) The vehicle velocity errors varying with time.

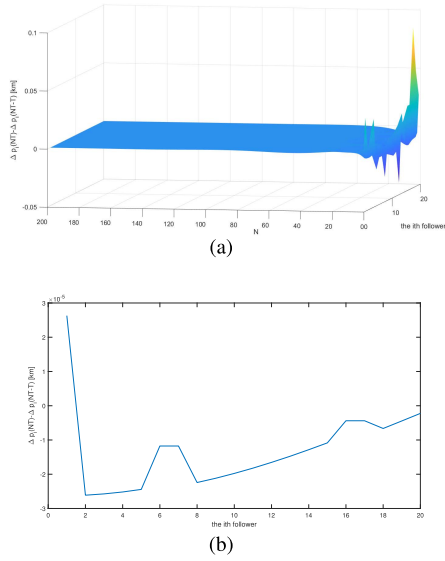


Fig. 3. Positions errors of the platoon satisfying Theorem 1 and Theorem 2: (a) the trend of the vehicle position errors varying with sampling time; (b) the trend of the follower vehicle velocity errors for the last sampling moment.

1st follower) on the curves are less than 0, i.e., the position errors will decrease along the vehicle platoon in Fig. 3(b).

### B. $\mathcal{H}_\infty$ Robustness Under Different Penetration Rates of the HDVWs

An dependent test was performed to study the impact of the penetration rate of the HDVWs on the robustness of platoon formation consensus.

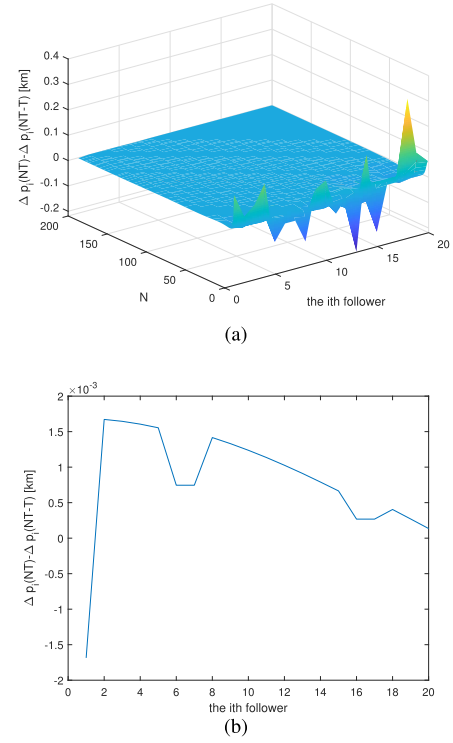


Fig. 4. Positions errors of the platoon not satisfying Theorem 1 and Theorem 2: (a) the trend of the vehicle position errors varying with sampling time; (b) the trend of the follower vehicle velocity errors for the last sampling moment.

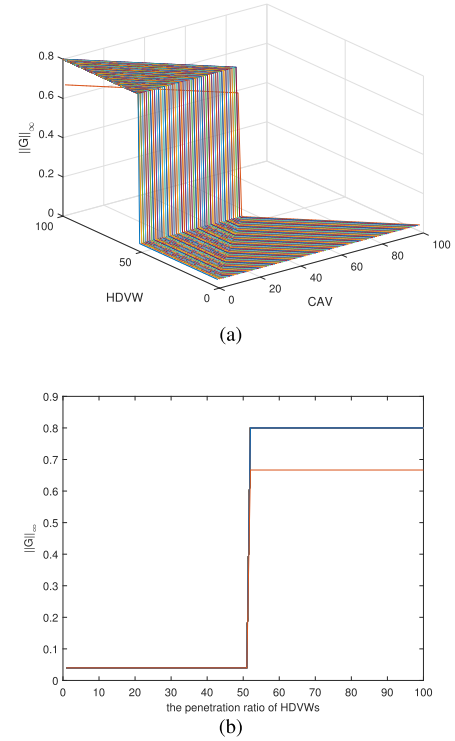


Fig. 5.  $\mathcal{H}_\infty$  norm of all vehicles under different penetration rates of HDVWs for platoon formation consensus: (a)  $\mathcal{H}_\infty$  norm of all vehicles under different penetration rate of HDVWs (general layout); (b)  $\mathcal{H}_\infty$  norm of all vehicles under different penetration rate of HDVWs with fixed proportion of  $P_{CAV}$  and  $P_{HDV}$ .

The setup of this test is similar to the case of platoon velocity consensus. The total number of vehicles in the platoon is 100. The reference vehicle is located in front of the vehicles

in the platoon, i.e. the leader. Then, for different penetration rate values of HDVWs and the CAVs, the  $\mathcal{H}_\infty$  norm is calculated as shown in Fig. 5.

According to the simulation results, when the penetration rate of the HDVWs increases from 0% to 50%, the  $\mathcal{H}_\infty$  norm of the system is low and flat, which means the controller is very robust to the uncertainties (i.e. the HDVWs). But, there is a turning point when the reactivation rate of the HDVWs increases to 50%, where the  $\mathcal{H}_\infty$  norm values achieve a peak, i.e. the robustness of the controller dramatically drops. For a fixed penetration rate of the HDVWs, the higher the penetration rate of the CAVs is, the more robust the platoon controller is with respect to the uncertainty. Compared to the results of the platoon velocity consensus, the increase of the penetration rate of the CAVs contributes more to the system robustness.

## VI. CONCLUSION

There is a transition stage, i.e. with mixed traffic flows of CAVs, HDVs, and HDVWs, before driverless technology will be fully deployed. This paper presents a method to quantify the robustness of the platoon control laws by an  $\mathcal{H}_\infty$  norm against the uncertainties caused by HDVWs of the mixed platoons, based on graph theory. At the same time, the conditions for judging the stability of the control laws under uncertainties are proved for the formation consensus:

- First, we consider HDVWs as disturbances, and one state-space models is established to describe the dynamics of the velocities and the positions of vehicles.
- Second, by analyzing the upper bounds of the  $\mathcal{H}_\infty$  norm for the platoon system, we present conditions to achieve velocity consensus and formation consensus. The conditions are proved mathematically, and the simulations demonstrate that the platoons can achieve formation consensus under the proposed controllers.
- Third, a new way for string stability analysis is proposed to effectively guarantee the security of the platoons.
- Finally, the robustness of the control law is analyzed by assessing variation of the  $\mathcal{H}_\infty$  norm with the variation of the penetration rate of HDVWs.

In the future, we will study the consensus of the heterogeneous vehicular platoons consistency with more accurate team models. In addition, we will focus on coordination between platoons control and signal control to relieve traffic jams effectively.

## APPENDIX

### A. Proof of the Transfer Equations (6)

First, we obtain the following state space expression from (5):

$$\begin{aligned} \ddot{\mathbf{p}} &= \begin{bmatrix} B_{21} & B_{22} \end{bmatrix} \begin{bmatrix} \ddot{\mathbf{p}} \\ \dot{\mathbf{p}} \end{bmatrix} + \begin{bmatrix} \bar{I}_j & \bar{I}_j \end{bmatrix} Q \begin{bmatrix} \ddot{\mathbf{e}} \\ \dot{\mathbf{e}} \end{bmatrix} \\ &= -B_{21}\ddot{\mathbf{p}} - B_{22}\dot{\mathbf{p}} + q_{\text{HDVW}}\bar{I}_j\ddot{\mathbf{e}} + d_{\text{HDVW}}\bar{I}_j\dot{\mathbf{e}}, \end{aligned} \quad (29)$$

$$\text{where } Q = \begin{bmatrix} q_{\text{HDVW}} & d_{\text{HDVW}} \end{bmatrix}.$$

As output signals of interest, we consider position errors of CAVs, HDVs as output. The input is the information of HDVWs. Based on the linear time-invariant control system as (5) and the theory of Laplace transform, (29) is rewritten with all initial condition assumed to be zero as:

$$\begin{aligned} s^2\tilde{\mathbf{P}}(s) &= -B_{21}\tilde{\mathbf{P}}(s) - B_{22}s\tilde{\mathbf{P}}(s) \\ &\quad + d_{\text{HDVW}}\bar{I}_js\tilde{\mathbf{E}}(s) + q_{\text{HDVW}}\bar{I}_j\tilde{\mathbf{E}}(s), \end{aligned} \quad (30)$$

where  $\tilde{\mathbf{P}}(s) = \mathcal{L}(\tilde{\mathbf{p}}(s))$ ,  $\tilde{\mathbf{E}}(s) = \mathcal{L}(\tilde{\mathbf{e}}(s))$ .

$$(s^2 + B_{22}s + B_{21})\tilde{\mathbf{P}}(s) = (d_{\text{HDVW}}\bar{I}_js + q_{\text{HDVW}}\bar{I}_j)\tilde{\mathbf{E}}(s) \quad (31)$$

Hence, the transfer function is deduced as (6).

### B. Proof of the Theorem 2

According to information transmitting of different kinds of vehicles, six cases are discussed as follows.

Case 1: In this case, the acceleration expression of the  $i$ th vehicle is as follows:

$$\begin{aligned} \ddot{p}_i(t) &= q_C(p_0(t) - p_i(t) + \Delta_{i0}) + d_C(v_0(t) - v_i(t)) \\ &\quad + q_C(p_{i+1}(t) - p_i(t) + \Delta_{i(i+1)}) \\ &\quad + d_C(v_{i+1}(t) - v_i(t)). \end{aligned} \quad (32)$$

By introducing the position errors, the acceleration of the  $i$ th vehicle can be rewritten as the following:

$$\ddot{p}_i(t) = d_C\dot{p}_{i+1}(t) - 2d_C\dot{p}_i(t) + q_C\dot{p}_{i+1}(t) - 2q_C\dot{p}_i(t). \quad (33)$$

The Laplace form of the above equation is shown below:

$$P_i(s) = \frac{d_Cs + q_C}{s^2 + 2d_Cs + 2q_C}P_{i+1}(s). \quad (34)$$

The above equation can be rewritten as follows:

$$\frac{P_{i+1}(s)}{P_i(s)} = \frac{1}{Z_1(s)}, \quad (35)$$

where

$$Z_1(s) = \frac{d_Cs + q_C}{s^2 + 2d_Cs + 2q_C}.$$

According to the definition, string stability is obtained if (36) is satisfied.

$$\|Z_1\|_\infty > 1. \quad (36)$$

Therefore, string stability is obtained if (37) is satisfied.

$$\|s^2 + 2d_Cs + 2q_C\|_\infty < 1. \quad (37)$$

Let  $Y_1(s) = \frac{s^2}{d_Cs + q_C} + 2$ . The amplitude of  $Y_1(s)$  satisfies:

$$\|Y_1\| = \frac{\sqrt{(-\omega^2q_C + 2q_C^2 + 2d_C^2\omega^2)^2 + \omega^6d_C^2}}{q_C^2 + d_C^2\omega^2}. \quad (38)$$

Consequently,  $\omega_1^2 = \frac{\sqrt{4q_C^3d_C^2 + q_C^4 - q_C^2}}{d_C^2}$  is a minimum point.

The minimum value for  $\|Y_1(j\omega)\|$  is

$$\frac{\sqrt{-d_C^2 w_1^3 + E w_1^2 + (8q_C^2 d_C^2 - 4q_C^3) w_1 + 4q_C^4}}{q_C^2 + d_C^2 w_1},$$

where  $E = q_C^2 + 4d_C^4 - 4d_C^2 q_C$ . According to (36), (22) can be derived.

Case 2: The acceleration expression of the  $i$ th vehicle is as follows:

$$\begin{aligned} \ddot{p}_i(t) &= q_C(p_0(t) - p_i(t) + \Delta_{i0}) + d_C(v_0(t) - v_i(t)) \\ &\quad + q_C(p_{i+1}(t) - p_i(t) + \Delta_{i(i+1)}) + d_C(v_{i+1}(t) - v_i(t)) \\ &\quad + q_C(p_{i-1}(t) - p_i(t) + \Delta_{i(i-1)}) + d_C(v_{i-1}(t) - v_i(t)). \end{aligned} \quad (39)$$

By introducing the position errors, the acceleration of the  $i$ th vehicle can be rewritten as the following:

$$\begin{aligned} \ddot{p}_i(t) &= d_C \dot{p}_{i+1}(t) - 3d_C \dot{p}_i(t) + d_C \dot{p}_{i-1}(t) \\ &\quad + q_C p_{i+1}(t) - 3q_C p_i(t) + q_C p_{i-1}(t). \end{aligned} \quad (40)$$

The Laplace form of the above equation is shown below:

$$\begin{aligned} P_i(s) &= \frac{d_C s + q_C}{s^2 + 32d_C s + 3q_C} P_{i+1}(s) \\ &\quad + \frac{d_C s + q_C}{s^2 + 32d_C s + 3q_C} P_{i-1}(s). \end{aligned} \quad (41)$$

The above equation can be rewritten as follows:

$$\frac{P_i(s)}{P_{i-1}(s)} = \frac{Z_2(s)}{1 - Z_2(s) \frac{P_{i+1}(s)}{P_i(s)}}, \quad (42)$$

where

$$Z_2(s) = \frac{d_C s + q_C}{s^2 + 32d_C s + 3q_C}.$$

By assuming that  $\|\frac{P_{i+1}(s)}{P_i(s)}\| < 1$  is satisfied, the string stability is achieved if  $\|Z_2(s)\|_\infty < 0.5$  is met. If  $\|Z_2(s)\|_\infty < 0.5$  is satisfied, then

$$\left\| \frac{s^2}{d_C s + q_C} + 3 \right\|_\infty > 2. \quad (43)$$

Let  $Y_2(s) = \frac{s^2}{d_C s + q_C} + 3$ . The amplitude of  $Y_2(s)$  satisfies:

$$\|Y_2\| = \frac{\sqrt{\omega^6 d_C^2 + F \omega^4 + (18q_C^2 d_C^2 - 6q_C^3) \omega^2 + 4q_C^4}}{q_C^2 + d_C^2 \omega^2}, \quad (44)$$

where  $F = q_C^2 + 9d_C^4 - 6d_C^2 q_C$ .

Consequently, The minimum value for  $\|Y_2(j\omega)\|$  is

$$\frac{\sqrt{-w_2^3 d_C^2 + E w_2^2 + (8q_C^2 d_C^2 - 4q_C^3) w_2 + 4q_C^4}}{q_C^2 + d_C^2 w_2},$$

where  $w_2 = \omega_2^2$ . According to (43), (23) can be derived.

The proofs of cases 3, 4, 5 and 6 are similar to the above cases.

## REFERENCES

- [1] Y. Zheng, J. Wang, and K. Li, "Smoothing traffic flow via control of autonomous vehicles," *IEEE Internet Things J.*, vol. 7, no. 5, pp. 3882–3896, May 2020.
- [2] B. Caiazzo, D. G. Lui, A. Petrillo, and S. Santini, "Distributed double-layer control for coordination of multiplatoons approaching road restriction in the presence of IoV communication delays," *IEEE Internet Things J.*, vol. 9, no. 6, pp. 4090–4109, Mar. 2022, doi: [10.1109/IJOT.2021.3102841](https://doi.org/10.1109/IJOT.2021.3102841).
- [3] S. Feng, Z. Song, Z. Li, Y. Zhang, and L. Li, "Robust platoon control in mixed traffic flow based on tube model predictive control," *IEEE Trans. Intell. Vehicles*, vol. 6, no. 4, pp. 711–722, Dec. 2021.
- [4] C. Chen, J. Wang, Q. Xu, J. Wang, and K. Li, "Mixed platoon control of automated and human-driven vehicles at a signalized intersection: Dynamical analysis and optimal control," *Transp. Res. C, Emerg. Technol.*, vol. 127, Jun. 2021, Art. no. 103138.
- [5] H. Zhao, D. Sun, M. Zhao, Q. Pu, and C. Tang, "Combined longitudinal and lateral control for heterogeneous nodes in mixed vehicle platoon under V2I communication," *IEEE Trans. Intell. Transp. Syst.*, vol. 23, no. 7, pp. 6751–6765, Jul. 2022, doi: [10.1109/TITS.2021.3061413](https://doi.org/10.1109/TITS.2021.3061413).
- [6] D. G. Lui, A. Petrillo, and S. Santini, "An optimal distributed PID-like control for the output containment and leader-following of heterogeneous high-order multi-agent systems," *Inf. Sci.*, vol. 541, pp. 166–184, Dec. 2020.
- [7] K. Li, Y. Bian, S. E. Li, B. Xu, and J. Wang, "Distributed model predictive control of multi-vehicle systems with switching communication topologies," *Transp. Res. C, Emerg. Technol.*, vol. 118, Sep. 2020, Art. no. 102717.
- [8] K. Li, F. Gao, Z. Lin, J. Li, Q. Sun, and S. E. Li, "Robust distributed consensus control of uncertain multiagents interacted by eigenvalue-bounded topologies," *IEEE Internet Things J.*, vol. 7, no. 5, pp. 3790–3798, Feb. 2020.
- [9] C. Pasquale, S. Saccone, S. Siri, and A. Ferrara, "Hierarchical centralized/decentralized event-triggered control of multiclass traffic networks," *IEEE Trans. Control Syst. Technol.*, vol. 29, no. 4, pp. 1549–1564, Jul. 2021.
- [10] M. Di Bernardo, A. Salvi, and S. Santini, "Distributed consensus strategy for platooning of vehicles in the presence of time-varying heterogeneous communication delays," *IEEE Trans. Intell. Transp. Syst.*, vol. 16, no. 1, pp. 102–112, Feb. 2015.
- [11] G. Guo and D. Li, "Adaptive sliding mode control of vehicular platoons with prescribed tracking performance," *IEEE Trans. Veh. Technol.*, vol. 68, no. 8, pp. 7511–7520, Aug. 2019.
- [12] D. He, L. Lu, R. Luo, and W. Zhang, "Energy-efficient cooperative predictive control for multi-agent non-linear systems with transmission delay," *IET Control Theory Appl.*, vol. 13, no. 17, pp. 2730–2737, Nov. 2019.
- [13] G. Fiengo, D. G. Lui, A. Petrillo, S. Santini, and M. Tufo, "Distributed robust PID control for leader tracking in uncertain connected ground vehicles with V2V communication delay," *IEEE/ASME Trans. Mechatronics*, vol. 24, no. 3, pp. 1153–1165, Jun. 2019.
- [14] A. Coppola, D. G. Lui, A. Petrillo, and S. Santini, "Distributed fixed-time leader-tracking control for heterogeneous uncertain autonomous connected vehicles platoons," in *Proc. 29th Medit. Conf. Control Autom. (MED)*, Jun. 2021, pp. 554–559.
- [15] W. Zhao, D. Ngoduy, S. Shepherd, R. Liu, and M. Papageorgiou, "A platoon based cooperative eco-driving model for mixed automated and human-driven vehicles at a signalised intersection," *Transp. Res. C, Emerg. Technol.*, vol. 95, pp. 802–821, Oct. 2018.
- [16] G. Guo, P. Li, and L. Y. Hao, "A new quadratic spacing policy and adaptive fault-tolerant platooning with actuator saturation," *IEEE Trans. Intell. Transp. Syst.*, vol. 23, no. 2, pp. 1200–1212, Feb. 2022.
- [17] Y. Bian, Y. Zheng, W. Ren, S. E. Li, J. Wang, and K. Li, "Reducing time headway for platooning of connected vehicles via V2V communication," *Transp. Res. C, Emerg. Technol.*, vol. 102, pp. 87–105, May 2019.
- [18] S. Liu et al., "Tractable robust predictive control approaches for freeway networks," in *Proc. 17th Int. IEEE Conf. Intell. Transp. Syst. (ITSC)*, Qingdao, China, Oct. 2014, pp. 1857–1862.
- [19] Y. Liu, D. Yao, H. Li, and R. Lu, "Distributed cooperative compound tracking control for a platoon of vehicles with adaptive NN," *IEEE Trans. Cybern.*, vol. 52, no. 7, pp. 7039–7048, Jul. 2022, doi: [10.1109/TCYB.2020.3044883](https://doi.org/10.1109/TCYB.2020.3044883).
- [20] D. Hajdu, J. I. Ge, T. Insperger, and G. Orosz, "Robust design of connected cruise control among human-driven vehicles," *IEEE Trans. Intell. Transp. Syst.*, vol. 21, no. 2, pp. 749–761, Feb. 2020.


- [21] J. Ploeg, D. P. Shukla, N. Van De Wouw, and H. Nijmeijer, "Controller synthesis for string stability of vehicle platoons," *IEEE Trans. Intell. Transp. Syst.*, vol. 15, no. 2, pp. 854–865, Apr. 2014.
- [22] L. E. Peppard, "String stability of relative-motion PID vehicle control systems," *IEEE Trans. Autom. Control*, vol. AC-19, no. 5, pp. 579–581, Oct. 1974.
- [23] K.-C. Chu, "Decentralized control of high-speed vehicular strings," *Transp. Sci.*, vol. 8, no. 4, pp. 361–384, 1974.
- [24] S. Feng, H. Sun, Y. Zhang, J. Zheng, H. X. Liu, and L. Li, "Tube-based discrete controller design for vehicle platoons subject to disturbances and saturation constraints," *IEEE Trans. Control Syst. Technol.*, vol. 28, no. 3, pp. 1066–1073, May 2020.
- [25] J. Ploeg, N. Van De Wouw, and H. Nijmeijer, "Lp string stability of cascaded systems: Application to vehicle platooning," *IEEE Trans. Control Syst. Technol.*, vol. 22, no. 2, pp. 786–793, Mar. 2014.
- [26] Y. A. Harfouch, S. Yuan, and S. Baldi, "An adaptive switched control approach to heterogeneous platooning with inter-vehicle communication losses," *IEEE Trans. Control Netw. Syst.*, vol. 5, pp. 1434–1444, 2018.
- [27] J. I. Ge and G. Orosz, "Dynamics of connected vehicle systems with delayed acceleration feedback," *Transp. Res. C, Emerg. Technol.*, vol. 46, pp. 46–64, Sep. 2014.
- [28] J. I. Ge and G. Orosz, "Optimal control of connected vehicle systems with communication delay and driver reaction time," *IEEE Trans. Intell. Transp. Syst.*, vol. 18, no. 8, pp. 2056–2070, Aug. 2017.
- [29] J. Wang, Y. Zheng, C. Chen, Q. Xu, and K. Li, "Leading cruise control in mixed traffic flow: System modeling, controllability, and string stability," *IEEE Trans. Intell. Transp. Syst.*, vol. 23, no. 8, pp. 12861–12876, Aug. 2022, doi: [10.1109/TITS.2021.3118021](https://doi.org/10.1109/TITS.2021.3118021).
- [30] S. Avedisov, G. Bansal, and G. Orosz, "Impacts of connected automated vehicles on freeway traffic patterns at different penetration levels," *IEEE Trans. Intell. Transp. Syst.*, vol. 23, no. 5, pp. 4305–4318, May 2022, doi: [10.1109/TITS.2020.3043323](https://doi.org/10.1109/TITS.2020.3043323).
- [31] M. Pirani, E. Hashemi, J. W. Simpson-Porco, B. Fidan, and A. Khajepour, "Graph theoretic approach to the robustness of  $k$ -nearest neighbor vehicle platoons," *IEEE Trans. Intell. Transp. Syst.*, vol. 18, no. 11, pp. 3218–3224, Nov. 2017.
- [32] F. De Souza, R. C. Carlson, E. R. Müller, and K. Ampountolas, "Multi-commodity traffic signal control and routing with connected vehicles," *IEEE Trans. Intell. Transp. Syst.*, vol. 23, no. 5, pp. 4111–4121, May 2022, doi: [10.1109/TITS.2020.3041436](https://doi.org/10.1109/TITS.2020.3041436).
- [33] M. Pirani and S. Sundaram, "On the smallest eigenvalue of grounded Laplacian matrices," *IEEE Trans. Autom. Control*, vol. 61, no. 2, pp. 509–514, Feb. 2016.
- [34] Y. Liu and Y. Wang, "Theory and experiment of enclosing control for second-order multi-agent systems," *IEEE Access*, vol. 8, pp. 186530–186539, 2020.
- [35] X. Qin, Y. Bian, Z. Yang, and M. Hu, "Distributed vehicular platoon control with heterogeneous communication delays," in *Proc. Chin. Control Decis. Conf. (CCDC)*, Hefei, China, Aug. 2020, pp. 3219–3224.
- [36] S. Azadi, R. Kazemi, and H. R. Nedamani, "Chapter 5—String stability and control of a platoon of vehicles," in *Vehicle Dynamics and Control*, S. Azadi, R. Kazemi, and H. R. Nedamani, Eds. Amsterdam, The Netherlands: Elsevier, 2021, pp. 153–212.



**Yixia Wang** (Student Member, IEEE) received the B.Sc. degree in automation from Yanshan University, Qinhuangdao, China, in 2018. She is currently pursuing the degree with the School of Computer and Control Engineering, University of Chinese Academy of Sciences, Beijing, China. Her research interests mainly include modeling, optimization, and control for traffic networks.




Beijing, China. Her research interests mainly include modeling, optimization, and control for intelligent traffic networks.



**Yibing Wang** (Senior Member, IEEE) received the B.Sc. degree in electronics and computer engineering from Sichuan University, Chengdu, China, the M.Eng. degree in automatic control engineering from Chongqing University, Chongqing, China, and the Ph.D. degree in control theory and applications from Tsinghua University, Beijing, China. He was a Post-Doctoral Researcher/a Research Fellow/a Senior Research Fellow with the Dynamic Systems and Simulation Laboratory, Department of Production Engineering and Management, Technical University of Crete, Greece, from 1999 to 2007. He was a Senior Lecturer at the Department of Civil Engineering, Monash University, Australia, from 2007 to 2013. Since 2013, he has been a Full Professor with the Institute of Intelligent Transportation Systems, Zhejiang University, China. His research interests include road traffic flow modeling, traffic surveillance, urban and freeway traffic control, and connected and automated vehicles (CAV). He serves as a Senior Editor for IEEE TRANSACTIONS ON INTELLIGENT TRANSPORTATION SYSTEMS and an Associate Editor for *Transportation Research—Part C: Emerging Technologies*. His research has been supported by the European Commission, the Discovery Program of the Australian Research Council, the National Natural Science Foundation of China, and the National Key Research and Development Program of China.



**Bart De Schutter** (Fellow, IEEE) received the Ph.D. degree (*summa cum laude*) in applied sciences from KU Leuven, Belgium, in 1996. He is currently the Head of Department and a Full Professor at the Delft Center for Systems and Control, Delft University of Technology, Delft, The Netherlands. He is a Senior Editor of the IEEE TRANSACTIONS ON INTELLIGENT TRANSPORTATION SYSTEMS and an Associate Editor of the IEEE TRANSACTIONS ON AUTOMATIC CONTROL. His current research interests include control of intelligent transportation systems, hybrid systems control, discrete-event systems, multi-agent systems, and optimization.



**Jungang Xu** (Senior Member, IEEE) received the Ph.D. degree in computer applied technology from the Graduate University of Chinese Academy of Sciences in 2003. He is currently a Full Professor with the School of Computer Science and Technology, University of Chinese Academy of Sciences. His current research interests are automated machine learning, computer vision, and intelligent transportation systems.