

A data model for route planning in case of forest fires

Zhiyong Wang^{a,*}, Sisi Zlatanova^a, Aitor Moreno^b, Peter van Oosterom^a, Carlos Toro^b

^a*Delft University of Technology, Jaffalaan 9, 2628BX Delft, The Netherlands*

^b*Vicomtech, Mikeletegi Pasealekua 57, 20009 San Sebastian, Spain*

Abstract

The ability to guide relief vehicles to safety and quickly pass through environments affected by fires is critical in fighting forest fires. In this paper, we focus on route determination in the case of forest fires, and propose a data model that supports finding paths among moving obstacles. This data model captures both static information, such as the type of the response team, the topology of the road network, and dynamic information, such as sensor information, changing availabilities of roads during disasters, and the position of the vehicle. We used a fire simulation model to calculate the fire evolution. The spread of the fire is represented as movements of obstacles that block the responders' path in the road network. To calculate safe and optimal routes avoiding obstacles, the A* algorithm is extended to consider the predicted availabilities of roads. We prove the optimality of the path calculated by our algorithm and then evaluate it in simulated scenarios. The results show that our model and algorithm are effective in planning routes that avoid one or more fire-affected areas and that the outlook for further investigation is promising.

Keywords: Emergency navigation, Fire simulation, Data model, Algorithm

1. Introduction

Natural fires have caused enormous socio-economic losses and created many victims in the past few years. Recently, there has been growing interest in understanding and mitigating the effects of these disastrous events. In fighting forest fires, a wide range of response activities and emergency operations are involved, such as transporting injured persons, distributing supplies, and evacuating citizens, all of which require navigation aids. Because the radiant heat released during burning can be considered obstacles that might make some roads unsafe and temporarily inaccessible (Taylor and Freeman, 2010), emergency managers need a path planner that is capable of finding a safe and optimal route that avoids fire-affected areas.

Navigation has been thoroughly studied from varied theoretical perspectives and across multiple disciplines, such as robotics, geomatics and applied mathematics (Chabini and Lan, 2002; Ge and Cui, 2002; Huang et al., 2007; Delling et al., 2009).

Nevertheless, very few research efforts have been devoted specifically to emergency navigation problems in the context of moving obstacles that dynamically affect the road network (Wang and Zlatanova, 2013b). Although some studies have some relevance for route planning in case of disaster events (Mioc et al., 2008; Liu et al., 2006), the issues that arise in the path planning during disasters have not yet been fully addressed. On one hand, the existing emergency support systems (Parker et al., 2008; Johnson, 2008) are capable of finding the shortest route to a certain location, taking the damages to the infrastructure into account, but do not consider the dynamics of disasters, particularly the predicted information on their developments, which limits their practical applications in disaster response. Some studies of emergency navigation used crowdsourced data regarding the state of the road to calculate the shortest path (Nedkov and Zlatanova, 2011; Neis et al., 2010). However, they can only cope with static obstacles, and do not offer the routing functionality required to avoid moving obstacles. On the other hand, most research on dynamic obstacles has been centered on robotics (Li

*Corresponding author. Tel.: +31 (0)152787934; fax: +31 (0)152784422. E-mail addresses: Z.Wang-1@tudelft.nl

et al., 2009; Masehian and Katebi, 2007; Gonzalez et al., 2012). The results from these studies could benefit the navigation of first responders in certain aspects. Nevertheless, the focus of their research is mainly on planning obstacle-avoiding paths in a given free space, without the constraints of a transportation network.

One of the most critical aspects in emergency navigation is information, most of which falls into two categories, static and dynamic. Static information is relevant to topographic and territorial data (e.g., land use, road network, buildings, and locations of fire hydrants). Most of the static data can be obtained through municipality offices and the emergency response (ER) sectors, as well as public resources, such as the location of fire hydrants on www.openfiremap.org and general maps from OpenStreetMap (www.openstreetmap.org). Dynamic information is more related to the incident description and its impacts, damages, and sensor measurements, etc., and has a highly temporal aspect, i.e., it changes rapidly with time. This information consists of historic information, about what has happened since the disaster occurred, and predicted information, about what may happen. Examples of historical information are the type, scale, and affected area of an incident, the number of injured and missing people, etc. This information is needed to help emergency managers identify dangerous areas that should be avoided. Examples of predicted information are the likelihood of floods in a given 2.5-dimensional terrain, areas threatened by gas plumes, and the forecasted wildfire front, etc. Such information is also needed to assist planners in adjusting original route plans in advance of developing disasters.

For the above reasons, a hazard simulation model that is capable of providing reliable predicted information about disaster changes, is a valuable framework that underlies the solutions for many problems that arise in the context of advance rescue planning. Many disaster models have emerged to encourage and facilitate emergency operations in the past few years (Hu, 2011; Moreno et al., 2012, 2011; Zelle et al., 2013; Lu et al., 2008). For example, Zelle et al. (2013) present an integrated system for smoke plume and gas cloud forecasts, combining a weather model, a smoke plume model and a crisis management system. Moreno et al. (2011) present a real-time fire simulation algorithm that can be integrated into interactive virtual simulations where fire fighters and managers can train their skills.

These models make it possible for emergency workers to assess the potential impact of a hazard, identify dangerous areas that should be evacuated, and make effective plans to curb damages and protect lives.

In our research, a geo-Database Management System (geo-DBMS) is selected to manage hazard simulation results and dynamic information of geographic objects. The Geo-DBMS provides efficient management of large spatial data sets (often encountered in large scale events). In addition, it has mechanisms that enable fast update and access to geographic information, and functionality for data analysis. The geometric model, which has been used and implemented in major geo-DBMSs (e.g., Oracle Spatial, PostGIS) (Meijers et al., 2005), makes the systems capable of handling all types of spatial data related to disaster management. Some data models have been developed in geo-DBMSs for emergency response (Dilo and Zlatanova, 2011; Kwan and Lee, 2005; Zlatanova and Baharin, 2008). However, they are not capable of dealing with predicted information from hazard simulation models and can not support routing among moving obstacles. Many researchers have been working on managing moving objects and numerous data management techniques have been developed to facilitate the collection, organization, and storage of dynamic data of moving objects (Wolfson et al., 1998; Meratnia, 2005; Güting et al., 2006). These studies provide a rich set of solutions for managing the dynamic information produced during disasters, such as the locations of the rescue unit, plume movement, and changes in the water level.

In this paper, we focus on the routing process in a real road network in the case of forest fires. We use a fire simulation model to generate datasets about the spread of the fire, and obtain information about its damage to the infrastructure through spatial data analysis. A spatio-temporal data model is proposed to structure dynamic information of transportation conditions affected by fires in the database. Using this information, we apply a modified shortest path algorithm to calculate optimal paths avoiding fire-affected areas for first responders. Such an approach is not limited to route planning during forest fires, but also can be extended to assist navigation among moving obstacles brought about by other types of disasters.

The organization of the paper is as follows. In section 2, we describe our system architecture for emergency navigation. Section 3 presents both con-

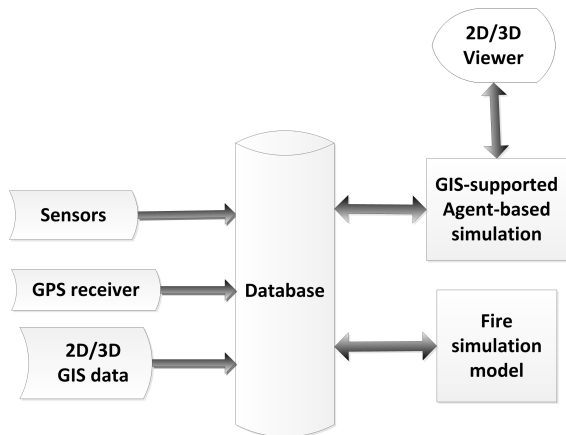


Figure 1: The overview of the proposed system architecture

ceptual and logical spatio-temporal data models of the dynamic information for routing to avoid obstacles. Section 4 illustrates the network analysis application, including the extended A* algorithm. Section 6 describes the detailed implementation of our navigation system. In section 7, we test the model and the algorithm in different scenarios, and detail our results. We draw some conclusions in section 8 and end this paper with proposed future work in section 9.

2. System architecture

To assist fire fighting in forest areas, a system architecture for routing avoiding fire-affected areas is designed. The framework of the proposed system is depicted in figure 1 and is composed of the following components: data collection, data management, fire simulation model, agent-based simulation model and visualization of simulation results. When a fire incident occurs, several measurement teams are formed and sent into the field to perform measurements. Real-time sensor information (e.g., wind speed and wind direction) is collected from the field via a communication network and incorporated into the fire simulation model (Moreno et al., 2012). The fire model produces dynamic data of spatial units about the fire state, from which the shape and direction of movement of fires are derived. This dynamic information, together with the geo-information of the network and the information regarding response units (routes, starting point, end point, status, etc.) is consistently recorded and structured in a geo-DBMS based on the data model designed for emergency response (Dilo and

Zlatanova, 2011). We use an agent-based simulator with GIS functionalities to predict the availabilities of roads in a certain area at a certain time, and to display the movement of both the fire and responders. The fire simulation results are represented as one or more moving polygons crossing a certain road network. The first responder is modeled as an agent characterized by a set of attributes (e.g., speed, type of vehicle) and performs certain actions (e.g., moving, waiting). Using predicted information about the status of roads, the path planner, within the agent, applies the shortest path algorithm to calculate the safest and fastest route for responders. The calculated results are visualized to users through a 2D view as well as a navigable 3D view to enhance human situational awareness (Schurr et al., 2005).

3. Data model design

A spatial temporal data model is needed to effectively organize all required information and knowledge in the geo-DBMS. This data model should fulfill the following requirements: (1) support representation of the environment, particularly the network elements and the network topology; (2) support dynamic simulation, such as the representations of disaster developments in time, changes in the availability of roads, and the movements of relief vehicles; (3) support various analyses, including identifying the areas that are most threatened, planning paths in the context of moving obstacles, etc.; (4) support representation of the calculated results, e.g., the navigation route, estimated traveling and arrival time; and (5) should be compatible with the relevant data models for emergency response and existing standards defined by the Open Geospatial Consortium (OGC) or International Standard Organization (ISO), e.g., ISO 19107:2003 that provides a formal structure for representation of spatial objects.

Using the requirements listed above, we define a data model to capture dynamics of the environment, using Unified Modeling Language (UML) profiles for database design. The proposed model is designed adhering to the data model presented by Dilo and Zlatanova (2011) as much as possible, and is built for the following 3 groups of data: (1) data related to the road network; (2) data relevant to disasters; and (3) data on response units. We define the topology of the network by ourselves, and use the geometric data types specified by ISO

233 19107, e.g., `GM_Point`, `GM_LineString`, `GM_Polygon`, 284
234 and `GM_MultiSurface`, to describe the spatial char- 285
235 acteristics of geographic features. Because the data 286
236 we are handling are constantly changing, new data 287
237 types are created to capture this spatio-temporal 288
238 nature. 289

239 3.1. Conceptual data model

240 Figure 2 is a UML class diagram presenting a 241
242 conceptual model of the data required for naviga- 243
243 tion among moving obstacles. The yellow classes 244
244 are created for handling the data related to dis- 245
245 asters. The green classes are used to support the 246
246 representation of the road network. The classes in 247
247 light-gray are defined for modeling the data of re- 248
248 sponse units. New datatypes are colored in purple. 249
249 The class `RoadNetwork` is an extended graph, con- 250
250 sisting of instances of `RoadSegment` that contain 251
251 dynamic information produced by disaster events. 252
252 To maintain the topology of the road network, an 253
253 association between `RoadSegment` and `RoadJunc- 254
254 tion` is established. Both `RoadSegment` and `Road- 255
255 Junction` have an attribute `affected_time_list` used to 256
256 store temporal information regarding the availabil- 257
257 ities of the corresponding spatial objects. A new 258
258 data type called `AffectedTimePeriod` is created for 259
259 these two classes containing the attribute of a dy- 260
260 namic nature. A `RealIncident` is used to record the 261
261 information of the disaster incident. It inherits all 262
262 properties of the abstract class `Incident` which con- 263
263 tains static information of the incident including 264
264 `incidentID` identifying the incident, the location of 265
265 the incident, the start time, and a text descrip- 266
266 tion of the incident. Some additional attributes 267
267 are added to store the dynamic information gener- 268
268 ated during the incident, such as the disaster type 269
269 which may change in time, `GRIPLlevel` describing the 270
270 changing severity of the incident, and `affected_area` 271
271 which stores the historic information of affected ar- 272
272 eas during the incident. The class `SimulatedEvent` is 273
273 linked with `RealIncident` to describe disaster simula- 274
274 tions that predict the effect of real incidents within 275
275 a certain period of time. The class `Obstacle` con- 276
276 tains predicted information about the obstacles in 277
277 the form of moving polygons affecting the road net- 278
278 work. As soon as a real incident occurs, different 279
279 types of `Processes` are started. Several teams that 280
280 are sent to address the incident are responsible for 281
281 managing these processes. A team may be com- 282
282 posed of one or more vehicles. The class `Vehicle` 283
283 contains information related to vehicles. The as- 284
284 sociation `Follow` is used to record the routes that

284 drivers want to follow. These `Routes` are calculated 285
285 based on spatio-temporal information in the geo- 286
286 DBMS and proposed to the drivers. The stored 287
287 route information will also be used for monitoring 288
288 movement of vehicles during disasters and analysed 289
289 after disaster response.

290 3.2. Logical data model

291 The proposed data model has been realized in 292
292 the relational database PostGIS (www.postgis.org). 293
293 PostGIS spatial data types and functions are com- 294
294 pliant with OGC specifications and ISO 19107. Fig- 295
295 ure 3 shows the logical data model for PostGIS. 296
296 Following classical approaches (Güting et al., 2000; 297
297 Güting and Schneider, 2005), we create some new 298
298 data types to store the spatio-temporal data, i.e., 299
299 `MovingPointInst` to store dynamic positions of both 300
300 vehicles and teams; `MovingPolygonInst` to record 301
301 historic affected regions and identify dangerous ar- 302
302 eas in the near future. These data types are de- 303
303 fined by adding timestamps as one of attributes to 304
304 capture the temporal aspect. We use the `ARRAY` 305
305 type, in which the new data types are used as a base 306
306 type of the array elements, to record facts associ- 307
307 ated with time. For example, `MovingPolygonInst[308
308]` is composed of a sequence of pairs of polygons 309
309 and time instances. To represent many-to-many 310
310 associations, an intersection table is created. For 311
311 instance, a table, `RoadSegment_to_Route`, is intro- 312
312 duced to hold the many-to-many relationship be- 313
313 tween `RoadSegment` and `Route`, combining the pri- 314
314 mary keys from the original tables. The logical 315
315 schema is automatically transformed by a modelling 316
316 tool Enterprise Architect (www.sparxsystems.com) 317
317 to a collection of Structured Query Language (SQL) 318
318 scripts for creating and dropping tables. These cre- 319
319 ated tables are populated with spatial and spatio- 320
320 temporal data that are used for analysis and visu- 321
321 alization by our navigation application as well as 322
322 traditional GIS tools.

323 4. Network analysis application considering 324 324 the spread of the fire

325 In this study, we design and develop a prototype 326
326 network analysis application for forest fire rescue 327
327 planning. The application supports both data pro- 328
328 cessing and data analysis, including fetching the fire 329
329 simulation results, formatting them into a general 330
330 representation, calculating the availability of road 331
331 segments, and computing the shortest path while

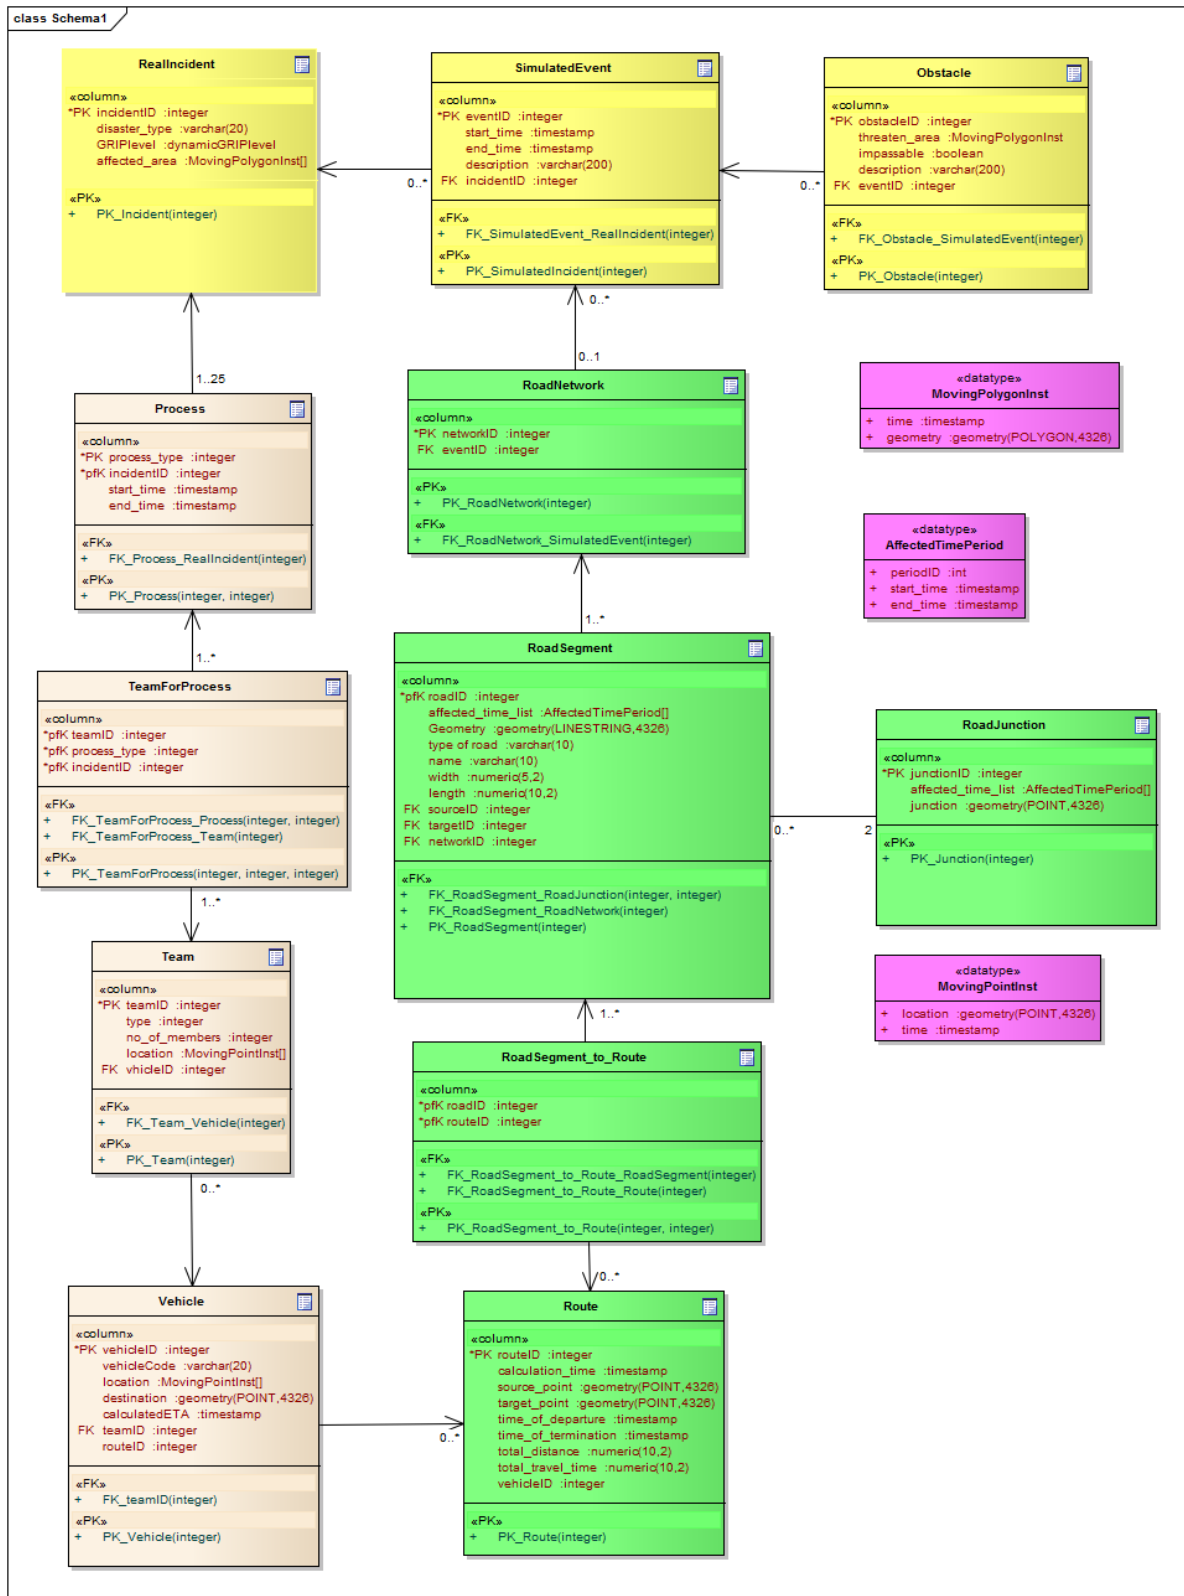


Figure 3: Logical data model (UML class diagram with PostGIS geometric data types, note that the ARRAY is used and indicated by square brackets [] after the datatype of the attribute)

348 as the quantity of combustible, the power intensity
349 of the fire, and the state of the fire. The fire simula-
350 tion system, integrated with passive data from dif-
351 ferent sources and dynamic events, including real-
352 time changes in the weather conditions, calculates
353 the spread of the forest fire and updates the run-
354 time information of forest cells calculated during
355 each simulation step. By grouping the cells accord-
356 ing to the cell state and time step, we create a set
357 of moving polygons that overlap a certain road net-
358 work. Considering that each cell in the simulation
359 has a certain width, we introduce a new buffer for
360 each road-center line to represent the road network,
361 extract all the road segments and junctions inside
362 affected areas, and store them with their affected
363 time periods in the database according the data
364 model described in section 3.

365 4.2. Routing algorithm

366 Once the state of roads has been updated, the
367 application fetches spatio-temporal data of the road
368 network from the database and generates a graph
369 with affected time of roads. Consider a graph
370 $G = (N, E)$ consisting of a finite set of edges E and
371 nodes N . Each edge $e \in E$ corresponds to an object
372 of class `RoadSegment`, and each node $n \in N$ corre-
373 sponds to an object of class `RoadSegment`. We use w
374 to represent the length of each `RoadSegment` and use
375 an interval $[t^{closed}, t^{open}]$ to denote an element of af-
376 fected_time.list attached to the corresponding road
377 segment and junction. $[t^{closed}, t^{open}]$ is an instance
378 of data type `AffectedTimeperiod`, where t^{closed} is the
379 start time of closing, and t^{open} is the end time of
380 closing. Here we assume that once the nodes and
381 edges are affected by the fire, they will not be avail-
382 able anymore. Following the above assumption, ev-
383 ery affected edge and node has only one affected
384 time interval, and the opening time, t^{open} , is set
385 to *inf* by default. To calculate routes avoiding ob-
386 stacles, a special algorithm is needed to handle the
387 affected time of roads.

388 In our application, we have extended the A*
389 methodology for shortest path planning among
390 moving obstacles. Related research on navigation
391 among moving obstacles have been greatly studied
392 in the robotic field. Phillips and Likhachev (2011)
393 introduce the concept of safe intervals to compress
394 search space and extends the A* algorithm to gener-
395 ate time-minimal paths in dynamic environments
396 with moving obstacles. Similarly, Narayanan et al.
397 (2012) use time intervals instead of timesteps and
398 develops a variant of A* for anytime path planning

The modified A* algorithm

```

1: Initialize startNode  $s$ , goalNode  $d$ , moveRate, departureTime
2: Initialize openSet, closedSet
3:  $g(s) :=$  departureTime
4: Insert  $s$  in openSet
5: while openSet is not empty do
6:    $n :=$  the node in openSet having the lowest  $f$  value
7:   if  $n = g$  then
8:     return the path from  $s$ 
9:   to  $d$ 
10:  end if
11:  Remove  $n$  from openSet
12:  Insert  $n$  to closedSet
13:  for each neighbor  $n'$  of  $n$  do
14:    if  $n'$  in closedSet then
15:      continue
16:    end if
17:    tentative_cost :=  $g(n) + w_{nn'}/\text{moveRate}$ 
18:    flag := false
19:    if  $n'$  not in openSet then
20:      if tentative_cost <  $t_{nn'}^{closed}$  then
21:        Insert  $n'$  to openSet
22:        flag := true
23:      end if
24:    else if (tentative_cost <  $g(n')$ ) and (tentative_cost <  $t_{nn'}^{closed}$ )
25:      then
26:        flag := true
27:      else
28:        flag := false
29:      end if
30:      if flag = true then
31:        the backpointer of  $n' := n$ 
32:         $g(n') :=$  tentative_cost /* the actual path cost from
33:        to node  $y$  */
34:         $h(n') :=$  heuristic_estimate_of_cost( $n', d$ )
35:         $f(n') := g(n') + h(n')$ 
36:      end if
37:    end for
38:  end while
39: return no-path

```

Figure 4: The modified A* algorithm

399 in the presence of dynamic obstacles. However,
400 their planners do not take constrains of the real
401 road network into consideration and can be only ap-
402 plied to free space. Our path planner has some sim-
403 ilarities to the algorithms presented in Visser (2009)
404 and Wang and Zlatanova (2013a) which also con-
405 sider predicted information of the road network and
406 introduce waiting options to avoid moving obsta-
407 cles. Under the above assumptions, waiting would
408 not be safe during fires and the vehicles need to
409 move as fast as possible. Therefore, we remove the
410 waiting option in the algorithm and do not consider
411 the information on the state of nodes.

A* is a well-known algorithm developed to solve
the one-to-one shortest path problem (Hart et al.,
1968). The A* algorithm uses a heuristic func-
tion to estimate cost from each node to the des-
tination to guide path search. The cost associated
with a node n is $f(n) = g(n) + h(n)$, where $g(n)$ is
the actual cost of the path from the start to node

419 n , and $h(n)$ is an estimated coast from node n to 468
 420 the destination. The algorithm maintains two sets: 469
 421 *openSet* that stores nodes who are not expanded 470
 422 , and *closedSet* that stores nodes who have been 471
 423 expanded. At each iteration, the algorithm selects 472
 424 node m with the minimal cost from the *openSet* 473
 425 for expansion. All successors of node m that are 474
 426 unexplored will be put in the *openSet* for further 475
 427 expansion. 476

428 In our extension of the A*, we take into account 477
 429 the affected time of roads and introduce an addi- 478
 430 tional parameter for the algorithm, the speed of 479
 431 vehicles *moveRate*, to select nodes for expansions. 480
 432 The value of *moveRate* can be obtained in two 481
 433 ways: (1) user configuration; (2) real-time calcula- 482
 434 tion based on the location of vehicles recorded 483
 435 in the database. A new parameter *departureTime* 484
 436 is added to help estimation of arrival time of each 485
 437 node. Figure 4 shows the main structure of the 486
 438 modified A*. When a node n is expanded, we com- 487
 439 pute the estimated arrival time considering the cost 488
 440 of the edge $w_{nn'}$ and the given speed, *moveRate* 489
 441 (see line 15). At line 18, we use a condition to de- 490
 442 cide if the successor n' of n should be added to the 491
 443 *openSet*. If the object can safely pass through the 492
 444 edge between the expanded node n and the succes- 493
 445 sor n' , i.e., the estimated arrival time is earlier than 494
 446 the closed time of the edge $t_{nn'}^{closed}$, the successor n' 495
 447 will be added into the *openSet* for further expan- 496
 448 sions. If not, it remains un-explored. The same 497
 449 condition is also applied on line 22, which guaran-
 450 tees that the evaluated node n' should be updated
 451 not only with the faster arrival time but also with
 452 the safety of passing through the edge nn' .

453 4.3. Theoretical analysis

454 Here we sketch the proof of the optimality of the 499
 455 path calculated by our algorithm.

456 **Theorem 1** *When the modified A* selects the goal*
 457 *for expansion, it has found a time-minimal and safe*
 458 *path to the goal node d .*

459 **Proof** Were this not the case, the optimal path,
 460 P , must have a node n that is not yet expanded
 461 (If the optimal path has been completely expanded,
 462 the goal would have been reached along the optimal
 463 path.). There are then the following two possibil-
 464 ities resulting in the fact that n is not expanded
 465 to generate successors: (1) $f(n) > f(d)$; (2) all
 466 successors of n cannot be safely reached, i.e. the
 467 estimated arrival time is after the closing time of

the edge between n and its successor. Because f
 is non-decreasing along any path, n would have a
 lower f -cost than d and would have been selected
 first for expansion before the goal node, which con-
 tradicts the first possibility. We assume n' is the
 successor of n along the optimal path, implying that
 $g(n) + w_{nn'} < t_{nn'}^{closed}$, which eliminates the second
 possibility. In the algorithm, the cost on an edge is
 equal to the time it takes to execute that edge, and
 whenever a g -value is updated (a shorter path is
 found), the time value is also updated to the earlier
 time. Therefore, when the node d is expanded, it
 is the earliest time we can arrive at the goal node.
 This is optimal in terms of time cost. We also know
 that all explored nodes are safely reached, which
 makes the entire path safe, from the start node to
 the goal node.

485 5. Route safety

486 To evaluate the safety of the route, we provide a
 487 method to quantify the safety value of edges and
 488 routes. Our method is similar to the one pro-
 489 posed by Shastri (2006) that introduces the mar-
 490 gin of safety of nodes, but uses the affected time of
 491 edges to evaluate the safety of routes. The safety
 492 of each edge is expressed as difference between the
 493 time when fires block the edge and the estimated
 494 time when the responder arrive at the target node
 495 of the edge. Mathematically, the safety of an edge
 496 $n_i n_{i+1}$, $S_{n_i n_{i+1}}$, is

$$S_{n_i n_{i+1}} = t_{n_i n_{i+1}}^{closed} - t_{n_{i+1}} \quad (1)$$

497 Here $t_{n_i n_{i+1}}^{closed}$ is the closed time of edge $n_i n_{i+1}$; $t_{n_{i+1}}$
 498 is the estimated time of reaching node n_{i+1} though
 499 edge $n_i n_{i+1}$.

Because the safety of a route mainly depends on
 the most unsafe edge along the route, the minimum
 of safety values of edges is selected as the route
 safety. Let $R = \{n_0, n_1, \dots, n_k\}$ be one of routes
 from s to t , where n_0, n_1, \dots, n_k are the nodes along
 the route, $n_0 = s$, $n_k = d$. The safety of the en-
 tire route can be computed by using the following
 formula (Shastri, 2006):

$$S_R = \min(S_{n_0 n_1}, S_{n_1 n_2}, \dots, S_{n_{k-1} n_k}) \quad (2)$$

If $S_R > 0$, the route is considered safe; If $S_R \leq 0$,
 the route is considered not safe. The higher the
 safety value, the more safe the route is. $+\infty$ means
 the route is completely safe.

Using the above formulas, we can compare the routes calculated by the algorithms to evaluate the proposed algorithm.

6. Implementation

The proposed model and algorithm are realized in a multi-agent simulator, called Mason (Luke et al., 2004, 2005), and are evaluated with a real road network. The data set of the road network is extracted from OpenStreetMap and loaded into the database according to our defined schema in section 3. The fire simulation model (Moreno et al., 2011) calculates the fire spread and the results are also updated into the database and used to create the moving polygons crossing the network. GeoTools (www.geotools.org) is used to fetch the required data from the database to perform the intersection operation and route calculation. The agent simulator displays both the spread of the fire and the movements of relief vehicles. The calculated results are shown to users through both a 2D viewer, which provides an overview of the fire spread and the navigation routes, and a 3D viewer, enabling users to gain accurate impressions of the actual situation. The 3D viewer is built on top of an open source visualization tool, OSM2World (www.osm2world.org) that builds three-dimensional models of the environment from OpenStreetMap data (a snapshot can be found in figure 5). Through the construction of the 3D visualization, situational awareness is enhanced by providing information on the surroundings, such as houses, gardens, etc., that might not initially be included in the street network model.

7. Case study

The model and algorithm have been tested with the road network dataset in San Sebastián, Spain. The network is composed of 1717 edges and 1661 nodes. We simulate several scenarios in which one or more fires take place in a forest located in the eastern part of the city. The fire simulator generates the fire spread dataset within the given area in seconds, starting from time $t=0$ min to time $t=20$ min. The information regarding the status of the road network is collected and used for instantiating the model. Paths between locations are calculated by using both the modified algorithm and the classical A* algorithm.

Table 1: Calculated results

	Route ID	Distance (km)	Total travel time (mins)	Route safety (mins)
Speed =20 km/h	R0	2.56	7.7	-1.8
	R1	3.00	9.0	$+\infty$
Speed =30 km/h	R0	2.56	5.1	0.7
	R2	2.56	5.1	0.7
Speed =50 km/h	R0	2.56	3.1	2.7
	R3	2.56	3.1	2.7

Notes:

- ¹ The vehicles considered in this scenario departure at time $t=0$ min
- ² R0: The shortest route calculated by the standard A* algorithm
- ³ R1: The route calculated by the modified A* algorithm at a speed of 20 km/h
- ⁴ R2: The route calculated by the modified A* algorithm at a speed of 30 km/h (the distance of R2 equals the distance of R0)
- ⁵ R3: The route calculated by the modified A* algorithm at a speed of 50 km/h (the distance of R3 equals the distance of R0)
- ⁶ $+\infty$: This route is completely safe from $t=0$ min to $t=20$ min

7.1. Scenario 1: navigation for one responder avoiding one fire-affected area

Considering that different vehicle types have different maximum moving speeds, we compare relief routes for different speeds to evaluate the practical application of our route planner. Table 1 shows the results of our experiments. In the first situation, where the relief vehicle is moving at a speed of 20 km/h, our algorithm and the standard A* algorithm produce different routes, depicted in figure 5. The light blue line is the route calculated by our algorithm, and the brown line represents the shortest path without considering the fire spread. The results indicate that when fires are moving fast and affect the environment rapidly, the vehicle at a speed of 20 km/h can not safely arrive at the destination along the shortest route, because the route could be blocked by fires before the vehicle can pass through. Our algorithm finds a new route that makes the responding unit detour to avoid fires and is safer than the shortest one.

Continuing our analysis, figure 6 depicts another situation in which the shortest path and the calculated route are the same at given speeds of 30 km/h and 50 km/h. As shown in table 1, the vehicle in this situation is moving faster, which leads to a shorter path and less travelling time. The table



Figure 5: The calculated paths (speed=20 km/h) from the blue point to the yellow point through the environment with one fire-affected area (in red)

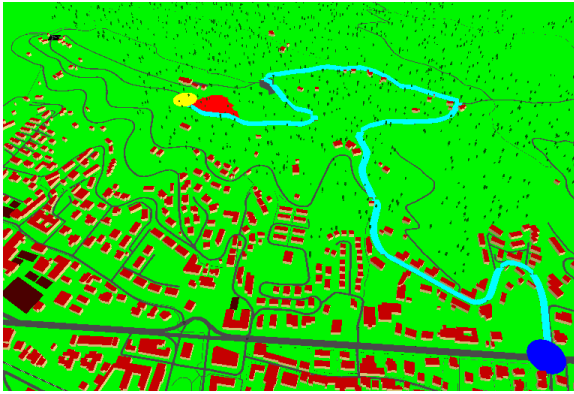


Figure 6: The calculated paths (speed=30, 50 km/h) from the blue point to the yellow point through the environment with one fire-affected area (in red)

578 1 also indicates the vehicle moving at a speed of 50
 579 km/h has a higher safety value than the vehicle at a
 580 speed of 30 km/h. By testing different speeds in the
 581 application, the emergency manager can determine
 582 the minimum speed required to safely pass through
 583 the affected region or to follow a specific route.

584 *7.2. Scenario 2: navigation for multiple responders*
 585 *avoiding multiple-affected areas*

586 In this scenario, we study the navigation case
 587 that multiple rescue vehicles have to be routed to
 588 one destination avoiding multiple fire-affected areas.
 589 The considered vehicles have different maximal
 590 speeds, and start moving from different locations
 591 at different time instants. Our algorithm calculates
 592 routes avoiding fires, considering both the
 593 speed of vehicles and their departure times. The

Table 2: Calculated results

	Route ID	Departure time (min)	Total travel time (mins)	Arrival time (min)
Vehicle 1 (30 km/h)	R0	2.0	6.0	8.0
	R1	2.0	6.0	8.0
Vehicle 2 (20 km/h)	R2	5.0	5.3	10.3
	R3	5.0	8.8	13.8
Vehicle 3 (20 km/h)	R4	8.0	6.5	14.5
	R5	8.0	11.0	19.0

Notes:

- ¹ R0, R2, R4: The shortest routes from different sources to the same destination
- ² R1: The route calculated by the modified A* algorithm given a speed of 30 km/h and a departure time $t=2.0$ min (the route R1 and the shortest route R0 are the same)
- ³ R3: The route calculated by the modified A* algorithm given a speed of 20 km/h and a departure time $t=5.0$ min
- ⁴ R5: The route calculated by the modified A* algorithm given a speed of 20 km/h and a departure time $t=8.0$ min

594 calculated results are shown in table 2. Because of
 595 the fact that the shortest routes could be blocked
 596 by the fires, emergency plans made based on es-
 597 timation of arrival time of the shortest route will
 598 not be feasible due to possible delays. As we can
 599 see from the table that, although vehicle 1 can ar-
 600 rive at the destination on time, the time difference
 601 between arrival time of the shortest route and ar-
 602 rival time of obstacle avoiding route for vehicle 2
 603 is about 3.5 min, and vehicle 3 has a time differ-
 604 ence of 4.5 min. Because responders often work in
 605 groups, a reliable estimation of their arrival time at
 606 the field site is very important for rapid emergency
 607 operations. A lack of consideration of possible de-
 608 lays caused by fires could slow the response process.
 609 Figure 7 shows a snapshot of routes calculated by
 610 our algorithm. The results indicate that our algo-
 611 rithm can not only deal with multiple fire-affected
 612 areas, but also give a more reliable estimation of
 613 arrival time for different types of vehicles starting
 614 from different places and different time instances,
 615 which would make emergency plans more effective
 616 and contributes to an improvement of performance
 617 of the response units.

618 **8. Conclusions**

619 During forest fires, transportation networks could
 620 be damaged by fires spreading and blocking roads

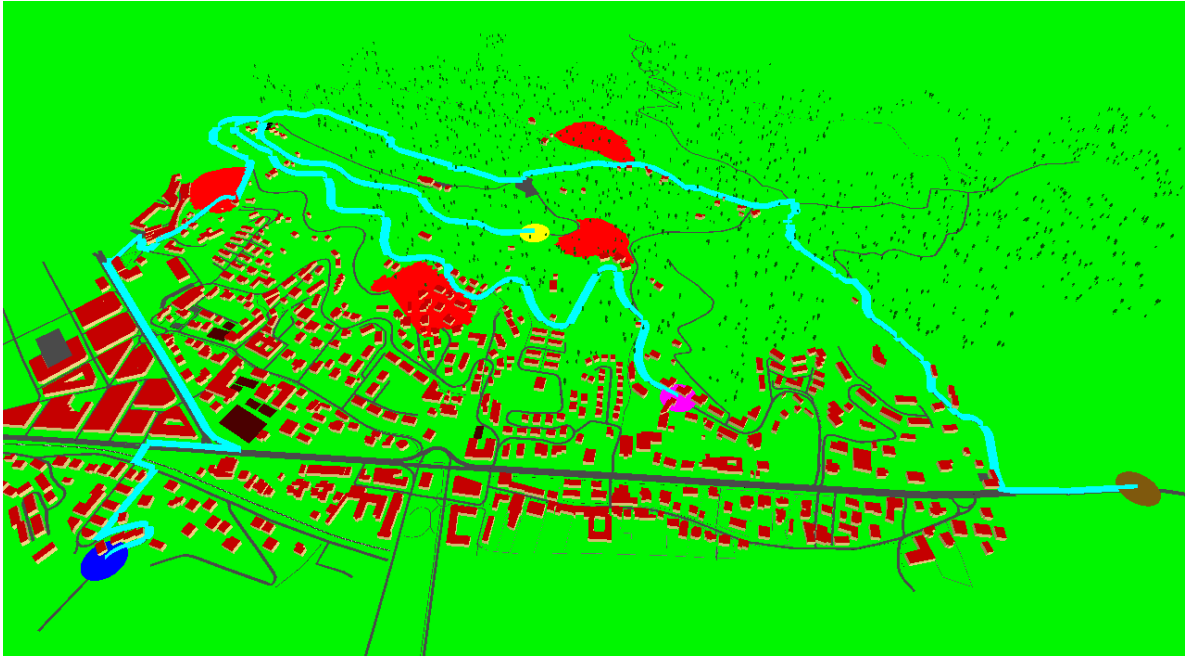


Figure 7: The calculated paths for three vehicles among multiple fire-affected areas (Vehicle 1 from the blue point for the yellow point; Vehicle 2 from the purple point to the yellow point; Vehicle 3 from the brown point to the yellow point)

621 (Taylor and Freeman, 2010). A system archi- 647
 622 tecture, combining a fire simulation system, GIS- 648
 623 supported agent-based simulation system, and geo- 649
 624 Database Management System (geo-DBMS), is de- 650
 625 signed to assist in planning paths among moving 651
 626 obstacles caused by forest fires. This paper presents 652
 627 a spatio-temporal data model for the management 653
 628 of both static and dynamic disaster-related infor- 654
 629 mation. On the basis of our data model, the geo- 655
 630 DBMS, which is updated constantly, can provide 656
 631 latest and most consistent data required for the 657
 632 network analysis application. In our application de- 658
 633 scribed here, we extend the A* algorithm to calcu- 659
 634 late obstacle-avoiding routes, considering the pre- 660
 635 dicted information regarding the state of the roads. 661
 636 Proof of the optimality of the path computed by 662
 637 our algorithm is also provided. 663

638 We apply the prototype system to the case of a 664
 639 simulated fire event. The experimental results indi- 665
 640 cate that our data model can manage various types 666
 641 of spatio-temporal data, reflect the dynamics of the 667
 642 road network during disasters, and allows relevant 668
 643 data to be appropriately organized to facilitate au- 669
 644 tomated network analysis and dynamic simulation. 670
 645 The application also shows that the extended al- 671
 646 gorithm, incorporating the dynamic data produced 672

by fire simulations, provides a safer route to the 647
 destination, highlighting the importance of the fire 648
 model in emergency planning. As demonstrated by 649
 our system, the integration of predicted informa- 650
 tion from the fire simulation can help to avoid one 651
 or more obstacles in the environment due to the 652
 spread of the fire, offering a promising direction for 653
 a wider range of applications. 654

655 It should be noted that, although the focus of this 656
 657 paper is on routing fire response units, the devel- 658
 659 oped approach is not limited to fires. Our central 660
 661 goal here is to provide safe and optimal paths avoid- 662
 663 ing obstacles caused by different disasters. The ap- 664
 665 proach introduced here can be tailored for other 666
 667 types of disasters, e.g., toxic plumes and floods. 668
 669 For example, in the designed data model, obsta- 670
 671 cles caused by other types of disasters can be also 672
 673 represented as moving polygons; the routing algo-
 rithm now considers the state of the edges, but the
 availability of nodes can also be taken into account
 if we introduce waiting options to avoid moving ob-
 stacles in certain situations.

674 Currently, the developments do not reflect all 675
 676 aspects of route determination during fire events. 677
 678 Several points should also be mentioned. First, 679
 680 there is not yet a direct connection between our 681
 682

673 application and the fire model. Because we need
674 only the output data from the fire simulation, we
675 assume that these data have been provided by ex-
676 ternal software or a simulation system and stored
677 in the database. The integration of the fire model
678 into the application could facilitate the computa-
679 tion and can be performed in later work. Second,
680 our data model only handles data that are essential
681 for emergency navigation. The structuring of the
682 OSM data and the fire simulation output data used
683 by our application is not considered in our data
684 model and is beyond the scope of this paper. Fi-
685 nally, due to a lack of data on the width of roads in
686 our test dataset, we assume all roads have the same
687 width and use it to create road buffers. Because the
688 affected time of roads for routing is obtained based
689 on intersection operations between road buffers and
690 fire affected areas, a data source that contains data
691 on real road width is needed to make calculated
692 route results more reliable.

693 9. Future work

694 Despite these promising results, many challenges
695 must still be addressed. One of the most challeng-
696 ing problems is that the behaviors of fires are diffi-
697 cult to capture with the fire simulation model. The
698 predictions, provided by the fire model, have inher-
699 ent uncertainty, which decreases the effectiveness of
700 our route planning for fire response. The next very
701 important step will be to improve the routing algo-
702 rithm to consider the accuracy of the fire model.

703 Because the environment could be simultane-
704 ously affected by multiple disasters and is con-
705 stantly changing, we need a path planner that is
706 capable of processing large volumes of updated data
707 from different hazard models and able to regener-
708 ate routes as quickly as possible. Currently, we
709 are building a multi-agent system, exploiting JADE
710 (Java Agent DEvelopment Framework) to support
711 automated data processing and analysis. Based on
712 the technology of the software agents, a collabora-
713 tion platform for emergency navigation is designed,
714 enabling interoperability between the hazard sim-
715 ulation systems and our network analysis applica-
716 tion.

717 In future work, we will also explore a variety
718 of navigation cases involving multiple responders
719 as well as multiple destinations. Furthermore, we
720 will consider connecting to the simulation model
721 to other types of disasters, e.g., the plume model,

the flood model. In the case of toxic plumes, in-
stead of being blocked or non-blocked, the affected
road can have a degree of accessibility that depends
on the amount of dangerous smoke along the road
and also changes over time. In some situations, the
responders can wait at certain places for dynamic
obstacles to pass to arrive at the destination faster.
Therefore, waiting could be an advantageous option
for certain types of disasters and should also be con-
sidered in the routing process. Another extension
of the data model is needed to meet a wider range
of informational needs when multiple disasters oc-
cur simultaneously. The data model is generic and
can be easily adjusted to merge and organize in-
formation from models of different types of disas-
ter. Based on using standard Web services, we can
further develop an Android navigation application
that supports interoperable collaborations between
the user and the machine, and apply it to real disas-
ter situations. In this application, a user interface
with various styling options will also be designed
for different situations, e.g., waiting and moving,
day and night, and urgent and non-urgent.

745 Acknowledgement

746 This work was supported by COST Action
747 TU0801 “Semantic Enrichment of 3D City Models
748 for Sustainable Urban Development”

749 References

- 750 Chabini, I., Lan, S., 2002. Adaptations of the A* algo-
751 rithm for the computation of fastest paths in deterministic
752 discrete-time dynamic networks. *Intelligent Transporta-
753 tion Systems*, IEEE Transactions on 3, 60–74.
- 754 Delling, D., Sanders, P., Schultes, D., Wagner, D., 2009.
755 Engineering route planning algorithms, in: *Algorithmics
756 of large and complex networks*. Springer, pp. 117–139.
- 757 Dilo, A., Zlatanova, S., 2011. A data model for operational
758 and situational information in emergency response. *Ap-
759 plied Geomatics* 3, 207–218.
- 760 Ge, S.S., Cui, Y., 2002. Dynamic motion planning for mobile
761 robots using potential field method. *Autonomous Robots*
762 13, 207–222.
- 763 Gonzalez, J.P., Dornbush, A., Likhachev, M., 2012. Us-
764 ing state dominance for path planning in dynamic envi-
765 ronments with moving obstacles, in: *Robotics and Au-
766 tomation (ICRA)*, 2012 IEEE International Conference
767 on, IEEE. pp. 4009–4015.
- 768 Güting, R., De Almeida, V., Ding, Z., 2006. Modeling and
769 querying moving objects in networks. *The VLDB Journal*
770 15, 165–190.
- 771 Güting, R.H., Böhlen, M.H., Erwig, M., Jensen, C.S.,
772 Lorentzos, N.A., Schneider, M., Vazirgiannis, M., 2000.

- 773 A foundation for representing and querying moving objects. *ACM Transactions on Database Systems (TODS)* 774 25, 1–42. 775
- 776 Güting, R.H., Schneider, M., 2005. Moving objects 777 databases. Morgan Kaufmann. 778
- 779 Hart, P.E., Nilsson, N.J., Raphael, B., 1968. A formal basis 780 for the heuristic determination of minimum cost paths. 781 *IEEE Transactions on Systems Science and Cybernetics* 782 4, 100–107. 783
- 784 Hu, X., 2011. Dynamic Data Driven Simulation. *SCS M&S Magazine*, 662–669. 785
- 786 Huang, B., Wu, Q., Zhan, F., 2007. A shortest path algorithm with novel heuristics for dynamic transportation 787 networks. *International Journal of Geographical Information Science* 21, 625–644. 788
- 789 Johnson, R., 2008. Gis technology and applications for the fire services, in: Zlatanova, S., Li, J. (Eds.), *Geospatial Information Technology for Emergency Response*. Taylor & Francis Ltd, London. *Geospatial Information Technology for Emergency Response*, pp. 351–372. 790
- 791 Kwan, M.P., Lee, J., 2005. Emergency response after 9/11: the potential of real-time 3D GIS for quick emergency 792 response in micro-spatial environments. *Computers, Environment and Urban Systems* 29, 93–113. 793
- 794 Li, H., Yang, S.X., Seto, M.L., 2009. Neural-network-based path planning for a multirobot system with moving obstacles. *Systems, Man, and Cybernetics, Part C: Applications and Reviews, IEEE Transactions on* 39, 410–419. 795
- 796 Liu, Y., Hatayama, M., Okada, N., 2006. Development of an adaptive evacuation route algorithm under flood disaster. *Annals of Disaster Prevention Research Institute, Kyoto University* 49, 189–195. 797
- 798 Lu, G., Wu, Z., Wen, L., Lin, C.A., Zhang, J., Yang, Y., 2008. Real-time flood forecast and flood alert map over the huaihe river basin in china using a coupled hydro-meteorological modeling system. *Science in China Series E: Technological Sciences* 51, 1049–1063. 799
- 800 Luke, S., Cioffi-Revilla, C., Panait, L., Sullivan, K., 2004. Mason: A new multi-agent simulation toolkit, in: *Proceedings of the 2004 SwarmFest Workshop*. 801
- 802 Luke, S., Cioffi-Revilla, C., Panait, L., Sullivan, K., Balan, G., 2005. Mason: A multiagent simulation environment. *Simulation* 81, 517–527. 803
- 804 Masehian, E., Katebi, Y., 2007. Robot motion planning in dynamic environments with moving obstacles and target. *International Journal of Mechanical Systems Science and Engineering* 1, 20–25. 805
- 806 Meijers, M., Zlatanova, S., Pfeifer, N., 2005. 3D geoinformation indoors: structuring for evacuation, in: *Proceedings of Next generation 3D city models*, pp. 21–22. 807
- 808 Meratnia, N., 2005. Towards database support for moving object data. Ph.D. thesis. University of Twente. 809
- 810 Mioc, D., Anton, F., Liang, G., 2008. On-line street network analysis for flood evacuation planning, in: *Remote Sensing and GIS Technologies for Monitoring and Prediction of Disasters*. Springer, pp. 219–242. 811
- 812 Moreno, A., Segura, Á., Korchi, A., Posada, J., Otaegui, O., 2011. Interactive urban and forest fire simulation with extinguishment support, in: *Advances in 3D Geo-Information Sciences*. Springer, pp. 131–148. 813
- 814 Moreno, A., Segura, Á., Zlatanova, S., Posada, J., García-Alonso, A., 2012. Benefit of the integration of semantic 3D models in a fire-fighting vr simulator. *Applied Geomatics* 4, 143–153. 815
- 816 Narayanan, V., Phillips, M., Likhachev, M., 2012. Anytime safe interval path planning for dynamic environments, in: *2012 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 4708–4715. 817
- 818 Nedkov, S., Zlatanova, S., 2011. Enabling obstacle avoidance for Google maps’ navigation service, in: Altan, Backhause, Boccardo & Zlatanova (Eds.), *International Archives ISPRS XXXVIII, 7th, Gi4DM, Antalya, Turkey*. 819
- 820 Neis, P., Singler, P., Zipf, A., 2010. Collaborative mapping and emergency routing for disaster logistics-case studies from the haiti earthquake and the un portal for afrika. *Geospatial Crossroads@ GIForum* 10. 821
- 822 Parker, C.J., MacFarlane, R., Phillips, C., 2008. Integrated emergency management: Experiences and challenges of a national geospatial information provider, ordnance survey, in: Zlatanova, S., Li, J. (Eds.), *Geospatial Information Technology for Emergency Response*. Taylor & Francis, London. volume 6 of *Geospatial Information Technology for Emergency Response*, pp. 275–310. 823
- 824 Phillips, M., Likhachev, M., 2011. SIPP: Safe interval path planning for dynamic environments, in: *2011 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 5628–5635. 825
- 826 Schurr, N., Marecki, J., Lewis, J., Tambe, M., Scerri, P., 2005. The defacto system: Coordinating human-agent teams for the future of disaster response, in: *Multi-Agent Programming*. Springer US. volume 15, pp. 197–215. 827
- 828 Shastri, J., 2006. Safe navigation during fire hazards using Specknets. Master’s thesis. The University of Edinburgh, Edinburgh, UK. 829
- 830 Taylor, M.A., Freeman, S.K., 2010. A review of planning and operational models used for emergency evacuation situations in australia. *Procedia Engineering* 3, 3 – 14. 831
- 832 Visser, I., 2009. Route determination in disaster areas. Master’s thesis. Utrecht University, Netherlands. 833
- 834 Wang, Z., Zlatanova, S., 2013a. An A*-based search approach for navigation among moving obstacles, in: *Intelligent Systems for Crisis Management*. Springer, pp. 17–30. 835
- 836 Wang, Z., Zlatanova, S., 2013b. Taxonomy of navigation for first responders, in: *Progress in Location-Based Services*. Springer, pp. 297–315. 837
- 838 Wolfson, O., Xu, B., Chamberlain, S., Jiang, L., 1998. Moving objects databases: Issues and solutions, in: *Proceedings of the 10th International Conference on Scientific and Statistical Database Management, IEEE Computer Society*. pp. 111–122. 839
- 840 Zelle, H., Wisse, E., Mika, Á., van Tilburg, T., 2013. Smoke plume modeling in crisis management, in: *Intelligent Systems for Crisis Management*. Springer, pp. 51–66. 841
- 842 Zlatanova, S., Baharin, S.S.K., 2008. Optimal navigation of first responders using dbms, in: *Joint conference of the 3rd international conference on information systems for crisis response and management/4th international symposium on geo-information for disaster management*, pp. 541–554. 843