

BIBLIOTHEEK  
DER  
TECHNISCHE HOOGESCHOOL  
DELFT.

ON THE ROLLING CONTACT OF TWO ELASTIC BODIES  
IN THE PRESENCE OF DRY FRICTION

ON THE ROLLING CONTACT OF TWO ELASTIC BODIES  
IN THE PRESENCE OF DRY FRICTION

PROEFSCHRIFT

TER VERKRIJGING VAN DE GRAAD VAN DOCTOR IN DE  
TECHNISCHE WETENSCHAPPEN AAN DE TECHNISCHE  
HOGESCHOOL TE DELFT OP GEZAG VAN DE RECTOR  
MAGNIFICUS IR. H. J. DE WIJS, HOGLERAAR IN DE  
AFDELING DER MIJNBOWWKUNDE, TE VERDEDIGEN OP  
WOENSDAG 5 JULI 1967 DES NAMIDDAGS TE 2 UUR

DOOR

JOOST JACQUES KALKER

WISKUNDIG INGENIEUR

GEBOREN TE 'S-GRAVENHAGE



NEDERLANDSCH DRUKKERIJ BEDRIJF N.V. — LEIDEN

1219.6253



*Dit proefschrift is goedgekeurd door de  
promotor prof. dr. ir. A. D. de PATER*

*Aan mijn vrouw  
Aan mijn moeder*

Table of Contents.

	Page
Samenvatting	IV
Summary	VI
<u>1. Introduction.</u>	1
1.1 Historical outline	2
1.2 Two simplifying assumptions. Outline of the thesis	9
<u>2. Two elastic half-spaces under normal and shearing loads acting in an elliptical contact area.</u>	16
2.1 Formulation of the problems as integral equations	17
2.2 The fundamental lemma	23
2.3 DOVNOROVICH's method	28
2.4 The load-displacement equations	32
2.41 A differentiation formula	36
2.42 The coefficients of the load-displacement equations as finite sums of complete elliptic integrals	38
2.43 Transformation to another metric	41
<u>3. Special cases of the load-displacement equations.</u>	43
3.1 The load-displacement equations, when the surface tractions vanish at the edge of the contact area	44
3.2 Examples of the use of the load-displacement equations. A list of the functions $J(d,i,j,e)$ and $F_{mn}^{h;pq}$	48
3.21 The case of infinite surface traction at the edge of the contact area	52
3.211 A normal problem: a rigid, flat elliptical die pressed into a half-space	52
3.212 A tangential problem: the problem of CATTANEO and MINDLIN without slip	53

	Page
3.22 The case of zero surface tractions at the edge of the contact area	55
3.221 A normal problem: the problem of HERTZ	55
3.222 A tangential problem: the problem of CATTANEO and MINDLIN with slip, without twist	58
<u>4. Steady rolling with creepage and spin: asymptotic theories.</u>	63
4.1 Boundary conditions	64
4.2 Considerations of symmetry. New dimensionless parameters	68
4.3 The limiting case of infinitesimal creepage and spin	73
4.31 Proof that no slip takes place at the leading edge, when creepage and spin are infinitesimal	77
4.32 Solution of the problem	84
4.33 Numerical results	90
4.4 The limiting case of large creepage and spin. Numerical results	95
<u>5. Steady rolling with arbitrary creepage and spin: a numerical theory.</u>	101
5.1 The numerical method	101
5.11 Formulation as a variational problem	101
5.12 Numerical analysis	104
5.13 The choice of the weight function	108
5.14 Final remarks on the method	109
5.2 The computer programme	111
5.21 The input	112
5.22 The form of the integrand	113
5.23 Optimisation of the programme	114
5.24 The output	118

	Page
5.3 Numerical results	122
5.31 Comparison with the experiment	122
5.32 Qualitative behaviour of the solution	128
5.321 Pure creepage	129
5.322 Pure spin	131
5.323 Arbitrary creepage and spin	134
5.33 The total force transmitted to the lower body	136
<u>6. Conclusion.</u>	144
6.1 Results achieved	144
6.2 Further research	146
References	148
Notations	151

## Samenvatting.

Twee zuiver elastische, volkomen gladde omwentelingslichamen worden op elkaar gedrukt, zodat een eindig contactgebied ontstaat. Vervolgens worden zij om hun assen gewenteld zodat zij over elkaar rollen. Indien men een koppel aanbrengt op het ene lichaam en afneemt van het andere, dan blijken de omtreksnelheden van de lichamen niet gelijk te zijn, zelfs indien de overgebrachte kracht kleiner is dan het produkt van wrijvingscoëfficiënt en normaalkracht. Dit verschijnsel wordt de "gemiddelde slip" (Engels: creepage) van de lichamen genoemd. Is er loodrecht op het contactvlak een component van rotatie van de lichamen ten opzichte van elkaar, dan spreekt men van "spin". In deze dissertatie worden de verschijnselen in het contactvlak bestudeerd; in het bijzonder wordt de betrekking gezocht die het verband aangeeft tussen de gemiddelde slip en spin enerzijds en de totale tangentiële kracht, die de lichamen op elkaar uitoefenen, anderzijds.

Na een historische inleiding in Hoofdstuk 1, worden in Hoofdstuk 2 en Hoofdstuk 3 een aantal wiskundige hulpmiddelen besproken, die voor de hier gegeven behandeling van het probleem noodzakelijk zijn. Wat betreft het elastische gedrag worden de omwentelingslichamen door elastische halfruimten benaderd en wij zullen dus de elastische verplaatsingen onderzoeken, die worden teweeggebracht door verdeelde belastingen van verschillende aard, die aangrijpen in een elliptisch gebied gelegen in het overigens spanningsvrije oppervlak van een elastische halfruimte. Dit onderzoek leidt tot het opstellen van een stelsel lineaire vergelijkingen waarmee de verplaatsingen in de belasting kunnen worden uitgedrukt. Dit stelsel is geschikt om de randvoorwaardeproblemen uit de elasticiteitstheorie op te lossen, waartoe sommige contactproblemen aanleiding geven.

In Hoofdstuk 4 keren wij terug tot het oorspronkelijke probleem. De randvoorwaarden worden opgesteld, en het aantal parameters dat het probleem bepaalt, wordt tot vijf teruggebracht. Tevens worden een aantal symmetrie eigenschappen besproken. Hoofdstuk 4 is verder gewijd aan de theorie van twee grensgevallen, t.w. het geval van zeer kleine (infinitesimale) gemiddelde slip en spin, en het geval van zeer grote

gemiddelde slip en spin (volledig doorglijden). De behandelingsmethode van het eerste geval is afkomstig van DE PATER [1], en werd door KALKER [1] toegepast op cirkelvormige contactgebieden. De methode wordt hier toegepast op elliptische contactgebieden, waarbij de theorie van Hoofdstuk 2 wordt gebruikt. Het geval van volledig doorglijden werd reeds behandeld door LUTZ [1,2,3] en WERNITZ [1,2]. Zij losten het probleem op voor het geval dat de gemiddelde slip de richting van een der hoofdassen van de contactellips heeft. De theorie van Hoofdstuk 4 is niet aan deze beperking onderhevig.

In Hoofdstuk 5 wordt een numerieke methode beschreven voor het algemene geval van eindige gemiddelde slip en spin, waarbij al dan niet volledig doorglijden optreedt. Het probleem wordt eerst teruggebracht tot de minimalisatie van een oppervlakte-integraal. Daarna wordt een numerieke methode besproken waarmee de integraal kan worden geminimaliseerd. Er wordt vervolgens uitvoerig ingegaan op het rekenmachineprogramma dat de numerieke methode verwezenlijkt en tenslotte worden de resultaten toegelicht. Er bestaat een redelijke overeenstemming met het experiment.

In Hoofdstuk 6 worden een aantal conclusies getrokken en enige projecten voor nader onderzoek aangeduid.

## Summary.

Two purely elastic, perfectly smooth bodies of revolution are pressed together, so that a finite contact area forms. Then they are rotated about their axes, so that they roll over each other. If a couple is applied to one body and taken from the other, the circumferential velocities of the bodies appear to be no longer equal, even in case the force transmitted is smaller than the product of the coefficient of friction and the normal force. This phenomenon was called "creepage" by CARTER [1]. If there is, perpendicular to the contact area, a component of rotation of the bodies with respect to each other, "spin" is said to be present. In this thesis, the phenomena in the contact area are studied and in particular the relationship is sought which connects the creepage and the spin on the one hand, and the total tangential force which the bodies exert upon each other on the other hand.

After a historical introduction in chapter 1, we discuss in chapter 2 and chapter 3 a number of mathematical tools which are needed for our treatment of the problem. As far as the elastic behaviour is concerned, the bodies are approximated by elastic half-spaces. So we investigate the elastic displacements which are due to distributed loads of different types acting in an elliptical area of the surface of an elastic half-space, while outside the elliptical area the surface is free of traction. This investigation leads to the construction of a system of linear equations by means of which the displacements can be expressed in terms of the surface tractions. This system enables us to solve the boundary value problems of the theory of elasticity which correspond to several contact problems. Chapter 3 finishes with an application of this method to a number of well-known contact problems.

In chapter 4 we return to the original problem. The boundary conditions are set up, and the number of parameters defining the problem is reduced to five. Also, a number of symmetry properties is discussed. The remainder of chapter 4 contains the theory of two limiting cases, viz. the case of very small (infinitesimal) creepage and spin, and the case of very large creepage and spin (bodily



sliding). The method of treatment of the former case is due to DE PATER [1], and it was applied by KALKER [1] to circular contact areas. Here, the method is applied to elliptical contact areas, using the theory of chapter 2. The case of bodily sliding has been treated by LUTZ [1,2,3] and WERNITZ [1,2]. They solved the problem for the case that the creepage has the direction of one of the principal axes of the contact ellipse. In chapter 4, this restriction is removed.

In chapter 5 a numerical method is given for the general case of finite creepage and spin, with or without bodily sliding. The problem is first reduced to the minimalisation of a surface integral. Next, a numerical method is discussed by means of which the integral can be minimized. Then we consider the computer programme which realises the numerical method, and finally we discuss the results. These appear to agree reasonably well with the experimental evidence.

In chapter 6 certain conclusions are drawn, and some projects for further research are indicated.

## 1. Introduction.

Consider two purely elastic, perfectly smooth bodies of revolution, see Fig. 1. They are pressed together with a force  $N$ ,

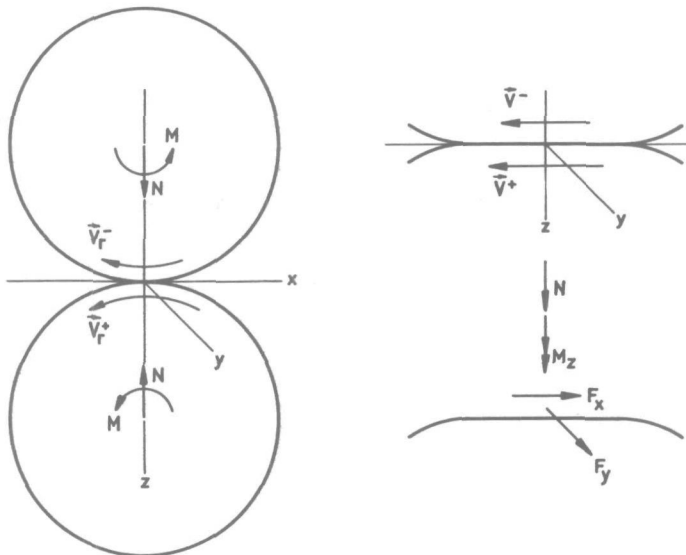


Fig. 1. Two bodies rolling over each other.

as a consequence of which a contact area comes into being along which the bodies touch. According to the theory of HERTZ (see LOVE [1], pg. 193 sqq.), this contact area is an ellipse when the bodies are counterformal. Subsequently, the bodies are rotated about their axes, so that they roll over each other. As a consequence of dry friction, the bodies can exert tangential forces upon each other at the contact area. If a couple is exerted on one body, and taken off from the other, it is found that the circumferential velocities of the bodies are no longer the same, without the occurrence of gross sliding. This difference in the circumferential velocities of the bodies, divided by the rolling velocity, is called the creepage of the bodies. If also the rotations of the bodies about an axis perpendicular to the contact area are different, we speak of

spin. The problem is, to investigate what takes place in the contact area, and in particular to find the connection between the two components of creepage (one in the direction of rolling: longitudinal creepage, and one in a direction perpendicular to the rolling direction: lateral creepage) and the spin on the one hand, and the two components of the total tangential force and the moment about an axis perpendicular to the contact area on the other hand.

It is assumed in this work that the law of dry friction (COULOMB's law) with constant coefficient of friction connects the tangential traction at a point of the contact area, and the local velocity of the bodies with respect to each other (the slip), and that a steady state is reached.

### 1.1. Historical outline.

The problem which we just stated was treated first by CARTER [1] in 1926. He considered the case of two cylinders with parallel axes, in which creepage only occurs in the direction of rolling, and he gave a complete solution of the problem. The tangential stress distribution is found as the difference of two stress distributions which are semicircular when the scale is properly chosen, see fig. 2. One of the stress distributions is acting over the whole contact width, and the other over a part of the contact width, viz. over the region where the local slip is zero: the area of adhesion, or locked area  $E_h$ . The area of adhesion is determined by the creepage, here defined as

$$v_x = \frac{V^- - V^+}{-\frac{1}{2}(V^+ + V^-)}, \quad (1.1)$$

where  $V^+$  and  $V^-$  are the circumferential velocities of the rolling cylinders. The velocity  $-\frac{1}{2}(V^+ + V^-)$  which occurs in the denominator of (1.1), is the rolling velocity. The semicircular traction distribution over the whole contact area equals  $\mu Z$ , where  $Z$  is the normal pressure distribution and  $\mu$  is the coefficient of friction. It is a consequence of the semicircular

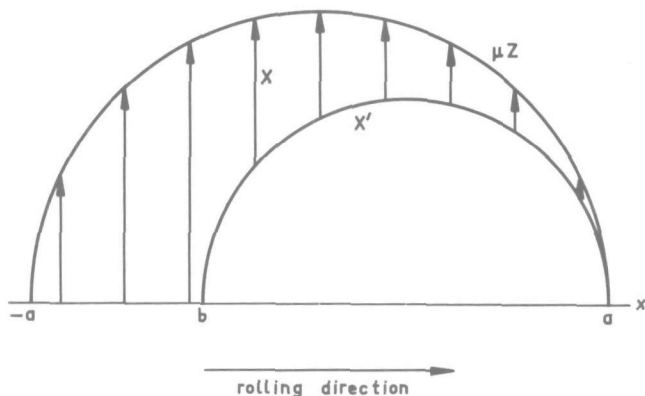


Fig. 2. The tangential stress distribution according to CARTER.

traction distribution over the area of adhesion, that the slip vanishes in the area of adhesion, while the total tangential traction falls below the bound  $\mu Z$  given by the law of friction.

It is seen from Fig. 2 that the adhesion area borders on the leading edge  $x = a$  of the contact area. No explanation of this phenomenon was given by CARTER, but it was supplied in 1950 by CAIN [1] in a discussion of a paper by PORITSKY. If the area of adhesion does not border on the leading edge, there would be an area of slip there; but CAIN showed that in that area of slip, the slip does not match the tangential traction as far as the direction is concerned, so that it cannot occur. In the area of slip behind the adhesion area, slip and traction do match in that respect.

The coordinate  $b$  of the trailing edge of the contact area is given by

$$\left. \begin{aligned} b/a &= \frac{|v_x| \rho}{2\mu a} - 1, & a: \text{half width of the contact area,} \\ \frac{1}{\rho} &= \frac{1}{4} \left( \frac{1}{R^+} + \frac{1}{R^-} \right), & R^+, R^-: \text{radii of cylinders,} \\ & & \text{positive when they are convex.} \end{aligned} \right\} (1.2)$$

It is seen from (1.2) that when the creepage vanishes, then  $b/a = -1$ , so that the area of adhesion covers the whole contact area, and the tangential traction vanishes. This is called free rolling, in which there is no dissipation by surface friction. There can be dissipation by elastic hysteresis, but such effects are not considered in this work. When the creepage increases,  $b/a$  increases, so that the area of adhesion diminishes. When  $|v_x| \rho / \mu a = 4$ ,  $b$  reaches the leading edge of the contact area, and when the creepage increases further,  $b$  passes the leading edge. This should be interpreted as follows: no area of adhesion forms at all. The tangential traction equals  $\mu z$  everywhere, and the slip matches it. This is called gross sliding.

We will give some impression of the magnitude of the creepage in the range we are interested in. When the cylinders have the same radius, then the characteristic length  $\rho$  is the diameter of the cylinders. In that case, a representative value of  $\rho/a$  is 200, the contact width being dependent on the normal load. A representative value of the coefficient of friction is 0.3. So, when in this example  $|v_x| = 0.003$ , the adhesion area covers half of the contact area, and gross sliding sets in when  $|v_x| = 0.006$ .

In the region between free rolling and the first onset of gross sliding, the total force  $F_x$  exerted on the lower body is given by a parabola which is tangent to the line  $F_x = \mu N$ , see Fig. 3. In the region of gross sliding,  $F_x$  has the maximum value  $\mu N$ .

$$\left. \begin{aligned}
 F_x &= \frac{1}{16} \mu N \left( \frac{v_x \rho}{\mu a} \right) \left( 8 - \frac{|v_x| \rho}{\mu a} \right), \text{ if } \frac{|v_x| \rho}{\mu a} \leq 4 \\
 &= \mu N, \qquad \qquad \qquad \text{if } \frac{|v_x| \rho}{\mu a} \geq 4
 \end{aligned} \right\} \quad (1.3)$$

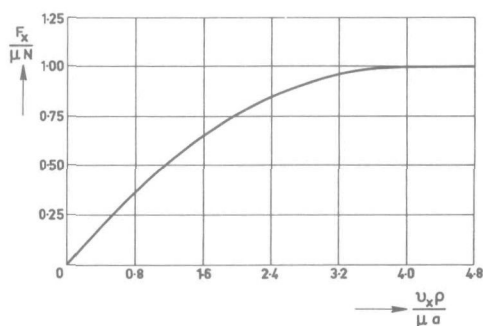


Fig. 3. The total force  $F_x/\mu N$  vs. the creepage  $\frac{u_x \rho}{\mu a}$  according to CARTER.

Progress was made by JOHNSON in a number of papers. JOHNSON performed a number of experiments in order to determine the connection between the total tangential force and the torsional moment on the one hand, and creepage and spin on the other hand. In [1] and [5] he also gives a theory of creepage without spin, which is a direct generalisation of CARTER's theory. In this theory, JOHNSON approximates the area of adhesion by an elliptical area which is similar to the contact area, and is similarly oriented. It touches the boundary of the contact area at its foremost point, see Fig. 4. Here also the traction distribution is found in the form of a difference between a semi-ellipsoidal traction distribution acting over the entire contact area, and another, which acts over the adhesion area alone. However, there is a serious flaw in this theory: in the region shown shaded in Fig. 4, the slip and the tangential traction do not match. In fact, if we define the slip as the local velocity of the upper body with respect to the lower, and consider the traction exerted on the lower body, the slip and traction are almost opposite in the shaded area, violating the friction law. In the slip region outside the shaded area, the traction and the slip are almost in the same sense; in fact, they make a small angle, and this is another, smaller, objection

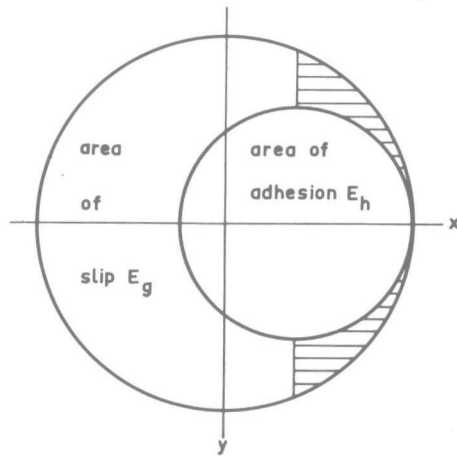


Fig. 4. Areas of adhesion and slip according to JOHNSON.

against the theory. The conclusion we draw from the shaded area of error is, that the area of adhesion is given incorrectly in JOHNSON's theory. If JOHNSON's theoretical results are compared with the experiment, it appears that the theoretical value of the creepage at a certain value of the total force parameter  $(F_x, F_y)/\mu N$  is lower than the experimental value. This difference is at most 25%, so that JOHNSON's theory can be used very well as an approximative theory, especially since the values of the coefficient of friction  $\mu$  differ considerably from one case to another.

Another theory is given by HAINES and OLLERTON [1]. Only creepage in the rolling direction is taken into consideration, and it is assumed that in narrow strips parallel to the rolling direction, CARTER's traction distribution is valid. It then appears that the area of adhesion is given by a lemon shaped area the leading edge of which coincides with the leading edge of the contact area, see Fig. 5. The trailing edge of the adhesion is an arc which, measured along the rolling direction, has a constant distance to the trailing edge of the contact area, in other terms, it is the trailing edge of the contact

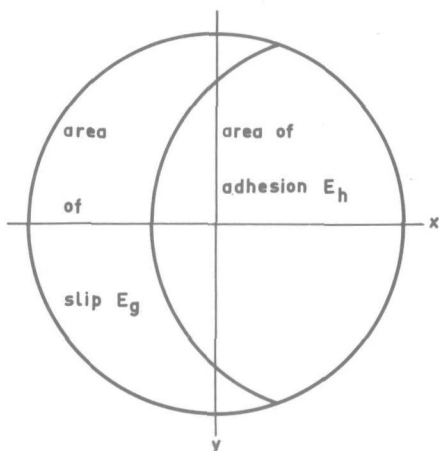


Fig. 5. Areas of adhesion and slip according to HAINES and OLLERTON.

area shifted parallel to itself in the rolling direction. This theory can in principle be used only for contact areas which are slender, with the minor axis in the rolling direction. However, HAINES and OLLERTON have also done photoelastic work from which it appeared that the theoretical form of the area of adhesion was in good agreement with practice, also when the contact area was not slender.

Recently, the theory of HAINES and OLLERTON was generalized by KALKER [2] so, that lateral creepage and, to a limited extent, also spin can be accounted for. In this theory, the elasticity equations are integrated approximately. This approximation is best when the contact ellipse is slender, with the minor semi-axis in the direction of rolling. With this approximate solution of the elasticity equations it is accomplished that 1°. there is no slip in the adhesion area; 2°. that the tangential traction in the slip area has the value  $\mu Z$ ; but 3°. there generally remains an angle between traction and slip in the slip area. This angle is small almost everywhere in case of pure creepage and when the spin is small, but deteriorates when



the spin increases. When for a slender contact ellipse the total force is compared with the results of ch. 5 of this dissertation, it is found that there is excellent agreement in the case of pure creepage, but in pure spin there are relative errors of up to 20%.

For spin there is a smaller amount of theory than for pure creepage. We just mentioned the theory of KALKER [2]. Aside from that, there are only theories on the two asymptotic cases, viz. very large creepage and spin, and infinitesimal creepage and spin. Experimental work on spin has been done by JOHNSON [2, 3] both on pure spin and on spin in combination with lateral creepage, by LEE and OLLERTON [1], and by POON [1].

The case of very large creepage and spin was treated by LUTZ [1, 2, 3] and WERNITZ [1, 2]. In their theory, they assume that the creepage and spin are so large, that the influence of the elastic deformation on the local slip can be neglected. As a consequence, there is no area of adhesion, and the local slip is completely specified by creepage and spin alone: there is no effect of the tangential traction on the slip. So, the direction of the local slip is known, and hence the direction of the local traction, its magnitude being given by  $\mu Z$ . The total tangential force and the torsional moment follow from integration. LUTZ [2] treated the case of a circular contact area, and WERNITZ [1] the case of an elliptical area. The latter case was treated, however, with a restriction on the components ( $v_x, v_y$ ) of the creepage: either  $v_x = 0$ , or  $v_y = 0$ . This is the case in friction drives which LUTZ and WERNITZ considered. We will treat the case of very large creepage and spin without this restriction in sec. 4.4 of this dissertation.

The opposite case is the case of infinitesimal creepage and spin. Here it is assumed that the adhesion area covers the entire contact area. For a circular contact area, this case was treated by DE PATER [1] for POISSON's ratio  $\sigma = 0$ , and by KALKER [1] without this restriction on  $\sigma$ . In sec. 4.3 sqq. of this dissertation, this theory is generalized to elliptical contact areas. Earlier, JOHNSON [2] treated the case of infinitesimal

spin for a circular contact area and arbitrary POISSON'S ratio. In KALKER [1], a comparison is made between the theories of KALKER [1], JOHNSON [2], and JOHNSON'S experiments [2]. There appears to be a fairly large discrepancy between the theories, and KALKER'S theory was found to be most in agreement with the experimental results.

In chapter 5 of this dissertation, a numerical theory is developed which can be used for arbitrary creepage and spin. This theory is mainly of academic interest in the case of pure creepage, owing to the fact that the approximative theories are of good quality. In the case of non-vanishing spin, the theory of chapter 5 provides the comparison needed for the safe use of the strip theory; such a comparison is made in KALKER [2]. For values of the spin not covered by the strip theory, the numerical theory of chapter 5 is the only one available. It can also be used to judge, when creepage and spin are large enough so that the theory of LUTZ [1, 2, 3] and WERNITZ [1, 2] can be used.

## 1.2. Two simplifying assumptions. Outline of the thesis.

As far as the theory elasticity is concerned, the lower and the upper body are approximated by half-spaces. In the Cartesian coordinate system  $(0, x, y, z)$  which we will adopt, the lower body occupies the half-space  $z \geq 0$ , and the upper occupies  $z \leq 0$ . Quantities pertaining to the lower body are distinguished by a superscript  $+$  added to the symbol from the analogous quantity of the upper body which carries a superscript  $-$ . The normal pressure is denoted by  $Z$ , while we define the tangential tractions  $(X, Y)$  as the local tangential (frictional) force per unit area exerted on the lower body by the upper body.

The contact area  $E$  and the distribution of normal pressure  $Z$  are determined by the boundary conditions of the HERTZ theory; see LOVE [1] pg. 193 sqq.:

$$w(x,y) \equiv w^+(x,y,0) - w^-(x,y,0) = -Ax^2 - By^2 + \alpha, \quad Z \geq 0 \text{ inside } E, \quad (1.4a)$$

$$w(x,y) \equiv w^+(x,y,0) - w^-(x,y,0) > -Ax^2 - By^2 + \alpha, \quad Z=0 \text{ on } z=0, \\ \text{outside } E, \quad (1.4b)$$

where  $w^*$  is the displacement component in the z-direction, while  $w(x,y)$  is called the displacement difference in the z-direction. A and B are determined by the radii of curvature of the bodies, see (3.38), and  $a$  is the penetration of the bodies.

In the first place, we will assume that the tangential traction distribution  $(X,Y)$  acting between the bodies does not disturb the displacement difference  $w(x,y)$ . Such an assumption was already made by MINDLIN [1] in 1949. It was shown by DE PATER [1] pg. 33, that the assumption is completely correct in the case that both bodies have the same elastic constants. A discussion of the error of the approximation when the elastic constants are different will be given in sec. 2.1. The assumption implies that neither the contact area E nor the normal pressure Z are disturbed by the tangential tractions. Consequently, E and Z are given by the HERTZ theory of frictionless contact. According to that theory, which is treated in some detail in sec. 3.221, the contact area E is elliptical in shape, so that we can choose our origin and x and y axes so that

$$E = \{ x,y,z: z = 0, (x/a)^2 + (y/b)^2 \leq 1 \}, \quad (1.5a)$$

while the normal pressure Z is given by

$$\begin{aligned} Z &= \frac{3N}{2\pi ab} \sqrt{1 - (x/a)^2 - (y/b)^2} \quad \text{inside } E, \\ &= 0 \quad \text{on } z = 0, \text{ outside } E, \end{aligned} \quad (1.5b)$$

N: total normal load.

The local slip at a point is defined as the local velocity of the upper body with respect to the lower body. We ordinarily use the relative slip  $(s_x, s_y)$ , which is equal to the local slip divided by the rolling velocity. We will show in sec. 4.1 of this dissertation that when steady rolling takes place in the x-direction, the relative slip is given by (4.15):

$$s_x = v_x - \phi y + \frac{\partial u}{\partial x}, \quad s_y = v_y + \phi x + \frac{\partial v}{\partial x}, \quad (1.6a)$$

with

$$\left. \begin{aligned}
 & (u_x, u_y): \text{ the creepage, } \phi: \text{ the spin,} \\
 & u = \{u^+(x,y,0) - u^-(x,y,0)\}, \quad v = \{v^+(x,y,0) - v^-(x,y,0)\} \\
 & u^\pm, v^\pm: (x,y) \text{ displacement components in lower/upper body.}
 \end{aligned} \right\} (1.6b)$$

We will also assume that the normal pressure distribution  $Z$  does not disturb the displacement differences  $(u,v)$ . Such an assumption was made by MINDLIN [1] in 1949. It was shown by DE PATER [1], pg. 33 that this second assumption is completely correct in the case that the bodies have the same elastic constants. A discussion of the error of the approximation when the elastic constants are different will be given in sec. 2.1.

As a consequence of the assumed independence of  $w$  on  $(X,Y)$ , the problem falls apart into a normal problem which completely determines the normal pressure and the contact area, and a tangential problem which uses the results of the normal problem as data. The reason for the assumed independence of  $(u,v)$  on  $Z$  lies in the fact that the case of equal elastic constants is technically the most important, while the theory becomes somewhat simpler, and the coefficient of friction does not figure as an independent parameter in the calculation.

A method to obtain a better approximation was indicated by JOHNSON [4], pg. 18 sqq. JOHNSON proposes to retain the assumption that  $w$  is independent of  $(X,Y)$ , but to take the dependence of  $(u,v)$  on  $Z$  into account. The value of this method consists of the fact that the dependence of  $(u,v)$  on  $Z$  is much more important than the dependence of  $w$  on  $(X,Y)$ , especially when the coefficient of friction  $\mu$  is small, see sec. 2.1. The advantage over the rigorous theory is, that the normal problem remains the same, and that the tangential problem changes only in that a term is added to the formula for the relative slip, the term being explicitly known, and being independent of the creepage and the spin. This method is not investigated further in this thesis, where we will retain the two assumptions of MINDLIN.

The tangential problem is determined by the following conditions.

$(X,Y)$  and  $(u,v)$  are connected by the elasticity equations }  
 for the half-space, in which stresses and displacements } (1.7)  
 vanish at infinity, while  $X = Y = 0$  on  $z = 0$ , outside  $E$ ;

$(X,Y) = \mu Z (w_x, w_y)$ ,  $w_x = s_x/s$ ,  $w_y = s_y/s$ ,  $s = \sqrt{s_x^2 + s_y^2}$  }  
 in the area of slip  $E_g$ ; } (1.8a)

$s_x = s_y = 0$ ,  $|(X,Y)| \leq \mu Z$  in the area of adhesion  $E_h$ . (1.8b)

We see from (1.7) and (1.8) that the tangential problem naturally falls into two parts. In the first part, we must study the effect of the traction distribution  $(X,Y)$  on the displacement differences  $(u,v)$ , in order to get the connection between the traction and the slip. We solve this problem by giving this connection for certain standard traction distributions which form a complete system. In the second part we superimpose the standard tractions so as to fit (approximately) the boundary conditions (1.8). It should be noted that the division of the contact area into areas of slip and adhesion is not known beforehand, but must result from the calculations.

In chapters 2 and 3 of the thesis, we attack the first sub-problem, viz. finding a complete set of tractions with their corresponding displacements differences. Apart from the tangential problem in which  $(X,Y)$  are given and  $Z$  is unimportant as we have here, we also treat the normal problem where  $(X,Y)$  are unimportant,  $Z$  is arbitrarily prescribed. This is done because it widens the scope of chapters 2 and 3, while it is done without much trouble, since a normal problem is equivalent to a tangential problem in which POISSON's ratio  $\sigma$  vanishes.

In chapter 2, we give the theory of tractions of the form

$$(X,Y,Z) = \{1-(x/a)^2-(y/b)^2\}^{-\frac{1}{2}} \sum_{p+q=0}^M (d_{pq}, e_{pq}, f_{pq}) x^p y^q. \quad (1.9)$$

It is shown in 2.2 that to the tractions (1.9) surface displacement differences belong

$$(u,v,w) = \sum_{m+n=0}^M (a_{mn}, b_{mn}, c_{mn}) x^m y^n \text{ if } (x,y) \text{ in } E. \quad (1.10)$$

The remainder of chapter 2 is devoted to the connection between the  $(a_{mn}, b_{mn}, c_{mn})$  and the  $(d_{pq}, e_{pq}, f_{pq})$ . This connection is given in the form of a square set of linear equations, which we call the load-displacement equations. They express  $(a_{mn}, b_{mn}, c_{mn})$  explicitly in  $(d_{pq}, e_{pq}, f_{pq})$ .

In chapter 3, we treat special cases of the load displacement equations. In 3.1, we consider the special case that  $(X,Y,Z)$  vanish at the edge of the contact area, and have the form

$$(X,Y,Z) = \{1 - (x/a)^2 - (y/b)^2\}^{+\frac{1}{2}} \sum_{p+q=0}^{M-2} (d_{pq}, e_{pq}, f_{pq}) x^p y^q \quad (1.11)$$

Again,  $(u,v,w)$  are given by (1.10). The coefficients of the load-displacement equations appear to undergo only minor changes. In 3.2, we treat a number of examples, viz. a rigid, flat die of elliptic circumference pressed into a half-space (3.211), the problem of CATTANEO and MINDLIN without slip (3.212), the problem of HERTZ, fairly detailed because it is used later on (3.221), and finally the problem of CATTANEO and MINDLIN with slip, without twist (3.222).

In chapters 4 and 5, we attack the second subproblem, viz. the fitting of the boundary conditions (1.8), by means of the theory of chapters 2 and 3. In 4.1, the boundary conditions are derived; this is followed by considerations of symmetry in 4.2. The remainder of chapter 4 is devoted to the two limiting cases, viz. infinitesimal creepage and spin (sec. 4.3), and very large creepage and spin (sec. 4.4). The case of infinitesimal creepage and spin, which was treated before by DE PATER [1] and KALKER [1] is extended to the case of an elliptical contact area. Traction of the form (1.9) are used. The case of very large creepage and spin, which was treated by WERNITZ for elliptical areas only when  $v_x=0$  or  $v_y=0$ , is here extended to the case of arbitrary creepage. The method of LUTZ and WERNITZ is retained, and the theory of chapters 2 and 3 is not used.

In chapter 5 we treat the case of arbitrary creepage and spin. The procedure is, to write the boundary conditions (1.8) in the form

$$I \equiv \iint_E \left\{ 1 - (x/a)^2 - (y/b)^2 \right\} \left\{ (X' - w_x)^2 + (Y' - w_y)^2 \right\} \left\{ s_x^2 + s_y^2 \right\} dx dy = 0 \right\} \quad (1.12a)$$

$$|(X', Y')| \leq 1,$$

$$\left. \begin{aligned} \text{with } (X, Y) = \mu Z(X', Y') &= \frac{3\mu N}{2\pi ab} \left\{ 1 - (x/a)^2 - (y/b)^2 \right\}^{+1/2} (X', Y'), \\ (X', Y') &= \sum_{p+q=0}^M (d_{pq}, e_{pq}) x^p y^q, \quad M \rightarrow \infty. \end{aligned} \right\} \quad (1.12b)$$

It should be observed that (1.12a) can only be satisfied if at every point of the contact area at least one of the factors of the integrand vanishes. The first factor does not vanish except on the edge of the contact area; if the second factor vanishes, (1.8a) is satisfied, and the point belongs to the area of slip; if the second factor vanishes, then (1.8b) is satisfied, and the point belongs to the area of adhesion. The inequality  $|(X', Y')| \leq 1$  ensures that the maximum  $\mu Z$  of the tangential traction is not exceeded. We see from (1.12b) that the tractions (1.11) of sec. 3.1 are used. This is done with the purpose to enter a rudiment of the inequality into the integral. In practice, we take  $M = 3$  in (1.12b), and minimize  $I$  with respect to  $(d_{pq}, e_{pq})$ , since the positive definite integral  $I$  vanishes only for infinite  $M$ . The inequality of (1.12a) will be verified afterwards. It is seen that in this method the difference between the locked areas  $E_h$  and the slip areas  $E_g$  disappears from the problem. The domain of slip can, however, be identified with the area in which  $\{(X' - w_x)^2 + (Y' - w_y)^2\} \ll (s_x^2 + s_y^2)$ , and the domain of adhesion  $E_h$  is that in which  $\{(X' - w_x)^2 + (Y' - w_y)^2\} \gg (s_x^2 + s_y^2)$ . This distinction is especially sharp in the case of pure creepage. The calculations were performed for a large number of parameter combinations  $v_x, v_y, \phi$ , and  $a/b$  (= ratio of the axes of the contact ellipse). In 5.1 sqq, the theory is discussed; in 5.2 sqq, we present some considerations on the computer programme with special emphasis on the optimisation of the programme and the verification of the

inequality, and in 5.3 sqq. we devote our attention to the numerical results.

The dissertation finishes with a conclusion in which the results achieved are summarized, and in which we make some remarks regarding further research.



## 2. Two elastic half-spaces under normal and shearing loads acting in an elliptical contact area.

In the present chapter, we will consider the stresses and displacement differences that arise when two half-spaces are in contact. Throughout the chapter we assume that contact takes place along an elliptical contact area  $E$ .

We introduce a cartesian coordinate system  $(0,x,y,z)$ , the origin of which lies in the centre of the contact ellipse. The directions of  $x$  and  $y$  are the axes of the ellipse, and the axis of  $z$  is directed along the inner normal of the lower half-space. We denote the surface tractions by  $(X,Y,Z)$ , the elastic displacement in the lower half-space  $z \geq 0$  by  $(u^+,v^+,w^+)$ , and the elastic displacement in the upper half-space  $z \leq 0$  by  $(u^-,v^-,w^-)$ .

We saw in the previous chapter that as a consequence of our assumptions we could decompose the problem into two partial problems, viz. the normal and the tangential problem.

The normal problem has to be solved first, and it is equivalent to a contact problem without friction. Its boundary conditions are formulated in terms of  $Z$  and the displacement difference  $w(x,y)=w^+(x,y,0)-w^-(x,y,0)$ , and the most important condition is that  $w(x,y)$  takes on a prescribed value in  $E$ . We can schematize the elasticity part of the problem by solving the following

Normal problem: The shear tractions  $(X,Y)$  vanish identically on the whole of the boundary  $z = 0$ , and the normal traction  $Z$  vanishes outside the elliptical area  $E$ . The surface displacement difference  $w(x,y)$  is given at  $E$  as a polynomial of degree  $M$  in  $x$  and  $y$ :

$$w(x,y) = \sum_{m=0}^M \sum_{n=0}^{M-m} c_{mn} x^m y^n \text{ inside } E. \quad (2.1)$$

Find the normal traction  $Z$  acting at the area  $E$ .

This problem seems to be artificial. The reason why we restrict ourselves to polynomial displacement differences is, that for such a displacement we can find the normal traction  $Z$  by solving a finite set of linear equations. Moreover, we observe

that the polynomials are complete in the sense that they can approximate any continuous function as well as one likes. Finally, in several problems, e.g. the problem of HERTZ (sec. 3.221), and the problem of a flat rigid die of elliptical circumference that is pressed into a half-space (sec. 3.211), the displacement difference  $w$  is actually a polynomial.

Making use of the results of the normal problem, we proceed to solve the tangential problem. From a point of view of elasticity alone, this problem is equivalent to a problem in which there is no normal load at the boundary, as a consequence of the second assumption of MINDLIN, see sec. 1.2. The most important boundary condition in the area of adhesion is the (almost complete) prescription of  $(u(x,y), v(x,y)) = (u^+(x,y,0) - u^-(x,y,0), v^+(x,y,0) - v^-(x,y,0))$  in it. Hence it is desirable to solve the following

Tangential Problem: The normal traction  $Z$  vanishes identically on the entire boundary  $z = 0$ , and the tangential surface traction  $(X,Y)$  vanishes outside the elliptical area  $E$ . The displacement differences  $(u(x,y), v(x,y))$  are given in  $E$  as polynomials of degree  $M$  in  $x$  and  $y$ :

$$(u(x,y), v(x,y)) = \sum_{m=0}^M \sum_{n=0}^{M-m} (a_{mn}, b_{mn}) x^m y^n \text{ inside } E. \quad (2.2)$$

Find the tangential traction  $(X,Y)$  acting at  $E$ .

This problem, too, can be solved explicitly, in the same way as the normal problem. As in the normal problem, there is an example in which  $(u,v)$  are actually polynomials: it is the problem of CATTANEO [1] and MINDLIN [1], in which two bodies are pressed together and then are shifted or twisted, while slip is assumed to be absent. This problem is treated in sec. 3.212.

We finally observe that both problems reduce to problems of the single half-space, when one of the two elastic half-spaces is assumed to be perfectly rigid.

### 2.1. Formulation of the problems as integral equations.

The connection of the surface tractions and the displacement

of a half-space can be given by an integral representation. In order to find it, we observe that the displacement in the lower half-space due to a concentrated load of magnitude  $Z$  acting at the origin in the direction of the positive  $z$ -axis is given by LOVE [1], par. 135, pg. 191, as follows:

$$\left. \begin{aligned} u^+ &= \frac{Z}{4\pi\mu} \frac{xz}{r^3} - \frac{Z}{4\pi(\lambda+\mu)} \frac{x}{r(z+r)}, \\ v^+ &= \frac{Z}{4\pi\mu} \frac{yz}{r^3} - \frac{Z}{4\pi(\lambda+\mu)} \frac{y}{r(z+r)}, \\ w^+ &= \frac{Z}{4\pi\mu} \frac{z^2}{r^3} + \frac{Z(\lambda+2\mu)}{4\pi\mu(\lambda+\mu)} \frac{1}{r}, \quad r = \sqrt{x^2+y^2+z^2} \end{aligned} \right\} \quad (2.3)$$

where  $\lambda$  and  $\mu$  are LAME'S constants, which are connected with the modulus of rigidity  $G$  and POISSON'S ratio  $\sigma$  by the relations

$$\mu = G, \quad \lambda = \frac{2\sigma G}{1-2\sigma}, \quad \lambda+\mu = \frac{G}{1-2\sigma}, \quad \lambda+2\mu = \frac{2G(1-\sigma)}{1-2\sigma}. \quad (2.4)$$

So, (2.3) becomes

$$\left. \begin{aligned} u^+ &= \frac{Z}{4\pi G^+} \left\{ \frac{xz}{r^3} - \frac{(1-2\sigma^+)x}{r(z+r)} \right\}, \\ v^+ &= \frac{Z}{4\pi G^+} \left\{ \frac{yz}{r^3} - \frac{(1-2\sigma^+)y}{r(z+r)} \right\}, \\ w^+ &= \frac{Z}{4\pi G^+} \left\{ \frac{z^2}{r^3} + \frac{2(1-\sigma^+)}{r} \right\}. \end{aligned} \right\} \quad (2.5)$$

The displacement in the lower body due to a distributed pressure  $Z(x,y)$  in the  $z$ -direction is then given by superposition:

$$\left. \begin{aligned} u^+(x,y,z) &= \frac{1}{4\pi G^+} \iint_E Z(x',y') \left\{ \frac{(x-x')z}{r^3} - \frac{(1-2\sigma^+)(x-x')}{r(z+r)} \right\} dx'dy', \\ v^+(x,y,z) &= \frac{1}{4\pi G^+} \iint_E Z(x',y') \left\{ \frac{(y-y')z}{r^3} - \frac{(1-2\sigma^+)(y-y')}{r(z+r)} \right\} dx'dy', \\ w^+(x,y,z) &= \frac{1}{4\pi G^+} \iint_E Z(x',y') \left\{ \frac{z^2}{r^3} + \frac{2(1-\sigma^+)}{r} \right\} dx'dy', \\ r &= \sqrt{(x-x')^2+(y-y')^2+z^2}, \quad z \geq 0. \end{aligned} \right\} \quad (2.6)$$

We must also have the displacement in the upper body. It is due to the reaction of  $Z(x,y)$ , and consequently it is given by the same equations, but in a coordinate system  $(x,y,z')$ , where  $z' = -z$ . To find it in our coordinate system  $(x,y,z)$ , we must change  $z$  to  $|z|$ ,

and  $w^+$  to  $-w^-$  everywhere. This gives for the displacement in both half-spaces:

$$\left. \begin{aligned} u^{\mp}(x,y,z) &= \frac{1}{4\pi G^{\mp}} \iint_E Z(x',y') \left\{ \frac{(x-x')|z|}{r^3} - \frac{(1-2\sigma^{\mp})(x-x')}{r(|z|+r)} \right\} dx'dy', \\ v^{\mp}(x,y,z) &= \frac{1}{4\pi G^{\mp}} \iint_E Z(x',y') \left\{ \frac{(y-y')|z|}{r^3} - \frac{(1-2\sigma^{\mp})(y-y')}{r(|z|+r)} \right\} dx'dy', \\ w^{\mp}(x,y,z) &= \frac{\mp 1}{4\pi G^{\mp}} \iint_E Z(x',y') \left\{ \frac{z^2}{r^3} + \frac{2(1-\sigma^{\mp})}{r} \right\} dx'dy', \\ r &= \sqrt{(x-x')^2+(y-y')^2+z^2}, \text{ upper and lower sign as } z < 0, z > 0. \end{aligned} \right\} (2.7)$$

From this we see that in case  $G$  and  $\sigma$  are the same in both bodies (elastic symmetry),

$$\left. \begin{aligned} u^+(x,y,z) &= u^-(x,y,-z), \\ v^+(x,y,z) &= v^-(x,y,-z), \\ w^+(x,y,z) &= -w^-(x,y,-z), \end{aligned} \right\} \text{ if } X = Y = 0 \quad (2.8)$$

a result due to DE PATER [1], pg. 33.

The displacement differences, which are prescribed in the normal and tangential problems, are:

$$\left. \begin{aligned} u(x,y) &= \{u^+(x,y,0) - u^-(x,y,0)\} = \\ &= \frac{1}{4\pi} \left\{ \frac{1-2\sigma^+}{G^+} - \frac{1-2\sigma^-}{G^-} \right\} \iint_E Z(x',y') \frac{x'-x}{R^2} dx'dy', \\ v(x,y) &= \{v^+(x,y,0) - v^-(x,y,0)\} = \\ &= \frac{1}{4\pi} \left\{ \frac{1-2\sigma^+}{G^+} - \frac{1-2\sigma^-}{G^-} \right\} \iint_E Z(x',y') \frac{y'-y}{R^2} dx'dy', \\ w(x,y) &= \{w^+(x,y,0) - w^-(x,y,0)\} = \\ &= \frac{1}{2\pi} \left\{ \frac{1-\sigma^+}{G^+} + \frac{1-\sigma^-}{G^-} \right\} \iint_E Z(x',y') \frac{dx'dy'}{R}, \\ X = Y = 0, R &= \sqrt{(x-x')^2+(y-y')^2}. \end{aligned} \right\} (2.9)$$

We combine  $\sigma^+$ ,  $\sigma^-$  and  $G^+$ ,  $G^-$  in the following manner:

$$\frac{1}{G} = \frac{1}{2} \left( \frac{1}{G^+} + \frac{1}{G^-} \right), \quad \frac{\sigma}{G} = \frac{1}{2} \left( \frac{\sigma^+}{G^+} + \frac{\sigma^-}{G^-} \right), \quad \kappa = \frac{1}{4} G \left( \frac{1-2\sigma^+}{G^+} - \frac{1-2\sigma^-}{G^-} \right). \quad (2.10)$$

It is easy to see that  $G$  lies between  $G^+$  and  $G^-$ , and that  $\sigma$  lies between  $\sigma^+$  and  $\sigma^-$ ; in the case of elastic symmetry,

$$G = G^+ = G^-, \quad \sigma = \sigma^+ = \sigma^-, \quad \kappa = 0. \quad (2.10a)$$

The constant  $\kappa$  vanishes in case of elastic symmetry, and also when both bodies are incompressible. Its maximum is 0.5, but in practice it is mostly small, e.g. 0.03 for steel on brass, and 0.09 for steel on aluminium. In terms of the constants of (2.10), the displacement differences become

$$\left. \begin{aligned} u(x,y) &= -\frac{\kappa}{\pi G} \iint_E Z(x',y') \frac{x-x'}{R^2} dx'dy', & (a) \\ v(x,y) &= -\frac{\kappa}{\pi G} \iint_E Z(x',y') \frac{y-y'}{R^2} dx'dy', & (b) \\ w(x,y) &= \frac{1-\sigma}{\pi G} \iint_E Z(x',y') \frac{dx'dy'}{R}. & (c) \end{aligned} \right\} (2.11)$$

If  $w$  is prescribed in the contact area  $E$ , (2.11c) is an integral equation for the unknown normal pressure  $Z(x,y)$ .

The procedure for the tangential problem is very nearly the same. We start with the displacement in the lower body due to a concentrated load of magnitude  $X$  acting at the origin in the direction of the positive  $x$ -axis, see LOVE [1], par. 166, pg. 243,

$$\left. \begin{aligned} u^+ &= \frac{X}{4\pi\mu} \left( \frac{\lambda+3\mu}{\lambda+\mu} \frac{1}{r} + \frac{x^2}{r^3} \right) - \frac{X}{2\pi(\lambda+\mu)} \frac{1}{r} + \frac{X}{4\pi(\lambda+\mu)} \left( \frac{1}{z+r} - \frac{x^2}{r(z+r)^2} \right), \\ v^+ &= \frac{X}{4\pi\mu} \frac{xy}{r^3} - \frac{X}{4\pi(\lambda+\mu)} \cdot \frac{xy}{r(z+r)^2}, \\ w^+ &= \frac{X}{4\pi\mu} \frac{xz}{r^3} + \frac{X}{4\pi(\lambda+\mu)} \cdot \frac{x}{r(z+r)}, \\ r &= \sqrt{x^2+y^2+z^2}. \end{aligned} \right\} (2.12)$$

The effect of a distributed shear stress  $X(x,y)$  in the  $x$ -direction is found by superposition. The displacement due to a load  $Y$  in the  $y$ -direction is found from (2.12) by cyclic interchange of  $x$  and  $y$ ,  $u$  and  $v$ ,  $X$  and  $Y$ . The displacement in the upper half-space is given by (2.12) in a coordinate system  $(x,y,z')$ , with  $z' = -z$ . However, we must take into account that the shearing traction on the upper body has the opposite sign. So we find the displacement in the coordinate system  $(x,y,z)$  by replacing  $X$  by  $-X$ ,  $Y$  by  $-Y$ ,  $z$  by  $|z|$ ,  $w^+$  by  $-w^-$ , and it is for both half-spaces

$$\begin{aligned}
u^{\mp}(x,y,z) &= \\
&= \mp \frac{1}{4\pi G^{\mp}} \iint_E [X(x',y') \left\{ \frac{1}{r} + \frac{1-2\sigma^{\mp}}{|z|+r} + \frac{(x-x')^2}{r^3} - \frac{(1-2\sigma^{\mp})(x-x')^2}{r(|z|+r)^2} \right\} + \\
&+ Y(x',y') \left\{ \frac{(x-x')(y-y')}{r^3} - \frac{(1-2\sigma^{\mp})(x-x')(y-y')}{r(|z|+r)^2} \right\}] dx' dy', \\
v^{\mp}(x,y,z) &= \\
&= \mp \frac{1}{4\pi G^{\mp}} \iint_E [X(x',y') \left\{ \frac{(x-x')(y-y')}{r^3} - \frac{(1-2\sigma^{\mp})(x-x')(y-y')}{r(|z|+r)^2} \right\} + \\
&+ Y(x',y') \left\{ \frac{1}{r} + \frac{1-2\sigma^{\mp}}{|z|+r} + \frac{(y-y')^2}{r^3} - \frac{(1-2\sigma^{\mp})(y-y')^2}{r(|z|+r)^2} \right\}] dx' dy', \\
w^{\mp}(x,y,z) &= \\
&= \frac{1}{4\pi G^{\mp}} \iint_E [X(x',y') \left\{ \frac{(x-x')|z|}{r^3} + \frac{(1-2\sigma^{\mp})(x-x')}{r(|z|+r)} \right\} + \\
&+ Y(x',y') \left\{ \frac{(y-y')|z|}{r^3} + \frac{(1-2\sigma^{\mp})(y-y')}{r(|z|+r)} \right\}] dx' dy', \\
r &= \sqrt{(x-x')^2 + (y-y')^2 + z^2}, \quad Z = 0. \\
\text{Upper sign: upper half-space, lower sign: lower half-space.} &
\end{aligned} \tag{2.13}$$

From this we see that in case G and  $\sigma$  are the same in both bodies (elastic symmetry),

$$\left. \begin{aligned}
u^+(x,y,z) &= -u^-(x,y,-z), \\
v^+(x,y,z) &= -v^-(x,y,-z), \\
w^+(x,y,z) &= +w^-(x,y,-z),
\end{aligned} \right\} \text{if } Z = 0, \tag{2.14}$$

a result due to DE PATER [1], pg. 33.

The displacement differences  $u(x,y)$ ,  $v(x,y)$ ,  $w(x,y)$ , which are prescribed in the normal and tangential problems, become with the definition (2.10) of  $G$ ,  $\sigma$ , and  $\kappa$ ,

$$\begin{aligned}
u(x,y) &= \\
&= \frac{1}{\pi G} \iint_E [X(x',y') \left\{ \frac{1-\sigma}{R} + \frac{\sigma(x-x')^2}{R^3} \right\} + Y(x',y') \frac{\sigma(x-x')(y-y')}{R^3}] dx' dy', \\
&= \frac{1}{\pi G} \iint_E [X(x',y') \left\{ \frac{1}{R} - \sigma \frac{\partial^2 R}{\partial x'^2} \right\} - \sigma Y(x',y') \frac{\partial^2 R}{\partial x' \partial y'}] dx' dy',
\end{aligned} \tag{2.15a}$$

$$\begin{aligned}
 v(x,y) &= \\
 &= \frac{1}{\pi G} \iint_E [X(x',y') \frac{\sigma(x-x')(y-y')}{R^3} + Y(x',y') \{ \frac{1-\sigma}{R} + \frac{\sigma(y-y')^2}{R^3} \}] dx' dy' \\
 &= \frac{1}{\pi G} \iint_E [ -\sigma X(x',y') \frac{\partial^2 R}{\partial x' \partial y'} + Y(x',y') \{ \frac{1}{R} - \sigma \frac{\partial^2 R}{\partial y'^2} \}] dx' dy',
 \end{aligned}
 \tag{2.15b}$$

$$w(x,y) = \frac{\kappa}{\pi G} \iint_E [X(x',y') \frac{x-x'}{R^2} + Y(x',y') \frac{y-y'}{R^2}] dx' dy',
 \tag{2.15c}$$

$$Z = 0, \quad R = \sqrt{(x-x')^2 + (y-y')^2}.
 \tag{2.16}$$

If  $Z = 0$ , and  $u$  and  $v$  are prescribed in the contact area, (2.15a) and (2.15b) are two simultaneous integral equations for the unknown tangential tractions  $(X, Y)$ .

According to (2.11) and (2.15), we see that a rough estimate of  $(u, v, w)$  in the contact area is

$$\begin{aligned}
 u &= O(F_x/Gs) + O(\sigma F_y/Gs) + O(\kappa N/Gs), \\
 v &= O(\sigma F_x/Gs) + O(F_y/Gs) + O(\kappa N/Gs), \\
 w &= O(\kappa F_x/Gs) + O(\kappa F_y/Gs) + O((1-\sigma)N/Gs), \\
 F_x, F_y, N: &\text{ total force in the } x, y, z\text{-directions,} \\
 s: &\text{ half diameter of the contact area.}
 \end{aligned}
 \tag{2.17}$$

Throughout the present work we will neglect the influence of the small constant  $\kappa$ . This leads to exact results in the technically important case of elastic symmetry, and also when both bodies are incompressible.

It would seem that our approximation leads to a high precision in the case of  $w$ , since  $F_x$  and  $F_y$  are the most of the order  $\mu N$  ( $\mu$ : coefficient of friction), so that the influence of  $X$  and  $Y$  on  $w$  is of  $O(\mu \kappa N/Gs)$ , which seems to be negligible with respect to the influence of  $Z$ , which is of  $O((1-\sigma)N/Gs)$ . But neglecting the influence of  $Z$  on  $(u, v)$  can lead to serious errors: this influence can be of  $O(\kappa N/Gs)$ , while the influence of the tangential traction is of  $O(\mu N/Gs)$ . Hence we would obtain a good second approximation by taking the influence of  $Z$  on  $(u, v)$  into account, and neglecting the influence of  $(X, Y)$  on  $w$ . The division of the problems into a normal and a tangential problem is then retained. This second approximation

was worked out by JOHNSON [4] for CARTER's problem, and he compared his results with the exact theory (see JOHNSON [4], fig. 7), from which it appeared that the error of the second approximation is small.

We finally observe that the problem is governed by three elastic constants, viz.  $G$ ,  $\sigma$ , and  $\kappa$ . That is one less than one would expect, since in principle the four constants  $G^+$ ,  $G^-$ ,  $\sigma^+$ ,  $\sigma^-$  can be arbitrarily chosen. We also see that  $G$  can be eliminated by introducing dimensionless tractions. So the elastic properties are taken into account by the two dimensionless parameters  $\kappa$  and  $\sigma$ , one of which we set equal to zero.

## 2.2. The fundamental lemma.

As we saw in the previous section, the normal and tangential problems can be formulated as the integral equations (2.11c) and (2.15a,b). They are

$$\left. \begin{aligned} u(x,y) &= \\ &= \frac{1}{\pi G} \iint_E [X(x',y') \left\{ \frac{1-\sigma}{R} + \frac{\sigma(x-x')^2}{R^3} \right\} + Y(x',y') \frac{\sigma(x-x')(y-y')}{R^3}] dx' dy', \\ v(x,y) &= \\ &= \frac{1}{\pi G} \iint_E [X(x',y') \frac{\sigma(x-x')(y-y')}{R^3} + Y(x',y') \left\{ \frac{1-\sigma}{R} + \frac{\sigma(y-y')^2}{R^3} \right\}] dx' dy', \end{aligned} \right\} \quad (2.18)$$

$$w(x,y) = \frac{1-\sigma}{\pi G} \iint_E Z(x',y') \frac{dx' dy'}{R}, \quad (2.19)$$

with

$$R = \sqrt{(x-x')^2 + (y-y')^2}, \quad E = \{x,y: x^2/a^2 + y^2/b^2 \leq 1\}. \quad (2.10)$$

LEES: (2, 20)

We will now prove the following

### Fundamental Lemma:

Let

$$\left. \begin{aligned} H(x,y) &= x^k y^{2\ell-k} / R^{2\ell+1}, \quad k \text{ and } \ell \text{ positive integers, } 2\ell \geq k; \\ J(x,y) &= \{1 - (x/a)^2 - (y/b)^2\}^{-\frac{1}{2}}; \quad R^2 = x^2 + y^2; \\ K(x,y) &= \sum_{p=0}^M \sum_{q=0}^{M-p} d_{pq} x^p y^q, \quad d_{pq} \text{ arbitrary constants;} \end{aligned} \right\} \quad (2.21a)$$



$$\left. \begin{aligned}
 I(x,y) &= \iint_E J(x',y')K(x',y')H(x-x',y-y')dx'dy', \\
 \text{then, if } (x,y) &\text{ lies in } E = \{x,y: x^2/a^2+y^2/b^2 \leq 1\}, \\
 I(x,y) &= \sum_{m=0}^M \sum_{n=0}^{M-m} a_{mn} x^m y^n,
 \end{aligned} \right\} \quad (2.21b)$$

that is,  $I(x,y)$  is a polynomial in  $x,y$  of the same degree as  $K(x,y)$ .

The lemma was established by GALIN [1], ch. 2, sec. 8, in the special case that  $k=l=0$ , by means of LAME's functions. Its significance for the solution of the integral equations (2.18) and (2.19) is the following. We see that all functions of  $(x-x')$  and  $(y-y')$  that occur in the integrands of (2.18) and (2.19) are of the form  $H(x-x',y-y')$ . If we suppose that the tractions  $X,Y,Z$  are of the form  $J(x,y)K(x,y)$ , then it follows that the displacement differences  $u,v,w$  inside the elliptical area are polynomials in  $x$  and  $y$  of the same degree as that of  $K(x,y)$ . But that means that there are as many parameters in the displacement differences as there are in the tractions. There is a strong presumption <sup>x)</sup>, borne out by our numerical work, that the displacement fields are independent of each other. It follows that we may invert the argument, and say that when  $u, v$  and  $w$  are given as polynomials inside  $E$ , the tractions  $X,Y,Z$  must be of the form  $J(x,y)K(x,y)$ . Clearly, the connection between the constants  $d_{pq}$  and  $a_{mn}$  is linear, owing to the linearity of the equations. Summarizing, we see that the lemma presumably implies that

$$\left. \begin{aligned}
 (u,v,w) &= \sum_{m=0}^M \sum_{n=0}^{M-m} (a_{mn}, b_{mn}, c_{mn}) x^m y^n \text{ inside } E \\
 \iff (X,Y,Z) &= J(x,y)G \sum_{p=0}^M \sum_{q=0}^{M-p} (d_{pq}, e_{pq}, f_{pq}) x^p y^q,
 \end{aligned} \right\} \quad (2.22)$$

where the constants  $(a_{mn}, b_{mn}, c_{mn})$  are connected with  $(d_{pq}, e_{pq}, f_{pq})$

---

x) KIRCHHOFF's uniqueness theorem does not hold when the stresses go to infinity, as they do here.

by linear equations.

We now turn to the

Proof of the Lemma.

Consider a typical term of the polynomial  $K(x,y)$ , viz.  $x^p y^q$ .

Then the lemma is proved, if we can show that

$$\iint_E J(x',y') x'^p y'^q H(x-x',y-y') dx' dy' = P_{p+q}(x,y), \quad (2.23)$$

where  $P_m(x,y)$  denotes an arbitrary polynomial in  $x,y$  of degree  $m$ . We introduce polar coordinates  $R, \psi$  about the point  $(x,y)$ :

$$x'-x = R\cos\psi, \quad y'-y = R\sin\psi, \quad dx' dy' = R dR d\psi, \quad (2.24)$$

and we introduce a new notation:  $F_m(\psi)$  is an unspecified function of  $\psi$ , independent of  $R, x$ , and  $y$ , for which

$$F_m(\psi+\pi) = (-1)^m F_m(\psi). \quad (2.25)$$

For example,  $\sin\psi = F_1(\psi)$ ,  $\cos\psi = F_1(\psi)$ . Multiplication of functions  $F_m(\psi)$  is governed by the law that  $F_m(\psi)F_n(\psi) = F_{m+n}(\psi)$ . Now,

$$H(x-x',y-y') = (x-x')^k (y-y')^{2\ell-k} / R^{2\ell+1}, \text{ so,}$$

$$H(x-x',y-y') = \frac{1}{R} F_0(\psi). \quad (2.26)$$

We must write the factor  $1-(x'/a)^2-(y'/b)^2$  in polar coordinates:

$$\begin{aligned} 1-(x'/a)^2-(y'/b)^2 &= 1 - \frac{(R\cos\psi+x)^2}{a^2} - \frac{(R\sin\psi+y)^2}{b^2} = \\ &= \left(1 - \frac{x^2}{a^2} - \frac{y^2}{b^2}\right) - 2R \left(\frac{x\cos\psi}{a^2} + \frac{y\sin\psi}{b^2}\right) - R^2 \left(\frac{\cos^2\psi}{a^2} + \frac{\sin^2\psi}{b^2}\right) = \\ &= -A \{R^2 + 2DR - C\} = -A \{(R+D)^2 - C - D^2\} = A \{B^2 - (R+D)^2\}, \end{aligned}$$

with

$$\left. \begin{aligned} A &= \frac{\cos^2\psi}{a^2} + \frac{\sin^2\psi}{b^2} = F_0(\psi) > 0, \\ C &= \frac{1}{A} \{1 - x^2/a^2 - y^2/b^2\}, \\ D &= \frac{1}{A} \left( \frac{x\cos\psi}{a^2} + \frac{y\sin\psi}{b^2} \right), \\ B &= B(\psi) = \sqrt{B^2} = \sqrt{\frac{1}{A} \left(1 - \frac{x^2}{a^2} - \frac{y^2}{b^2}\right) + \frac{1}{A^2} \left(\frac{x\cos\psi}{a^2} + \frac{y\sin\psi}{b^2}\right)^2} = \\ &= B(\pi+\psi), \\ 1 - (x'/a)^2 - (y'/b)^2 &= A\{B^2 - (R+D)^2\}. \end{aligned} \right\} \quad (2.27)$$

As to the limits of integration,  $\psi$  goes from 0 to  $2\pi$ , since  $(x,y)$  lies inside the area of integration, and  $R$  goes from 0 to the positive zero of  $1-(x'/a)^2-(y'/b)^2$ , that is, to  $-D+B$ . So we get from (2.24), (2.26), and (2.27) that (2.23) becomes

$$\left. \begin{aligned} & \iint_E J(x',y') x'^p y'^q H(x-x',y-y') dx' dy' = \\ & = \int_0^{2\pi} F_0(\psi) d\psi \int_0^{B-D} \frac{(x+R\cos\psi)^p (y+R\sin\psi)^q}{\sqrt{B^2-(R+D)^2}} dR = P_{p+q}(x,y) \end{aligned} \right\} (2.28)$$

where the factor  $1/\sqrt{A}$  and  $RH(x-x',y-y')$  have been taken together into the single term  $F_0(\psi)$ .

We can expand the term  $(x+R\cos\psi)^p (y+R\sin\psi)^q$  to a finite double sum by means of the binomial theorem, twice applied. A typical term is  $A_{i,j} R^{i+j} x^{p-i} y^{q-j} \sin^i \psi \cos^j \psi$ , which can be written as  $R^{i+j} F_{i+j}(\psi) \times x^{p-i} y^{q-j}$ . Inserting this into the integral (2.28), we see that it is sufficient to prove that

$$x^{p-i} y^{q-j} \int_0^{2\pi} F_{i+j}(\psi) d\psi \int_0^{B-D} \frac{R^{i+j} dR}{\sqrt{R^2-(R+D)^2}} = P_{p+q}(x,y). \quad (2.29)$$

Setting  $i+j=m$ , we see that (2.29) is satisfied when

$$\int_0^{2\pi} F_m(\psi) d\psi \int_0^{B-D} \frac{R^m dR}{\sqrt{B^2-(R+D)^2}} = P_m(x,y).$$

Now we introduce the variable  $t=R+D$  instead of  $R$ . Then,  $dR=dt$ , and the limits are from  $D$  to  $B$ :

$$\int_0^{2\pi} F_m(\psi) d\psi \int_D^B \frac{(t-D)^m dt}{\sqrt{B^2-t^2}} = P_m(x,y). \quad (2.30)$$

We evaluate the term  $(t-D)^m$  again with the binomial theorem. A typical term is  $A t^q D^{m-q}$ . If into this we introduce the value of  $D$  from (2.27), we obtain

$$A_q t^q D^{m-q} = F_0(\psi) t^q \left( \frac{x\cos\psi}{a^2} + \frac{y\sin\psi}{b^2} \right)^{m-q}.$$

Here again we evaluate the right-hand side with the binomial theorem; a typical term is

$$F_0(\psi) A_p t^q x^p y^{m-q-p} \cos^p \psi \sin^{m-p-q} \psi = F_{-m+q}(\psi) t^q x^p y^{m-p-q}.$$

Inserting this in (2.30), we get for a typical term:

$$x^p y^{m-p-q} \int_0^{2\pi} F_q(\psi) d\psi \int_D \frac{t^q dt}{\sqrt{B^2-t^2}} = P_m(x, y),$$

and this is satisfied if

$$\int_0^{2\pi} F_q(\psi) d\psi \int_D \frac{t^q dt}{\sqrt{B^2-t^2}} = P_q(x, y). \quad (2.31)$$

Now there are two possibilities: either  $q$  is odd, or  $q$  is even.

$q=2m+1$  is odd. (2.31) becomes then

$$\begin{aligned} & \int_0^{2\pi} F_1(\psi) d\psi \int_D \frac{t^{2m+1} dt}{\sqrt{B^2-t^2}} = \\ & = \int_0^{2\pi} F_1(\psi) d\psi \int_{D^2} \frac{t^m dt}{\sqrt{B^2-t}} = \\ & = \int_0^{\pi} F_1(\psi) d\psi \left\{ \int_{D^2} \frac{t^m dt}{\sqrt{B^2-t}} - \int_{D^2} \frac{t^m dt}{\sqrt{B^2-t}} \right\} = 0, \end{aligned}$$

since by (2.27),

$D^2(\psi+\pi) = D^2(\psi)$ ,  $B^2(\psi+\pi) = B^2(\psi)$ . So, the odd values of  $q$  do not contribute at all to the integral.

$q=2m$  is even. (2.31) becomes then

$$\begin{aligned} & \int_0^{2\pi} F_0(\psi) d\psi \int_D \frac{t^{2m} dt}{\sqrt{B^2-t^2}} = \int_0^{2\pi} F_0(\psi) d\psi \int_{D/B}^1 \frac{t^{2m} B^{2m} dt}{\sqrt{1-t^2}} = \\ & = \int_0^{2\pi} F_0(\psi) B^{2m} d\psi \int_0^1 \frac{t^{2m} dt}{\sqrt{1-t^2}} - \int_0^{\pi} F_0(\psi) B^{2m} d\psi \left\{ \int_0^{D/B} + \int_0^{-D/B} \right\} \frac{t^{2m} dt}{\sqrt{1-t^2}}, \end{aligned}$$

and the latter two terms vanish, because  $t^{2m}/\sqrt{1-t^2}$  is an even function of  $t$ . As to the first term,

$$\int_0^1 \frac{t^{2m}}{\sqrt{1-t^2}} dt$$

is a constant, so that we must consider

$$\int_0^{2\pi} F_0(\psi) B^{2m} d\psi;$$

but  $B^2$  is a second degree polynomial in  $x$  and  $y$ , with coefficients depending upon  $\psi$ . So  $B^{2m}$  is a  $(2m)$ -degree polynomial in  $x$  and  $y$ ,

and (2.31) becomes

$$\int_0^{2\pi} F_{2m}(\psi) B^{2m} d\psi = P_{2m}(x, y),$$

which establishes the lemma.

### 2.3. DOWNOROVICH's method.

In the previous section we showed that if

$$(X, Y, Z) = GJ(x, y) \sum_{p=0}^M \sum_{q=0}^{M-p} (d_{pq}, e_{pq}, f_{pq}) x^p y^q,$$

with  $J(x, y) = \sqrt{1 - (x/a)^2 - (y/b)^2}^{-1}$ , then and (presumably) only then

(2.32)

$$(u, v, w) = \sum_{m=0}^M \sum_{n=0}^{M-n} (a_{mn}, b_{mn}, c_{mn}) x^m y^n \text{ inside } E,$$

with  $E = \{x, y: (x/a)^2 + (y/b)^2 \leq 1\}$ ,

where the coefficients  $(d, e, f)$  on the one hand, and  $(a, b, c)$  on the other hand are connected with each other by the integral representations (2.15a, b) and (2.11c). In order to find the equations connecting  $(a, b, c)$  and  $(d, e, f)$  explicitly, it is, of course, possible to follow exactly the road indicated by the proof of the fundamental lemma. However, we prefer the road followed by DOWNOROVICH [1] in his treatment of the normal problem. DOWNOROVICH uses the lemma only in the form proved by GALIN, that is for  $H(x, y) = 1/R$ . He calculates  $c_{mn}$  by differentiating the integral representation (2.11c)  $m$  times with respect to  $x$  and  $n$  times with respect to  $y$ , and then he sets  $x = y = 0$ :

$$\begin{aligned} m!n!c_{mn} &= \left[ \frac{\partial^{m+n}}{\partial x^m \partial y^n} \sum_{j=0}^M \sum_{k=0}^{M-j} c_{jk} x^j y^k \right]_{x=y=0} = \\ &= \left[ \frac{\partial^{m+n}}{\partial x^m \partial y^n} \frac{1-\sigma}{\pi G} \iint_E Z(x', y') \frac{dx' dy'}{R} \right]_{x=y=0} = \\ &= \left[ \frac{\partial^{m+n}}{\partial x^m \partial y^n} \frac{1-\sigma}{\pi} \sum_{p=0}^M \sum_{q=0}^{M-p} f_{pq} \iint_E J(x', y') x'^p y'^q \frac{dx' dy'}{R} \right]_{x=y=0}. \end{aligned}$$

Since the values of  $p$  and  $q$  for which  $p+q < m+n$  give rise to

polynomials of a degree lower than  $m+n$ , these values do not give any contribution to  $c_{mn}$ , hence

$$m!n!c_{mn} = \frac{1-\sigma}{\pi} \left[ \frac{\partial^{m+n}}{\partial x^m \partial y^n} \sum_{p+q \geq m+n, p \geq 0, q \geq 0}^M f_{pq} \iint_E J(x',y') x'^p y'^q \frac{dx' dy'}{R} \right]_{x=y=0}.$$

As we will prove later in this section, we may interchange differentiation and integration in this expression, so that

$$\begin{aligned} m!n!c_{mn} &= \frac{1-\sigma}{\pi} \sum_{\substack{p+q \geq m+n, \\ p \geq 0, q \geq 0}}^M f_{pq} \iint_E J(x,y) x^p y^q \left[ \frac{\partial^{m+n} R^{-1}}{\partial x^m \partial y^n} \right]_{x'=y'=0} dx dy = \\ &= \frac{1-\sigma}{\pi} \sum_{\substack{p+q \geq m+n, \\ p \geq 0, q \geq 0}}^M (-1)^{m+n} f_{pq} \iint_E J(x,y) x^p y^q \left[ \frac{\partial^{m+n} r^{-1}}{\partial x^m \partial y^n} \right] dx dy, \end{aligned} \quad (2.33)$$

$$r = \sqrt{x^2+y^2}.$$

In exactly the same way, we find from (2.15a,b), and (2.32) that

$$\begin{aligned} m!n!a_{mn} &= \frac{1}{\pi} \sum_{\substack{p+q \geq m+n, \\ p \geq 0, q \geq 0}}^M (-1)^{m+n} \iint_E J(x,y) x^p y^q \left[ d_{pq} \left[ \left( \frac{\partial^{m+n} r^{-1}}{\partial x^m \partial y^n} - \sigma \frac{\partial^{m+n+2} r}{\partial x^{m+2} \partial y^n} \right) + \right. \right. \\ &\quad \left. \left. - \sigma e_{pq} \frac{\partial^{m+n+2} r}{\partial x^{m+1} \partial y^{n+1}} \right] \right] dx dy, \\ m!n!b_{mn} &= \frac{1}{\pi} \sum_{\substack{p+q \geq m+n, \\ p \geq 0, q \geq 0}}^M (-1)^{m+n} \iint_E J(x,y) x^p y^q \left[ -\sigma d_{pq} \frac{\partial^{m+n+2} r}{\partial x^{m+1} \partial y^{n+1}} + \right. \\ &\quad \left. + e_{pq} \left( \frac{\partial^{m+n} r^{-1}}{\partial x^m \partial y^n} - \sigma \frac{\partial^{m+n+2} r}{\partial x^m \partial y^{n+2}} \right) \right] dx dy. \end{aligned} \quad (2.34)$$

$$r = \sqrt{x^2+y^2}, E = \{x,y: x^2/a^2+y^2/b^2 \leq 1\}.$$

The integrals

$$E_{mn}^{h;pq} = \frac{(-1)^{m+n}}{2\pi} \iint_E J(x,y) x^p y^q \frac{\partial^{m+n} r^{2h-1}}{\partial x^m \partial y^n} dx dy \quad (2.35)$$

are fairly easy to calculate; we will do that in the next section.

The remainder of this section is devoted to the proof of the validity of the equation

$$\left. \begin{aligned} & \left[ \frac{\partial^{m+n}}{\partial x'^m \partial y'^n} \iint_E f(x,y)H(x-x',y-y') dx dy \right]_{x'=y'=0} = \\ & = (-1)^{m+n} \iint_E f(x,y) \frac{\partial^{m+n} H(x,y)}{\partial x^m \partial y^n} dx dy, \\ & f(x,y) = J(x,y)x^p y^q, H(x,y) = (x^2+y^2)^{h-\frac{1}{2}}, \end{aligned} \right\} \quad (2.36)$$

when

$$2h+p+q-m-n > -1. \quad (2.37)$$

Proof. We divide the domain of integration into a small square

$$D = \{x,y: |x| < \delta, |y| < \delta\} \quad (2.38)$$

about the origin, and the rest  $E-D$  of  $E$ . When the point  $(x',y')$  is close enough to the origin, say

$$|x'| < \delta/2, |y'| < \delta/2, \quad (2.39)$$

it lies in the square  $D$ , and then all derivatives of  $H(x-x',y-y')$  with respect to  $x'$  and  $y'$  exist and are continuous in  $E-D$ . Hence we may interchange differentiation and integration in  $E-D$ , so that

$$\left. \begin{aligned} & \left[ \frac{\partial^{m+n}}{\partial x'^m \partial y'^n} \iint_{E-D} f(x,y)H(x-x',y-y') dx dy \right]_{x'=y'=0} = \\ & = (-1)^{m+n} \iint_{E-D} f(x,y) \frac{\partial^{m+n} H(x,y)}{\partial x^m \partial y^n} dx dy. \end{aligned} \right\} \quad (2.40)$$

We will now show that the contribution of the square  $D$  to both the right hand side and the left hand side of (2.36) vanishes as  $\delta \rightarrow 0$ , that is

$$A = \int_{-\delta}^{\delta} \int_{-\delta}^{\delta} f(x,y) \frac{\partial^{m+n} H(x,y)}{\partial x^m \partial y^n} dx dy \rightarrow 0 \text{ as } \delta \rightarrow 0, \quad (2.41)$$

$$B = \frac{\partial^{m+n}}{\partial x'^m \partial y'^n} \int_{-\delta}^{\delta} \int_{-\delta}^{\delta} f(x,y)H(x-x',y-y') dx dy \rightarrow 0 \text{ as } \delta \rightarrow 0 \quad (2.42)$$

Evidently this will establish (2.36).

As to (2.41), we observe that  $\frac{\partial^{m+n} r^{2h-1}}{\partial x^m \partial y^n} = O(r^{2h-1-m-n})$ ; more-

over,  $f(x,y)=J(x,y)x^p y^q = O(r^{p+q})$ , so that the integrand of A is  $O(r^{2h-1+p+q-m-n})$ , and

$$A = O\left(\int_0^{2\pi} d\psi \int_0^{2\delta} r^{2h+p+q-m-n} dr\right) \rightarrow 0 \text{ as } \delta \rightarrow 0, \quad \text{when } 2h+p+q-m-n > -1. \quad (2.43)$$

As to (2.42), let us consider the case that  $m=1, n=0$ . Evidently,

$$\begin{aligned} & \frac{\partial}{\partial x'} \int_{-\delta}^{\delta} dy \int_{-\delta}^{\delta} f(x,y)H(x-x',y-y')dx = \\ & = \lim_{k \rightarrow 0} \int_{-\delta}^{\delta} dy \int_{-\delta}^{\delta} f(x,y)\{H(x-x'-k,y-y')-H(x-x',y-y')\} \frac{dx}{k} = \\ & = \lim_{k \rightarrow 0} \left\{ \int_{-\delta}^{\delta} dy \left[ \int_{-\delta}^{\delta} \frac{f(x+k,y)-f(x,y)}{k} H(x-x',y-y')dx + \right. \right. \\ & \quad \left. \left. + \frac{1}{k} \int_{-\delta-k}^{-\delta} f(x+k,y)H(x-x',y-y')dx + \right. \right. \\ & \quad \left. \left. - \frac{1}{k} \int_{\delta-k}^{\delta} f(x+k,y)H(x-x',y-y')dx \right] \right\} = \\ & = \int_{-\delta}^{\delta} dy \int_{-\delta}^{\delta} \frac{\partial f(x,y)}{\partial x} H(x-x',y-y')dx - \int_{-\delta}^{\delta} dy \left[ f(x,y)H(x-x',y-y') \right]_{x=-\delta}^{x=\delta}, \end{aligned}$$

or, summarizing,

$$\left. \begin{aligned} & \frac{\partial}{\partial x'} \int_{-\delta}^{\delta} dy \int_{-\delta}^{\delta} f(x,y)H(x-x',y-y')dx = \\ & = \int_{\delta}^{\delta} dy \int_{-\delta}^{\delta} \frac{\partial f(x,y)}{\partial x} H(x-x',y-y') dx + \\ & - \int_{-\delta}^{\delta} \left[ f(x,y)H(x-x',y-y') \right]_{x=-\delta}^{x=\delta} dy. \end{aligned} \right\} \quad (2.44)$$

We observe in passing that the right hand side of (2.44) is formally equal to  $-\int f(x,y) \frac{\partial H}{\partial x} dx dy$ , integrated partially. This integral, however, is not absolutely convergent when  $h=0$ , unless  $x'=y'=0$ .

The first integral on the right hand side of (2.44) is analogous to the original integral  $\iint_D f(x,y)H(x-x',y-y')dx dy$ ; when we differentiate it further, we obtain forms analogous to (2.44). The second integral may be differentiated under the integral sign, since  $H(\pm\delta-x',y-y')$  has continuous derivatives of any order with respect



to  $x'$  and  $y'$ , when  $x'$  and  $y'$  satisfy (2.39). So we find, by differentiating first  $m$  times with respect to  $x'$ , and then  $n$  times with respect to  $y'$ , that

$$\left. \begin{aligned} & \frac{\partial^{m+n}}{\partial x'^m \partial y'^n} \int_{-\delta}^{\delta} \int_{-\delta}^{\delta} f(x,y) H(x-x', y-y') dx dy = \\ & \int_{-\delta}^{\delta} \int_{-\delta}^{\delta} \frac{\partial^{m+n} f(x,y)}{\partial x'^m \partial y'^n} H dx dy + \\ & - \sum_{i=0}^{m-1} \int_{\delta}^{\delta} \left[ \frac{\partial^i f(x,y)}{\partial x'^i} \frac{\partial^{m+n-i-1} H}{\partial x'^{m-i-1} \partial y'^n} \right]_{x=-\delta}^{x=\delta} dy + \\ & - \sum_{i=0}^{n-1} \int_{-\delta}^{\delta} \left[ \frac{\partial^{m+i} f(x,y)}{\partial x'^m \partial y'^i} \frac{\partial^{n-i-1} H}{\partial y'^{n-i-1}} \right]_{y=-\delta}^{y=\delta} dx, \end{aligned} \right\} \quad (2.45)$$

just as if we had integrated  $(-1)^{m+n} \iint_D f(x,y) \frac{\partial^{m+n} H}{\partial x'^m \partial y'^n} dx dy$  partially with respect to  $x$  and  $y$ . It follows from the definition (2.36) of  $f(x,y)$  and  $H(x-x', y-y')$  that

$$\frac{\partial^i f(x,y)}{\partial x'^i} = 0 \quad (\delta^{p+q-i}), \quad \frac{\partial^{m+i} f(x,y)}{\partial x'^m \partial y'^i} = 0 \quad (\delta^{p+q-m-i}),$$

$$\left[ \frac{\partial^{m+n-i-1} H}{\partial x'^{m-i-1} \partial y'^n} \right]_{x=\pm\delta} = 0 (\delta^{2h+i-m-n}), \quad \left[ \frac{\partial^{n-i-1} H}{\partial y'^{n-i-1}} \right]_{y=\pm\delta} = 0 (\delta^{2h+i-n}),$$

so that the line integrals of (2.45) are all

$$0 \int_{-\delta}^{\delta} \delta^{2h+p+q-m-n} dy = 0 (\delta^{2h+1+p+q-m-n}).$$

The surface integral of (2.45) behaves as

$$\int_{-\delta}^{\delta} \int_{-\delta}^{\delta} \delta^{2h-1+p+q-m-n} dx dy = 0 (\delta^{2h+1+p+q-m-n}).$$

Hence all terms of (2.45) are  $0 (\delta^{2h+1+p+q-m-n})$ , which vanishes as  $\delta \rightarrow 0$ , when  $2h+p+q-m-n > -1$ .

#### 2.4. The load-displacement equations.

We saw in the previous section that when

$$\left. \begin{aligned} (u,v,w) &= \sum_{m=0}^M \sum_{n=0}^{M-m} (a_{mn}, b_{mn}, c_{mn}) x^m y^n \text{ and} \\ (X,Y,Z) &= GJ(x,y) \sum_{p=0}^M \sum_{q=0}^{M-p} (d_{pq}, e_{pq}, f_{pq}) x^p y^q, \end{aligned} \right\} \quad (2.46)$$

then is, according to (2.34), (2.33), and (2.35),

$$a_{mn} = \frac{2}{m!n!} \sum_{\substack{p+q>m+n, \\ p>q, q>0}}^M \left[ d_{pq} (E^{0;pq}_{mn} - \sigma E^{1;pq}_{m+2,n}) - \sigma e_{pq} E^{1;pq}_{m+1,n+1} \right], \quad (2.47a)$$

$$b_{mn} = \frac{2}{m!n!} \sum_{\substack{p+q>m+n, \\ p>0, q>0}}^M \left[ -\sigma d_{pq} E^{1;pq}_{m+1,n+1} + e_{pq} (E^{0;pq}_{mn} - \sigma E^{1;pq}_{m,n+2}) \right], \quad (2.47b)$$

$$c_{mn} = \frac{2(1-\sigma)}{m!n!} \sum_{\substack{p+q>m+n, \\ p>0, q>0}}^M f_{pq} E^{0;pq}_{mn}, \quad (2.47c)$$

with, as we recall,

$$\left. \begin{aligned} E^{h;pq}_{mn} &= \frac{(-1)^{m+n}}{2\pi} \iint_E J(x,y) x^p y^q \frac{\partial^{m+n} r^{2h-1}}{\partial x^m \partial y^n} dx dy, \\ &\text{when } 2h+p+q-m-n > 0, \\ &= 0 \quad \text{else.} \\ r &= \sqrt{x^2+y^2}, \quad J(x,y) = \{1-(x/a)^2-(y/b)^2\}^{-\frac{1}{2}}. \end{aligned} \right\} \quad (2.48)$$

We call the equations (2.47) the load-displacement equations.

We can clarify the structure and the connection between  $(u,v,w)$  and  $(X,Y,Z)$  by using index notation. We set

$$\left. \begin{aligned} u_i &= a_{00}, a_{10}, a_{01}, a_{20}, a_{11}, \dots, a_{0M}, \quad i=1 \text{ to } \frac{1}{2}(M+1)(M+2), \\ v_i &= b_{00}, b_{10}, b_{01}, \dots, b_{0M}, \\ w_i &= c_{00}, c_{10}, c_{01}, \dots, c_{0M}, \\ X_i &= d_{00}, d_{10}, d_{01}, \dots, d_{0M}, \\ Y_i &= e_{00}, e_{10}, e_{01}, \dots, e_{0M}, \\ Z_i &= f_{00}, f_{10}, f_{01}, \dots, f_{0M}, \\ x_i &= 1, x, y, x^2, xy, y^2, \dots, y^M. \end{aligned} \right\} \quad (2.49)$$

The square matrix  $\frac{2}{m!n!} E^{0;pq}_{mn}$ , adapted to this order, we call  $A_{ij}$ , the matrix  $\frac{2}{m!n!} E^{1;pq}_{m+2,n}$  is  $B_{ij}$ ,  $\frac{2}{m!n!} E^{1;pq}_{m+1,n+1}$  is  $H_{ij}$ , and  $\frac{2}{m!n!} E^{1;pq}_{m,n+2}$  is  $D_{ij}$ . Finally we use the summation convention: when two indices in an expression are the same, summation from 1 to  $\frac{1}{2}(M+1)(M+2)$  is understood. Then we have:

$$\begin{aligned} X &= GJ(x,y)X_i x_i, \quad Y = GJ(x,y)Y_i x_i, \quad Z = GJ(x,y)Z_i x_i, \\ u &= u_i x_i, \quad v = v_i x_i, \quad w = w_i x_i, \end{aligned} \quad (2.50)$$

and the load-displacement equations are

$$\left. \begin{aligned} u_i &= (A_{ij} - \sigma B_{ij}) X_j - \sigma H_{ij} Y_j, \\ v_i &= -\sigma H_{ij} X_j + (A_{ij} - \sigma D_{ij}) Y_j, \\ w_i &= (1 - \sigma) A_{ij} Z_j, \end{aligned} \right\} \quad (2.51)$$

so that

$$\left. \begin{aligned} u &= x_i \{ (A_{ij} - \sigma B_{ij}) X_j - \sigma H_{ij} Y_j \}, \\ v &= x_i \{ -\sigma H_{ij} X_j + (A_{ij} - \sigma D_{ij}) Y_j \}, \\ w &= x_i (1 - \sigma) A_{ij} Z_j. \end{aligned} \right\} \quad (2.52)$$

We note that only  $x_i$  is position dependent. For illustration, we write out the quantities connected with  $Z$  for  $M=1$ :

$$\begin{aligned} (x_i) &= (1, x, y); \quad (Z_i) = (f_{00}, f_{10}, f_{01}); \quad w_i = (c_{00}, c_{10}, c_{01}), \\ Z &= GJ(1, x, y) \begin{bmatrix} f_{00} \\ f_{10} \\ f_{01} \end{bmatrix}, \quad w = (1, x, y) \begin{bmatrix} c_{00} \\ c_{10} \\ c_{01} \end{bmatrix}, \end{aligned}$$

$$\frac{1}{2(1-\sigma)} w = (1, x, y) \begin{bmatrix} E^{0;00}_{00} & E^{0;10}_{00} & E^{0;01}_{00} \\ E^{0;00}_{10} & E^{0;10}_{10} & E^{0;01}_{10} \\ E^{0;00}_{01} & E^{0;10}_{01} & E^{0;01}_{01} \end{bmatrix} \begin{bmatrix} f_{00} \\ f_{10} \\ f_{01} \end{bmatrix}.$$

We consider again the constants  $E^{h;pq}_{mn}$  which we defined as integrals in (2.48). Since the integrand is an odd function of  $x$  when  $(p+m)$  is odd, and since the domain of integration  $E = \{x, y: (x/a)^2 + (y/b)^2 < 1\}$  is symmetric about the  $x$ -axis,

$E_{mn}^{h;pq} = 0$  when  $(p+m)$  is odd. In the same way, we find that

$E_{mn}^{h;pq} = 0$  when  $(q+n)$  is odd. So,

$$E_{mn}^{h;pq} = \frac{(-1)^{m+n}}{2\pi} \iint_E J(x,y) x^p y^q \frac{\partial^{m+n} r^{2h-1}}{\partial x^m \partial y^n} dx dy, \left. \begin{array}{l} \text{when } (p+m) \text{ and } (q+n) \text{ are even, and } 2h+p+q-m-n \geq 0, \\ = 0 \text{ in all other cases.} \end{array} \right\} (2.53)$$

The fact that  $E_{mn}^{h;pq} = 0$  unless  $(p+m)$  and  $(q+n)$  are even, has an important practical consequence for numerical calculations. This consequence is, that the load-displacement equations for  $u$  and  $v$ , and also those for  $w$ , can be decomposed into 4 independent systems.

In order to show this, we bring out the parity of  $p, q, m$  and  $n$  by writing for  $p$ :  $2p+\epsilon$ , or  $2p+\epsilon'$  as the case may be, for  $q$ :  $2q+\omega$  or  $2q+\omega'$ , for  $m$ :  $2m+\epsilon$ , or  $2m+\epsilon'$ , and for  $n$ :  $2n+\omega$  or  $2n+\omega'$ . Here,  $\epsilon$  and  $\omega$  take on the values 0 or 1 only, while  $\epsilon'$  and  $\omega'$  correspond to  $\epsilon$  and  $\omega$  by the equations  $\epsilon+\epsilon'=1$ ,  $\omega+\omega'=1$ , so that when  $\epsilon=1$ , then  $\epsilon'=0$ , and when  $\omega=1$ ,  $\omega'=0$ , and vice versa. Further we will consider the case that the degree  $M$  of the polynomials is given by  $2K+v$ , ( $v=0,1$ ;  $v+v'=1$ ):

$$M=2K+v, \epsilon=0,1; \omega=0,1; v=0,1; \epsilon+\epsilon'=\omega+\omega'=v+v'=1. \quad (2.54)$$

It follows from a consideration of the 8 cases  $v=0,1$ ;  $\epsilon=0,1$ ;  $\omega=0,1$ , that the ranges of the summation can be represented in the formulae

$$\left. \begin{array}{l} 2m+2n+\epsilon+\omega \leq 2p+2q+\epsilon+\omega \leq 2K+v \\ \rightarrow m+n \leq p+q \leq K-v\epsilon\omega+v'(\epsilon'\omega'-1), \\ 2m+2n+\epsilon+\omega \leq 2p+2q+\epsilon'+\omega' \leq 2K+v \\ \rightarrow m+n+1-\epsilon'-\omega' \leq p+q \leq K-v\epsilon'\omega'+v'(\epsilon\omega-1), \end{array} \right\} (2.55a)$$

while

$$2m+1+\epsilon=2(m+\epsilon)+\epsilon', \quad 2n+1+\omega=2(n+\omega)+\omega'. \quad (2.55b)$$

So we find from (2.47):

$$\left. \begin{array}{l} \frac{1}{2}(2m+\epsilon)!(2n+\omega)! a_{2m+\epsilon, 2n+\omega} = \\ = \sum_{\substack{p+q=m+n, \\ p \geq 0, q \geq 0}}^{K-v\epsilon\omega+v'(\epsilon'\omega'-1)} d_{2p+\epsilon, 2q+\omega} \left( E^{0; 2p+\epsilon, 2q+\omega}_{2m+\epsilon, 2n+\omega} - \sigma E^{1; 2p+\epsilon, 2q+\omega}_{2(m+1)+\epsilon, 2q+\omega} \right) + \\ - \sigma \sum_{\substack{p+q=m+n+1-\omega'-\epsilon', \\ p \geq 0, q \geq 0}}^{K-v\epsilon'\omega'+v'(\epsilon\omega-1)} e_{2p+\epsilon', 2q+\omega'} E^{1; 2p+\epsilon', 2q+\omega'}_{2(m+\epsilon)+\epsilon', 2(n+\omega)+\omega'} \end{array} \right\} (2.56a)$$

$$\begin{aligned}
& \frac{1}{2}(2m+\epsilon')!(2n+\omega')! b_{2m+\epsilon', 2n+\omega'} = \\
& = -\sigma \sum_{\substack{p+q=m+n+1-\epsilon-\omega, \\ p \geq 0, q \geq 0}}^{K-\nu\epsilon\omega+\nu'(\epsilon'\omega'-1)} d_{2p+\epsilon, 2q+\omega} E^{1; 2p+\epsilon, 2q+\omega}_{2(m+\epsilon')+\epsilon, 2(n+\omega')+\omega'} + \\
& + \sum_{\substack{p+q=m+n \\ p \geq 0, q \geq 0}}^{K-\nu\epsilon'\omega'+\nu'(\epsilon\omega-1)} e_{2p+\epsilon', 2q+\omega'} (E^{0; 2p+\epsilon', 2q+\omega'}_{2m+\epsilon', 2n+\omega'} - \sigma E^{1; 2p+\epsilon', 2q+\omega'}_{2m+\epsilon', 2(n+1)+\omega'}),
\end{aligned} \tag{2.56b}$$

$$\begin{aligned}
& \frac{1}{2}(2m+\epsilon)(2n+\omega)! c_{2m+\epsilon, 2n+\omega} = \\
& = (1-\sigma) \sum_{\substack{p+q=m+n, \\ p > 0, q > 0}}^{K-\nu\epsilon\omega+\nu'(\epsilon'\omega'-1)} f_{2p+\epsilon, 2q+\omega} E^{0; 2p+\epsilon, 2q+\omega}_{2m+\epsilon, 2n+\omega}.
\end{aligned} \tag{2.56c}$$

We see immediately from these equations that the systems (2.56a) and (2.56b) taken together form a closed system of equations for each of the four possible choices for  $(\epsilon, \omega)$ , viz.  $(\epsilon, \omega) = (0, 0)$ ,  $(0, 1)$ ,  $(1, 0)$ ,  $(1, 1)$ . The same can be said of the system (2.56c). Moreover, when  $\sigma = 0$ , there is no longer any interaction between  $Y$  and  $u$ , and between  $X$  and  $v$ , so that the equations (2.56a) can be solved independently of (2.56b); in fact, (2.56a) and (2.56b) get the same form as (2.56c) with  $\sigma = 0$ .

After these general considerations, we will determine  $E^{h; 2p+\epsilon, 2q+\omega}_{2m+\epsilon, 2n+\omega}$  in the next subsections.

#### 2.41. A differentiation formula.

In the present subsection, we derive the following differentiation formula:

$$\begin{aligned}
& \frac{\partial^{m+n}(x^2+y^2)^\alpha}{\partial x^m \partial y^n} = \\
& = \sum_{k \geq m/2}^m \sum_{\ell \geq n/2}^n \frac{(-1)^{k+\ell} (-\alpha)_{k+\ell} m!n!}{(m-k)!(n-\ell)!(2k-m)!(2\ell-n)!} (x^2+y^2)^{\alpha-k-\ell} (2x)^{2k-m} (2y)^{2\ell-n},
\end{aligned} \tag{2.57}$$

in which we use the notation  $(z)_j$ :

$$(z)_j = \frac{\Gamma(z+j)}{\Gamma(z)}; \quad (z)_0 = 1; \quad (z)_j = z(z+1)\dots(z+j-1), \quad j=1, 2, 3, \dots \tag{2.58}$$

Proof. We expand  $\{(x+u)^2+(y+v)^2\}^\alpha$  about  $(x^2+y^2)$ . According to TAYLOR'S theorem, we have that

$$H \equiv \{(x+u)^2+(y+v)^2\}^\alpha = \sum_{m=0}^{\infty} \sum_{n=0}^{\infty} \frac{u^m v^n}{m!n!} \frac{\partial^{m+n}(x^2+y^2)^\alpha}{\partial x^m \partial y^n}. \quad (2.59)$$

This expansion has a radius of convergence which differs from zero, when  $(x^2+y^2) \neq 0$ .

On the other hand, we can expand H by means of the binomial theorem:

$$\begin{aligned} H &\equiv \{(x+u)^2+(y+v)^2\}^\alpha = \{(x^2+y^2)+(2xu+u^2+2yv+v^2)\}^\alpha = \\ &= (x^2+y^2)^\alpha \sum_{k=0}^{\infty} \frac{(-1)^k (-\alpha)_k}{k!} \frac{(2xu+u^2+2yv+v^2)^k}{(x^2+y^2)^k} = \\ &= \sum_{k=0}^{\infty} \sum_{\ell=0}^k \frac{(-1)^k (-\alpha)_k}{(k-\ell)! \ell!} (x^2+y^2)^{\alpha-k} (2xu+u^2)^{k-\ell} (2yv+v^2)^\ell. \end{aligned}$$

In this double sum, we interchange the summation. The summation ranges are then  $0 \leq \ell < \infty$ ,  $\ell \leq k < \infty$ . Then, we replace k by k+l, which gives us an expression for H which is symmetric in k and l:

$$\begin{aligned} H &= \sum_{\ell=0}^{\infty} \sum_{k=0}^{\infty} \frac{(-1)^{k+\ell} (-\alpha)_{k+\ell}}{k! \ell!} (x^2+y^2)^{\alpha-k-\ell} (2xu+u^2)^k (2yv+v^2)^\ell = \\ &= \sum_{\ell=0}^{\infty} \sum_{k=0}^{\infty} \sum_{m=0}^k \sum_{n=0}^{\ell} \frac{(-1)^{k+\ell} (-\alpha)_{k+\ell} u^{k+m} v^{\ell+n}}{(k-m)! (\ell-n)! n! m!} (x^2+y^2)^{\alpha-k-\ell} (2x)^{k-m} (2y)^{\ell-n}. \end{aligned}$$

In order to get  $u^m v^n$  in this sum, we replace m by m-k, and n by n-l:

$$\begin{aligned} H &= \sum_{\ell=0}^{\infty} \sum_{k=0}^{\infty} \sum_{m=k}^{2k} \sum_{n=\ell}^{2\ell} \frac{(-1)^{k+\ell} (-\alpha)_{k+\ell} u^m v^n}{(2k-m)! (m-k)! (2\ell-n)! (n-\ell)!} \times \\ &\quad \times (x^2+y^2)^{\alpha-k-\ell} (2x)^{2k-m} (2y)^{2\ell-n}. \end{aligned}$$

We bring the summation over m and n in front. The range of summation of k and m was:  $0 \leq k < \infty$ ,  $k \leq m \leq 2k$ ; this becomes  $0 \leq m < \infty$ ,  $\frac{1}{2}m \leq k \leq m$ . So,

$$\begin{aligned} H &= \sum_{m=0}^{\infty} \sum_{n=0}^{\infty} \sum_{k \geq m/2}^m \sum_{\ell \geq n/2}^n \frac{(-1)^{k+\ell} (-\alpha)_{k+\ell} (x^2+y^2)^{\alpha-k-\ell}}{(m-k)! (n-\ell)! (2k-m)! (2\ell-n)!} \times \\ &\quad \times u^m v^n (2x)^{2k-m} (2y)^{2\ell-n}. \quad (2.60) \end{aligned}$$

Comparing this with (2.59), we see, that indeed

$$\frac{\partial^{m+n}(x^2+y^2)^\alpha}{\partial x^m \partial y^n} = \sum_{\substack{m \\ k \geq m/2}} \sum_{\substack{n \\ \ell \geq n/2}} \frac{(-1)^{k+\ell} (-\alpha)_{k+\ell} m!n!}{(m-k)!(n-\ell)!(2k-m)!(2\ell-n)!} (x^2+y^2)^{\alpha-k-\ell} (2x)^{2k-m} (2y)^{2\ell-n},$$

as we set out to prove.

2.42. The coefficients of the load-displacement equations as finite sums of complete elliptic integrals.

We use the differentiation formula (2.57) to calculate the integrals

$$E^{h; 2p+\epsilon, 2q+\omega}_{2m+\epsilon, 2n+\omega} = \frac{(-1)^{\epsilon+\omega}}{2\pi} \iint_E J(x,y) x^{2p+\epsilon} y^{2q+\omega} \frac{\partial^{2m+2n+\epsilon+\omega} r^{2h-1}}{\partial x^{2m+\epsilon} \partial y^{2n+\omega}} dx dy, \quad (2.61)$$

where

$$\epsilon=0,1; \omega=0,1; h+p+q-m-n > -\frac{1}{2} \quad (2.62)$$

see (2.53), in which the coefficients of the load-displacement equations (2.56) are expressed.

We call  $|e|$  the excentricity of the contact ellipse  $(x/a)^2+(y/b)^2 = 1$ ,  $0 \leq |e| \leq 1$ ;  $g = \sqrt{1-e^2}$  is the ratio of the axes. When  $a$  is the minor semi-axis, we take  $e \geq 0$ . We will denote the minor semi-axis by  $s$ :

$$\left. \begin{aligned} e > 0: s=a=gb \leq b=s/g, \quad J &= \{1-(x/s)^2-(gy/s)^2\}^{-\frac{1}{2}}, \\ e < 0: s=b=ga \leq a=s/g, \quad J &= \{1-(gx/s)^2-(y/s)^2\}^{-\frac{1}{2}}, \\ g &= \sqrt{1-e^2}, \quad |e| = \sqrt{1-g^2}. \end{aligned} \right\} \quad (2.63)$$

We interchange in (2.61)  $x$  and  $y$ ,  $p$  and  $q$ ,  $m$  and  $n$ ,  $\epsilon$  and  $\omega$ . Taking (2.63) into account, we see that

$$E^{h; 2p+\epsilon, 2q+\omega}_{2m+\epsilon, 2n+\omega} (e) = E^{h; 2q+\omega, 2p+\epsilon}_{2n+\omega, 2m+\epsilon} (-e). \quad (2.64)$$

So, without loss of generality, we consider the case of  $e \geq 0$  only.

We substitute the differentiation formula (2.57) into (2.61).

This gives:

$$\begin{aligned}
 & E^{h; 2p+\epsilon, 2q+\omega} = \\
 & \frac{1}{2\pi} \sum_{k=m+\epsilon}^{2m+\epsilon} \sum_{\ell=n+\omega}^{2n+\omega} \frac{(-1)^{k+\ell+\epsilon+\omega} \left(\frac{1}{2}-h\right)_{k+\ell} (2m+\epsilon)! (2n+\omega)!}{(2m+\epsilon-k)! (2n+\omega-\ell)! (2k-2m-\epsilon)! (2\ell-2n-\omega)!} \times \\
 & \times 2^{2k+2\ell-2m-2n-\epsilon-\omega} \iint_E J(x,y) x^{2k+2p-2m} y^{2\ell+2q-2n} (x^2+y^2)^{h-\frac{1}{2}-k-\ell} dx dy, \\
 & \text{with } J(x,y) = \{1-(x/s)^2-(gy/s)^2\}^{-\frac{1}{2}}.
 \end{aligned} \tag{2.65}$$

In the double integral (2.65) we introduce polar coordinates:

$$x = s r \cos \psi, \quad y = s r \sin \psi, \quad dx dy = s^2 r dr d\psi.$$

The form  $J(x,y)$  becomes

$$J(x,y) = \{1-r^2 \cos^2 \psi - r^2 g^2 \sin^2 \psi\}^{-\frac{1}{2}} = \{1-D^2 r^2\}^{-\frac{1}{2}}, \quad D = \sqrt{1-e^2 \sin^2 \psi}. \tag{2.66}$$

The integration is taken over all points  $x$  and  $y$ , for which  $J(x,y)$  is real. That is, the limits are in polar coordinates:  $0 \leq \psi < 2\pi$ ,  $0 \leq r \leq 1/D$ .

If we set  $2k+2p-2m=2i$ ,  $2\ell+2q-2n=2j$  in (2.65), we see that a typical integral of (2.65) becomes

$$\begin{aligned}
 I &= s^{2d+1} \int_0^{2\pi} d\psi \int_0^{1/D} \frac{\cos^{2i} \psi \sin^{2j} \psi r^{2d} dr}{\sqrt{1-D^2 r^2}}, \\
 & \left. \begin{aligned} i &= k+p-m, \quad j = \ell+q-n, \quad d = h+p+q-m-n. \end{aligned} \right\} \tag{2.67}
 \end{aligned}$$

Changing the variable to  $t = D^2 r^2$ , with  $dr = \frac{dt}{2D\sqrt{t}}$ , we obtain

$$I = s^{2d+1} \int_0^{2\pi} \frac{\cos^{2i} \psi \sin^{2j} \psi d\psi}{2D^{2d+1}} \int_0^1 t^{d-\frac{1}{2}} (1-t)^{-\frac{1}{2}} dt. \tag{2.68}$$

The integral over  $t$  in (2.68) is a complete Beta function,

$$B(x,y) = \int_0^1 t^{x-1} (1-t)^{y-1} dt = \Gamma(x)\Gamma(y)/\Gamma(x+y). \tag{2.69}$$

As to  $\psi$ , we may restrict ourselves to the interval  $0 \leq \psi \leq \pi/2$ , owing to the symmetry of the integrand. So we get from (2.66), (2.68), and (2.69), that

$$\begin{aligned}
 I &= \iint_E J(x,y) \frac{x^{2i} y^{2j} dx dy}{(x^2+y^2)^{i+j-d+\frac{1}{2}}} = \\
 &= \frac{2s^{2d+1} \Gamma(d+\frac{1}{2}) \Gamma(\frac{1}{2})}{\Gamma(d+1)} \int_0^{\pi/2} \frac{\cos^{2i} \psi \sin^{2j} \psi d\psi}{(1-e^2 \sin^2 \psi)^{d+\frac{1}{2}}}.
 \end{aligned} \tag{2.70}$$

This is a complete elliptic integral of a general type, which can,



in principle, be reduced to a combination of elliptic integrals of the first and second kind. We substitute (2.70) into (2.65), setting  $i=k+p-m$ ,  $j=l+q-n$ . Then,

$$\begin{aligned}
 E_{2m+\epsilon, 2n+\omega}^{h; 2p+\epsilon, 2q+\omega}(|e|) &= E_{2n+\omega, 2m+\epsilon}^{h; 2q+\omega, 2p+\epsilon}(-|e|) = \\
 &= \frac{1}{2\pi} \sum_{k=m+\epsilon}^{2m+\epsilon} \sum_{l=n+\omega}^{2n+\omega} \frac{(-1)^{k+l+\epsilon+\omega} \left(\frac{1}{2}-h\right)_{k+l} (2m+\epsilon)! (2n+\omega)! 4^{k+l-m-n} 2^{-\epsilon-\omega}}{(2m+\epsilon-k)! (2n+\omega-l)! (2k-2m-\epsilon)! (2l-2n-\omega)!} \times \\
 &\quad \times \frac{2s^{2d+1} \Gamma(d+\frac{1}{2}) \Gamma(\frac{1}{2})}{d!} \int_0^{\pi/2} \frac{(\cos^2 \psi)^{k+p-m} (\sin^2 \psi)^{l+q-n} d\psi}{(1-e^2 \sin^2 \psi)^{d+\frac{1}{2}}}, \\
 d &= h+p+q-m-n > 0.
 \end{aligned} \tag{2.71}$$

We replace  $k$  by  $k+m+\epsilon$ ,  $l$  by  $l+n+\omega$ . The limits of summation then become  $0 < k < m$ ,  $0 < l < n$ . Making use of the formulae of the Gamma function

$$\Gamma\left(\frac{1}{2}+z\right)\Gamma\left(\frac{1}{2}-z\right) = \pi / \cos(\pi z), \quad \Gamma\left(\frac{1}{2}\right) = \sqrt{\pi}, \quad (z)_j = \frac{\Gamma(z+j)}{\Gamma(z)}, \tag{2.72}$$

it is easy to see that  $\left(\frac{1}{2}-h\right)_{k+l} \Gamma(d+\frac{1}{2}) \Gamma(\frac{1}{2})$  in (2.71) becomes

$$\begin{aligned}
 \left(\frac{1}{2}-h\right)_{k+l+m+n+\epsilon+\omega} \Gamma(d+\frac{1}{2}) \Gamma(\frac{1}{2}) &= \frac{\Gamma(\frac{1}{2}-h+m+n+k+l+\epsilon+\omega) \Gamma(\frac{1}{2}) \pi}{\Gamma(\frac{1}{2}-h) \Gamma(\frac{1}{2}-d) \cos \pi d} = \\
 &= \frac{\Gamma(\frac{1}{2}-d+p+q+k+l+\epsilon+\omega)}{\Gamma(\frac{1}{2}-d)} \frac{\cos \pi h}{\cos \pi d} \frac{\Gamma(\frac{1}{2}+h)}{\Gamma(\frac{1}{2})} \pi = \\
 &= (-1)^{p+q-m-n} \pi \left(\frac{1}{2}-d\right)_{p+q+k+l+\epsilon+\omega} \left(\frac{1}{2}\right)_h.
 \end{aligned}$$

So, (2.71) becomes

$$\begin{aligned}
 E_{2m+\epsilon, 2n+\omega}^{h; 2p+\epsilon, 2q+\omega}(e) &= \\
 &= \left(\frac{1}{2}\right)_h (-2)^{\epsilon+\omega} \sum_{k=0}^m \sum_{l=0}^n \frac{4^{k+l} (2m+\epsilon)! (2n+\omega)! s^{2d+1}}{(m-k)! (n-l)! (2k+\epsilon)! (2l+\omega)!} I(d, k+p+\epsilon, l+q+\omega, e),
 \end{aligned} \tag{2.73}$$

with

$$\begin{aligned}
 I(d, i, j, |e|) &= I(d, j, i, -|e|) = \frac{1}{d!} \left(\frac{1}{2}-d\right)_{i+j} \int_0^{\pi/2} \frac{(-\cos^2 \psi)^i (-\sin^2 \psi)^j d\psi}{(1-e^2 \sin^2 \psi)^{d+\frac{1}{2}}}, \\
 \frac{1}{d!} &= 0 \text{ when } d = -1, -2, -3, \dots
 \end{aligned} \tag{2.74}$$

which is valid when  $d = h+p+q-m-n > -\frac{1}{2}$ . When  $h$  is an integer, as it is in the load displacement equations,  $d$  is also an integer, and then (2.73) is a finite sum of complete elliptic integrals of a general type which can be reduced to complete elliptic integrals of the first

and second kind.

It is useful for the purpose of numerical calculations, to know beforehand what elliptic integrals (2.74) actually occur in the load-displacement equations (2.56). Let the degree of the polynomials (2.46) be  $2k+v$ , with  $v = 0$  or  $1$ . Then it can be shown that

$$\left. \begin{aligned} M=2k+v, v=0,1 \rightarrow 0 \leq d \leq k, d \leq i+j \leq 2k+v-d, i \geq 0, j \geq 0, \\ \text{for } w \text{ (eq. 2.56c) and for } u,v \text{ when } \sigma = 0 \text{ (eq. 2.56a,b),} \end{aligned} \right\} (2.75)$$

and

$$\left. \begin{aligned} M=2k+v, v=0,1 \rightarrow 0 \leq d \leq k, d \leq i+j \leq 2k+1+v-d, i \geq 0, j \geq 0, \\ \text{for } u,v \text{ (eq. 2.56a,b), } \sigma \neq 0. \end{aligned} \right\} (2.76)$$

### 2.43. Transformation to another metric.

We will consider the case that we transform the coordinate system  $(x,y,z)$  to another coordinate system  $(\bar{x},\bar{y},\bar{z})$  with the same origin and axes, but with another metric:

$$\bar{x} = \lambda x, \bar{y} = \lambda y, \bar{z} = \lambda z, \bar{s} = \lambda s, (\lambda \text{ constant}). \quad (2.77)$$

We distinguish quantities taken with respect to  $(\bar{x},\bar{y},\bar{z})$  from the corresponding quantities in  $(x,y,z)$  by a bar over the letter. Clearly, we have

$$\left. \begin{aligned} (\bar{u}^\pm, \bar{v}^\pm, \bar{w}^\pm) &= \lambda(u^\pm, v^\pm, w^\pm), \\ (\bar{u}, \bar{v}, \bar{w}) &= \lambda(u, v, w), \\ (\bar{X}, \bar{Y}, \bar{Z})/\bar{G} &= (X, Y, Z)/G, \quad \bar{G} = G/\lambda^2. \end{aligned} \right\} (2.78)$$

Also,

$$\left. \begin{aligned} J(\bar{x}, \bar{y}) &= \sqrt{1-(\bar{x}/\bar{a})^2-(\bar{y}/\bar{b})^2}^{-1} = \sqrt{1-(x/a)^2-(y/b)^2}^{-1} = J(x, y), \\ \bar{g} &= g, \quad \bar{e} = e. \end{aligned} \right\} (2.79)$$

It is easy to see that

$$\begin{aligned} (\bar{u}, \bar{v}, \bar{w}) &= \sum_{m=0}^M \sum_{n=0}^{M-m} (\bar{a}_{mn}, \bar{b}_{mn}, \bar{c}_{mn}) \bar{x}^m \bar{y}^n = \\ &= \sum_{m=0}^M \sum_{n=0}^{M-m} \lambda^{m+n} (a_{mn}, b_{mn}, c_{mn}) x^m y^n = \\ &= \lambda(u, v, w) = \sum_{m=0}^M \sum_{n=0}^{M-m} \lambda (a_{mn}, b_{mn}, c_{mn}) x^m y^n, \end{aligned}$$

from which it follows that

$$\bar{a}_{mn} = \lambda^{1-m-n} a_{mn}, \quad \bar{b}_{mn} = \lambda^{1-m-n} b_{mn}, \quad \bar{c}_{mn} = \lambda^{1-m-n} c_{mn}, \quad (2.80)$$

and it follows in the same way from

$$\begin{aligned}
 (\bar{X}, \bar{Y}, \bar{Z}) / \bar{G} &= J(\bar{x}, \bar{y}) \sum_{p=0}^M \sum_{q=0}^{M-p} (\bar{d}_{pq}, \bar{e}_{pq}, \bar{f}_{pq}) \bar{x}^p \bar{y}^q = \\
 &= (X, Y, Z) / G = J(x, y) \sum_{p=0}^M \sum_{q=0}^{M-p} (d_{pq}, e_{pq}, f_{pq}) x^p y^q,
 \end{aligned}$$

that

$$\bar{d}_{pq} = \lambda^{-p-q} d_{pq}, \quad \bar{e}_{pq} = \lambda^{-p-q} e_{pq}, \quad \bar{f}_{pq} = \lambda^{-p-q} f_{pq}. \quad (2.81)$$

From (2.73) and (2.74) we see with the aid of (2.77) and (2.79) that

$$E_{mn}^{h;pq} = \lambda^{2d+1} E_{mn}^{h;pq}, \quad 2d = 2h+p+q-m-n. \quad (2.82)$$

If  $(a_{mn}, b_{mn}, c_{mn})$  and  $(d_{pq}, e_{pq}, f_{pq})$  are such that the (unbarred) load-displacement equations are satisfied, we see immediately from (2.47) that the barred load-displacement equations are satisfied by

$$\begin{aligned}
 (\bar{a}_{mn}, \bar{b}_{mn}, \bar{c}_{mn}) &= \lambda^{1-m-n} (a_{mn}, b_{mn}, c_{mn}), \\
 (\bar{d}_{pq}, \bar{e}_{pq}, \bar{f}_{pq}) &= \lambda^{-p-q} (d_{pq}, e_{pq}, f_{pq}),
 \end{aligned}$$

that is, by the same parameters as in (2.80) and (2.81). So, solving the load-displacement equations for one value of  $\lambda$ , means solving them for all  $\lambda$ .

### 3. Special cases of the load-displacement equations.

In section 3.1 of the present chapter, we develop the theory of the load-displacement equations further. In fact, we will study the special case that the traction behaves as  $\sqrt{1-(x/a)^2-(y/b)^2}$  as one approaches the edge of the contact area, rather than as  $\sqrt{1-(x/a)^2-(y/b)^2}^{-1}$ , as we had in chapter 2, see eq. (2.32). This is of importance in some applications of which we will name the normal problem of HERTZ, which is treated in 3.221, and the tangential problem of CATTANEO [1], and MINDLIN [1], which is treated in section 3.222. Since for a general polynomial displacement the traction goes to infinity at the edge, the demand that the traction must vanish constitutes a restraint on the displacement, in other terms, the displacement must have a special form in order to meet it. In the HERTZ case this special form results from the adaptation of form and size of the contact ellipse; similarly, in the MINDLIN-CATTANEO problem of section 3.222, and in CARTER's [1] problem, the area of adhesion is so adapted.

One can perhaps say that in tangential problems in which slip is actually present, but is neglected in the calculation, the load-displacement equations of section 2.4 must be used: the infinity of the traction at the edge of the contact area indicates an area of slip. This is the case, at any rate, in the MINDLIN-CATTANEO problem without slip (sec. 3.212), in DE PATER's [1] treatment of the problem of the rolling contact between two cylinders with parallel axes with infinitesimal longitudinal creepage, and in the treatment of the problem of rolling contact with infinitesimal creepage and spin of section 4.3. In that section, the interpretation of the traction singularity is treated more fully. In normal problems, the pressure singularity can indicate a sharp edge, as is the case in the problem of an elliptical die pressed into a half-space, see section 3.211.

If in the tangential problems slip is not neglected, as we have in sec. 3.222, the MINDLIN-CATTANEO problem with slip, without twist, and in the theory of rolling with arbitrary creepage and spin, chapter 5, the tangential traction generally vanishes at the edge of the contact area. For the normal pressure distribution will mostly be Hertzian, and the friction law demands that  $|(X,Y)| \leq \mu Z$ . So X and

Y must also vanish at the edge of the contact area, and at least as fast as the normal load Z.

3.1. The load-displacement equations, when the surface tractions vanish at the edge of the contact area.

As we pointed out in section 3, the demand of vanishing traction at the edge of the contact area E constitutes a restraint on the surface displacement differences (u,v,w).

We had found in sec. 2.2 (see 2.32) that when

$$(X,Y,Z) = G\{1-x^2/a^2-y^2/b^2\}^{-\frac{1}{2}} \sum_{p=0}^{M+2} \sum_{q=0}^{M+2-p} (d'_{pq}, e'_{pq}, f'_{pq}) x^p y^q, \quad (3.1)$$

then

$$(u,v,w) = \sum_{m=0}^{M+2} \sum_{n=0}^{M+2-m} (a_{mn}, b_{mn}, c_{mn}) x^m y^n. \quad (3.2)$$

Now, the tractions must vanish at the edge of the contact area. This means that the constants  $(d'_{pq}, e'_{pq}, f'_{pq})$  must be so, that

$$\sum_{p=0}^{M+2} \sum_{q=0}^{M+2-p} (d'_{pq}, e'_{pq}, f'_{pq}) x^p y^q$$

is divisible by  $\{1-(x/a)^2-(y/b)^2\}$ . That means that

$$\begin{aligned} (X,Y,Z) &= GJ(x,y) \sum_{p=0}^{M+2} \sum_{q=0}^{M+2-p} (d'_{pq}, e'_{pq}, f'_{pq}) x^p y^q \\ &= GJ(x,y) \sum_{p=0}^M \sum_{q=0}^{M-p} (d_{pq}, e_{pq}, f_{pq}) \{1-(x/a)^2-(y/b)^2\} x^p y^q \\ &= G\sqrt{1-(x/a)^2-(y/b)^2} \sum_{p=0}^M \sum_{q=0}^{M-p} (d_{pq}, e_{pq}, f_{pq}) x^p y^q \\ &= GJ(x,y) \sum_{p=0}^M \sum_{q=0}^{M-p} (d_{pq}, e_{pq}, f_{pq}) (x^p y^q - \frac{1}{a^2} x^{p+2} y^q - \frac{1}{b^2} x^p y^{q+2}), \\ J(x,y) &= \{1-(x/a)^2-(y/b)^2\}^{-\frac{1}{2}}. \end{aligned} \quad (3.3)$$

Comparing (3.2) and (3.3), we see that there are more constants  $(a_{mn}, b_{mn}, c_{mn})$  in (3.2) than there are constants  $(d_{pq}, e_{pq}, f_{pq})$  in (3.3). So, the matrix of the load-displacement equations is no

longer square.

We seek the connection between  $(a_{mn}, b_{mn}, c_{mn})$  on the one hand, and  $(d_{pq}, e_{pq}, f_{pq})$  on the other hand. For that purpose we define

$$F_{mn}^{h;pq} = E_{mn}^{h;pq} - \frac{1}{a^2} E_{mn}^{h;p+2,q} - \frac{1}{b^2} E_{mn}^{h;p,q+2}. \quad (3.4)$$

We note that by (2.53)  $E_{mn}^{h;pq} = 0$  when  $2h+p+q-m-n < 0$ , ( $h=0,1$ ), but that for  $2h+p+q-m-n = -2$ ,  $E_{mn}^{h;p+2,q}$  and  $E_{mn}^{h;p,q+2}$  do not vanish for all values of  $p, q, m, n$ . Keeping this in mind, we see from (3.3), (3.2), (3.4), and (2.47) that

$$\left. \begin{aligned} a_{mn} &= \frac{2}{m!n!} \sum_{\substack{p+q \geq m+n-2, \\ p \geq 0, q \geq 0}}^M \{d_{pq} (F_{mn}^{0;pq} - \sigma F_{m+2,n}^{1;pq}) - \sigma e_{pq} F_{m+1,n+1}^{1;pq}\}, \\ b_{mn} &= \frac{2}{m!n!} \sum_{\substack{p+q \geq m+n-2, \\ p \geq 0, q \geq 0}}^M \{e_{pq} (F_{mn}^{0;pq} - \sigma F_{m,n+2}^{1;pq}) - \sigma d_{pq} F_{m+1,n+1}^{1;pq}\}, \\ c_{mn} &= \frac{2(1-\sigma)}{m!n!} \sum_{\substack{p+q \geq m+n-2, \\ p \geq 0, q \geq 0}}^M f_{pq} F_{mn}^{0;pq}. \end{aligned} \right\} \quad (3.5)$$

We will now calculate  $F_{mn}^{h;pq}$ . We see from (3.4) and (2.53) that

$$F_{mn}^{h;pq} = 0 \text{ when } 2h+p+q-m-n = -3, -4, -5, \dots, \quad (3.6a)$$

and we note that  $(p+2)$  and  $(q+2)$  have the same parity as  $p$  and  $q$ , respectively, so that it follows from (3.4) and (2.53) that

$$F_{mn}^{h;pq} = 0 \text{ unless both } (p+m) \text{ and } (q+n) \text{ are even.} \quad (3.6b)$$

Hence, the load-displacement equations can again be decomposed into 4 sets. Further, by (2.64) we have from (3.4) that

$$F_{mn}^{h;pq}(|e|) = E_{mn}^{h;pq}(|e|) - (1/s^2) E_{mn}^{h;p+2,q}(|e|) - (g^2/s^2) E_{mn}^{h;p,q+2}(|e|), \quad (3.7a)$$

$$F_{nm}^{h;qp}(-|e|) = E_{nm}^{h;qp}(-|e|) - (1/s^2) E_{nm}^{h;q,p+2}(-|e|) - (g^2/s^2) E_{nm}^{h;q+2,p}(-|e|), \quad (3.7b)$$

where  $s$  denotes the minor semi-axis, and  $g$  is the ratio of the axes  $\min(a/b, b/a)$ . Since  $E_{mn}^{h;pq}(e) = E_{nm}^{h;qp}(-e)$  according to (2.64), it follows from (3.7) that

$$F_{mn}^{h;pq}(e) = F_{nm}^{h;qp}(-e). \quad (3.8)$$

So, by (3.6) and (3.8), we only have to calculate  $F_{2m+\epsilon, 2n+\omega}^{h;2p+\epsilon, 2q+\omega}(|e|)$ . We consider a change of metric as described in sec. 2.43. It is easy to see from (3.2), (3.3), (3.5), and (3.4), and from (2.32) and (2.47) that the analysis of 2.43 remains valid in the present case of zero stress at the edge of the contact area, so that the effect of a change of metric here is also described by (2.80), (2.81), and (2.82), if we read F for E. So, we have to set up the load-displacement equations for one metric only.

We see from (3.4) that the  $E_{mn}^{h;pq}$  occurring in the expression for  $F_{mn}^{h;pq}$  all have the same h, m, and n. So in substituting the  $E_{mn}^{h;pq}$  from (2.73), we can bring the double summation outside the brackets. Then we have for  $e \geq 0$ :

$$\begin{aligned} F_{2m+\epsilon, 2n+\omega}^{h;2p+\epsilon, 2q+\omega} &= \\ &= E_{2m+\epsilon, 2n+\omega}^{h;2p+\epsilon, 2q+\omega} - (1/s^2) E_{2m+\epsilon, 2n+\omega}^{h;2(p+1)+\epsilon, 2q+\omega} - (g^2/s^2) E_{2m+\epsilon, 2n+\omega}^{h;2p+\epsilon, 2(q+1)+\omega} = \\ &= \left(\frac{1}{2}\right)_h (-2)^{\epsilon+\omega} \sum_{k=0}^m \sum_{\ell=0}^n \frac{4^{k+\ell} (2m+\epsilon)! (2n+\omega)! s^{2d+1}}{(m-k)! (n-\ell)! (2k+\epsilon)! (2\ell+\omega)!} \{ I(d, k+p+\epsilon, \ell+q+\omega, e) + \\ &\quad - I(d+1, k+p+1+\epsilon, \ell+q+\omega, e) - g^2 I(d+1, k+p+\epsilon, \ell+q+1+\omega, e) \}, \\ &\quad e \geq 0, \quad d = h+p+q-m-n. \end{aligned} \quad (3.9)$$

We define

$$\begin{aligned} J(d, i, j, |e|) &= I(d, i, j, |e|) - I(d+1, i+1, j, |e|) - g^2 I(d+1, i, j+1, |e|), \\ J(d, j, i, -|e|) &= I(d, j, i, -|e|) - I(d+1, j, i+1, -|e|) - g^2 I(d+1, j+1, i, -|e|), \end{aligned} \quad (3.10)$$

so that

$$J(d, i, j, e) = J(d, j, i, -e), \quad (3.11)$$

and from (3.8), (3.9), (3.10) and (3.11) it follows that

$$\begin{aligned} F_{2m+\epsilon, 2n+\omega}^{h;2p+\epsilon, 2q+\omega}(e) &= F_{2n+\omega, 2m+\epsilon}^{h;2q+\omega, 2p+\epsilon}(-e) = \\ &= \left(\frac{1}{2}\right)_h (-2)^{\epsilon+\omega} \sum_{k=0}^m \sum_{\ell=0}^n \frac{4^{k+\ell} (2m+\epsilon)! (2n+\omega)! s^{2d+1}}{(m-k)! (n-\ell)! (2k+\epsilon)! (2\ell+\omega)!} J(d, k+p+\epsilon, \ell+q+\omega, e). \\ F_{mn}^{h;pq} &= 0 \text{ unless } (p+m), (q+n) \text{ are both even and } d = h+p+q-m-n \geq -1. \end{aligned} \quad (3.12)$$

Comparing this with (2.73), we see that  $F_{mn}^{h;pq}$  and  $E_{mn}^{h;pq}$  have exactly the same form, the only difference is that  $F$  has  $J$ -functions where  $E$  has  $I$ -functions.

We calculate  $J(d,i,j,|e|)$  from (3.10) and (2.74).

$$\begin{aligned} J(d,i,j,|e|) &= I(d,i,j,|e|) - I(d+1,i+1,j,|e|) - g^2 I(d+1,i,j+1,|e|) = \\ &= \frac{1}{d!} \left(\frac{1}{2}-d\right)_{i+j} \int_0^{\pi/2} \frac{(-\cos^2\psi)^i (-\sin^2\psi)^j d\psi}{(1-e^2\sin^2\psi)^{d+\frac{1}{2}}} - \frac{1}{(d+1)!} \left(\frac{1}{2}-d-1\right)_{i+j+1} \times \\ &\times \int_0^{\pi/2} \frac{(-\cos^2\psi)^i (-\sin^2\psi)^j d\psi}{(1-e^2\sin^2\psi)^{d+3/2}} (-\cos^2\psi - g^2\sin^2\psi). \end{aligned}$$

Since  $1/d!$  must be interpreted as zero when  $d = -1$ , we can write  $1/d! = \frac{d+1}{(d+1)!}$ ; further,  $\cos^2\psi + g^2\sin^2\psi = 1 - e^2\sin^2\psi$ , and finally  $\left(\frac{1}{2}-d-1\right)_{i+j+1} = \left(\frac{1}{2}-d-1\right)\left(\frac{1}{2}-d\right)_{i+j}$ , so that

$$\begin{aligned} J(d,i,j,|e|) &= \frac{2d+2-2d-1}{2(d+1)!} \left(\frac{1}{2}-d\right)_{i+j} \int_0^{\pi/2} \frac{(-\cos^2\psi)^i (-\sin^2\psi)^j}{(1-e^2\sin^2\psi)^{d+\frac{1}{2}}} d\psi \\ &= \frac{1}{2} \frac{1}{(d+1)!} \left(\frac{1}{2}-d\right)_{i+j} \int_0^{\pi/2} \frac{(-\cos^2\psi)^i (-\sin^2\psi)^j}{(1-e^2\sin^2\psi)^{d+\frac{1}{2}}} d\psi, \\ J(d,i,j,|e|) &= J(d,j,i,-|e|), \quad 1/(d+1)! = 0 \text{ when } d = -2, -3 \dots \end{aligned} \quad (3.13)$$

Comparing this with (2.74), we see that

$$I(d,i,j,e) = 2(d+1)J(d,i,j,e), \quad (3.14)$$

so that we find from (3.12) and (2.73), that

$$E_{mn}^{h;pq} = 2(d+1)F_{mn}^{h;pq}, \quad 2d = 2h+p+q-m-n, \quad (3.15)$$

which means that the coefficients of the load-displacement equations for an infinite traction at the edge of the contact area can be found by multiplying the corresponding coefficient of the load-displacement equation with zero traction at the edge with  $2(d+1)$ .

It is useful for the purpose of numerical calculations to know beforehand which elliptical integrals (3.13) occur. When the degree of the traction polynomial is  $M = 2K+v$ ,  $v = 0$  or  $1$ , it can be shown that

$$M=2K+v: w, \text{ and } (u,v) \text{ when } \sigma=0: -1 \leq d \leq K, \max(0,d) \leq i+j \leq 2K+v-d \quad (3.16a)$$

$$M=2K+v: (u,v) \text{ when } \sigma \neq 0: -1 \leq d \leq K, \max(0,d) \leq i+j \leq 2K+1+v-d. \quad (3.16b)$$



### 3.2. Examples of the use of the load-displacement equations.

A list of the functions  $J(d,i,j,e)$  and  $F_{mn}^{h;pq}$ .

In the present section we give a few examples of the use of the load-displacement equations. First we will give a list of the elliptic integrals out of which the  $F_{mn}^{h;pq}$  are formed, and a list of these coefficients themselves. We define with JAHNKE & EMDE [2]:

$$\underline{K} = \int_0^{\pi/2} \frac{d\psi}{\sqrt{1-e^2\sin^2\psi}}, \quad \underline{E} = \int_0^{\pi/2} \sqrt{1-e^2\sin^2\psi} d\psi, \quad (3.17a)$$

$$\underline{C} = \int_0^{\pi/2} \frac{\sin^2\psi \cos^2\psi d\psi}{\sqrt{1-e^2\sin^2\psi}^3}, \quad \underline{D} = \int_0^{\pi/2} \frac{\sin^2\psi d\psi}{\sqrt{1-e^2\sin^2\psi}}, \quad \underline{B} = \int_0^{\pi/2} \frac{\cos^2\psi d\psi}{\sqrt{1-e^2\sin^2\psi}}, \quad (3.17b)$$

$$\underline{K} = 2\underline{D} - e^2\underline{C}; \quad \underline{E} = (2-e^2)\underline{D} - e^2\underline{C}; \quad \underline{B} = \underline{D} - e^2\underline{C}. \quad (3.17c)$$

The functions  $\underline{K}$  and  $\underline{E}$  are the complete elliptic integrals of the first and second kind, respectively. The functions  $\underline{B}$ ,  $\underline{C}$ ,  $\underline{D}$  do not have a special name. The five functions are tabulated by JAHNKE & EMDE [1], pg. 78, 80, 83, and 82. In Table 1, we give a small table of the values of  $\underline{C}$  and  $\underline{D}$ , taken from JAHNKE & EMDE [1].

Table 1.  $\underline{C}$  and  $\underline{D}$  as functions of  $g = \sqrt{1-e^2}$ .

$g$	$\rightarrow 0$	0.1	0.2	0.3	0.4	0.5
$\underline{C}$	$-2+\log 4/g$	1.7351	1.1239	0.8107	0.6171	0.4863
$\underline{D}$	$-1+\log 4/g$	2.7067	2.0475	1.6827	1.4388	1.2606
$g$	0.6	0.7	0.8	0.9	1.0	
$\underline{C}$	0.3929	0.3235	0.27060	0.22925	$0.19635 = \frac{\pi}{16}$	
$\underline{D}$	1.1234	1.0138	0.9241	0.8491	$0.7854 = \frac{\pi}{4}$	

It is well-known that the complete elliptic integrals of the type we encountered can be expressed in two independent elliptic integrals. We will list the reduction to  $\underline{K}$  and  $\underline{E}$ , because these functions are widely tabulated. We also give the reduction to  $\underline{C}$  and  $\underline{D}$ , which are tabulated in JAHNKE & EMDE [1], because in our short list of elliptic integrals the coefficients of  $\underline{D}$  and  $\underline{C}$  do not contain the excentricity  $|e|$  in the denominator, while  $g^2 = 1-e^2$

occurs in the denominator only twice.

The reduction is accomplished by regarding  $\underline{K}$ ,  $\underline{E}$ ,  $\underline{C}$ , and  $\underline{D}$ , and  $J(d, i, j, |e|)$  as hypergeometric functions  $F(a, b; c; e^2)$  in the following manner. According to ERDÉLYI et al. [1], Vol. 1, pg. 115, eq. 2.12 (7)

$$F(a, b; c; z) = \frac{2\Gamma(c)}{\Gamma(b)\Gamma(c-b)} \int_0^{\pi/2} \frac{(\cos\psi)^{2c-2b-1} (\sin\psi)^{2b-1} d\psi}{(1-z \sin^2\psi)^a} \quad \left. \vphantom{F(a, b; c; z)} \right\} (3.18a)$$

$$= \sum_{n=0}^{\infty} \frac{(a)_n (b)_n}{n! (c)_n} z^n, \text{ when } |z| < 1.$$

We set  $z=e^2$ ,  $a=d+\frac{1}{2}$ ,  $b=j+\frac{1}{2}$ ,  $c=i+j+1$  in (3.18a), and from this and (3.13) it follows that

$$J(d, i, j, |e|) = \frac{(-1)^{i+j}}{2(d+1)!} \frac{\Gamma(\frac{1}{2}-d+i+j)}{\Gamma(\frac{1}{2}-d)} \int_0^{\pi/2} \frac{(\cos^2\psi)^i (\sin^2\psi)^j d\psi}{(1-e^2 \sin^2\psi)^{d+\frac{1}{2}}} \quad \left. \vphantom{J(d, i, j, |e|)} \right\} (3.18b)$$

$$= \frac{(-1)^{i+j}}{4(d+1)!} \frac{\Gamma(\frac{1}{2}-d+i+j)}{\Gamma(\frac{1}{2}-d)} \frac{\Gamma(j+\frac{1}{2})\Gamma(i+\frac{1}{2})}{\Gamma(i+j+1)} F(d+\frac{1}{2}, j+\frac{1}{2}; i+j+1; e^2).$$

Further we have from (3.17) and (3.18a) that

$$\left. \begin{aligned} \underline{K} &= \frac{\pi}{2} F(\frac{1}{2}, \frac{1}{2}; 1; e^2); & \underline{E} &= \frac{\pi}{2} F(-\frac{1}{2}, \frac{1}{2}; 1; e^2); & \underline{B} &= \frac{\pi}{4} F(\frac{1}{2}, \frac{1}{2}; 2; e^2); \\ \underline{C} &= \frac{\pi}{16} F(3/2, 3/2; 3; e^2); & \underline{D} &= \frac{\pi}{4} F(\frac{1}{2}, 3/2; 2; e^2). \end{aligned} \right\} (3.19)$$

The reduction itself is accomplished by repeatedly applying the 15 relations of GAUSS which connect  $F(a, b; c; z)$  with any two of the 6 functions  $F(a+1, b; c; z)$ ,  $F(a, b+1; c; z)$ ,  $F(a, b; c+1; z)$ . These relations can be found, for instance, in ERDÉLYI et al. [1], Vol. 1, par. 2.8, pg. 103-104, eq. (31)/(45). We shall give the result of this reduction without proof. Since according to (3.11) and (3.14)

$$I(d, i, j, e) = 2(d+1)J(d, i, j, e) = 2(d+1)J(d, j, i, -e), \quad (3.20)$$

we give only  $J(d, i, j, |e|)$ .

$$\begin{aligned}
J(-1,0,0,|e|) &= \frac{1}{2}(2-e^2)\underline{D} - \frac{1}{2}e^2\underline{C} &= \frac{1}{2}\underline{E}, \\
J(-1,0,1,|e|) &= -\frac{1}{4}(3-2e^2)\underline{D} + \frac{1}{4}e^2\underline{C} &= -\frac{1-e^2}{4e^2}\underline{K} + \frac{1-2e^2}{4e^2}\underline{E}, \\
J(-1,1,0,|e|) &= -\frac{1}{4}(3-e^2)\underline{D} + \frac{1}{2}e^2\underline{C} &= \frac{1-e^2}{4e^2}\underline{K} - \frac{1+e^2}{4e^2}\underline{E}, \\
J(-1,0,2,|e|) &= \frac{1}{8}(11-8e^2)\underline{D} + \frac{1}{8}(1-4e^2)\underline{C} &= \frac{1+e^2-2e^4}{4e^4}\underline{K} - \frac{2+3e^2-8e^4}{8e^4}\underline{E}, \\
J(-1,1,1,|e|) &= \frac{1}{4}(2-e^2)\underline{D} - \frac{1}{8}(1+e^2)\underline{C} &= -\frac{2-3e^2+e^4}{8e^4}\underline{K} + \frac{1-e^2+e^4}{4e^4}\underline{E}, \\
J(-1,2,0,|e|) &= \frac{1}{8}(11-3e^2)\underline{D} + \frac{1}{8}(1-9e^2)\underline{C} &= \frac{1-4e^2+3e^4}{4e^4}\underline{K} - \frac{2-7e^2-3e^4}{8e^4}\underline{E}, \\
J(0,0,0,|e|) &= \underline{D} - \frac{1}{2}e^2\underline{C} &= \frac{1}{2}\underline{K}, \\
J(0,0,1,|e|) &= -\frac{1}{4}\underline{D} &= -\frac{1}{4e^2}\underline{K} + \frac{1}{4e^2}\underline{E}, \\
J(0,1,0,|e|) &= -\frac{1}{4}\underline{D} + \frac{1}{4}e^2\underline{C} &= \frac{1-e^2}{4e^2}\underline{K} - \frac{1}{4e^2}\underline{E}, \\
J(0,0,2,|e|) &= \frac{1}{4}\underline{D} + \frac{1}{8}\underline{C} &= \frac{2+e^2}{8e^4}\underline{K} - \frac{1+e^2}{4e^4}\underline{E}, \\
J(0,1,1,|e|) &= \frac{1}{8}\underline{D} - \frac{1}{8}\underline{C} &= -\frac{1-e^2}{4e^4}\underline{K} + \frac{2-e^2}{8e^4}\underline{E}, \\
J(0,2,0,|e|) &= \frac{1}{4}\underline{D} + \frac{1}{8}(1-3e^2)\underline{C} &= \frac{2-5e^2+3e^4}{8e^4}\underline{K} - \frac{1-2e^2}{4e^4}\underline{E}, \\
J(1,0,0,|e|) &= \{(2-e^2)\underline{D} - e^2\underline{C}\}/4g^2 &= \underline{E}/4g^2, \\
J(1,0,1,|e|) &= \frac{\underline{D}}{8(1-e^2)} - \frac{e^2\underline{C}}{8(1-e^2)} &= -\frac{1}{8e^2}\underline{K} + \frac{1}{8e^2(1-e^2)}\underline{E}, \\
J(1,1,0,|e|) &= \frac{1}{8}\underline{D} &= \frac{1}{8e^2}\underline{K} - \frac{1}{8e^2}\underline{E}.
\end{aligned}
\tag{3.21}$$

We can form the following sets of load-displacement equations from the elliptic integrals (3.21):

- X=Y=Z  $\rightarrow \infty$  on edge; w, and (u,v) for  $\sigma = 0$ : the 2nd degree (M=2),  
(u,v) for  $\sigma \neq 0$  : the 1st degree (M=1),  
X=Y=Z = 0 on edge; w, and (u,v) for  $\sigma = 0$ : the 1st degree (M=1),  
(u,v) for  $\sigma \neq 0$  : the 0th degree (M=0).

The E's and F's which are needed for those equations are:

$$\begin{aligned}
\frac{1}{2}E^0_{00} &= F^0_{00} = s(D - \frac{1}{2}e^2C) = \frac{1}{2}sK \\
F^0_{20} &= -s^{-1}(D - e^2C) = -s^{-1}B \\
F^0_{02} &= -s^{-1}e^2D \\
\frac{1}{2}E^0_{10} &= F^0_{10} = \frac{1}{2}s(D - e^2C) = \frac{1}{2}sB \\
F^0_{30} &= -s^{-1}\{2D + (1 - 3e^2)C\} = s^{-1}(D - 3B - C) \\
F^0_{12} &= -s^{-1}e^2(D - C) \\
\frac{1}{2}E^0_{01} &= F^0_{01} = \frac{1}{2}sD \\
F^0_{21} &= -s^{-1}(D - C) \\
F^0_{03} &= -s^{-1}e^2(2D + C) \\
\frac{1}{2}E^0_{20} &= F^0_{20} = \frac{1}{8}s^3D \\
\frac{1}{2}E^0_{20} &= F^0_{20} = \frac{1}{2}s\{D + (1 - 2e^2)C\} = \frac{1}{2}s(2B - D + C) \\
\frac{1}{2}E^0_{02} &= F^0_{02} = -\frac{1}{2}s e^2 C \\
\frac{1}{2}E^0_{11} &= F^0_{11} = \frac{1}{2}s(D - C) \\
\frac{1}{2}E^0_{00} &= F^0_{00} = \frac{s^3}{8g^2}(D - e^2C) = \frac{s^3}{8g^2}B \\
\frac{1}{2}E^0_{20} &= F^0_{20} = -\frac{1}{2}sC \\
\frac{1}{2}E^0_{02} &= F^0_{02} = \frac{1}{2}s(D + C)
\end{aligned}$$

$$\begin{aligned}
\frac{1}{2}E^1_{00} &= F^1_{00} = \frac{s^3}{8g^2}\{(2 - e^2)D - e^2C\} = \frac{s^3}{8g^2}E \\
\frac{1}{2}E^1_{20} &= F^1_{20} = \frac{1}{2}sD \\
\frac{1}{2}E^1_{02} &= F^1_{02} = \frac{1}{2}s(D - e^2C) = \frac{1}{2}sB \\
F^1_{40} &= -s^{-1}(D - C) \\
F^1_{22} &= -e^2s^{-1}C \\
F^1_{04} &= -e^2s^{-1}(D - C) \\
\frac{1}{2}E^1_{10} &= F^1_{10} = -\frac{s^3}{8}D \\
\frac{1}{2}E^1_{30} &= F^1_{30} = \frac{1}{2}s(D - C) \\
\frac{1}{2}E^1_{12} &= F^1_{12} = \frac{1}{2}e^2sC \\
\frac{1}{2}E^1_{01} &= F^1_{01} = -\frac{s^3}{8g^2}(D - e^2C) = -\frac{s^3}{8g^2}B \\
\frac{1}{2}E^1_{21} &= F^1_{21} = \frac{1}{2}sC \\
\frac{1}{2}E^1_{03} &= F^1_{03} = \frac{1}{2}s(D - C)
\end{aligned}$$

$e > 0,$   
 $s = a$   
(3.22)

3.21. The case of infinite surface traction at the edge of the contact area.

In 3.211 we shall treat a normal problem, and in 3.212 a tangential problem in which the traction becomes infinite at the edge of the contact area. So the building blocks of the coefficients of the load-displacement equations are the  $E^{h;pq}_{mn}$ , see (2.73), (3.13) and (3.14):

$$E^{h;2p+\epsilon,2q+\omega}_{2m+\epsilon,2n+\omega}(e) = \left. \begin{aligned} &= \left(\frac{1}{2}\right)_h (-2)^{\epsilon+\omega} \sum_{k=0}^m \sum_{\ell=0}^n \frac{4^{k+\ell} (2m+\epsilon)! (2n+\omega)! s^{2d+1}}{(m-k)! (n-\ell)! (2k+\epsilon)! (2\ell+\omega)!} I(d, k+p+\epsilon, \ell+q+\omega, e), \\ &d = h+p+q-m-n; I(d, i, j, e) = 2(d+1)J(d, i, j, e). \end{aligned} \right\} \quad (3.23)$$

The equations themselves are given in (2.56).

3.211. A normal problem: a rigid, flat elliptical die pressed into a half-space.

A rigid, flat die of elliptical circumference with semi-axes  $a$  and  $b$ ,  $s = a \leq b$ , is pressed into the elastic half-space  $z \geq 0$  with a normal force  $N$ , with the action line along  $x=x_0, y=y_0$ . The force is applied so, that contact takes place over the whole of the base of the die. Friction is assumed to be absent. This problem was treated by DOVNOROVICH [1] with the aid of the load-displacement equations.

After deformation, the equation of the base of the die is

$$w = z = c_{00} + c_{10}x + c_{01}y; \quad (3.24)$$

the vertical displacement difference  $w$  is clearly equal to  $w^+(x, y, 0)$  since the die is perfectly rigid, and that in turn is clearly given by (3.24). The constants  $c_{00}$ ,  $c_{10}$ , and  $c_{01}$  follow from the demand that the total force and moment exerted by the half-space on the die is in equilibrium with the applied load. We have for the normal pressure distribution on the half-space:

$$\left. \begin{aligned} Z &= G \sqrt{1-(x/a)^2-(y/b)^2}^{-1} (f_{00} + f_{10}x + f_{01}y), \\ G &= 2G^+, \sigma = \sigma^+; \end{aligned} \right\} \quad (3.25)$$

it follows from considerations of equilibrium of the die that

$$N = \iint_E Z \, dx dy = 2\pi abG f_{00}, \quad x_0 N = \iint_E x Z \, dx dy = \frac{2}{3} \pi a^3 bG f_{10},$$

$$y_0 N = \iint_E y Z \, dx dy = \frac{2}{3} \pi ab^3 G f_{01},$$

or,

$$f_{00} = N/2\pi abG, \quad f_{10} = \frac{3}{2} Nx_0/\pi a^3 bG, \quad f_{01} = \frac{3}{2} Ny_0/\pi ab^3 G. \quad (3.26)$$

The condition that contact must take place over the whole of the base of the die is equivalent to the condition that the normal pressure is everywhere positive, that is, according to (3.25) and (3.26), that

$$f_{00} + f_{10}x + f_{01}y = \frac{N}{2\pi abG} \left( 1 + \frac{3xx_0}{a^2} + \frac{3yy_0}{b^2} \right) \geq 0, \quad (3.27a)$$

which after some calculation leads to the condition

$$\frac{x_0^2}{\left(\frac{1}{3}a\right)^2} + \frac{y_0^2}{\left(\frac{1}{3}b\right)^2} \leq 1, \quad (3.27b)$$

from which we see that  $(x_0, y_0)$  must lie inside the ellipse which is concentric, similar, and similarly oriented with E, but the axes of which are  $\frac{1}{3}$  times the axes of E.

The load-displacement equations are, according to (2.56c) and (3.22):

$$\left. \begin{aligned} c_{00} &= 2(1-\sigma)E^{0;00}_{00} f_{00} = \frac{(1-\sigma)N}{\pi bG} (2\underline{D}-e^2\underline{C}) = \frac{(1-\sigma)N}{\pi bG} \underline{K}, \\ c_{10} &= 2(1-\sigma)E^{0;10}_{10} f_{10} = \frac{3(1-\sigma)Nx_0}{\pi a^2 bG} (\underline{D}-e^2\underline{C}) = \frac{3(1-\sigma)Nx_0}{\pi a^2 bG} \underline{B}, \\ c_{01} &= 2(1-\sigma)E^{0;01}_{01} f_{01} = \frac{3(1-\sigma)Ny_0}{\pi b^3 G} \underline{D}, \\ G &= 2G^+, \quad \sigma = \sigma^+, \end{aligned} \right\} \quad (3.28)$$

which is also the solution of the problem.

### 3.212. A tangential problem: the problem of CATTANEO and MINDLIN without slip.

Two elastic bodies are pressed together by a normal force N, so that a contact area forms between them. According to the HERTZ theory, which we assume to be valid, the contact area E is elliptical with semi-axes a, b ( $s=a \leq b$ ):

$$E = \{x,y: (x/a)^2+(y/b)^2 \leq 1\}, s = a \leq b. \quad (3.29)$$

After this, a tangential force  $(F_x, F_y)$  and a torsional couple  $M_z$  are applied. Assuming that the HERTZ distribution does not influence the tangential displacement difference and vice versa, it is required to find the tangential displacement  $(\delta_x, \delta_y)$  and the torsion angle  $\beta$  of the upper body with respect to the lower. Slip in the contact area is assumed to be absent. This problem was treated by CATTANEO [1] and MINDLIN [1].

Since we must choose the unstressed state so that the displacement vanishes at infinity, we have in the contact area

$$\left. \begin{aligned} u(x,y) &= u^+(x,y,0) - u^-(x,y,0) = \delta_x - \beta y = a_{00} + a_{01}y, \\ v(x,y) &= v^+(x,y,0) - v^-(x,y,0) = \delta_y + \beta x = b_{00} + b_{10}x. \end{aligned} \right\} \quad (3.30)$$

Therefore, the tangential traction distribution over the contact area has the following form:

$$\left. \begin{aligned} X &= G\sqrt{1-(x/a)^2-(y/b)^2}^{-1} (d_{00} + d_{01}y), \\ Y &= G\sqrt{1-(x/a)^2-(y/b)^2}^{-1} (e_{00} + e_{10}x) \end{aligned} \right\} \quad (3.31a)$$

so that

$$F_x = 2\pi abGd_{00}, \quad F_y = 2\pi abGe_{00}, \quad M_z = \iint_E (xY - yX) dx dy = \frac{2}{3} \pi abG(a^2e_{10} - b^2d_{01}) \quad (3.31b)$$

The load-displacement equations are:

$$\left. \begin{aligned} a_{00} &= \delta_x = 2 \left( E_{00}^{0;00} - \sigma E_{20}^{1;00} \right) d_{00}, \\ b_{00} &= \delta_y = 2 \left( E_{00}^{0;00} - \sigma E_{02}^{1;00} \right) e_{00}, \\ a_{01} &= -\beta = 2 \left( E_{01}^{0;01} - \sigma E_{21}^{1;01} \right) d_{01} - 2\sigma E_{12}^{1;10} e_{10}, \\ b_{10} &= \beta = 2 \left( E_{10}^{0;10} - \sigma E_{12}^{1;10} \right) e_{01} - 2\sigma E_{21}^{1;01} d_{01}. \end{aligned} \right\} \quad (3.32)$$

Now,  $e_{10} \geq 0$ , so that according to (3.22),

$$\left. \begin{aligned} E_{00}^{0;00} &= a\underline{K}, \quad E_{20}^{1;00} = a\underline{D}, \quad E_{02}^{1;00} = a\underline{B}, \quad E_{01}^{0;01} = a\underline{D}, \\ E_{01}^{1;01} &= a\underline{C}, \quad E_{12}^{1;10} = a\underline{g}^2\underline{C}, \quad E_{10}^{0;10} = a\underline{B}. \end{aligned} \right\} \quad (3.33)$$

From (3.17c), (3.31b), (3.32), and (3.33) we can solve  $\delta_x$ ,  $\delta_y$  and  $\beta$ :

$$\delta_x = \frac{(\underline{K}-\sigma\underline{D})\underline{F}}{\pi b G} \underline{x}, \quad \delta_y = \frac{(\underline{K}-\sigma\underline{B})\underline{F}}{\pi b G} \underline{y}, \quad \beta = \frac{3M_z (\underline{B} \underline{D}-\sigma\underline{E} \underline{C})}{\pi b^3 G (\underline{E}-4\sigma\underline{G}^2 \underline{C})}. \quad (3.34)$$

### 3.22. The case of zero surface traction at the edge of the contact area.

In 3.221 we shall treat the HERTZ problem, and in 3.222 the problem of CATTANEO and MINDLIN with slip, but without twist. The HERTZ problem is treated in some detail, since its results are frequently used in the present work. We also give a numerical table.

The building blocks of the coefficients of the load-displacement equations are the  $F_{mn}^{h;pq}$  of (3.12):

$$F_{2m+\epsilon, 2n+\omega}^{h; 2p+\epsilon, 2q+\omega}(\epsilon) = \left(\frac{1}{2}\right)_h (-2)^{\epsilon+\omega} \sum_{k=0}^m \sum_{\ell=0}^n \frac{4^{k+\ell} (2m+\epsilon)! (2n+\omega)! s^{2d+1}}{(m-k)! (n-\ell)! (2k+\epsilon)! (2\ell+\omega)!} \times \left. \begin{array}{l} \\ \\ \end{array} \right\} \quad (3.35)$$

$$\times J(d, k+p+\epsilon, \ell+q+\omega, \epsilon), \quad d = h+p+q-m-n \geq -1.$$

The equations themselves are given by (3.5).

### 3.221. A normal problem: the problem of HERTZ.

Two elastic bodies are pressed together by a normal force  $N$ , so that a contact area forms between them. Assuming that friction is absent, and that for the boundary conditions the bodies may be approximated by elliptic paraboloids, find the contact area, the pressure distribution over the contact area, and the depth of penetration of the bodies.

The most important case in which we shall use the HERTZ problem is that of two bodies of revolution which are steadily rolling over each other. In that case the parallel circles of both bodies are approximately parallel. We shall confine ourselves to that case. The axes of the paraboloids then coincide. The elasticity problem remains the same when the axes of the paraboloids are not parallel, but the boundary conditions require a little more algebra, which is given, for instance in LOVE [1] pg. 193-194. We shall give the results of this analysis only.

We must choose the unstressed state so, that the displacement and the stresses vanish at infinity; in such an unstressed state, the



bodies intersect. Let the principal radii of curvature of the bodies be given by  $R_x^+$ ,  $R_y^+$ , where a + refers to the lower body, and a - to the upper body. We count them positive if the centre of curvature in question lies inside the half-space under consideration. The equation of the surface of the bodies near the contact area is

$$z^{\mp} = \mp \frac{x^2}{2R_x^{\mp}} \mp \frac{y^2}{2R_y^{\mp}} + \alpha^{\mp}, \quad \left. \begin{array}{l} \text{upper sign: upper half-space,} \\ \text{lower sign: lower half-space.} \end{array} \right\} \quad (3.36)$$

In the contact area, we have  $w^+(x,y,0)+z^+-w^-(x,y,0)-z^- = 0$ , that is,

$$w(x,y) = z^-(x,y)-z^+(x,y) = -Ax^2-By^2+\alpha, \quad (3.37)$$

with

$$\left. \begin{array}{l} \alpha = \alpha^- - \alpha^+, \\ A = \frac{1}{2} \left( \frac{1}{R_x^+} + \frac{1}{R_x^-} \right), \\ B = \frac{1}{2} \left( \frac{1}{R_y^+} + \frac{1}{R_y^-} \right), \\ \frac{1}{\rho} = \frac{1}{2}(A+B) = \frac{1}{4} \left( \frac{1}{R_1^+} + \frac{1}{R_1^-} + \frac{1}{R_2^+} + \frac{1}{R_2^-} \right), \\ \rho: \text{characteristic length of the bodies;} \\ R_{1,2}^{\pm}: \text{principal radii of curvature of lower (+) and} \\ \text{upper (-) body, taken positive when the} \\ \text{corresponding centre of curvature lies inside} \\ \text{the half-space under consideration;} \\ 4(A-B)^2 = \left( \frac{1}{R_1^+} - \frac{1}{R_2^-} \right)^2 + \left( \frac{1}{R_2^+} - \frac{1}{R_1^-} \right)^2 + \\ + 2 \left( \frac{1}{R_1^+} - \frac{1}{R_2^+} \right) \left( \frac{1}{R_2^-} - \frac{1}{R_1^-} \right) \cos 2\omega, \\ \omega: \text{angle between the plane of } R_1^+ \text{ and the plane of } R_1^-, \\ \text{in case the axes of the paraboloids are not parallel.} \end{array} \right\} \quad (3.38)$$

This means that

$$c_{00} = \alpha, \quad c_{20} = -A, \quad c_{02} = -B. \quad (3.39)$$

We propose the hypothesis that the contact area is elliptic with semi-axes a and b,

$$E = \{x,y: (x/a)^2+(y/b)^2 \leq 1\}. \quad (3.40)$$

We take the normal stress in the form

$$Z = G f_{00} \sqrt{1 - (x/a)^2 - (y/b)^2}, \quad (3.41)$$

where  $G$  is the combined modulus of rigidity. We will also need the combined POISSON'S ratio  $\sigma$ . They are given by (2.10), which we repeat here:

$$\frac{1}{G} = \frac{1}{2} \left( \frac{1}{G^+} + \frac{1}{G^-} \right), \quad \frac{\sigma}{G} = \frac{1}{2} \left( \frac{\sigma^+}{G^+} + \frac{\sigma^-}{G^-} \right). \quad (3.42)$$

The total normal force can be found from (3.41) by integration:

$$N = \iint_E Z \, dx dy = \frac{2}{3} \pi a b G f_{00}, \quad f_{00} = \frac{3N}{2\pi a b G}. \quad (3.43)$$

The load-displacement equations are

$$\left. \begin{aligned} \alpha = c_{00} &= 2(1-\sigma) F_{00}^{0;00} f_{00}, \\ -A = c_{20} &= (1-\sigma) F_{20}^{0;00} f_{00}, \\ -B = c_{02} &= (1-\sigma) F_{02}^{0;00} f_{00}; \end{aligned} \right\} \quad (3.44)$$

according to (3.22),

$$\left. \begin{aligned} F_{00}^{0;00}(|e|) &= F_{00}^{0;00}(-|e|) = \frac{1}{2} s \underline{K}, \\ F_{20}^{0;00}(|e|) &= F_{02}^{0;00}(-|e|) = -(\underline{D} - e^2 \underline{C})/s = -\underline{B}/s, \\ F_{02}^{0;00}(|e|) &= F_{20}^{0;00}(-|e|) = -(1-e^2)\underline{D}/s = -g^2 \underline{D}/s. \end{aligned} \right\} \quad (3.45)$$

s: minor semi-axis of contact ellipse.

So we obtain from (3.43), (3.44), and (3.45):

$$\left. \begin{aligned} \alpha &= \frac{3N(1-\sigma)s\underline{K}}{2\pi a b G}, \quad A(|e|) = B(-|e|) = \frac{3N(1-\sigma)(\underline{D} - e^2 \underline{C})}{2\pi a b s G} = \frac{3N(1-\sigma)\underline{B}}{2\pi a b s G}, \\ B(|e|) &= B(-|e|) = \frac{3N(1-\sigma)(1-e^2)\underline{D}}{2\pi a b s G} = \frac{3N(1-\sigma)g^2 \underline{D}}{2\pi a b s G}. \end{aligned} \right\} \quad (3.46)$$

Since  $\underline{D} > \underline{C}$ , see sec. 3.2, Table 1, it follows that  $A(|e|) = B(-|e|) \geq B(|e|) = A(-|e|)$ , so that we have:

$$\left. \begin{aligned} A &= \frac{1}{2} \left( \frac{1}{R_x^+} + \frac{1}{R_x^-} \right) \geq B = \frac{1}{2} \left( \frac{1}{R_y^+} + \frac{1}{R_y^-} \right) \Rightarrow e \geq 0, \quad a \leq b, \\ A &= \frac{1}{2} \left( \frac{1}{R_x^+} + \frac{1}{R_x^-} \right) \leq B = \frac{1}{2} \left( \frac{1}{R_y^+} + \frac{1}{R_y^-} \right) \Rightarrow e \leq 0, \quad b \leq a. \end{aligned} \right\} \quad (3.47)$$

In order to find the excentricity of the contact ellipse, we set with

$$\cos \tau = \frac{|A-B|}{A+B} = \frac{1}{2} \rho |A-B| = \frac{|1/R_x^+ + 1/R_x^- - 1/R_y^+ - 1/R_y^-|}{1/R_x^+ + 1/R_x^- + 1/R_y^+ + 1/R_y^-}, \quad (3.48a)$$

and it follows from this and (3.46) and (3.17c) that

$$\cos \tau = \frac{e^2(\underline{D}-\underline{C})}{\underline{E}}. \quad (3.48b)$$

$\underline{E}$ ,  $|e|$  and  $g$  are tabulated as functions of  $\tau$  in Table 2. This table is taken from LOVE [1], p. 197, and from JAHNKE & EMDE [1], p. 78 and Table 2.  $|e|$ ,  $g$ ,  $\underline{E}$ ,  $\underline{K}$  as functions of  $\tau$ .

$\tau$	$90^\circ$	$80^\circ$	$70^\circ$	$60^\circ$	$50^\circ$	$40^\circ$	$30^\circ$	$20^\circ$	$10^\circ$	$0^\circ$
$g=s/l$	1.00	0.79	0.62	0.47	0.36	0.26	0.18	0.10	0.05	0.00
$ e $	0.00	0.61	0.73	0.83	0.93	0.96	0.98	0.99	0.999	1.00
$\underline{K}$	1.57	1.76	1.97	2.21	2.46	2.75	3.14	3.71	4.40	$\infty$
$\underline{E}$	1.57	1.41	1.29	1.19	1.13	1.08	1.04	1.02	1.01	1.00

30. We see from (3.48) that the shape of the contact ellipse depends only on A and B, and not on the applied load N or the elastic properties of the bodies. The size of the contact area does depend on the load, as follows:

$$A+B = \frac{2}{\rho} = \frac{3N(1-\sigma)\underline{E}}{2\pi ab s G} = \frac{3N(1-\sigma)\underline{E}}{2\pi G c^3 \sqrt{g}}, \quad c = \sqrt{ab}, \quad (3.49)$$

or

$$3N(1-\sigma)\rho\underline{E} = 4\pi c^3 G \sqrt{g}, \quad c = \sqrt{ab}. \quad (3.50)$$

A frequently-used quantity is  $f_{00}$ . It is

$$f_{00} = \frac{3N}{2\pi ab G} = \frac{2c\sqrt{g}}{(1-\sigma)\underline{E}\rho} = \frac{2}{(1-\sigma)\underline{E}} \frac{s}{\rho}. \quad (3.51)$$

Finally we determine the penetration  $\alpha$  of the bodies according to (3.44), (3.46), (3.51)

$$\alpha = (1-\sigma)\underline{K} f_{00} s = \frac{2 s^2 \underline{K}}{\rho\underline{E}}. \quad (3.52)$$

3.222. A tangential problem: The problem of CATTANEO and MINDLIN with slip, without twist.

Two elastic bodies are pressed together by a normal force N, so

that a contact area forms between them. According to the HERTZ theory, which we assume to be applicable, the contact area  $E$  is elliptical with semi-axes  $a$  and  $b$ ,  $a \leq b$ :

$$E = \{x,y: (x/a)^2+(y/b)^2\}, \quad a \leq b. \quad (3.53)$$

After this, a tangential force  $(F_x, F_y)$  is applied. Assuming that the HERTZ distribution does not influence the tangential displacement difference, and vice versa, it is required to find the tangential displacement  $(\delta_x, \delta_y)$  of the upper body with respect to the lower. This problem was treated by MINDLIN [1] and CATTANEO [1].

If the tangential force is below its maximal value as predicted by COULOMB's law,

$$|(F_x, F_y)| < \mu N, \quad \mu: \text{coefficient of friction} \quad (3.54)$$

the contact area is split up into a region of adhesion  $E_h$  in which there is no relative movement of the particles in contact as a consequence of the tangential force, and a region of slip  $E_g$  where the tangential traction has reached the COULOMB value  $|(X, Y)| = \mu Z$ . The boundary conditions in  $E_h$  are the same as those of 3.312, with  $\beta=0$ :

$$\left. \begin{aligned} u(x,y) &= u^+(x,y,0) - u^-(x,y,0) = \delta_x, \\ v(x,y) &= v^+(x,y,0) - v^-(x,y,0) = \delta_y, \end{aligned} \right\} \text{ in } E_h. \quad (3.55)$$

The boundary conditions in  $E_g$  are, that the tangential traction is equal to the COULOMB value, and that the local slip takes place in the direction of the local tangential traction:

$$\left. \begin{aligned} |(X, Y)| = \mu Z &= G\mu f_{00} \sqrt{1-(x/a)^2-(y/b)^2}, \quad f_{00} = \frac{3N}{2\pi abG}, \\ \text{slip in direction of tangential traction.} \end{aligned} \right\} \text{ in } E_g \quad (3.56a) \quad (3.56b)$$

In the analysis of CATTANEO and MINDLIN, which we will give here with the aid of the load-displacement equations, boundary conditions (3.55) and (3.56a) are met completely; (3.56b) is satisfied only approximately, for it is assumed that  $(X, Y)$  is in the same sense as  $(F_x, F_y)$ , rather than in the same sense as the slip. The solution is found by a device which was already used by CARTER [1] in his treatment of the problem of the rolling contact with creepage of parallel cylinders. This device consists of assuming that the stress distribution is that which obtains when complete sliding takes place,

$(X', Y')$ , from which is subtracted a stress distribution  $(X'', Y'')$  over the adhesion area alone, and which is similar to the stress distribution of complete sliding. As a consequence (3.56a) is met automatically and, (this hypothesis was advanced by CATTANEO and MINDLIN), the area of adhesion will be bounded by an ellipse. We will show that the ellipse is similar to the contact ellipse, concentric with it, and similarly oriented. We denote the semi-axes of the area of adhesion by  $a'', b''$ , and we will prove the statement just made by showing that the boundary conditions (3.55) can be met.

Denoting by  $(u', v')$  the displacement differences due to the stress distribution  $(X', Y')$  of complete sliding, and by  $(u'', v'')$  those due to the stress distribution  $(X'', Y'')$  over the adhesion area alone, we have

$$\left. \begin{aligned} (X', Y') &= \mu Z \frac{(F_x, F_y)}{F} = \frac{\mu G f_{00}}{F} (F_x, F_y) \sqrt{1 - (x/a)^2 - (y/b)^2} \text{ in } E, \\ &= 0 \text{ outside } E, \\ (X'', Y'') &= \mu G f''_{00} \frac{(F_x, F_y)}{F} \sqrt{1 - (x/a'')^2 - (y/b'')^2} \text{ in } E_h, \\ &= 0 \text{ outside } E_h, \\ (X, Y) &= (X', Y') - (X'', Y''); \quad F = |(F_x, F_y)|, \end{aligned} \right\} (3.57)$$

and

$$(u', v') = (a_{00}, b_{00}) + (a_{20}, b_{20})x^2 + (a_{11}, b_{11})xy + (a_{02}, b_{02})y^2 \text{ in } E, \quad (3.58a)$$

$$(u'', v'') = (a''_{00}, b''_{00}) + (a''_{20}, b''_{20})x^2 + (a''_{11}, b''_{11})xy + (a''_{02}, b''_{02})y^2 \text{ in } E_h, \quad (3.58b)$$

$$(u, v) = (u' - u'', v' - v'') = (\delta_x, \delta_y) \text{ in } E_h, \quad (3.58c)$$

where, according to the load-displacement equations (3.6),

$$\left. \begin{aligned} a_{00} &= 2 \begin{pmatrix} F^0; 00 \\ 00 \\ -\sigma F^1; 00 \\ 20 \end{pmatrix} \\ a_{20} &= \begin{pmatrix} F^0; 00 \\ 20 \\ -\sigma F^1; 00 \\ 40 \end{pmatrix} \\ b_{11} &= -2\sigma F^1; 00 \\ & \quad 22 \\ a_{02} &= \begin{pmatrix} F^0; 00 \\ 02 \\ -\sigma F^1; 00 \\ 22 \end{pmatrix} \end{aligned} \right\} \mu f_{00} \frac{F_x}{F}, \quad \left. \begin{aligned} a''_{00} &= 2 \begin{pmatrix} F''^0; 00 \\ 00 \\ -\sigma F''^1; 00 \\ 20 \end{pmatrix} \\ a''_{20} &= \begin{pmatrix} F''^0; 00 \\ 20 \\ -\sigma F''^1; 00 \\ 40 \end{pmatrix} \\ b''_{11} &= -2\sigma F''^1; 00 \\ & \quad 22 \\ a''_{02} &= \begin{pmatrix} F''^0; 00 \\ 02 \\ -\sigma F''^1; 00 \\ 22 \end{pmatrix} \end{aligned} \right\} \mu f''_{00} \frac{F_x}{F}, \quad (3.59a)$$

$$\left. \begin{aligned}
 b_{00} &= 2 \left( \begin{matrix} F^0;00 \\ 00 \end{matrix} - \sigma \begin{matrix} F^1;00 \\ 02 \end{matrix} \right) \\
 b_{20} &= \left( \begin{matrix} F^0;00 \\ 20 \end{matrix} - \sigma \begin{matrix} F^1;00 \\ 22 \end{matrix} \right) \\
 a_{11} &= -2 \sigma \begin{matrix} F^1;00 \\ 22 \end{matrix} \\
 b_{02} &= \left( \begin{matrix} F^0;00 \\ 02 \end{matrix} - \sigma \begin{matrix} F^1;00 \\ 04 \end{matrix} \right)
 \end{aligned} \right\} \mu f_{00} \frac{F_y}{F}, \quad \left. \begin{aligned}
 b''_{00} &= 2 \left( \begin{matrix} F''^0;00 \\ 00 \end{matrix} - \sigma \begin{matrix} F''^1;00 \\ 02 \end{matrix} \right) \\
 b''_{20} &= \left( \begin{matrix} F''^0;00 \\ 20 \end{matrix} - \sigma \begin{matrix} F''^1;00 \\ 22 \end{matrix} \right) \\
 a''_{11} &= -2 \begin{matrix} F''^1;00 \\ 22 \end{matrix} \\
 b''_{02} &= \left( \begin{matrix} F''^0;00 \\ 02 \end{matrix} - \sigma \begin{matrix} F''^1;00 \\ 04 \end{matrix} \right)
 \end{aligned} \right\} \mu f''_{00} \frac{F_y}{F}. \quad (3.59b)$$

Here the coefficients  $F_{mn}^{h;pq}$  are taken with the minor semi-axis  $a$  of the contact area, while the  $F_{mn}''^{h;pq}$  are taken with the minor semi-axis  $a''$  of the adhesion area.

Now, we see from (3.35) that the coefficients  $F$  and  $F''$  of the second degree terms are equal to each other but for a factor  $s^{-1} = a^{-1}$  and  $(s'')^{-1} = (a'')^{-1}$ , since  $d = -1$ . So,

$$F'' = F a/a'' \text{ in 2nd degree terms.} \quad (3.60)$$

If the second degree terms in  $(u,v)$  are to vanish in  $E_h$ , as is demanded by (3.58c), we must choose

$$f''_{00} = + \frac{a''}{a} f_{00}. \quad (3.61)$$

If we do so all second degree terms vanish simultaneously.

We are now in a position to express the semi-axes  $a''$  in  $a$ , with the aid of the prescribed forces  $F_x$  and  $F_y$ :

$$\begin{aligned}
 F_x &= \iint_E X' dx dy - \iint_{E_h} X'' dx dy = \iint_E X' dx dy - \iint_E \frac{a'' b''}{ab} \frac{a''}{a} X' dx dy = \\
 &= \{1 - (a''/a)^3\} \mu F_x N/F, \\
 F_y &= \{1 - (a''/a)^3\} \mu F_y N/F,
 \end{aligned}$$

so that

$$\frac{b''}{b} = \frac{a''}{a} = (1 - F/\mu N)^{1/3}, \quad F = \sqrt{F_x^2 + F_y^2}. \quad (3.62)$$

As to the zero degree terms, it follows from the fact that  $d=0$ , that  $F'' = F a''/a$ , so that

$$a''_{00} = a_{00} \frac{f''_{00}}{f_{00}} \frac{a''}{a} = a_{00} (1 - F/\mu N)^{2/3}, \quad b''_{00} = b_{00} (1 - F/\mu N)^{2/3}. \quad (3.63)$$

According to (3.22),

$$F^0_{00} = \frac{1}{2} \underline{K} a, \quad F^1_{20} = \frac{1}{2} \underline{D} a, \quad F^1_{02} = \frac{1}{2} \underline{B} a, \quad (3.64)$$

and we finally find that

$$\left. \begin{aligned} \delta_x &= \left\{ 1 - (1 - F/\mu N)^{2/3} \right\} (K - \sigma D) \frac{3\mu N F_x}{2\pi b G F}, \\ \delta_y &= \left\{ 1 - (1 - F/\mu N)^{2/3} \right\} (K - \sigma B) \frac{3\mu N F_y}{2\pi b G F}. \end{aligned} \right\} \quad (3.65)$$

If we let  $F/\mu N$  approach zero, we get again the result (3.34).

It should be observed that for non-vanishing POISSON'S ratio  $\sigma$  the boundary condition (3.56b) is met only approximately. In order to see that, we consider the case that  $F_y = 0$ , and that  $F_x$  grows to  $F_x = \mu N$ .

The traction at every instant is then parallel to the x-axis, and the same should hold for the slip. The slip is given by

$\left( \frac{\partial [u - \delta_x]}{\partial t}, \frac{\partial [v - \delta_y]}{\partial t} \right)$ ; its y-component should vanish, that is,  $\frac{\partial (v - \delta_y)}{\partial t} = 0$ . Since  $\delta_y = 0$  when  $F_y = 0$ ,  $\frac{\partial v}{\partial t}$  should vanish at every instant. Accordingly,  $v$  should vanish in the final state of complete slip; in that case,  $v'' = 0$ , and  $v = v' = b_{11}xy$  according to (3.59a), where  $b_{11} \neq 0$  when  $\sigma \neq 0$ . So the slip is not always parallel to the traction. In the case of a circular contact area, the maximum angle between  $(u, v)$  and  $(X, Y)$  is  $9.6^\circ$  when  $\sigma = \frac{1}{2}$ , and  $4.1^\circ$  when  $\sigma = \frac{1}{4}$ . We conjecture from this that the angle between  $(u, v)$  and  $(X, Y)$  is always small.

4. Steady Rolling with creepage and spin: asymptotic theories.

In this chapter and the next we will treat the problem of the transmission of tangential forces during rolling.

Consider two bodies of revolution which are pressed together by a normal force  $N$ , and which roll steadily over each other, see Fig. 6.

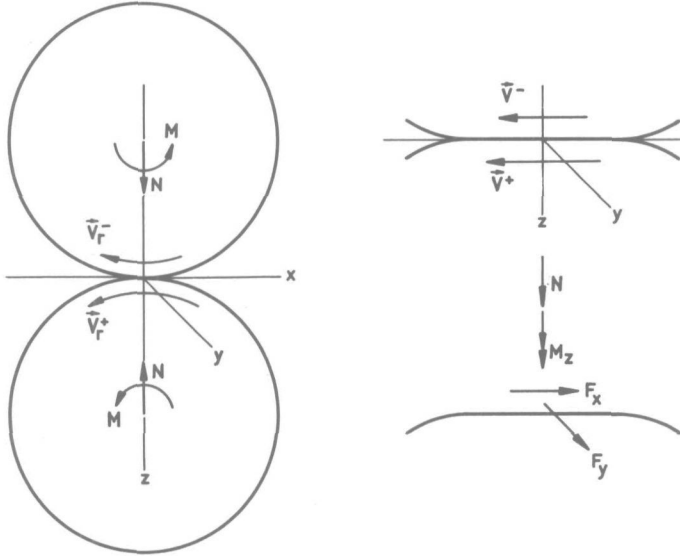


Fig. 6. Two bodies rolling over each other.

Owing to the normal force, a contact area is formed along which the bodies touch. If the conformity of the bodies is not too strong, and the changes of curvature are small, the contact area and the normal pressure transmitted across it are given by the HERTZ theory which we treated in detail in 3.221. According to this theory, the contact area is an ellipse with semi-axes  $a$  and  $b$ ,

$$E = \{x, y, z: (x/a)^2 - (y/b)^2 \leq 1, z=0\}, \quad (4.1)$$

while the distribution of normal stress is given by

$$Z = \frac{3N}{2\pi ab} \sqrt{1 - (x/a)^2 - (y/b)^2}. \quad (4.2)$$

The formulae by means of which the semi-axes  $a$  and  $b$  can be computed from  $N$  and from the radii of curvature  $R_x^+$ ,  $R_y^+$ ,  $R_x^-$ ,  $R_y^-$  are given in 3.221. When the bodies are rolling steadily, their parallel circles are almost parallel, so that according to 3.221 the axes of the



contact ellipse are very nearly oriented along the rolling direction and perpendicular to it. So, if we take the axial direction of the ellipse as  $x$  and  $y$  axes, as we did throughout this work, the rolling direction very nearly coincides with one of these, so that we can assume without loss of generality that it is the positive  $x$ -axis.

In addition to the normal load, a tangential force can be transmitted from one body to the other, owing to friction. When the tangential load is below its maximal COULOMB value, that is,  $|(F_x, F_y)| < \mu N$ ,  $\mu$ : coeff. of friction, slip occurs in part of the contact area called the area of slip  $E_g$ , while in the remainder of the contact area, the locked area or area of adhesion  $E_h$ , there is no relative velocity of one body with respect to the other. This is a consequence of the fact that the elastic deformation of the bodies modifies the velocity pattern near the contact area. In the area of slip  $E_g$ , work is done by friction; macroscopically, this results in a difference of the overall circumferential velocity of the bodies. This difference is determined by means of the quantities called creepage and spin, which are defined in (4.14).

In the present chapter, we first set up the boundary conditions both for steady and unsteady rolling (sec. 4.1). In sec. 4.2, we consider the various symmetries present in the problem, and we introduce a number of dimensionless parameters. In sec. 4.3 we generalize the theory of DE PATER [1] and KALKER [1] on DE PATER's asymptotic case of infinitesimal creepage and spin, to elliptic contact areas. This is an application of the load-displacement equations of ch. 2. In 4.4 we present the theory of LUTZ [1,2,3] and WERNITZ [1,2] on LUTZ's asymptotic case of infinite creepage and spin, in a slightly generalized form.

#### 4.1. Boundary conditions.

For the problem of elasticity and the solution of the boundary value problem, the bodies will be approximated by half-spaces. The boundary conditions are set up for the finite bodies, but we will already utilize the coordinate system of the half-spaces.

A cartesian coordinate system  $(0; x, y, z)$  is introduced in the following manner. The plane  $z=0$  is the boundary of the half-spaces,

$z \geq 0$  is the lower half-space. The bodies touch each other along an elliptical contact area  $E$ , see 3.221. We take the centre of the ellipse as origin, and the axes of the ellipse as the coordinate axes  $x$  and  $y$ ,

$$E = \{x, y, z: (x/a)^2 + (y/b)^2 \leq 1, z=0\}. \quad (4.3)$$

The positive  $x$ -axis coincides approximately with the rolling direction, which is always the case when two bodies of revolution roll steadily over each other, as we pointed out in sec. 4.

The material of the bodies flows through this coordinate system. We take the undeformed state so, that at infinity the deformed and the undeformed state coincide, in other terms, the elastic displacement  $\underline{u}^\pm = (u^\pm, v^\pm, w^\pm)$  vanishes at infinity. In this undeformed state, the bodies intersect. This intersection is countered by the elastic deformation, as a consequence of which the contact area forms. According to 3.221, only the difference  $w = w^+ - w^-$  of the  $z$ -component of the displacement is involved in the formation of the contact area. As we have seen in (2.15c) and (2.10a), this difference is unaffected by the tangential tractions acting in the contact area, when the elastic constants of the bodies are the same. That means that contact area and normal pressure can be calculated as if the tangential tractions were absent. In the case that the elastic constants are not the same, we assume that the contact area  $E$  and the normal pressure  $Z$  are not significantly altered by the tangential tractions  $(X, Y)$ , see sec. 2.1.

Regarding the tangential tractions, we only take the effect of dry friction into account. This means that the contact area is divided into a region of slip  $E_g$  where the tangential traction  $|(X, Y)| = \mu Z$ , and is directed along the slip, and a locked region  $E_h$  where the slip vanishes, and  $|(X, Y)| \leq \mu Z$ . We assume that the coefficient of friction is independent of the slip, in particular, that the coefficient of friction which prevails in the locked region is the same as that in the slip region.

We observe that the slip is of central importance in the boundary conditions, and we proceed to find an expression for it. Consider a particle of the bodies which lies at a certain time  $t$  in

the point  $\underline{x} = (x,y,z)$  in the undeformed state. The position in the deformed state is  $\underline{x} + \underline{u}^\pm = (x+u^\pm, y+v^\pm, z+w^\pm)$ . The velocity of the particle is found by differentiation with respect to time. In the undeformed state the velocity is

$$\underline{v}_u = \frac{d\underline{x}}{dt} = \left( \frac{dx}{dt}, \frac{dy}{dt}, \frac{dz}{dt} \right), \quad (4.4)$$

and in the deformed state,

$$\underline{v}_d = \frac{d\underline{x}}{dt} + \frac{d\underline{u}}{dt} = \underline{v}_u + \frac{\partial \underline{u}}{\partial t} + (\underline{v}_u \cdot \text{grad}) \underline{u}. \quad (4.5)$$

Let the superscript  $+$  refer to the lower body, and the superscript  $-$  to the upper body. We define the slip as the velocity of the upper body with respect to the lower body in the deformed state. It is:

$$\left. \begin{aligned} \underline{v}(x,y,0) = \underline{v}_d^- - \underline{v}_d^+ &= (\underline{v}_u^- - \underline{v}_u^+) + \frac{\partial (\underline{u}^- - \underline{u}^+)}{\partial t} + \\ &+ \frac{1}{2} \{ (\underline{v}_u^- + \underline{v}_u^+) \cdot \text{grad} \} (\underline{u}^- - \underline{u}^+) + \frac{1}{2} \{ (\underline{v}_u^- - \underline{v}_u^+) \cdot \text{grad} \} (\underline{u}^+ + \underline{u}^-). \end{aligned} \right\} \quad (4.6)$$

Since  $|\text{grad}(\underline{u}^+ + \underline{u}^-)| \ll 1$ , we may neglect the last term of the right hand side of (4.6) with respect to the first term. This gives

$$\left. \begin{aligned} \underline{v}(x,y,0) &= (\underline{v}_u^+ - \underline{v}_u^-) - \frac{\partial \underline{u}}{\partial t} - \frac{1}{2} \{ (\underline{v}_u^- + \underline{v}_u^+) \cdot \text{grad} \} \underline{u}, \\ \underline{u} &= \underline{u}^+ - \underline{u}^-. \end{aligned} \right\} \quad (4.7)$$

The z-component of  $\underline{v}(x,y,0)$  vanishes in the half-space approximation; the (x,y) components of  $\underline{v}(x,y,0)$  depend only on the differences  $u = u^+ - u^-$ ,  $v = v^+ - v^-$  of the (x,y) components of the elastic displacement at  $z=0$ . We saw in (2.11a,b), and (2.10a) that this difference is unaffected by the normal pressure  $Z$ , when the elastic displacements of both bodies are the same. We can then calculate the tangential tractions and the difference of the (x,y) components of the elastic displacement at the contact area, as if the normal pressure were absent. We will do this throughout this work. If we use the results so obtained also in the case of different elastic constants by using the combined modulus of rigidity  $G$  and POISSON's ratio  $\sigma$  of eq. (2.10), it should be kept in mind that we make an error. This error is not necessarily small, see sec. 2.1.

We can regard the velocity of the undeformed bodies in the half-

space approximation as a velocity at the origin and a rotation about the z-axis:

$$\left. \begin{aligned} \frac{dx^+}{dt} &= \frac{dx^+}{dt} \Big|_O - \Omega_z^+ y, & \frac{dy^+}{dt} &= \frac{dy^+}{dt} \Big|_O + \Omega_z^+ x, \\ \frac{dx^-}{dt} &= \frac{dx^-}{dt} \Big|_O - \Omega_z^- y, & \frac{dy^-}{dt} &= \frac{dy^-}{dt} \Big|_O + \Omega_z^- x. \end{aligned} \right\} \quad (4.8)$$

We define the rolling velocity  $\underline{V}_r$ , with magnitude  $V$  as the opposite of the mean velocity at the origin,

$$\underline{V}_r = -\frac{1}{2} \left( \left[ \frac{dx^+}{dt} + \frac{dx^-}{dt} \right]_O, \left[ \frac{dy^+}{dt} + \frac{dy^-}{dt} \right]_O \right), \quad V = |\underline{V}_r|. \quad (4.9)$$

In the steady rolling of two bodies of revolution over each other, the rolling velocity makes a small angle  $\delta$  with the positive x-axis. We confine ourselves to this case of small  $\delta$ . Then, we have:

$$\underline{V}_r \approx - (V, \delta V). \quad (4.10)$$

The creepage  $\underline{u} = (u_x, u_y)$  is defined as follows:

$$u_x = \frac{1}{V} \left( \frac{dx^-}{dt} - \frac{dx^+}{dt} \right) \Big|_O, \quad u_y = \frac{1}{V} \left( \frac{dy^-}{dt} - \frac{dy^+}{dt} \right) \Big|_O. \quad (4.11)$$

We write for the rotations  $\Omega_z^+$  and  $\Omega_z^-$

$$\Omega_z^+ = \frac{1}{2}(\Phi - \phi)V, \quad \Omega_z^- = \frac{1}{2}(\Phi + \phi)V. \quad (4.12)$$

$\phi$  is called the spin, and the constant  $\Phi$  has no special name. Note that  $\phi$  and  $\Phi$  are not dimensionless, but have the dimension of (length)<sup>-1</sup>. The velocity (4.8) of the undeformed bodies becomes:

$$\left. \begin{aligned} \frac{dx^+}{dt} &= -V - \frac{1}{2}Vu_x - \frac{1}{2}(\Phi - \phi)yV, & \frac{dy^+}{dt} &= -\delta V - \frac{1}{2}Vu_y + \frac{1}{2}(\Phi - \phi)xV; \\ \frac{dx^-}{dt} &= -V + \frac{1}{2}Vu_x - \frac{1}{2}(\Phi + \phi)yV, & \frac{dy^-}{dt} &= -\delta V + \frac{1}{2}Vu_y + \frac{1}{2}(\Phi + \phi)xV, \end{aligned} \right\} \quad (4.13)$$

and

$$\underline{V}_u^- - \underline{V}_u^+ = \left( \frac{d(x^- - x^+)}{dt}, \frac{d(y^- - y^+)}{dt} \right) = V(u_x - \phi y, u_y + \phi x), \quad (4.14a)$$

$$\underline{V}_u^- + \underline{V}_u^+ = -V(2 + \phi y, 2\delta - \phi x). \quad (4.14b)$$

$(\underline{V}_u^- + \underline{V}_u^+)$  is multiplied in (4.7) by a term of order  $\text{grad } \underline{u}$ . So we may neglect  $\delta$  with respect to 1 when we insert (4.14b) in (4.7). We also assume that the angle between the rolling axes of the upper and the lower body and the z-axis is not small, that is, the rolling

axes are not almost vertical. In that case, the horizontal component of rotation  $\Omega_x$  is larger or has the same order of magnitude as  $\Omega_z$ , or  $\phi V$ . But  $V = O(\rho\Omega_x)$ , where  $\rho$  is the characteristic length of the bodies, see (3.38). Therefore,  $\phi x$  and  $\phi y$  are at most of the order of magnitude  $x/\rho$ ,  $y/\rho$ . In the contact area we have that  $x/\rho$  and  $y/\rho$  are  $O(\ell/\rho)$ , with  $\ell$  the major semi-axis of the contact ellipse, which is small with respect to unity when the bodies are counterformal. Hence we may also neglect the terms  $\phi y$  and  $\phi x$  when we insert (4.14b) into (4.7):

$$\left( \underline{v}_{-u}^+ + \underline{v}_{-u}^- \right) = (-2V, 0) \text{ when inserted in (4.7).} \quad (4.14c)$$

So, (4.7) becomes

$$\underline{V}(x, y, 0) = V \underline{s}(x, y, 0) = V(s_x, s_y, 0), \quad \underline{s}: \text{relative slip} \quad (4.15a)$$

$$\left. \begin{aligned} s_x &= v_x - \phi y - \frac{1}{V} \frac{\partial u}{\partial t} + \frac{\partial u}{\partial x}, \\ s_y &= v_y + \phi x - \frac{1}{V} \frac{\partial v}{\partial t} + \frac{\partial v}{\partial x}; \end{aligned} \right\} \text{unsteady rolling} \quad (4.15b)$$

$$s_x = v_x - \phi y + \frac{\partial u}{\partial x}, \quad s_y = v_y + \phi x + \frac{\partial v}{\partial x}: \text{steady rolling.} \quad (4.15c)$$

The boundary conditions can now be formulated.

$$\text{Stresses and displacements vanish at infinity;} \quad (4.16a)$$

$$\left. \begin{aligned} Z &= 0 \text{ on } z = 0, \text{ outside } E; \\ Z &= G f_{00} \sqrt{1 - (x/a)^2 - (y/b)^2}, \quad f_{00} = \frac{3N}{2\pi abG} \text{ inside } E; \end{aligned} \right\} \quad (4.16b)$$

$$X = Y = 0 \text{ on } z = 0, \text{ outside } E; \quad (4.16c)$$

$$\left. \begin{aligned} (X, Y) &= \mu G f_{00} \sqrt{1 - (x/a)^2 - (y/b)^2} (w_x, w_y) \text{ in region of slip } E_g, \\ \text{with } \mu: \text{coeff. of friction, } w_x &= s_x/s, \quad w_y = s_y/s, \quad s = \sqrt{s_x^2 + s_y^2}, \\ \underline{s} &\text{ given in (4.15).} \end{aligned} \right\} \quad (4.16d)$$

$$s_x = s_y = 0, \quad |(X, Y)| \leq \mu Z \text{ in region of adhesion } E_h. \quad (4.16e)$$

#### 4.2. Considerations of symmetry. New dimensionless parameters.

Let us define

$$X' = \frac{2\pi abG}{3\mu N} X, \quad Y' = \frac{2\pi abG}{3\mu N} Y \quad (4.17a)$$

$$(u'_x, u'_y, \phi') = \frac{2\pi abG}{3\mu N} (u_x, u_y, \phi). \quad (4.17b)$$

Then it follows from HOOKE's law and from the fact that we neglect the influence of the normal pressure  $Z$  on the displacement differences  $u$  and  $v$ , that the displacement differences due to  $(X', Y')$  are

$$(u', v') = \frac{2\pi abG}{3\mu N} (u, v), \quad (4.17c)$$

where  $(u, v)$  are the displacement differences due to  $(X, Y)$ . Hence,

$$\left. \begin{aligned} s'_x &= u'_x - \phi' y - \frac{1}{V} \frac{\partial u'}{\partial t} + \frac{\partial u'}{\partial x} = \frac{2\pi abG}{3\mu N} s_x, \\ s'_y &= u'_y + \phi' x - \frac{1}{V} \frac{\partial v'}{\partial t} + \frac{\partial v'}{\partial x} = \frac{2\pi abG}{3\mu N} s_y. \end{aligned} \right\} \quad (4.17d)$$

Clearly,

$$w'_x = w_x, \quad w'_y = w_y. \quad (4.17e)$$

If

$$\left. \begin{aligned} (X', Y') &= G \sqrt{1 - (x/a)^2 - (y/b)^2} (w'_x, w'_y) && \text{in } E_g, \\ s'_x = s'_y &= 0, \quad |(X', Y')| \leq G \sqrt{1 - (x/a)^2 - (y/b)^2} && \text{in } E_h, \end{aligned} \right\} \quad (4.18)$$

then it is clear that (4.16a,c,d,e) are satisfied by  $(X, Y)$ . So we have only to solve (4.18) to obtain the solution for any coefficient of friction and normal load. Also, we have only to consider a single value of  $G$ , further we can choose the unit of length arbitrarily, so that we have to consider only one contact area with the prescribed ratio of the axes. In accordance with this, we introduce new dimensionless parameters. We consider  $f'_x = F'_x / \mu N$ ,  $f'_y = F'_y / \mu N$ ,  $m'_z = M'_z / \mu Nc$ ,  $c = \sqrt{ab}$ , (see 3.50). Let  $F'_x$ ,  $F'_y$ , and  $M'_z$  be the total force and torsional couple connected with  $(X', Y')$ ; then

$$\left. \begin{aligned} f'_x = F'_x / \mu N &= \frac{3\mu N}{2\pi abG} \times \frac{F'_x}{\mu N} = \frac{3F'_x}{2\pi c^2 G}; \\ f'_y = F'_y / \mu N &= \frac{3\mu N}{2\pi abG} \times \frac{F'_y}{\mu N} = \frac{3F'_y}{2\pi c^2 G}; \\ m'_z = M'_z / \mu Nc &= \frac{3\mu N}{2\pi abG} \times \frac{M'_z}{\mu Nc} = \frac{3M'_z}{2\pi c^3 G}. \end{aligned} \right\} \quad (4.19)$$

We also introduce new dimensionless parameters for creepage and spin:

$$\left. \begin{aligned} \frac{1}{\rho} &= \frac{1}{4} \left( \frac{1}{R_x^+} + \frac{1}{R_x^-} + \frac{1}{R_y^+} + \frac{1}{R_y^-} \right), \text{ see (3.38);} \\ \xi &= \frac{u_x^{\rho}}{\mu c}, \quad \eta = \frac{u_y^{\rho}}{\mu c}, \quad \chi = \frac{\phi \rho}{\mu}, \quad c = \sqrt{ab}. \end{aligned} \right\} \quad (4.20)$$

We express  $\xi$ ,  $\eta$  and  $\chi$  in  $u'_x$ ,  $u'_y$ , and  $\phi'$  of (4.17b). We make use of (3.51):

$$\left. \begin{aligned} \xi &= \frac{u_x^{\rho}}{\mu c} = \frac{3N\mu}{2\pi abG} \frac{\rho}{\mu c} u'_x = \frac{2\sqrt{g}}{(1-\sigma)\underline{E}} u'_x, \quad \eta = \frac{2\sqrt{g}}{(1-\sigma)\underline{E}} u'_y, \\ \chi &= \frac{\phi \rho}{\mu} = \frac{2c\sqrt{g}}{(1-\sigma)\underline{E}} \phi' = \frac{2s}{(1-\sigma)\underline{E}} \phi', \quad s: \text{ minor semi-axis of } E. \end{aligned} \right\} \quad (4.21)$$

We observe that  $c\phi'$  and  $s\phi'$  are dimensionless.

In the following, we suppose that  $(X', Y')$  and  $(u', v')$  satisfy the boundary conditions (4.18). Let

$$X^{(2)} = -X', \quad Y^{(2)} = -Y', \quad (4.22a)$$

$$u_x^{(2)} = -u'_x, \quad u_y^{(2)} = -u'_y, \quad \phi^{(2)} = -\phi'. \quad (4.22b)$$

From (4.22a) it follows that the corresponding displacement differences  $u^{(2)}$  and  $v^{(2)}$  satisfy

$$u^{(2)} = -u', \quad v^{(2)} = -v', \quad (4.22c)$$

so that it follows from (4.22b) and (4.22c) that

$$s_x^{(2)} = -s_x, \quad s_y^{(2)} = -s_y \implies w_x^{(2)} = -w'_x, \quad w_y^{(2)} = -w'_y; \quad (4.22d)$$

hence the boundary conditions are satisfied by  $(X^{(2)}, Y^{(2)}, u^{(2)}, v^{(2)})$  with the creepage and spin of (4.22b). The areas of slip and adhesion are the same as in the solution  $(X', Y', u', v')$ , and we have that

$$\left. \begin{aligned} f_x &= f_x(-\xi, -\eta, -\chi) = -f_x(\xi, \eta, \chi), \\ f_y &= f_y(-\xi, -\eta, -\chi) = -f_y(\xi, \eta, \chi), \\ m_z &= m_z(-\xi, -\eta, -\chi) = -m_z(\xi, \eta, \chi). \end{aligned} \right\} \quad (4.22e)$$

Let

$$X^{(3)}(x, y) = -X'(x, -y), \quad Y^{(3)}(x, y) = Y'(x, -y). \quad (4.23a)$$

Then, according to (2.15a, b),

$$u^{(3)}(x, y) = -u'(x, -y), \quad v^{(3)}(x, y) = v'(x, -y). \quad (4.23b)$$

When

$$u_x^{(3)} = -u'_x, \quad u_y^{(3)} = u'_y, \quad \phi^{(3)} = \phi', \quad (4.23c)$$

it is easy to see that

$$s_x^{(3)}(x,y) = -s'_x(x,-y), \quad s_y^{(3)}(x,y) = s'_y(x,-y), \quad (4.23d)$$

so that

$$w_x^{(3)}(x,y) = -w'_x(x,-y), \quad w_y^{(3)}(x,y) = w'_y(x,-y). \quad (4.23e)$$

We conclude that  $(X^{(3)}, Y^{(3)}, u^{(3)}, v^{(3)})$  satisfy the boundary conditions (4.18), with areas of adhesion and slip which are the mirror images with respect to the x-axis of the  $E_h$  and  $E_g$  corresponding to  $(X', Y')$ . Moreover, it is easily verified from

$$(F_x, F_y) = \iint_E (X, Y) dx dy, \quad M_z = \iint_E (xY - yX) dx dy \quad (4.24)$$

that

$$f_x(\xi, \eta, \chi) = -f_x(-\xi, \eta, \chi), \quad f_y(\xi, \eta, \chi) = f_y(-\xi, \eta, \chi), \quad m_z(\xi, \eta, \chi) = m_z(-\xi, \eta, \chi). \quad (4.23f)$$

Let

$$X^{(4)}(x,-y) = X'(x,y), \quad Y^{(4)}(x,-y) = -Y'(x,y), \quad (4.25a)$$

$$u_x^{(4)} = u'_x, \quad u_y^{(4)} = -u'_y, \quad \phi^{(4)} = -\phi'. \quad (4.25b)$$

It follows from (2.15a,b) that the corresponding surface displacement differences

$$u^{(4)}(x,y) = u'(x,-y), \quad v^{(4)}(x,y) = -v'(x,-y), \quad (4.25c)$$

so that

$$s_x^{(4)}(x,y) = s'_x(x,-y), \quad s_y^{(4)}(x,y) = -s'_y(x,-y), \quad (4.25d)$$

$$\implies w_x^{(4)}(x,y) = w'_x(x,-y), \quad w_y^{(4)}(x,y) = -w'_y(x,-y), \quad (4.25e)$$

So the system  $(X^{(4)}, Y^{(4)}, u^{(4)}, v^{(4)})$  satisfies the boundary conditions (4.18) for the creepage and spin as given in (4.25b), and with locked area and slip area which are the mirror image with respect to the x-axis of the  $E_h$  and  $E_g$  corresponding to  $(X', Y', u', v')$ . Again it is readily verified from (4.25a) and (4.24) that



$$\left. \begin{aligned} f_x(\xi, \eta, \chi) &= f_x(\xi, -\eta, -\chi), \\ f_y(\xi, \eta, \chi) &= -f_y(\xi, -\eta, -\chi), \\ m_z(\xi, \eta, \chi) &= -m_z(\xi, -\eta, -\chi). \end{aligned} \right\} \quad (4.25f)$$

As a corollary of (4.23) we have

$$\left. \begin{aligned} \xi = 0 \implies X'(x, y) &= X^{(3)}(x, y) = -X'(x, -y), \\ Y'(x, y) &= Y^{(3)}(x, y) = Y'(x, -y), \\ s'_x(x, y) &= s^{(3)}(x, y) = -s'_x(x, -y), \\ s'_y(x, y) &= s^{(3)}(x, y) = s'_y(x, -y), \\ f'_x(0, \eta, \chi) &= 0, \\ E_h \text{ and } E_g &\text{ symmetric with respect} \\ &\text{to the x-axis.} \end{aligned} \right\} \quad (4.26)$$

We see from (4.26) that when  $\xi = 0$ , traction and slip are mirror antisymmetric about the x-axis.

As a corollary of (4.25) we have

$$\left. \begin{aligned} \eta = \chi = 0 \implies X'(x, y) &= X^{(4)}(x, y) = X'(x, -y), \\ Y'(x, y) &= Y^{(4)}(x, y) = -Y'(x, -y), \\ s'_x(x, y) &= s_x^{(4)}(x, y) = s_x^{(4)}(x, -y), \\ s'_y(x, y) &= s_y^{(4)}(x, y) = -s_y^{(4)}(x, -y), \\ f'_y(\xi, 0, 0) &= m_z(\xi, 0, 0) = 0, \\ E_h \text{ and } E_g &\text{ symmetric with respect} \\ &\text{to the x-axis.} \end{aligned} \right\} \quad (4.27)$$

We see from (4.27) that when  $\eta = \chi = 0$ , traction and slip are mirror symmetric about the x-axis.

We summarize (4.22e), (4.23f), and (4.25f):

$$\left. \begin{aligned} f_x(\xi, \eta, \chi) &= -f_x(-\xi, \eta, \chi) = f_x(\xi, -\eta, -\chi) = -f_x(-\xi, -\eta, -\chi), \\ f_y(\xi, \eta, \chi) &= f_y(-\xi, \eta, \chi) = -f_y(\xi, -\eta, -\chi) = -f_y(-\xi, -\eta, -\chi), \\ m_z(\xi, \eta, \chi) &= m_z(-\xi, \eta, \chi) = -m_z(\xi, -\eta, -\chi) = -m_z(-\xi, -\eta, -\chi). \end{aligned} \right\} \quad (4.28)$$

Finally, it should be observed that the method used here for symmetries about the x-axis cannot be used for symmetries about the

y-axis. To see this, one might propose the following relationship:

$$X^{(5)}(x,y) = -X'(-x,y), \quad Y^{(5)}(x,y) = Y^{(5)}(-x,y).$$

Then indeed

$$u^{(5)}(x,y) = -u'(-x,y), \quad v^{(5)}(x,y) = v'(-x,y),$$

but

$$\frac{\partial u^{(5)}(x,y)}{\partial x} = + \frac{\partial u'(-x,y)}{\partial x}, \quad \frac{\partial v^{(5)}(x,y)}{\partial x} = - \frac{\partial v'(-x,y)}{\partial x},$$

so that the signs of  $(s_x^{(5)}, s_y^{(5)})$  do not match those of  $(X^{(5)}, Y^{(5)})$ .

#### 4.3. The limiting case of infinitesimal creepage and spin.

When creepage and spin are absent, it follows from (4.15) that the relative slip  $(s_x, s_y)$  is given by

$$s_x = - \frac{1}{V} \frac{\partial u}{\partial t} + \frac{\partial u}{\partial x}, \quad s_y = - \frac{1}{V} \frac{\partial v}{\partial t} + \frac{\partial v}{\partial x}, \quad (4.29)$$

so that we can satisfy the adhesion condition  $s_x = s_y = 0$  (4.16e) throughout the contact area by setting  $u = v = 0$ , from which it follows that  $X = Y = 0$  (all in case of elastic symmetry). Therefore, the adhesion area covers the whole contact area and there is no slip.

As a consequence it is to be expected that when creepage and spin do not vanish but are very small, the adhesion area covers nearly the entire contact area. Accordingly it was proposed by DE PATER in 1957 to treat the case that creepage and spin are so small that the adhesion area can be approximated by the entire contact area. So, the boundary conditions (4.16) become

$$\text{Stresses and displacements vanish at infinity;} \quad (4.30a)$$

$$Z = 0 \quad \text{on} \quad z = 0, \quad \text{outside } E,$$

$$Z = G f_{00} \sqrt{1-(x/a)^2-(y/b)^2}, \quad f_{00} = \frac{3N}{2\pi abG} \quad \text{inside } E; \quad (4.30b)$$

$$X = Y = 0 \quad \text{on} \quad z = 0, \quad \text{outside } E; \quad (4.30c)$$

$$\left. \begin{aligned} s_x &\equiv v_x - \phi y - \frac{1}{V} \frac{\partial u}{\partial t} + \frac{\partial u}{\partial x} = 0, \\ s_y &\equiv v_y + \phi x - \frac{1}{V} \frac{\partial v}{\partial t} + \frac{\partial v}{\partial x} = 0. \end{aligned} \right\} \quad (4.30d)$$

Condition (4.30a) is satisfied if we use the integral representations (2.7) and (2.13) of BOUSSINESQ-CERRUTTI for the connection between

surface tractions and displacements. Conditions (4.30b) define the HERTZ problem which we treated in 3.221. We will consider only the case of steady rolling, so that  $\frac{\partial u}{\partial t} = \frac{\partial v}{\partial t} = 0$ , and (4.30d) becomes

$$s_x \equiv v_x - \phi y + \frac{\partial u}{\partial x} = 0, \quad s_y \equiv u_y + \phi x + \frac{\partial v}{\partial x} = 0 \quad \text{inside } E. \quad (4.30e)$$

We integrate (4.30e) with respect to  $x$ , to find  $u$  and  $v$ :

$$u = -v_x x + \phi xy + f(y), \quad v = -v_y x - \frac{1}{2} \phi x^2 + g(y) \quad \text{in } E, \quad (4.31)$$

where  $f(y)$  and  $g(y)$  are arbitrary, differentiable functions of  $y$ . In order to apply the theory of the load-displacement equations, which is based on the integral representation of BOUSSINESQ-CERRUTI, so that (4.30a) is satisfied, and in which the surface outside the ellipse  $E$  is free of traction (cond. (4.30c)), we approximate  $f(y)$  and  $g(y)$  by polynomials:

$$\left. \begin{aligned} u &= -v_x x + \phi xy + \sum_{n=0}^M a_{on} y^n, \\ v &= -v_y x - \frac{1}{2} \phi x^2 + \sum_{n=0}^M b_{on} y^n. \end{aligned} \right\} \quad \text{in } E \quad (4.32)$$

By increasing  $M$ , we can approximate  $f$  and  $g$  as closely as we like. The coefficients  $a_{on}$  and  $b_{on}$  are  $(2M+2)$  parameters which are still free. To  $(u,v)$  correspond the tangential tractions  $(X,Y)$  of the form

$$(X,Y) = \{1 - (x/a)^2 - (y/b)^2\}^{-\frac{1}{2}} \sum_{p=0}^M \sum_{q=0}^{M-p} (d_{pq}, e_{pq}) x^p y^q, \quad (4.33)$$

where the  $(d_{pq}, e_{pq})$  are uniquely determined by  $v_x, v_y, \phi$  and the  $(2M+2)$  parameters  $a_{on}$  and  $b_{on}$ . This means that we can assume  $(2M+2)$  relations between the  $(d_{pq}, e_{pq})$ .

In order to find these relations, we first attempt to bring  $X$  and  $Y$  in a form in which there is no singularity at the edge of the contact area:

$$(X,Y) = \{1 - (x/a)^2 - (y/b)^2\}^{+\frac{1}{2}} \sum_{p=0}^{M-2} \sum_{q=0}^{M-p-2} (d'_{pq}, e'_{pq}) x^p y^q, \quad (4.34)$$

and compare the number of coefficients in (4.33) and (4.34). In (4.33), there are  $(M+1)(M+2)$  coefficients, while (4.34) contains  $(M-1)M$  coefficients. In order that (4.33) can be brought into the form (4.34), there must exist  $(M+1)(M+2) - (M-1)M = 4M+2$  relations

between the coefficients of (4.33), which is about double the number of parameters  $(a_{on}, b_{on})$ . So it would seem to be impossible to bring (4.33) in the form (4.34).

Another argument which points in the same direction is the following. Let us suppose that POISSON'S ratio  $\sigma = 0$ . Then, according to (2.15a,b),

$$u(x,y) = \frac{1}{\pi G} \iint_E X(x',y') \frac{dx'dy'}{R}, \quad v(x,y) = \frac{1}{\pi G} \iint_E Y(x',y') \frac{dx'dy'}{R},$$

$$R = \sqrt{(x-x')^2 + (y-y')^2}.$$

It is easy to see that when  $X$  is even in  $x$ ,  $u$  will be even in  $x$ . For,

$$\begin{aligned} u(-x,y) &= \frac{1}{\pi G} \int_{-b}^b dy' \int_{-a\sqrt{1-(y'/b)^2}}^{a\sqrt{1-(y'/b)^2}} \frac{X(x',y') dx'dy'}{\sqrt{(x+x')^2 + (y-y')^2}} \\ &= \frac{1}{\pi G} \int_{-b}^b dy' \int_{-a\sqrt{1-(y'/b)^2}}^{a\sqrt{1-(y'/b)^2}} \frac{X(-x',y') dx'dy'}{\sqrt{(x-x')^2 + (y-y')^2}} \\ &= \frac{1}{\pi G} \iint_E \frac{X(x',y') dx'dy'}{R} = u(x,y). \end{aligned}$$

The converse, viz. that to an  $u$  which is even in  $x$  corresponds an  $X$  which is also even in  $x$ , follows from the (assumed) uniqueness. In the same way it can be shown that to an  $u$  which is odd in  $x$  corresponds an  $X$  which is odd in  $x$ . Now,  $u = -v_x$  is odd in  $x$ , and it is a polynomial, so it gives rise to an  $X$  which is odd in  $x$  and which has a singularity on the edge of the contact area, the strength of which is an odd function of  $x$ .  $u = f(y)$  gives rise to an  $X$  with a singularity (if any) which is even in  $x$ . So these singularities can never cancel each other. The same holds for  $v = -v_y$  and for  $u = \phi xy$ . Finally, the singularities due to  $u = -v_x$  and to  $u = \phi xy$  cannot cancel each other, since the former is even in  $y$  and the latter is odd in  $y$ . The conclusion is that there will be a singularity in  $(X,Y)$  at the edge of the contact area when  $\sigma = 0$ , and hence there is a strong presumption that the same happens when  $\sigma \neq 0$ .

The two arguments above point to two things: firstly, that it is impossible to have no area of slip whenever there is creepage and/or spin, and secondly, that if we assume as an approximation that there is no area of slip, we must accept a solution with an infinite traction at the edge of the contact area.

The first conclusion has a simple physical explanation. It is that there is a rate of dissipation connected with creepage and spin, of magnitude  $(F_x^u + F_y^u + M_z \phi)V$ , where  $(F_x, F_y)$  is the resultant tangential force and  $M_z$  is the resulting torsional couple about the z-axis, transmitted at the contact area. Since the elastic field is conservative, and the absence of an area of slip means that there is no dissipation by friction, the hypothesis that there is no area of slip leads to a contradiction.

As to the second conclusion we observe that there is also a rate of dissipation connected with the solution in which there is a stress singularity at the edge, and no slip in the contact area. This constitutes a paradox. It was pointed out by JOHNSON [3], pg. 797, that a comparable paradox occurs in aerofoil theory.

So we have found that the surface traction goes to infinity at the edge of the contact area. On the other hand, we still have the  $(2M+2)$  parameters  $a_{on}$  and  $b_{on}$ , and the only boundary condition which we did not use is COULOMB's friction law. The conclusion is that the parameters  $a_{on}$  and  $b_{on}$  must be determined by an application of the friction law, interpreted to fit our problem.

The friction law states in the first place that the tangential traction  $|(X,Y)|$  may not exceed a finite multiple of the normal pressure  $Z$ :  $|(X,Y)| \leq \mu Z$ . This part of the friction law is violated near the edge of the contact area, if the traction goes to infinity there. So it is plausible to suppose that an infinite traction at a point should be interpreted as an indication that it belongs to the area of slip. We will show in 4.31 that the slip area does not border on the leading edge of the contact area in our approximation. Hence we must have that the strength of the singularity  $(X^e, Y^e)$  vanishes at the leading edge:

$$\left. \begin{aligned} (X^e, Y^e) &= 0 \text{ on leading edge of } E, \\ (X^e, Y^e) &= \lim_{(x,y) \rightarrow \text{edge from inside}} (X,Y) \sqrt{1-(x/a)^2-(y/b)^2} \end{aligned} \right\} (4.35)$$

The question arises whether this last condition indeed suffices to remove the undeterminateness of the boundary conditions (4.30). In the case of a circular contact area and vanishing POISSON's ratio

we succeeded in determining the solution in terms of an infinite series of spheroidal harmonics, the coefficients of which were stated explicitly (see KALKER [1], p. 171, eq. (8.10)). It was found that the problem is indeed completely determined by the conditions (4.30) and (4.35). Although this does not constitute a proof, there is a strong presumption that the conditions (4.30) and (4.35) indeed completely define the more general problem ( $\sigma \neq 0$ , elliptical contact area) we have here.

In the case of a finite number of the parameters  $a_{on}, b_{on}$ , it is impossible to satisfy (4.35). We then approximate (4.35) by the demand that  $(a_{on}, b_{on})$  are chosen so as to minimize the integral

$$\left. \begin{aligned} \int_{-\pi/2}^{\pi/2} \{(X^e)^2 + (Y^e)^2\} d\psi = \text{minimal, } x = a \cos \psi, y = b \sin \psi; \\ (X^e, Y^e) \text{ given by (4.35).} \end{aligned} \right\} (4.36)$$

Since  $(X^e, Y^e)$  depend linearly on the parameters  $(a_{on}, b_{on})$ , condition (4.36) furnishes us with the following  $(2M+2)$  linear equations in the  $(2M+2)$  unknowns  $(a_{on}, b_{on})$ :

$$\left. \begin{aligned} \int_{-\pi/2}^{\pi/2} \left\{ X^e \frac{\partial X^e}{\partial a_{on}} + \frac{\partial Y^e}{\partial a_{on}} \right\} d\psi = \int_{-\pi/2}^{\pi/2} \left\{ X^e \frac{\partial X^e}{\partial b_{on}} + Y^e \frac{\partial Y^e}{\partial b_{on}} \right\} d\psi = 0, n=0, \dots, M, \\ X^e, Y^e: \text{ linearly dependent on } (a_{on}, b_{on}), \\ \frac{\partial X^e}{\partial a_n}, \dots, \dots, \dots \text{ independent of } (a_{on}, b_{on}). \end{aligned} \right\} (4.37)$$

#### 4.31. Proof that no slip takes place at the leading edge, when creepage and spin are infinitesimal.

As we pointed out in 4.3, an infinite traction at a point of the edge on the contact area means that this point belongs to the slip area  $E_g$ . COULOMB's law also states that the slip is in the same direction as the tangential traction. To obtain an insight into the slip at the traction singularity, we determine the limiting behaviour of  $s_x$  and  $s_y$  as we approach the edge of the contact area from the outside since  $s_x = s_y = 0$  inside the contact area.

We can express the slip in the traction by means of (2.16):

$$\left. \begin{aligned}
 s_x(x',y') &= v_x - \phi y' + \\
 &+ \frac{1}{\pi G} \frac{\partial}{\partial x'} \iint_E [X(x,y) \left\{ \frac{1-\sigma}{R} + \frac{\sigma(x-x')^2}{R^3} \right\} + Y(x,y) \frac{\sigma(x-x')(y-y')}{R^3}] dx dy, \\
 s_y(x',y') &= v_y + \phi x' + \\
 &+ \frac{1}{\pi G} \frac{\partial}{\partial x'} \iint_E [Y(x,y) \left\{ \frac{1-\sigma}{R} + \frac{\sigma(y-y')^2}{R^3} \right\} + X(x,y) \frac{\sigma(x-x')(y-y')}{R^3}] dx dy \\
 R &= \sqrt{(x-x')^2 + (y-y')^2}, \quad E: \text{ contact area.}
 \end{aligned} \right\} (4.38)$$

Since  $(x',y')$  lies outside the contact area, we may interchange differentiation with respect to  $x'$  and integration:

$$\left. \begin{aligned}
 s_x(x',y') &= v_x - \phi y' + \\
 &+ \frac{1}{\pi G} \iint_E [X(x,y) \left\{ \frac{(1-3\sigma)(x-x')}{R^3} + \frac{3\sigma(x-x')^3}{R^5} \right\} + \\
 &\quad + \sigma Y(x,y) \left\{ -\frac{y-y'}{R^3} + \frac{3(x-x')^2(y-y')}{R^5} \right\}] dx dy, \\
 s_y(x',y') &= v_y + \phi x' + \\
 &+ \frac{1}{\pi G} \iint_E [Y(x,y) \left\{ \frac{(1-\sigma)(x-x')}{R^3} + \frac{3\sigma(x-x')(y-y')^2}{R^5} \right\} + \\
 &\quad + \sigma X(x,y) \left\{ -\frac{y-y'}{R^3} + \frac{3(x-x')^2(y-y')}{R^5} \right\}] dx dy
 \end{aligned} \right\} (4.39)$$

We assume that the tangential traction has an inverse square root behaviour at the edge of the contact area,

$$\left. \begin{aligned}
 X(x,y) &= X'(x,y) \{ 1 - (x/a)^2 - (y/b)^2 \}^{-\frac{1}{2}}, \\
 Y(x,y) &= Y'(x,y) \{ 1 - (x/a)^2 - (y/b)^2 \}^{-\frac{1}{2}},
 \end{aligned} \right\} (4.40)$$

where  $X'(x,y)$  and  $Y'(x,y)$  are continuously differentiable functions. Now it will be shown later in this section that when the distance  $u'$  of  $(x',y')$  to  $E$  approaches zero, see fig. 7, then the relative slip is given by

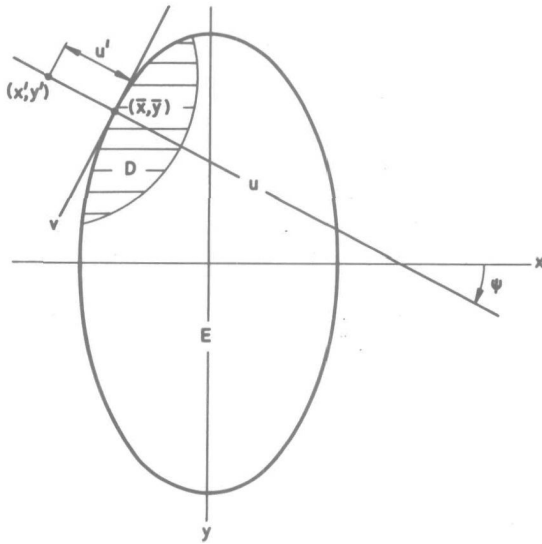


Fig. 7. The contact area with the  $u, v$ -axes.

$$\left. \begin{aligned}
 s_x(x', y') &= \cos\psi \left\{ \frac{2X'(\bar{x}, \bar{y})}{GB\sqrt{u'}} (1 - \sigma \cos^2\psi) - \frac{2\sigma Y'(\bar{x}, \bar{y})}{GB\sqrt{u'}} \cos\psi \sin\psi \right\} + O(1) \\
 s_y(x', y') &= \cos\psi \left\{ \frac{2Y'(\bar{x}, \bar{y})}{GB\sqrt{u'}} (1 - \sigma \sin^2\psi) - \frac{2\sigma X'(\bar{x}, \bar{y})}{GB\sqrt{u'}} \cos\psi \sin\psi \right\} + O(1)
 \end{aligned} \right\} (4.41)$$

$u'$ : distance of  $(x', y')$  to  $E$ ,  $B = \sqrt{2} \sqrt{(x'/a^2)^2 + (y'/b^2)^2}$ ,  
 $\psi$ : angle between pos.  $x$ -axis and inner normal on edge of  $E$   
 which passes through  $(x', y')$ ;  
 $(\bar{x}, \bar{y})$ : intersection of this normal with the ellipse;  
 $O(1)$ : any bounded function.

When POISSON's ratio  $\sigma=0$ ,  $s_x$  and  $s_y$  become

$$\left. \begin{aligned}
 s_x(x', y') &= \frac{2X'(\bar{x}, \bar{y})}{GB\sqrt{u'}} \cos\psi + O(1), \\
 s_y(x', y') &= \frac{2Y'(\bar{x}, \bar{y})}{GB\sqrt{u'}} \cos\psi + O(1),
 \end{aligned} \right\} (4.42)$$

from which we see that the vector  $(s_x, s_y)$  is parallel to the tangential traction  $(X, Y)$  as  $u' \neq 0$ , when, at any rate,  $(X', Y') \neq (0, 0)$  or, in other terms, when the traction goes to infinity at the edge. The vector has the same sense as  $(X', Y')$  when  $\cos\psi > 0$ , and the opposite sense when  $\cos\psi < 0$ . It is easy to see from fig. 7 that  $\cos\psi > 0$  when  $(x', y')$  approaches the trailing edge  $x < 0$ , and that



$\cos\psi < 0$  when  $(x', y')$  approaches the leading edge  $x > 0$ . It is thus plausible to suppose that at the leading edge the slip would be opposite to the tangential traction, if the traction goes to infinity there; according to the friction law, this should not happen, and therefore the traction singularity should be removed from the leading edge.

When POISSON'S ratio  $\sigma \neq 0$ , the slip and the tangential traction are not precisely parallel, but we can show that at the leading edge they are almost opposite, and at the trailing edge almost in the same sense. In order to show this, we calculate the angle  $\theta$  between slip and traction from (4.41). After some calculation we obtain:

$$\cos\theta = \frac{Xs'_x + Ys'_y}{|(X, Y)| |(s'_x, s'_y)|} = \frac{\{X^2 + Y^2 - \sigma(X\cos\psi + Y\sin\psi)^2\} \text{sign}(\cos\psi)}{\sqrt{X^2 + Y^2} \sqrt{X^2 + Y^2 - \sigma(2 - \sigma)(X\cos\psi + Y\sin\psi)^2}} \quad (4.43)$$

where we dropped the prime of  $X'$  and  $Y'$ . We denote by  $D$  the ratio

$$D = (X\cos\psi + Y\sin\psi)^2 / (X^2 + Y^2). \quad (4.44a)$$

Since  $(X\cos\psi + Y\sin\psi)$  is the component of  $(X, Y)$  in the direction  $(\cos\psi, \sin\psi)$ ,

$$0 \leq D \leq 1. \quad (4.44b)$$

In this notation,  $\cos\theta$  becomes

$$\cos\theta = \frac{(1 - \sigma D) \text{sign}(\cos\psi)}{\sqrt{1 - \sigma(2 - \sigma)D}}. \quad (4.45)$$

It can be shown without difficulty that the absolute value  $|\cos\theta|$  reaches a maximum of 1 when  $D=0$  or  $D=1$ , and a minimum of  $\frac{2\sqrt{1-\sigma}}{2-\sigma}$  when  $D = \frac{1}{2-\sigma}$ . When  $\sigma=0$ , the minimum equals unity as we knew already. When  $\sigma = \frac{1}{4}$ , the minimum is 0.987, corresponding to an angle of  $9^\circ$ ; when  $\sigma = \frac{1}{2}$ , the minimum is 0.941, corresponding to an angle of  $20^\circ$ . As a consequence of this and of the presence of  $\text{sign}(\cos\psi)$  in the expression for  $\cos\theta$ , we have that on the leading edge the angle  $\theta$  is nearly  $180^\circ$ , and on the trailing edge it is nearly zero. Numerically we have:

$$\left. \begin{array}{l} \text{at the leading edge: } 180^\circ - \theta_m \leq \theta \leq 180^\circ + \theta_m, \\ \text{at the trailing edge: } -\theta_m \leq \theta \leq \theta_m, \\ \theta_m = 0 \text{ for } \sigma = 0; \theta_m = 9^\circ \text{ for } \sigma = \frac{1}{4}; \theta_m = 20^\circ \text{ for } \sigma = \frac{1}{2}. \end{array} \right\} (4.46)$$

The conclusion is again that the traction singularity should be

removed from the leading edge of the contact area.

In the remainder of this section we will establish (4.41). We see from (4.39) and (4.41) that this task consists in calculating the part that behaves as  $1/\sqrt{u'}$  (see fig. 7 and (4.41)) as the distance  $u'$  from  $(x', y')$  to  $E$  goes down to zero, of integrals of the following type:

$$I(x', y') = \iint_E \frac{f(x, y)(x-x')^m(y-y')^n}{R^{m+n+2}\sqrt{1-(x/a)^2-(y/b)^2}} dx dy, \quad \begin{array}{l} R: \text{ see (2.9),} \\ E: \text{ see (1.5a),} \end{array} \quad (4.47)$$

where  $f(x, y)$  is a continuously differentiable function, and  $(x', y')$  is a point outside the elliptic area  $E$ . We shall show that  $|I(x', y')| \rightarrow \infty$  as  $(x', y')$  approaches the elliptic area  $E$ , and we shall calculate the singular part of  $I$ .

In our coordinate system, we take the minor semi-axis of  $E$  as the unit of length. From  $(x', y')$  we drop a normal on the ellipse, see fig. 7; the point of intersection is  $(\bar{x}, \bar{y})$ . It is clear that the contribution to the integral of the domain of integration outside a neighbourhood of  $(x', y')$  with radius  $\delta$  is bounded. We denote by  $D$  this neighbourhood in so far it intersects with the elliptic area  $E$ .  $D$  is shown shaded in fig. 7. We also denote a bounded function by  $O(1)$ . So we obtain

$$I(x', y') = \iint_D \frac{f(x, y)(x-x')^m(y-y')^n}{R^{m+n+2}\sqrt{1-(x/a)^2-(y/b)^2}} dx dy + O(1). \quad (4.48)$$

We introduce the cartesian coordinate system  $(u, v)$  into this integral, which has  $(\bar{x}, \bar{y})$  as origin, and the positive  $u$ -axis of which coincides with the inner normal to the ellipse at  $(\bar{x}, \bar{y})$ , see fig. 7. Let  $\psi$  be the angle between the positive  $x$ -axis and the positive  $u$ -axis. Then:

$$\left. \begin{array}{l} x-\bar{x} = u\cos\psi - v\sin\psi, \quad y-\bar{y} = u\sin\psi + v\cos\psi; \\ \text{the point } (x', y') \text{ has in the } (u, v) \text{ coordinate system} \\ \quad \text{the coordinates } (-u', 0); \\ u' \text{ is the distance from } (x', y') \text{ to } E, \quad u' > 0; \\ x-x' = (u+u')\cos\psi - v\sin\psi, \quad y-y' = (u+u')\sin\psi + v\cos\psi; \\ R^2 = (u+u')^2 + v^2; \quad dx dy = du dv; \\ f(x, y) = f(\bar{x}, \bar{y}) + O(\sqrt{u^2+v^2}) = f(\bar{x}, \bar{y}) + O(\sqrt{[u+u']^2+v^2}). \end{array} \right\} \quad (4.49)$$

Also, since  $(\bar{x}, \bar{y})$  lies on the ellipse,

$$1 - (x/a)^2 - (y/b)^2 = \frac{\bar{x}^2 - x^2}{a^2} + \frac{\bar{y}^2 - y^2}{b^2} = \frac{(\bar{x} - x)\{2\bar{x} - (\bar{x} - x)\}}{a^2} + \frac{(\bar{y} - y)\{2\bar{y} - (\bar{y} - y)\}}{b^2} = \left. \begin{aligned} &= -\left(\frac{2\bar{x}\cos\psi}{a^2} + \frac{2\bar{y}\sin\psi}{b^2}\right)u - \left(-\frac{2\bar{x}\sin\psi}{a^2} + \frac{2\bar{y}\cos\psi}{b^2}\right)v + h'(u, v), \end{aligned} \right\} \quad (4.50)$$

where  $h'(u, v)$  is a homogeneous quadratic form in  $(u, v)$ . So,

$$h'(u, v) = 0(u^2 + v^2) = 0((u+u')^2 + v^2) = 0(R^2) \text{ in } D, \quad (4.51)$$

where we made use of the fact that  $u' > 0$ , and that  $u > 0$  in  $D$ . Also we have that the coefficient of  $v$  vanishes in (4.50), since the ellipse is tangent to the  $v$ -axis. That means according to (4.50), that

$$\left. \begin{aligned} \frac{2\bar{x}}{a^2} &= \alpha \cos\psi, \quad \frac{2\bar{y}}{b^2} = \alpha \sin\psi, \quad \alpha = \pm 2 \sqrt{\frac{\frac{x^2}{a^4} + \frac{y^2}{b^4}}{1+O(R)}}, \\ B &= \sqrt{2} \sqrt{\left(\frac{x'}{a^2}\right)^2 + \left(\frac{y'}{b^2}\right)^2}, \end{aligned} \right\} \quad (4.52)$$

so that (4.50) becomes

$$\left. \begin{aligned} 1 - (x/a)^2 - (y/b)^2 &= B^2\{u+h(u, v)\}(1+O(R)), \\ \text{with } h'(u, v) &= B^2(1+O(R))h(u, v) = 0(R^2). \end{aligned} \right\} \quad (4.53)$$

In (4.53) we chose the negative sign for  $\alpha$ , since a point  $(x, y)$  with  $v=0$ ,  $0 < u < 1$  lies inside the ellipse, so that  $1 - (x/a)^2 - (y/b)^2 > 0$ .

The integral (4.43) becomes with (4.49) and (4.53):

$$I(x', y') = \iint_D \frac{\{f(\bar{x}, \bar{y}) + 0(R)\} \{(u+u')\cos\psi - v\sin\psi\}^m \{(u+u')\sin\psi + v\cos\psi\}^n}{B(1+O(R)) \sqrt{u+h(u, v)} R^{m+n+2}} dudv + 0(1). \quad (4.54)$$

Again we introduce a new coordinate system into this integral:

$$w = u+h(u, v), \quad v = v; \quad (4.55)$$

we denote

$$\left. \begin{aligned} r^2 &= (w+u')^2 + v^2; \text{ then, } h(u, v) = 0(r^2), \quad R^2 = r^2(1+O(r)); \\ dudv &= \{1+O(r)\} dw dv; \\ (u+u')\cos\psi - v\sin\psi &= \{(w+u')\cos\psi - v\sin\psi\}(1+O(r)), \\ (u+u')\sin\psi + v\cos\psi &= \{(w+u')\sin\psi + v\cos\psi\}(1+O(r)), \\ \text{all in } D. \end{aligned} \right\} \quad (4.56)$$

The integral becomes

$$\begin{aligned}
 I(x', y') &= \iint_D \frac{f(\bar{x}, \bar{y}) + 0(r) \{(w+u') \cos \psi - v \sin \psi\}^m}{B\sqrt{w} r^{m+n+2}} \times \\
 &\quad \times \{(w+u') \sin \psi + v \cos \psi\}^n \{1 + 0(r)\} dv dw + 0(1), \\
 &= I'(x', y') + 0(1), \\
 I'(x', y') &= \iint_D \frac{f(\bar{x}, \bar{y}) \{(w+u') \cos \psi - v \sin \psi\}^m \{(w+u') \sin \psi + v \cos \psi\}^n}{B\sqrt{w} r^{m+n+2}} dv dw,
 \end{aligned} \tag{4.57}$$

since  $\iint_D r^{m+n+1}/r^{m+n+2} dv dw = 0(1)$ .

We observe that the domain of integration  $D$  lies in the half-plane  $w \geq 0$ . For  $u' \geq 0$ , the domain outside  $D$ , in so far as it lies in the half-plane  $w \geq 0$ , gives a finite contribution to the integral. So we can extend the integration to the whole half-plane  $w \geq 0$ :

$$\begin{aligned}
 I(x', y') &= \\
 &= \int_0^\infty \frac{f(\bar{x}, \bar{y})}{B\sqrt{w}} dw \int_{-\infty}^\infty \frac{\{(w+u') \cos \psi - v \sin \psi\}^m \{(w+u') \sin \psi + v \cos \psi\}^n}{r^{m+n+2}} dv + 0(1)
 \end{aligned} \tag{4.58}$$

We evaluate  $\{(w+u') \cos \psi - v \sin \psi\}^m \{(w+u') \sin \psi + v \cos \psi\}^n$  by means of the binomial theorem. A typical integral is then

$$I(x', y', k, \ell) = \frac{f(\bar{x}, \bar{y})}{B} \int_0^\infty \frac{dw}{\sqrt{w}} \int_{-\infty}^\infty \frac{(w+u')^k v^\ell dv}{\{(w+u')^2 + v^2\}^{k/2 + \ell/2 + 1}}. \tag{4.59}$$

By symmetry, this integral vanishes when  $\ell$  is odd. When  $\ell$  is even, we use the substitution

$$v = (w+u') \tan \theta, \quad dv = \frac{w+u'}{\cos^2 \theta} d\theta. \tag{4.60}$$

This gives

$$\begin{aligned}
 I(x', y', k, \ell) &= \frac{f(\bar{x}, \bar{y})}{B} \int_0^\infty \frac{dw}{(w+u')\sqrt{w}} \int_{-\pi/2}^{\pi/2} \sin^\ell \theta \cos^k \theta d\theta = \\
 &= \frac{\pi f(\bar{x}, \bar{y})}{B\sqrt{u'}} \frac{\Gamma\left(\frac{k+1}{2}\right) \Gamma\left(\frac{\ell+1}{2}\right)}{\Gamma\left(\frac{k+\ell+2}{2}\right)} \text{ when } \ell \text{ is even,} \\
 &= 0 \text{ when } \ell = \text{odd.}
 \end{aligned} \tag{4.61}$$

So as a final result from (4.58), (4.59) and (4.61) we obtain:

$$\begin{aligned}
 I(x', y') &= \iint_E \frac{f(x, y)(x-x')^m (y-y')^n}{R^{m+n+2} \sqrt{1-(x/a)^2 - (y/b)^2}} dx dy = \\
 &= \frac{\pi f(\bar{x}, \bar{y})}{2B\sqrt{u'}} \left\{ \sum_{i=0}^m \sum_{j=0}^n [(-1)^i + (-1)^j] \binom{m}{i} \binom{n}{j} \frac{\Gamma\left(\frac{m+n-i-j+1}{2}\right) \Gamma\left(\frac{i+j+1}{2}\right)}{\Gamma\left(\frac{m+n+2}{2}\right)} \times \right. \\
 &\quad \left. \times \cos^{m+j-i} \psi \sin^{n+i-j} \psi \right\} + O(1), \\
 B &= \sqrt{2} \sqrt[4]{(x'/a^2)^2 + (y'/b^2)^2}, \\
 \bar{x}, \bar{y}, u' \text{ and } \psi, &\text{ see fig. 7.}
 \end{aligned} \tag{4.62}$$

The expression (4.41) follows from (4.39) and from (4.62) after a straightforward, but somewhat laborious calculation, which we omit here.

#### 4.32. Solution of the problem.

When we use the theory of the load-displacement equations, the boundary conditions (4.30a,c) are automatically satisfied, and the only boundary conditions left are (4.32) and (4.36).

We define

$$(X', Y') = \sum_{p=0}^M \sum_{q=0}^{M-p} (d_{pq}, e_{pq}) x^p y^q, \tag{4.63}$$

where the coefficients  $d_{pq}, e_{pq}$  depend uniquely on  $u_x, u_y, \phi, a_{on}, b_{on}$  through the load-displacement equations (2.56), where we have, according to (4.32) in terms of the constants  $(a_{mn}, b_{mn})$  of (2.32):

$$\left. \begin{aligned}
 a_{10} &= -u_x, \quad a_{11} = \phi, \quad a_{mn} = 0 \text{ otherwise, unless } m = 0; \\
 b_{10} &= -u_y, \quad b_{20} = -\frac{1}{2}\phi, \quad b_{mn} = 0 \text{ otherwise, unless } m = 0.
 \end{aligned} \right\} \tag{4.64}$$

X and Y are given by

$$(X, Y) = G \sqrt{1-(x/a)^2 - (y/b)^2}^{-1} (X', Y'), \tag{4.65}$$

so that according to the definition (4.35)

$$(X^e, Y^e) = G \lim_{x, y \rightarrow \text{edge}} (X', Y'). \tag{4.66}$$

According to the remarks made after (2.56),  $(a_{2m+\epsilon}, 2n+\omega, b_{2m+\epsilon'}, 2n+\omega')$  on the one hand, and  $(d_{2p+\epsilon}, 2q+\omega, e_{2p+\epsilon'}, 2q+\omega')$  on

the other hand belong to a closed system of equations for each of the four possible choices of  $(\epsilon, \omega)$ . If we set  $M=2K+1$ , for instance, and

$$\left. \begin{aligned}
 X_j^0 &= (1, x^2, y^2, x^4, x^2y^2, y^4, \dots, y^{2K}) \\
 X_j^1 &= x(1, x^2, y^2, x^4, x^2y^2, y^4, \dots, y^{2K}) \\
 X_j^2 &= y(1, x^2, y^2, x^4, x^2y^2, y^4, \dots, y^{2K}) \\
 X_j^3 &= xy(1, x^2, y^2, x^4, x^2y^2, y^4, \dots, y^{2K-2}), \\
 X_j^0 &= (d_{00}, d_{20}, d_{02}, d_{40}, d_{22}, d_{04}, \dots, d_{0,2K}) \\
 X_j^1 &= (d_{10}, d_{30}, d_{12}, d_{50}, d_{32}, \dots, d_{1,2K}) \\
 X_j^2 &= (d_{01}, d_{21}, d_{03}, d_{41}, d_{23}, \dots, d_{0,2K+1}), \\
 X_j^3 &= (d_{11}, d_{31}, d_{13}, d_{51}, \dots, d_{1,2K-1}), \\
 Y_j^i &\text{ as } X_j^i, \text{ with } e_{pq} \text{ instead of } d_{pq}, \\
 u_j^i &\text{ as } X_j^i, \text{ with } a_{mn} \text{ instead of } d_{pq}, \\
 v_j^i &\text{ as } X_j^i, \text{ with } b_{mn} \text{ instead of } d_{pq},
 \end{aligned} \right\} \quad (4.67)$$

then, if we sum over repeated indices,

$$X' = X_j^i x_j^i, \quad Y' = Y_j^i x_j^i, \quad u = u_j^i x_j^i, \quad v = v_j^i x_j^i. \quad (4.68)$$

We can write the load-displacement equations (2.56) as

$$\begin{bmatrix} u_j^i \\ v_j^{3-i} \end{bmatrix} = (A_{j\ell}^i) \begin{bmatrix} X_\ell^i \\ Y_\ell^{3-i} \end{bmatrix}, \quad \text{no sum over } i; \quad i = 0, 1, 2, 3. \quad (4.69)$$

The matrices  $A_{j\ell}^i$  are square and have a non-vanishing determinant, so that we can invert them:

$$\begin{bmatrix} X_j^i \\ Y_j^{3-i} \end{bmatrix} = (A_{j\ell}^i)^{-1} \begin{bmatrix} u_\ell^i \\ v_\ell^{3-i} \end{bmatrix}. \quad (4.70)$$

According to (4.64), a great number of the  $u_j^i$  and  $v_j^i$  are zero, so that we can drop a number of columns of  $(A_{j\ell}^i)^{-1}$ , and we can write

$$\left. \begin{aligned}
 X_j^0 &= B_{j,2n}^0 a_{0,2n} & (i=0 \text{ i.e. } \epsilon=\omega=0), \\
 X_j^1 &= \tilde{C}_{j,2n+1}^2 b_{0,2n+1} + D_j^1 v_x, & (i=1, \text{ i.e. } \epsilon=1, \omega=0), \\
 X_j^2 &= B_{j,2n+1}^2 a_{0,2n+1} + \tilde{E}_j^1 v_y, & (i=2, \text{ i.e. } \epsilon=0, \omega=1), \\
 X_j^3 &= \tilde{C}_{j,2n}^0 b_{0,2n} + F_j^3 \phi, & (i=3, \text{ i.e. } \epsilon=\omega=1). \\
 Y_j^3 &= \tilde{B}_{j,2n}^0 a_{0,2n} & (i=0 \text{ i.e. } \epsilon=\omega=0), \\
 Y_j^2 &= C_{j,2n+1}^2 b_{0,2n+1} + \tilde{D}_j^1 v_x, & (i=1, \text{ i.e. } \epsilon=1, \omega=0), \\
 Y_j^1 &= \tilde{B}_{j,2n+1}^2 a_{0,2n+1} + \tilde{E}_j^1 v_y, & (i=2, \text{ i.e. } \epsilon=0, \omega=1), \\
 Y_j^0 &= C_{j,2n}^0 b_{0,2n} + \tilde{F}_j^3 \phi, & (i=3, \text{ i.e. } \epsilon=\omega=1).
 \end{aligned} \right\} (4.71)$$

The quantities with the superscript  $\sim$  vanish when  $\sigma=0$ , except  $\tilde{F}_j^3$ .

This gives for  $(X', Y')$ :

$$\left. \begin{aligned}
 X' &= x_j^0 B_{j,2n}^0 a_{0,2n} + x_j^1 \{ \tilde{C}_{j,2n+1}^2 b_{0,2n+1} + D_j^1 v_x \} + \\
 &+ x_j^2 \{ B_{j,2n+1}^2 a_{0,2n+1} + \tilde{E}_j^1 v_y \} + x_j^3 \{ \tilde{C}_{j,2n}^0 b_{0,2n} + F_j^3 \phi \}, \\
 Y' &= x_j^3 \tilde{B}_{j,2n}^0 a_{0,2n} + x_j^2 \{ C_{j,2n+1}^2 b_{0,2n+1} + \tilde{D}_j^1 v_x \} + \\
 &+ x_j^1 \{ \tilde{B}_{j,2n+1}^2 a_{0,2n+1} + \tilde{E}_j^1 v_y \} + x_j^0 \{ C_{j,2n}^0 b_{0,2n} + \tilde{F}_j^3 \phi \}.
 \end{aligned} \right\} (4.72)$$

We can split  $X'$  and  $Y'$  in a part  $X_+, Y_+$ , even in  $y$  and a part  $X_-, Y_-$ , odd in  $y$ .

$$\left. \begin{aligned}
 \omega=0: X_+ &= x_j^0 B_{j,2n}^0 a_{0,2n} + x_j^1 \{ \tilde{C}_{j,2n+1}^2 b_{0,2n+1} + D_j^1 v_x \}, \\
 Y_- &= x_j^3 \tilde{B}_{j,2n}^0 a_{0,2n} + x_j^2 \{ C_{j,2n+1}^2 b_{0,2n+1} + \tilde{D}_j^1 v_x \},
 \end{aligned} \right\} (4.73a)$$

$$\left. \begin{aligned}
 \omega=1: X_- &= x_j^2 \{ B_{j,2n+1}^2 a_{0,2n+1} + \tilde{E}_j^1 v_y \} + x_j^3 \{ \tilde{C}_{j,2n}^0 b_{0,2n} + F_j^3 \phi \}, \\
 Y_+ &= x_j^1 \{ \tilde{B}_{j,2n+1}^2 a_{0,2n+1} + \tilde{E}_j^1 v_y \} + x_j^0 \{ C_{j,2n}^0 b_{0,2n} + \tilde{F}_j^3 \phi \}
 \end{aligned} \right\} (4.73b)$$

$$X' = X_- + X_+, \quad Y' = Y_- + Y_+. \quad X_+(-y) = X_+(y), \quad X_-(-y) = -X_-(y). \quad (4.73c)$$

We enter (4.73c) into the compensation condition (4.36):

$$\left. \begin{aligned}
 &\int_{-\pi/2}^{\pi/2} \{ (X_+ + X_-)^2 + (Y_+ + Y_-)^2 \}_{\text{edge}} d\psi = \\
 &= \int_{-\pi/2}^{\pi/2} \{ X_+^2 + Y_-^2 \}_{\text{edge}} d\psi + \int_{-\pi/2}^{\pi/2} \{ X_-^2 + Y_+^2 \}_{\text{edge}} d\psi = \text{minimal.}
 \end{aligned} \right\} (4.74)$$

We see from (4.73a) that  $\{X_+^2 + Y_-^2\}$  depends only on  $v_x$ ,  $a_{0,2n}$  and  $b_{0,2n+1}$ , and that  $\{X_-^2 + Y_+^2\}$  depends only on  $v_y$ ,  $\phi$ ,  $a_{0,2n+1}$  and  $b_{0,2n}$ . So the system of compensation equations falls apart into two systems, one involving the quantities with  $\omega = 0$ , and one involving those with  $\omega = 1$ . Now, the total force is given by

$$F_x = G \iint_E \sqrt{1 - (x/a)^2 - (y/b)^2}^{-1} X_+ dx dy = G \iint_E \sqrt{1 - (x/a)^2 - (y/b)^2}^{-1} X_+ dx dy, \quad (4.75a)$$

so that, after removal of the singularity from the leading edge,  $F_x$  depends only on  $v_x$ . Further we have that

$$F_y = G \iint_E \sqrt{1 - (x/a)^2 - (y/b)^2}^{-1} Y_+ dx dy, \quad (4.75b)$$

$$M_z = G \iint_E \sqrt{1 - (x/a)^2 - (y/b)^2}^{-1} (xY_+ - yX_-) dx dy, \quad (4.75c)$$

so that  $F_y$  and  $M_z$  depend only on  $v_y$  and  $\phi$ . This is completely in accordance with the findings of 4.2, since  $F_x$ ,  $F_y$  and  $M_z$  are here linear in  $v_x$ ,  $v_y$ ,  $\phi$ , owing to the linear character of the compensation condition, see (4.37).

Let us call

$$x^e = \begin{bmatrix} x_j^0 \\ x_j^1 \\ x_j^2 \\ x_j^3 \end{bmatrix}, \quad x^0 = \begin{bmatrix} x_j^2 \\ x_j^3 \end{bmatrix}, \quad u^e = \begin{bmatrix} a_{0,2n} \\ b_{0,2n+1} \\ v_x \end{bmatrix}, \quad u^0 = \begin{bmatrix} a_{0,2n+1} \\ b_{0,2n} \\ v_y \\ \phi \end{bmatrix} \quad (4.76)$$

and let us indicate a transpose by a ' over the letters. Then we have

$$X_+ = (x_j^0 \ x_j^1) \begin{bmatrix} B_{j,2n}^0 & 0 & 0 \\ 0 & \tilde{C}_{j,2n+1}^2 & D_{j,2n+1}^1 \end{bmatrix} \begin{bmatrix} a_{0,2n} \\ b_{0,2n+1} \\ v_x \end{bmatrix} = x^e B^e u^e; \quad (4.77a)$$

$$Y_- = (x_j^2 \ x_j^3) \begin{bmatrix} 0 & C_{j,2n+1}^2 & \tilde{D}_{j,2n+1}^1 \\ \tilde{B}_{j,2n}^0 & 0 & 0 \end{bmatrix} \begin{bmatrix} a_{0,2n} \\ b_{0,2n+1} \\ v_x \end{bmatrix} = x^0 B^0 u^e; \quad (4.77b)$$



$$X_- = (x_j^2 \ x_j^3) \begin{bmatrix} B_{j,2n+1}^2 & 0 & \tilde{E}_j^1 & 0 \\ 0 & \tilde{C}_{j,2n}^0 & 0 & F_j^3 \end{bmatrix} \begin{bmatrix} a_{0,2n+1} \\ b_{0,2n} \\ u_y \\ \phi \end{bmatrix} = x^0 C^0 u^0; \quad (4.77c)$$

$$Y_+ = (x_j^0 \ x_j^1) \begin{bmatrix} 0 & C_{j,2n}^0 & 0 & \tilde{F}_j^3 \\ \tilde{B}_{j,2n+1}^2 & 0 & E_j^1 & 0 \end{bmatrix} \begin{bmatrix} a_{0,2n+1} \\ b_{0,2n} \\ u_y \\ \phi \end{bmatrix} = x^e C^e u^o \quad (4.77d)$$

So,

$$\left. \begin{aligned} X_+^2 + Y_-^2 &= u^e B^e x^e x^e B^e u^e + u^e B^o x^o x^o B^o u^e = \\ &= u^e (B^e x^e x^e B^e + B^o x^o x^o B^o) u^e, \end{aligned} \right\} \quad (4.78a)$$

$$X_-^2 + Y_+^2 = u^o (C^o x^o x^o C^o + C^e x^e x^e C^e) u^o. \quad (4.78b)$$

We integrate (4.78a) and (4.78b) over the leading edge of the contact area  $x=acos\psi$ ,  $y=bsin\psi$ ,  $-\pi/2 \leq \psi \leq \pi/2$ . Only the matrices  $x^e x^e$  and  $x^o x^o$  are position dependent. There are two types of integral:

$$\left. \begin{aligned} \int_{-\pi/2}^{\pi/2} x_k^i x_l^i d\psi &= \int_{-\pi/2}^{\pi/2} x^{2p} y^{2q} d\psi = \int_{-\pi/2}^{\pi/2} a^{2p} b^{2q} \cos^{2p}\psi \sin^{2q}\psi d\psi \\ &= a^{2p} b^{2q} \frac{\Gamma(p+\frac{1}{2})\Gamma(q+\frac{1}{2})}{(p+q)!}, \end{aligned} \right\} \quad (4.79a)$$

$$\begin{aligned} \int_{-\pi/2}^{\pi/2} x_k^{2\omega} x_l^{2\omega+1} d\psi &= \int_{-\pi/2}^{\pi/2} x^{2p+1} y^{2q} d\psi = \\ &= \int_{-\pi/2}^{\pi/2} a^{2p+1} b^{2q} \cos^{2p+1}\psi \sin^{2q}\psi d\psi = a^{2p+1} b^{2q} \frac{\Gamma(q+\frac{1}{2})p!}{\Gamma(p+q+3/2)}. \end{aligned} \quad (4.79b)$$

Call

$$\int_{-\pi/2}^{\pi/2} x^e x^e d\psi = F^e, \quad \int_{-\pi/2}^{\pi/2} x^o x^o d\psi = F^o, \quad (4.80)$$

then

$$\int_{-\pi/2}^{\pi/2} \{X_+^2 + Y_-^2\} d\psi = u^e (B^e F^e B^e + B^0 F^0 B^0) u^e = \text{minimal}, \quad (4.81)$$

$$\int_{-\pi/2}^{\pi/2} \{X_-^2 + Y_+^2\} d\psi = u^0 (C^e F^e C^e + C^0 F^0 C^0) u^0 = \text{minimal},$$

and a typical compensation equation is found by differentiating (4.81) with respect to  $a_{on}$ ,  $b_{on}$ :

$$2(0,0,1,0 \dots 0) (B^e F^e B^e + B^0 F^0 B^0) u^e = 0, \quad (4.82)$$

or, in other terms

$$\text{the first } (2K+1) \text{ rows of } (B^e F^e B^e + B^0 F^0 B^0) u^e \text{ must vanish,} \quad (4.83a)$$

$$\text{the first } (2K+1) \text{ rows of } (C^e F^e C^e + C^0 F^0 C^0) u^0 \text{ must vanish.} \quad (4.83b)$$

These equations are solved numerically, where we set  $u_x=1$  in (4.83a), and by multiplying the resulting  $(a_{0,2n}, b_{0,2n+1})$  by  $u_x$ ; we set  $u_y=1, \phi=0$  in (4.83b) and multiply the resulting  $(a_{0,2n+1}, b_{0,2n})$  by  $u_y$ , and finally we set  $u_y=0, \phi=1$  in (4.83b) and multiply the resulting  $(a_{0,2n+1}, b_{0,2n})$  by  $\phi$ .

In order to find the total force  $F_x, F_y$  and the torsional couple  $M_z$ , we first observe that

$$\left. \begin{aligned} F_x &= G \iint_E \sqrt{1-(x/a)^2-(y/b)^2}^{-1} X^i dx dy = G \iint_E \sqrt{1-(x/a)^2-(y/b)^2}^{-1} X_j^0 x_j^0 dx dy, \\ F_y &= G \iint_E \sqrt{1-(x/a)^2-(y/b)^2}^{-1} Y_j^0 x_j^0 dx dy, \\ M_z &= G \iint_E \sqrt{1-(x/a)^2-(y/b)^2}^{-1} (x Y_j^1 x_j^1 - y X_j^2 x_j^2) dx dy. \end{aligned} \right\} \quad (4.84)$$

By means of (4.71), we can determine  $X_j^0, Y_j^0, X_j^2, Y_j^1$  from the  $(a_{on}, b_{on})$  which we find from the solution of the compensation equations (4.83a,b). A typical integral of (4.84) is

$$\left. \begin{aligned} \iint_E x^{2p} y^{2q} \sqrt{1-(x/a)^2-(y/b)^2}^{-1} dx dy &= \\ &= a^{2p+1} b^{2q+1} \int_0^{2\pi} \cos^{2p} \psi \sin^{2q} \psi d\psi \int_0^1 \frac{r^{2p+2q+1}}{\sqrt{1-r^2}} dr = \\ &= a^{2p+1} b^{2q+1} \frac{\Gamma(p+\frac{1}{2}) \Gamma(q+\frac{1}{2}) \Gamma(\frac{1}{2})}{\Gamma(p+q+3/2)}. \end{aligned} \right\} \quad (4.85)$$

We obtain

$$F_x = Gc^2 C_{11} v_x, \quad F_y = Gc^2 (C_{22} v_y + C_{23} c\phi), \quad M_z = Gc^3 (C_{32} v_y + C_{33} c\phi) \quad (4.86)$$

where the creepage and spin coefficients  $C_{ij}$  are calculated with  $c = \sqrt{ab}$  as unit of length. With (4.19), (4.20) and (3.50) we obtain for the dimensionless parameters of sec. 4.2:

$$(f_x, f_y, m_z) = \left( \frac{F_x}{\mu H}, \frac{F_y}{\mu H}, \frac{M_z}{\mu H c} \right) = \frac{3(1-\sigma)E}{4\pi\sqrt{g}} (C_{11}\xi, C_{22}^n + C_{23}\chi, C_{32}^n + C_{33}\chi). \quad (4.87)$$

### 4.33. Numerical results.

The creepage coefficients  $C_{ij}$  were calculated for a few values of  $a/b$  with  $2K+v=3, 5, 7$ . It was found that the solution with  $2K+v=5$  had a relative error of less than 1% from the solution with  $2K+v=7$ . Therefore, we calculated the creepage coefficients  $C_{ij}$  for more values of  $a/b$  with  $2K+v=5$ . The results are shown in fig. 3a and 3b, and in Table 3.

For the case of a circular contact area ( $a/b = 1$ ), the values found coincide with those given in KALKER [1]. In that paper, the values of  $C_{ij}$  were compared with JOHNSON's experimental results on the rolling of steel balls [1,3]. JOHNSON found that  $C_{11}$  lies between 3.8 and 4.4; we find for  $\sigma = 0.28$  the value 4.22. Also, according to Johnson,  $C_{22} = 3.47$  and  $C_{23} = 1.53$ ; we find 3.71 and 1.49 respectively. Since according to JOHNSON the moment  $M_z$  due to elastic hysteresis is of a higher order of magnitude than the moment due to creepage and spin, when the latter are very small, we cannot compare  $C_{32}$  and  $C_{33}$  with the experiment; indeed, we conclude that the values of  $C_{23}$  and  $C_{33}$  are of little practical significance.

According to the theoretical results of JOHNSON and VERMEULEN [5],

$$\left. \begin{aligned} C_{22}(e) &= C_{22}(0) \psi_1(0)/\psi_1(e), \\ \psi_1(e) &= \frac{B}{\sigma g^2 C} \quad \text{when } a \leq b \quad (e \geq 0), \\ &= \frac{1}{16} (4-\sigma)\pi \quad \text{when } a = b \quad (e = 0), \\ &= \frac{gD}{\sigma g C} \quad \text{when } a \geq b \quad (e \leq 0); \end{aligned} \right\} \quad (4.88a)$$

Table 3. The creepage and spin coefficients  $C_{ij}$ .

	$C_{11}$			$C_{22}$			$C_{23} = -C_{32}$			$C_{33}$			
	$g$	$\sigma=0$	1/4	1/2	$\sigma=0$	1/4	1/2	$\sigma=0$	1/4	1/2	$\sigma=0$	1/4	1/2
a/b	0.0	$\pi^2/4(1-\sigma)$			$\pi^2/4$			$\pi\sqrt{g}/3$	-	-	$\pi^2/16(1-\sigma)g$		
	0.1	2.51	3.31	4.85	2.51	2.52	2.53	0.334	0.473	0.731	6.42	8.28	11.7
	0.2	2.59	3.37	4.81	2.59	2.63	2.66	0.483	0.603	0.809	3.46	4.27	5.66
	0.3	2.68	3.44	4.80	2.68	2.75	2.81	0.607	0.715	0.889	2.49	2.96	3.72
	0.4	2.78	3.53	4.82	2.78	2.88	2.98	0.720	0.823	0.977	2.02	2.32	2.77
	0.5	2.88	3.62	4.83	2.88	3.01	3.14	0.827	0.929	1.07	1.74	1.93	2.22
	0.6	2.98	3.72	4.91	2.98	3.14	3.31	0.930	1.03	1.18	1.56	1.68	1.86
	0.7	3.09	3.81	4.97	3.09	3.28	3.48	1.03	1.14	1.29	1.43	1.50	1.60
	0.8	3.19	3.91	5.05	3.19	3.41	3.65	1.13	1.25	1.40	1.34	1.37	1.42
	0.9	3.29	4.01	5.12	3.29	3.54	3.82	1.23	1.36	1.51	1.27	1.27	1.27
a/c	1.0	3.40	4.12	5.20	3.40	3.67	3.98	1.33	1.47	1.63	1.21	1.19	1.16
	0.9	3.51	4.22	5.30	3.51	3.81	4.16	1.44	1.59	1.77	1.16	1.11	1.06
	0.8	3.65	4.36	5.42	3.65	3.99	4.39	1.58	1.75	1.94	1.10	1.04	0.954
	0.7	3.82	4.54	5.58	3.82	4.21	4.67	1.76	1.95	2.18	1.05	0.965	0.852
	0.6	4.06	4.78	5.80	4.06	4.50	5.04	2.01	2.23	2.50	1.01	0.892	0.751
	0.5	4.37	5.10	6.11	4.37	4.90	5.56	2.35	2.62	2.96	0.958	0.819	0.650
	0.4	4.84	5.57	6.57	4.84	5.48	6.31	2.88	3.24	3.70	0.912	0.747	0.549
	0.3	5.57	6.34	7.34	5.57	6.40	7.51	3.79	4.32	5.01	0.868	0.674	0.446
	0.2	6.96	7.78	8.82	6.96	8.14	9.79	5.72	6.63	7.89	0.828	0.601	0.341
	0.1	10.7	11.7	12.9	10.7	12.8	16.0	12.2	14.6	18.0	0.795	0.526	0.228

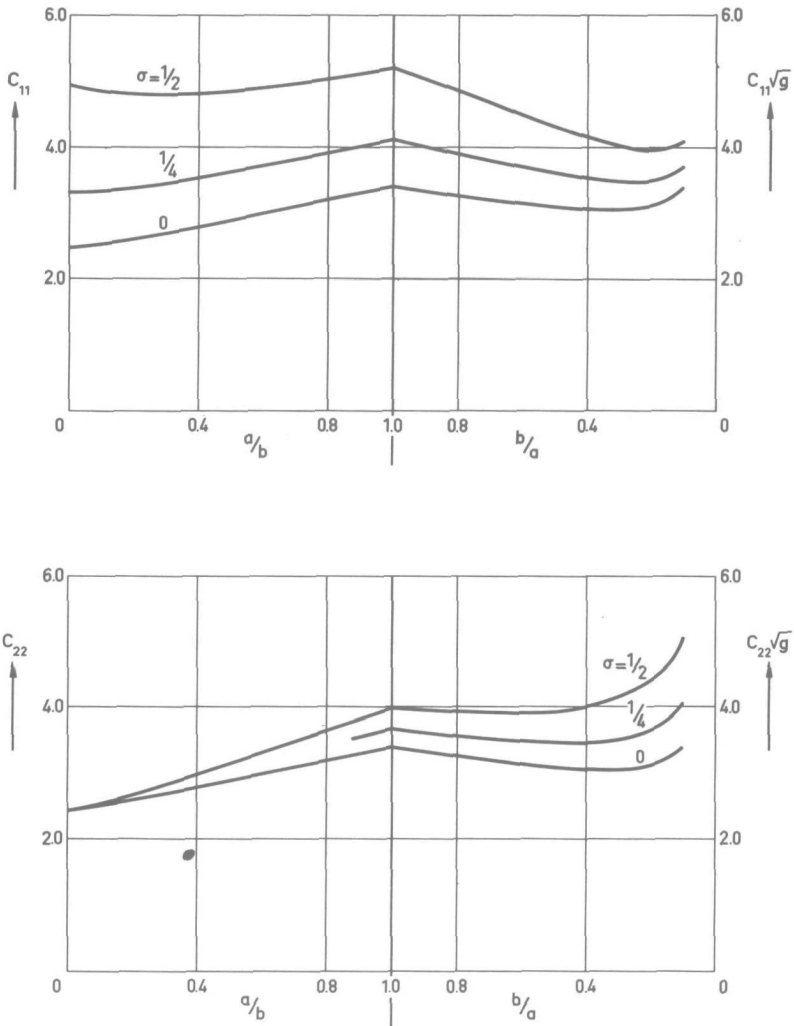


Fig. 3a. The creepage coefficients  $C_{11}$  and  $C_{22}$ .

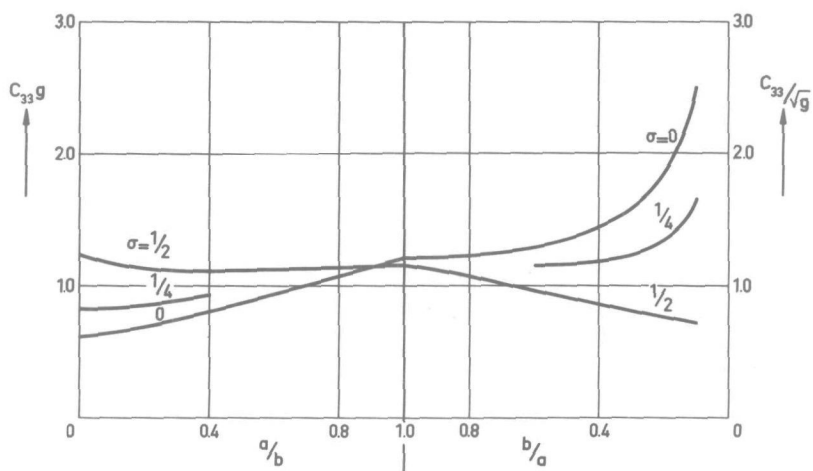
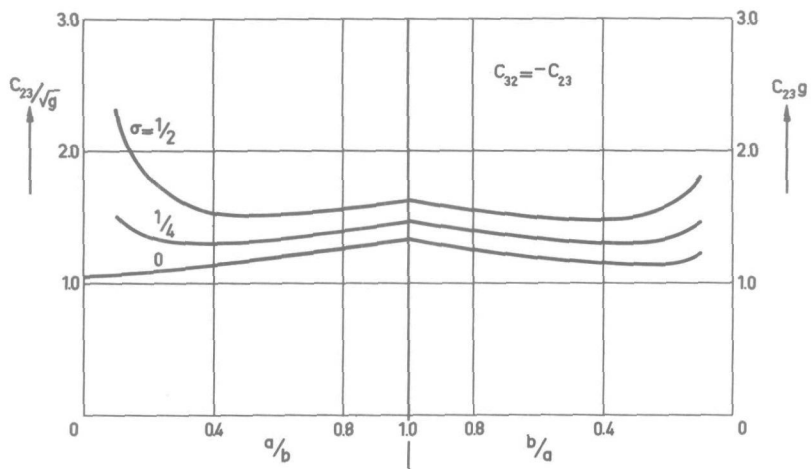


Fig. 3b. The creepage and spin coefficients  $C_{23}$ ,  $C_{32}$ ,  $C_{33}$ .

$$\left. \begin{aligned}
 C_{11}(e) &= C_{11}(0) \phi(0)/\phi(e), \\
 \phi(e) &= \underline{B} - \sigma(\underline{D} - \underline{C}) && \text{when } a \leq b \ (e \geq 0), \\
 &= \frac{1}{16} (4-3\sigma)\pi && \text{when } a = b \ (e = 0), \\
 &= g(1-\sigma)\underline{D} + \sigma g\underline{C} && \text{when } a \geq b \ (e \leq 0).
 \end{aligned} \right\} \quad (4.88b)$$

The experiments of JOHNSON and VERMEULEN on the dependence of  $F_y$  on  $v_y$  for different values of the axial ratio  $a/b$ , (see [5], fig. 3) show that the relationship

$$\left[ \frac{F}{\mu N} \right]_{v_x = \phi = 0} = f \left( \frac{\pi G a b v_y}{3 \mu N \psi_1} \right), \quad \sigma = 0.23 \quad (4.89)$$

is very nearly satisfied. We compared the functions

$$\left. \begin{aligned}
 C'_{22}(e) &= C_{22}(0) \psi_1(0)/\psi_1(e), \\
 C'_{11}(e) &= C_{11}(0) \phi(0)/\phi(e)
 \end{aligned} \right\} \quad (4.90)$$

with the values of  $C_{22}(e)$  and  $C_{11}(e)$  as we calculated them, for  $\sigma=0.25$ . In the range  $0.2 \leq a/b \leq 1$ ,  $0.2 \leq b/a \leq 1$  we found a discrepancy of at most 7% both in  $C_{22}$  and in  $C_{11}$ , the largest discrepancy occurring at the end of the ranges  $a/b = 0.2$  or  $b/a = 0.2$ . In fact,

$$\left. \begin{aligned}
 a/b = 0.2: \quad C_{22}(0) \psi_1(0)/\psi_1(e) &= 1.07 C_{22}(e), \\
 C_{11}(0) \phi(0)/\phi(e) &= 1.05 C_{11}(e), \\
 b/a = 0.2: \quad C_{22}(0) \psi_1(0)/\psi_1(e) &= 0.94 C_{22}(e), \\
 C_{11}(0) \phi(0)/\phi(e) &= 0.93 C_{11}(e).
 \end{aligned} \right\} \quad (4.91)$$

So here also the experimental results of JOHNSON are fairly close to our theoretical results on  $C_{22}$ .

We observe that in the calculations of  $C_{ij}$ , the smallest value of  $a/b$  and  $b/a$  with which we computed was  $a/b = 0.1$ ,  $b/a = 0.1$ . The values of  $C_{ij}$  for  $a/b = 0.1$  came close to those of the strip theory of KALKER [2], with the exception of  $C_{32} = -C_{23}$ , for  $\sigma \neq 0$ . So we ventured to put in the values of  $C_{ij}$  obtained by the strip theory at  $a/b = 0$ , and led the graphs through to  $a/b = 0$ .

Finally we note that the feature that  $C_{32} = -C_{23}$  which was noted in KALKER [1], also persists in the case of elliptical contact

areas. No explanation has been given for this curious feature.

#### 4.4. The limiting case of large creepage and spin. Numerical results.

When the creepage and the spin become very large, we may neglect the elastic deformation in the expression (4.15) for the relative slip:

$$\left. \begin{aligned} s_x &= v_x - \phi y + \frac{\partial u}{\partial x} - \frac{1}{V} \frac{\partial u}{\partial t} \approx v_x - \phi y, \\ s_y &= v_y + \phi x + \frac{\partial v}{\partial x} - \frac{1}{V} \frac{\partial v}{\partial t} \approx v_y + \phi x. \end{aligned} \right\} \quad (4.92)$$

We can then regard the slip, with LUTZ [1,2,3] and WERNITZ [1,2] as a pure rigid body rotation with angular velocity  $\phi V$  about a point in the plane  $z = 0$  which is called the spin pole by LUTZ and WERNITZ:

$$\text{spin pole} = (x', y'), \quad x' = -v_y / \phi = -c\eta / \lambda, \quad y' = v_x / \phi = c\xi / \lambda, \quad (4.93)$$

see fig. 9. No adhesion area is assumed to form, not even when the

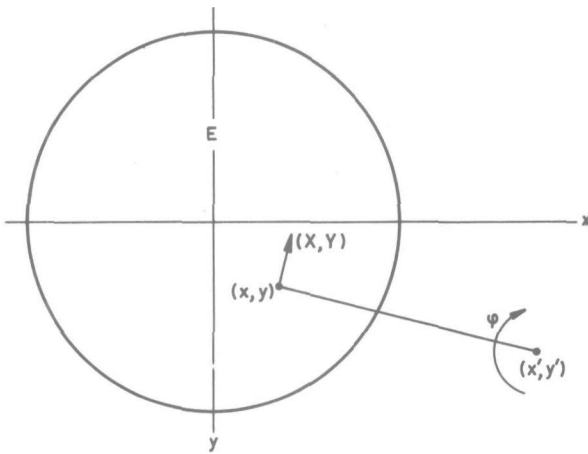


Fig. 9. Contact area with spin pole and traction vector.

spin pole lies inside the contact area. Note that the rolling direction is no longer a preferred direction. The surface traction transmitted by the upper body to the lower body has the magnitude

$$|(X, Y)| = \mu Z = \frac{3\mu N}{2\pi ab} \sqrt{1 - (x/a)^2 - (y/b)^2}, \quad (4.94)$$

and the direction is perpendicular to the line between  $(x', y')$  and  $(x, y)$ , with a positive moment with respect to  $(x', y')$  when  $\phi$  is positive, and with a negative moment when  $\phi$  is negative. It is easy to see from fig. 9 that



$$\left. \begin{aligned}
 df_x &= d(F_x/\mu N) = \frac{3\text{sign}(\chi)}{2\pi ab} \sqrt{1-(x/a)^2-(y/b)^2} \frac{(y'-y)dx dy}{\sqrt{(x-x')^2+(y-y')^2}}, \\
 df_y &= d(F_y/\mu N) = -\frac{3\text{sign}(\chi)}{2\pi ab} \sqrt{1-(x/a)^2-(y/b)^2} \frac{(x'-x)dx dy}{\sqrt{(x-x')^2+(y-y')^2}}, \\
 dm'_z &= d(M'_z/\mu Nc) = \frac{3\text{sign}(\chi)}{2\pi ab} \sqrt{1-(x/a)^2-(y/b)^2} \sqrt{(x-x')^2+(y-y')^2} dx dy.
 \end{aligned} \right\} (4.95)$$

Here  $M'_z$  is the moment about the spin pole. For the moment about the origin, we have the relation

$$M_z = M'_z + x'F_y - y'F_x. \quad (4.96)$$

We find the total force and moment by integrating (4.95),

$$\left. \begin{aligned}
 f_x &= \frac{3\text{sign}(\chi)}{2\pi ab} \iint_E \sqrt{1-(x/a)^2-(y/b)^2} \frac{(y'-y)dx dy}{\sqrt{(x-x')^2+(y-y')^2}}, \\
 f_y &= -\frac{3\text{sign}(\chi)}{2\pi ab} \iint_E \sqrt{1-(x/a)^2-(y/b)^2} \frac{(x'-x)dx dy}{\sqrt{(x-x')^2+(y-y')^2}}, \\
 m_z &= \frac{3\text{sign}(\chi)}{2\pi abc} \iint_E \sqrt{1-(x/a)^2-(y/b)^2} \sqrt{(x-x')^2+(y-y')^2} dx dy - \frac{\eta}{\chi} f_y - \frac{\xi}{\chi} f_x.
 \end{aligned} \right\} (4.97)$$

In the special case that the contact area is circular, these integrals were evaluated by LUTZ in [2], and in the special case that the contact area is an ellipse, and that the spin pole lies on one of the axes of the ellipse, they were evaluated by WERNITZ [1], p. 63-72. Since any line through the origin is an axis of the circle, LUTZ's results are a special case of WERNITZ's results. If, say,  $x' = 0$ , LUTZ and WERNITZ integrate with respect to  $x$ , and obtain as a result a form involving complete elliptic integrals of the first and second kind, which then has to be integrated with respect to  $y$ . This latter integration is done numerically. This process breaks down, however, when the spin pole does not lie on one of the axes, i.e. when  $x' \neq 0$ ,  $y' \neq 0$ . The first integration with respect to  $x$  is still possible, but the resulting form contains also elliptic integrals of the third kind. We accordingly abandoned the attempt of analytically performing the first integration, and we treated the integrals as follows. We had:

$$\begin{aligned}
 f_x &= \frac{3\text{sign}(\chi)}{2\pi ab} \iint_E \frac{\sqrt{1-(x/a)^2-(y/b)^2} \frac{(y'-y)dx dy}{\sqrt{(x-x')^2+(y-y')^2}}}{\sqrt{(x-x')^2+(y-y')^2}} = \\
 &= -\frac{3\text{sign}(\chi)}{2\pi ab} \iint_E \frac{\sqrt{(x-x')^2+(y-y')^2} \frac{y}{b^2} dx dy}{\sqrt{1-(x/a)^2-(y/b)^2}} \quad (4.98)
 \end{aligned}$$

by partial integration with respect to  $y$ . Then, we set

$$x = \arccos\psi, \quad y = b\text{rsin}\psi. \quad (4.99)$$

This gives

$$\begin{aligned}
 f_x &= \frac{-3\text{sign}(\chi)}{2\pi b} \int_0^1 \frac{r^2 dr}{\sqrt{1-r^2}} \int_0^{2\pi} \frac{\sqrt{(\arccos\psi-x')^2+(b\text{rsin}\psi-y')^2}}{\sqrt{1-r^2}} \sin\psi d\psi = \\
 &= -\frac{3\text{sign}(\chi)}{2\pi b} \int_0^{\pi/2} \sin^2\theta d\theta \int_0^{2\pi} \frac{\sqrt{(a\sin\theta\cos\psi-x')^2+(b\sin\theta\sin\psi-y')^2}}{\sqrt{1-r^2}} \sin\psi d\psi. \quad (4.100a)
 \end{aligned}$$

In the same way we find

$$f_y = \frac{3\text{sign}(\chi)}{2\pi a} \int_0^{\pi/2} \sin^2\theta d\theta \int_0^{2\pi} \frac{\sqrt{(a\sin\theta\cos\psi-x')^2+(b\sin\theta\sin\psi-y')^2}}{\sqrt{1-r^2}} \cos\psi d\psi, \quad (4.100b)$$

$$\begin{aligned}
 m_z &= \frac{3\text{sign}(\chi)}{2\pi c} \int_0^{\pi/2} \sin\theta\cos^2\theta d\theta \int_0^{2\pi} \frac{\sqrt{(a\sin\theta\cos\psi-x')^2+(b\sin\theta\sin\psi-y')^2}}{\sqrt{1-r^2}} d\psi + \\
 &\quad - \frac{\xi}{\chi} f_x - \frac{\eta}{\chi} f_y. \quad (4.100c)
 \end{aligned}$$

By means of the substitution  $\alpha = \pi - \psi$  in (4.100) it is easy to see from (4.93) that

$$\left. \begin{aligned}
 f_x(\xi/\chi, (-\eta)/\chi) &= f_x(\xi/\chi, \eta/\chi), \\
 f_y(\xi/\chi, (-\eta)/\chi) &= -f_y(\xi/\chi, \eta/\chi), \\
 m_z(\xi/\chi, (-\eta)/\chi) &= m_z(\xi/\chi, \eta/\chi).
 \end{aligned} \right\} \quad (4.101a)$$

By means of the substitution  $\alpha = -\psi$  in (4.100), it is easy to see from (4.93) that

$$\left. \begin{aligned}
 f_x((- \xi)/\chi, \eta/\chi) &= -f_x(\xi/\chi, \eta/\chi), \\
 f_y((- \xi)/\chi, \eta/\chi) &= f_y(\xi/\chi, \eta/\chi), \\
 m_z((- \xi)/\chi, \eta/\chi) &= m_z(\xi/\chi, \eta/\chi).
 \end{aligned} \right\} \quad (4.101b)$$

By means of the substitution  $\alpha = \pi/2 - \psi$  in (4.100), it is easy to see that

$$\left. \begin{aligned}
 f_x(a, b, \xi/\chi, \eta/\chi) &= -f_y(b, a, \eta/\chi, \xi/\chi), \\
 m_z(a, b, \xi/\chi, \eta/\chi) &= m_z(b, a, \eta/\chi, \xi/\chi).
 \end{aligned} \right\} \quad (4.101c)$$

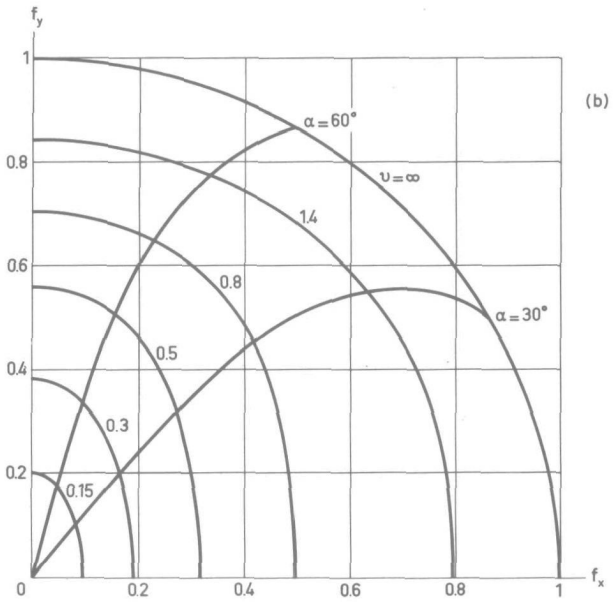
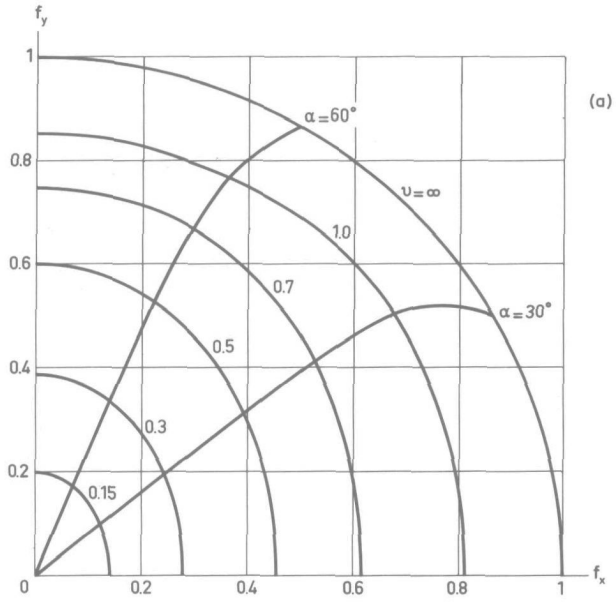


Fig. 10. The total force for large creepage and spin.  
 (a):  $g=0.5$ ; (b):  $g=0.2$ .

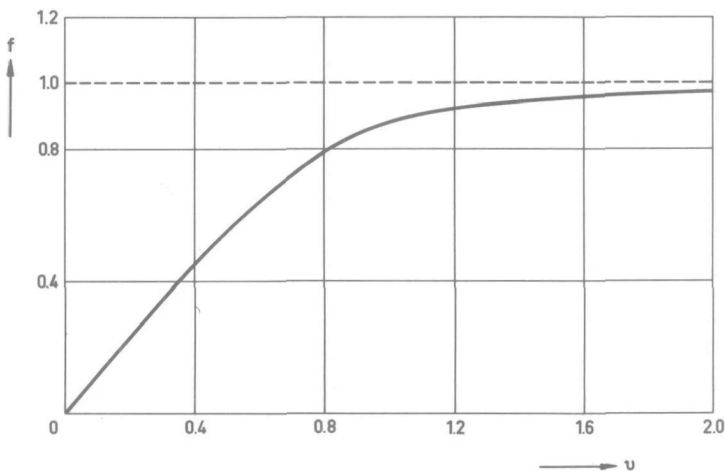


Fig. 11. The total force for large creepage and spin.  $g=1$ .

So we can confine ourselves for the purpose of calculations to the cases with

$$e \geq 0 \quad (a \leq b), \quad -x' = c\eta/\chi \geq 0, \quad y' = c\xi/\chi \geq 0. \quad (4.102)$$

Under the conditions (4.102) we can eliminate  $a$  and  $b$  from (4.100).

This gives

$$\left. \begin{aligned} f_x &= -\frac{3\sqrt{g} \operatorname{sign}(\chi)}{2\pi} \int_0^{\pi/2} \sin^2\theta d\theta \times \\ &\quad \times \int_0^{2\pi} \sqrt{(\sqrt{g} \sin\theta \cos\psi + \eta/\chi)^2 + \left(\frac{\sin\theta \sin\psi}{\sqrt{g}} - \xi/\chi\right)^2} \sin\psi d\psi, \\ f_y &= \frac{3 \operatorname{sign}(\chi)}{2\pi\sqrt{g}} \int_0^{\pi/2} \sin^2\theta d\theta \times \\ &\quad \times \int_0^{2\pi} \sqrt{(\sqrt{g} \sin\theta \cos\psi + \eta/\chi)^2 + \left(\frac{\sin\theta \sin\psi}{\sqrt{g}} - \xi/\chi\right)^2} \cos\psi d\psi, \\ m_z &= \frac{3 \operatorname{sign}(\chi)}{2\pi} \int_0^{\pi/2} \sin\theta \cos^2\theta d\theta \times \\ &\quad \times \int_0^{2\pi} \sqrt{(\sqrt{g} \sin\theta \cos\psi + \eta/\chi)^2 + \left(\frac{\sin\theta \sin\psi}{\sqrt{g}} - \xi/\chi\right)^2} d\psi + \\ &\quad - (\eta/\chi)f_y - (\xi/\chi)f_x \end{aligned} \right\} (4.103)$$

$\chi \neq 0$ ; if  $\chi = 0$  then  $f_x = \xi/u$ ,  $f_y = \eta/u$ ,  $u = \sqrt{\xi^2 + \eta^2}$ .

The repeated integrals of (4.103) are easy to integrate numerically. The total force has been calculated for  $g = 0.5$  and  $g = 0.2$ , see fig. 10, and for  $g = 1$ , see fig. 11. In the figures, we use the symbols  $v$  and  $\alpha$ :

$$\xi, \chi = v \cos \alpha, \quad \eta/\chi = u \sin \alpha. \quad (4.104)$$

As to fig. 11, we observe that the force is always in the direction of the creepage. So fig. 11 could have a simpler form than fig. 10.

We finally observe that the three integrals of (4.97) can be written as a sum of integrals of the form

$$I = P_2(x', y') \iint_E P_4(x, y) J(x, y) \frac{dx dy}{R}, \quad (4.105)$$

where  $P_2$  and  $P_4$  are polynomials and  $J(x, y)$  and  $R$  have their usual meaning. Hence GALIN's theorem of sec. 2.2 can be applied, and the  $I$  can be evaluated by means of DOWNOROVICH's method. This gives after some calculation:

$$\left. \begin{aligned} f_x &= \frac{3y \operatorname{sign}(\chi)}{ab} \left[ F^{1;00}_{02} + \frac{1}{6} y^2 F^{1;00}_{04} + \frac{1}{2} x^2 F^{1;00}_{22} \right], \\ f_y &= -\frac{3x \operatorname{sign}(\chi)}{ab} \left[ F^{1;00}_{20} + \frac{1}{6} x^2 F^{1;00}_{40} + \frac{1}{2} y^2 F^{1;00}_{22} \right], \\ m_z &= \frac{3 \operatorname{sign}(\chi)}{abc} \left[ F^{1;00}_{00} + \frac{1}{2} x^2 F^{1;00}_{20} + \frac{1}{2} y^2 F^{1;00}_{02} + \right. \\ &\quad \left. + \frac{1}{24} x^4 F^{1;00}_{40} + \frac{1}{4} x^2 y^2 F^{1;00}_{22} + \frac{1}{24} y^4 F^{1;00}_{04} \right] + \\ &\quad + \frac{x}{c} f_y - \frac{y}{c} f_x \end{aligned} \right\} \quad (4.106)$$

$(x, y)$ : spin pole,  $x = -c\eta/\chi$ ,  $y = c\xi/\chi$ .  
 $F^{1;00}_{ij}$ : see (3.22).

It should be kept in mind that (4.106) is valid only when the spin pole lies inside the contact area, so that (4.106) has only limited applicability.

## 5. Steady rolling with arbitrary creepage and spin: a numerical theory.

In the present chapter we apply the theory of the load-displacement equations to the problem of rolling with arbitrary creepage and spin. In section 5.1 and its subsections we present the numerical process. In section 5.2 and its subsections we discuss a computer programme based on the method of section 5.1. Finally we present the numerical results in section 5.3 and its subsections. In 5.31 they are compared with the experiments of JOHNSON and HAINES and OLLERTON. In the two remaining subsections of 5.3, we discuss the solutions obtained.

### 5.1. The numerical method.

In 5.11, we reformulate the boundary conditions so, that the solution becomes equivalent to minimizing a certain integral. The numerical analysis of the minimalization is presented in 5.12, and some details concerning the minimalization and the formulation of the problem are discussed in 5.13 and 5.14.

#### 5.11. Formulation as a variational problem.

Since the tangential traction is at most equal to a finite multiple of the normal Hertzian traction, the latter vanishing at the edge of the contact area, we will use the theory of section 3.1. We can rewrite the results of that section as follows:

$$\begin{aligned}
 \text{Let } Z &= G \int_{00} \sqrt{1-(x/a)^2-(y/b)^2} \quad \text{inside } E, \\
 &= 0 \quad \text{on } z=0, \text{ outside } E; \\
 \text{If } (X, Y) &= G \mu \int_{00} \sqrt{1-(x/a)^2-(y/b)^2} \sum_{k=1}^p (x_k^M \tau_k^M, y_k^M \tau_k^M) \quad \text{inside } E, \\
 &= (0, 0) \quad \text{on } z=0, \text{ outside } E, \\
 \text{with } (x_k^M) &= (1, x, y, x^2, xy, y^2, \dots, y^M, 0, 0, 0, \dots, 0), \\
 (y_k^M) &= (0, 0, 0, \dots, 0, 1, x, y, x^2, xy, y^2, \dots, y^M), \\
 (\tau_k^M) &= (d_{00}, d_{10}, d_{01}, d_{20}, \dots, d_{0M}, e_{00}, e_{10}, e_{01}, e_{20}, \dots, e_{0M}), \\
 p &= (M+1)(M+2),
 \end{aligned}
 \tag{5.1}$$

$$\left. \begin{aligned}
 &\text{then } [u(x,y), v(x,y)] = f_{00} \sum_{k=1}^p \sum_{j=1}^q (z_j^! u_{jk} \tau_k, z_j^! v_{jk} \tau_k), \\
 &\text{with } u_{jk}, v_{jk}: \text{ coefficients of the load-displacement} \\
 &\quad \text{equations (3.5),} \\
 &(z_j^!) = (1, x, y, x^2, xy, y^2, \dots, xy^{M+1}, y^{M+2}), \\
 &q = \frac{1}{2}(M+3)(M+4).
 \end{aligned} \right\} \quad (5.1)$$

The derivatives of  $u$  and  $v$  with respect to  $x$ , which we need to calculate the slip, are readily found. They are:

$$\left. \begin{aligned}
 &\left( \frac{\partial u}{\partial x}, \frac{\partial v}{\partial x} \right) = \mu f_{00} \sum_{k=1}^p \sum_{j=1}^q (z_j^! u_{jk} \tau_k, z_j^! v_{jk} \tau_k), \\
 &\text{with } (z_j^!) = \left( \frac{\partial z_j}{\partial x} \right) = (0, 1, 0, 2x, y, 0, 3x^2, \dots, y^{M+1}, 0).
 \end{aligned} \right\} \quad (5.2)$$

The relative slip due to the traction distribution of (5.1) in steady rolling is then according to (4.15c),

$$\begin{aligned}
 (s_x, s_y) &= \left( u_x - \phi y + \frac{\partial u}{\partial x}, u_y + \phi x + \frac{\partial v}{\partial x} \right), \\
 s_x &= \mu f_{00} \left\{ \frac{u_x}{\mu f_{00}} - \frac{\phi y}{\mu f_{00}} + \sum_{k=1}^p \sum_{j=1}^q z_j^! u_{jk} \tau_k \right\}, \\
 s_y &= \mu f_{00} \left\{ \frac{u_y}{\mu f_{00}} + \frac{\phi x}{\mu f_{00}} + \sum_{k=1}^p \sum_{j=1}^q z_j^! v_{jk} \tau_k \right\}.
 \end{aligned}$$

According to (3.51),

$$\mu f_{00} = \frac{3\mu N}{2\pi abG} = \frac{2\mu c \sqrt{g}}{(1-\sigma)\rho \underline{E}},$$

and according to (4.20),

$$\xi = \frac{u_x^0}{\mu c}, \quad \eta = \frac{u_y^0}{\mu c}, \quad \chi = \frac{\phi \rho}{\mu},$$

so that the relative slip due to the tractions of (5.1) becomes

$$\left. \begin{aligned}
 s_x &= \mu f_{00} \left( A\xi - A\chi \frac{y}{c} + \sum_{k=1}^p \sum_{j=1}^q z_j^! u_{jk} \tau_k \right), \\
 s_y &= \mu f_{00} \left( A\eta + A\chi \frac{x}{c} + \sum_{k=1}^p \sum_{j=1}^q z_j^! v_{jk} \tau_k \right), \\
 A &= \frac{(1-\sigma)\underline{E}}{2\sqrt{g}}, \quad \underline{E} = \int_0^{\pi/2} \sqrt{1-e^2 \sin^2 \theta} d\theta.
 \end{aligned} \right\} \quad (5.3)$$

When we use the  $X$  and  $Y$  of (5.1), and we calculate the surface displacement differences also in the manner of (5.1), we accomplish that the surface of the half-space outside the contact area is free of traction, and that the displacement and stress vanish at infinity. In terms of the boundary conditions (4.16), this means that (4.16c) and (4.16a) are satisfied. Also, the normal pressure of (5.1) is the same as the one in (4.16b). So, only condition (4.16d) remains for the slip region  $E_g$  and condition (4.16e) for the locked region  $E_h$ . We repeat these boundary conditions here:

$$\left. \begin{aligned} s_x &= u_x - \phi y + \frac{\partial u}{\partial x}, \quad s_y = u_y + \phi x + \frac{\partial v}{\partial x}, \\ w_x &= s_x/s, \quad w_y = s_y/s, \quad s = \sqrt{s_x^2 + s_y^2}; \\ (X, Y) &= \mu G f_{00} \sqrt{1 - (x/a)^2 - (y/b)^2} (w_x, w_y) \quad \text{in slip area } E_g, \\ s_x &= s_y = 0, \quad |(X, Y)| \leq \mu Z = \mu G f_{00} \sqrt{1 - (x/a)^2 - (y/b)^2} \quad \text{in locked area } E_h. \end{aligned} \right\} \quad (5.4)$$

We set

$$(X', Y') = (X, Y) / \mu Z = (X, Y) / \{ \mu f_{00} G \sqrt{1 - (x/a)^2 - (y/b)^2} \}. \quad (5.5)$$

Then we can reformulate the boundary conditions:

$$\left. \begin{aligned} T &= (X' - w_x)^2 + (Y' - w_y)^2, \quad S = \frac{1}{\mu^2 f_{00}^2} (s_x^2 + s_y^2), \\ T &= 0 \quad \text{in } E_g, \\ S &= 0, \quad |(X', Y')| \leq 1 \quad \text{in } E_h, \end{aligned} \right\} \quad (5.6)$$

where  $E_g$  and  $E_h$  are unknown, and follow from the solution of the problem. We defined  $S$  so that it is independent of the factor  $\mu f_{00}$  which represents the normal load and the coefficient of friction. We eliminate  $E_g$  and  $E_h$  from the equations by demanding that the product  $TS$  vanishes everywhere in  $E$ . Moreover,  $|(w_x, w_y)| = 1$ , so that the inequality  $|(X', Y')| \leq 1$  must hold throughout  $E$ . So we obtain for (5.6):

$$TS = 0, \quad |(X', Y')| \leq 1 \quad \text{in } E. \quad (5.7)$$

If (5.7) is satisfied, we have found the solution of the problem. Since  $TS \geq 0$  for any choice of  $(X', Y')$ , we can integrate (5.7) to obtain



$$\left. \begin{aligned} I &= \iint_E \text{WTS } dx dy = 0, \quad |(X', Y')| \leq 1 \text{ in } E, \\ W &= \text{weightfunction} > 0 \text{ in } E. \end{aligned} \right\} \quad (5.8)$$

Here we have put in a positive weightfunction  $W$ . Again, since  $\text{WTS} \geq 0$ , the integral  $I \geq 0$  for any choice of  $(X', Y')$ , so that the value zero of the integral is actually a minimum. So we can reformulate (5.8):

$$I = \iint_E \text{WTS } dx dy = \text{minimal}, \quad |(X', Y')| \leq 1 \text{ in } E. \quad (5.9)$$

The two conditions of (5.9) are completely equivalent to the boundary conditions (5.4), but (5.9) can be used to obtain an approximate solution, namely by introducing the tractions of (5.1) into it, with the corresponding relative slip (5.3), and minimizing the integral with respect to the  $\tau_k$ . The inequality  $|(X', Y')| \leq 1$  is verified afterwards.

#### 5.12. Numerical analysis.

We summarize the new formulation of the problem:

$$\left. \begin{aligned} I &= \iint_E \text{WTS } dx dy \text{ is minimal}, \quad |(X', Y')| \leq 1 \text{ in } E; \\ T &= (X' - w_x)^2 + (Y' - w_y)^2, \quad \mu^2 f_{00}^2 S = s_x^2 + s_y^2, \\ (X', Y') &= \sum_{k=1}^P (x_k^M \tau_k, y_k^M \tau_k), \\ w_x &= s_x/s, \quad w_y = s_y/s, \quad s = |(s_x, s_y)|, \\ s_x &= \mu f_{00} (A\xi - AX \frac{y}{c} + \sum_{k=1}^P \sum_{j=1}^q z_j^! v_{jk} \tau_k), \\ s_y &= \mu f_{00} (A\eta + AX \frac{x}{c} + \sum_{k=1}^P \sum_{j=1}^q z_j^! v_{jk} \tau_k), \\ A &= (1-\sigma)\underline{E}/2\sqrt{g}. \end{aligned} \right\} \quad (5.10)$$

(5.10) is an approximation in the sense that we take along only  $p=(M+1)(M+2)$  parameters  $\tau_k$ , so that  $X'$  and  $Y'$  are arbitrary  $M$ -th degree polynomials in  $x$  and  $y$ , the coefficients of which are determined from condition (5.9).

In order to determine the  $\tau_k$  from the condition  $I = \text{minimal}$ , we

seek the stationary value of  $I$  with respect to the  $\tau_k$  by iteration. We are not certain that the stationary value we find is actually the absolute minimum or even a relative minimum. In practice, however, we determined  $I$  after each iteration step and we found in practically all cases that at the stationary value,  $I$  was indeed the smallest as compared with the series of values of  $I$  obtained during the iteration. In the cases where this was not so, the solution was grossly at fault. So there is a strong presumption to believe that we indeed find a minimum.

At the stationary value,

$$\frac{\partial I}{\partial \tau_k} = \frac{\partial}{\partial \tau_k} \iint_E WTS \, dx dy = \iint_E W \frac{\partial(TS)}{\partial \tau_k} \, dx dy = 0. \quad (5.11)$$

This is a difficult equation, as a consequence, principally, of the complicated dependence of  $(w_x, w_y)$  on  $\tau_k$ . We find the solution by NEWTON'S method: we start with an arbitrary  $\tau_k^0$ , and proceed by iteration, as follows:

$$(\tau_k^0) = \text{arbitrary}; \quad (5.12a)$$

$$\left. \begin{aligned} & \left( \frac{\partial I}{\partial \tau_k} \right)_{\tau_k = \tau_k^n + \Delta \tau_k} \iint_E W \left( \frac{\partial TS}{\partial \tau_k} \right)_{\tau_k = \tau_k^n} \, dx dy + \\ & + \iint_E W \sum_{\ell=1}^p \left( \frac{\partial^2 TS}{\partial \tau_k \partial \tau_\ell} \right)_{\tau_k = \tau_k^n, \tau_\ell = \tau_\ell^n} \Delta \tau_\ell \, dx dy = 0, \end{aligned} \right\} (5.12b)$$

$k = 1, 2, 3, \dots, p = (M+1)(M+2);$

$$\left. \begin{aligned} & \tau_k^{n+1} = \tau_k^n + \Delta \tau_k; \text{ if } \max_k |\Delta \tau_k| < \delta \max_k |\tau_k^{n+1}| \text{ then solution is found;} \\ & \delta: \text{ a small positive number which can be chosen arbitrarily.} \end{aligned} \right\} (5.12c)$$

The equations of (5.12b) are  $p$  linear equations in the  $p$  unknowns  $\Delta \tau_\ell$ .

The integrals are evaluated numerically, by replacing them by un-weighted sums over a fairly large number of points. This was done for two reasons. The most important reason is that the integrals have no physical meaning, so that we are not interested in their precise value. In fact, one could directly have used finite sums instead of integrals in the original equations. Secondly, the function  $T$ , containing as it does the discontinuous functions  $w_x$  and

$w_y$ , is a function with locally large gradients. This does not render it very suitable for numerical integration methods involving higher order differences.

The process (5.12) of successive approximations converges fairly rapidly: it depends on the behaviour of the resulting function WTS, and to some extent also on the starting value  $\tau_k^0$ . When in the calculation of several cases we work in a chainlike fashion, by slowly increasing the creepage and the spin, and using the previous result as a starting value, the number of iterations for  $\delta=0.001$  (see 5.12c) is about 5, sometimes increasing to 7 or 8 when the adhesion area is large, or dropping down to 3 when the adhesion area is small. The number of iterations increases slowly with the degree M of the polynomials X' and Y'. In the calculation performed on a series of 33 different values of creepage and spin, we needed an average of 3.9 iterations per case for M=2 (12  $\tau$ 's), 4.4 iterations per case for M=3 (20  $\tau$ 's), and 4.7 iterations per case for M=4 (30  $\tau$ 's). The number  $\delta$  of (5.12c) was taken equal to 0.001.

In the contact area we took 80 points to approximate the integral when M=2 or M=3, and about 100 points when M=4. The calculations proved to be exceedingly lengthy. On the fast Telefunken TR4 computer of Delft Technological University, each iteration step (5.12b), which consists of the evaluation of the coefficients of the linear equations and their subsequent solution, took the following amount of machine time:

M=2, 12 equations, 80 points in the contact area	...18 sec.	}	(5.13)
M=3, 20 equations, 80 points in the contact area	...35 sec.		
M=4, 30 equations, 100 points in the contact area	...87 sec.		

Most of the time was used in setting up the equations. These long calculating times are due to the complicated character of  $\partial^2(TS)/\partial\tau_k\partial\tau_\ell$  (see sec. 5.23), and to the fact that these calculations have to be performed for every point, that is, they must be repeated about a hundred times for each iteration step.

In the calculation outlined above, the inequality  $|(X', Y')| \leq 1$  is ignored. After the  $\tau_k$  have been determined, we inspect the solution to see whether  $|(X', Y')| \leq 1$  in each point (x,y) of the

contact area. The output of the computer programme has been especially designed to facilitate this verification, see sec. 5.24. We found that generally  $|(X',Y')| > 1$  at some points. In judging this aberration, we distinguish three cases, viz.  $T < S$ ,  $T > S$ , and  $(x,y)$  near the edge of the contact area.

In the case  $T < S$ , the reduced tangential tractions  $(X',Y')$  are closer to the Coulomb value than the slip is to zero. That means that the solution at a point where  $T < S$  approximates slip area conditions, in which  $|(X',Y')|$  should be equal to unity. That means that the traction  $|(X',Y')|$  we actually find should be regarded as a more or less successful approximation of unity. The situation  $|(X',Y')| > 1$ ,  $T < S$  indeed occurred very frequently in our numerical work, but for the reason just mentioned should not be used to throw doubt on the validity of the solution.

Points with  $|(X',Y')| > 1$ ,  $T > S$  do throw doubt on the validity of the solution. A point of this type we call an aberration of the solution. Aberrations also occurred in our numerical work, but much less frequently, and mostly concentrated in a small portion of the contact area. Solutions with aberrations occur mostly at values of the spin close to the peaks of fig. 23, sec. 5.33. The argument of the case  $T < S$  does not apply, since the solution at a point with  $T > S$  approximates adhesion area conditions, where  $|(X',Y')|$  should be smaller than unity. One might be tempted to think that where  $|(X',Y')|$  passes the value 1, a slip area with small  $T$  should be found. This is, however, not always the case, since a small value of  $T$  implies not only that  $|(X',Y')| \approx 1$ , but also that the angle between slip and traction must be small. Mostly this angle is not small in an aberration.

As to the case that  $(x,y)$  is near the edge of the contact area while  $|(X',Y')| > 1$ , we observe that for reasons discussed in sec. 5.13, we used the weight function

$$W = W_1 \equiv 1 - x^2/a^2 - y^2/b^2. \quad (5.14)$$

As a consequence, little weight is attached during the minimalisation process to the behaviour of the solution near the edge of the contact area where  $W_1$  is small, and hence in judging the solution in the

light of the requirement that  $|(X',Y')| \leq 1$ , little importance should be attached to the behaviour near the edge.

5.13. The choice of the weight function.

The weight function of (5.14) was chosen, because then WT is proportional to the square of the absolute value of the difference between the actual tractions  $(X,Y)$  and the COULOMB traction  $\mu Z(w_x, w_y)$ , with the proportionality constant  $\mu^2 f_{00}^2 G^2$ . As a consequence,  $\mu^4 f_{00}^4 G^2 V^2 (W_1 TS)$  is the square of the rate of work per unit area done by the difference of the actual tractions  $(X,Y)$  and the COULOMB traction  $\mu Z(w_x, w_y)$  on the slip  $V(s_x, s_y)$ , if the latter were in the same direction as the traction difference  $(X - \mu Z w_x, Y - \mu Z w_y)$ .

We also tried  $W=1$ , and compared the total force obtained with  $W=W_1$  with the total force obtained with  $W=1$  for the degree  $M$  of the traction polynomials  $(X',Y')$  equal to 2 (12  $\tau$ 's), to 3 (20  $\tau$ 's), and to 4 (30  $\tau$ 's). We did not use higher degrees  $M$ , because of the large amount of machine time, see (5.13). We calculated the force  $f_y = F_y / \mu N$  for a circular contact area, POISSON'S ratio  $\sigma=0.28$ , and for pure lateral creepage ( $v_x = \phi = 0, v_y \neq 0$ ), and also for pure spin ( $v_x = v_y = 0, \phi \neq 0$ ). The results of the comparison are given in Tables 4 and 5. In reading the tables it should be remembered that the maximum value of Table 4. A comparison of  $f_y$  with  $W=1$  and with  $W=W_1$ , for  $M=4$ .

	$v_x = \phi = 0$		$v_x = v_y = 0$	
	Max	Mean	Max	Mean
$ f_{y,W=1} - f_{y,W=W_1} $	0.016	0.009	0.046	0.016

Table 5. A comparison of  $f_y$  with  $W=1, W=W_1$ , with the conjectured value of  $f_y$ .

	$v_x = \phi = 0$			$v_x = v_y = 0$		
	W	Max	Mean	W	Max	Mean
$ \frac{1}{2}f_{y,W=1,M=4} + \frac{1}{2}f_{y,W=W_1,M=4} - f_{y,M=3} $	1	0.022	0.009	1	0.044	0.023
	$W_1$	0.033	0.011	$W_1$	0.029	0.018

$f_y$  is 1.

We see from Table 4 that there is a distinct difference between  $f_{y,W=W_1}$  and  $f_{y,W=1}$  for  $M=4$ . This indicates that we should have used a higher value of  $M$  in our calculation. The large amount of machine time precluded that, however.

In table 5 we assume that  $(\frac{1}{2}f_{y,W=1,M=4} + \frac{1}{2}f_{y,W=W_1,M=4})$  is the correct value of  $f_y$  with which we want to compare the performance of polynomials with degree  $M=3$ . We see from Table 5 that the polynomials with  $M=3$  give passable results. The weightfunction  $W=1$  performed better than  $W=W_1$  in the case of pure lateral creepage, and  $W=W_1$  performed better than  $W=1$  in the case of pure spin. In view of the fact that the largest errors occur in the case of pure spin, and in view of the amount of machine time available, we decided to adopt  $M=3$ ,  $W=W_1$ , in all our further calculations.

#### 5.14. Final remarks on the method.

It should be observed that the formulation of the boundary value problem as a minimalization problem is by no means unique. In fact, one could also minimize the integral  $\iint_E WT^m S^n dx dy$ , but we preferred the integral (5.9), since the integrand is the square of a rate of work per unit area. A possibility to be considered is  $m=n=\frac{1}{2}$ : the integrand is then a rate of work per unit area. We tried it for a single case in which the integrand  $W_1 TS$  gave good results, but it turned out that the iteration did not converge. We suspect that this is because  $\sqrt{TS}$  has too large gradients near  $T=0$  and  $S=0$  to be workable.

A possibility which has been investigated more fully is the minimalization of

$$\left. \begin{aligned} \iint_{E_g} W_2 T dx dy + \iint_{E_h} W_3 S dx dy = \text{minimal}, \\ |(X', Y')| \leq 1 \text{ in } E_h. \end{aligned} \right\} \quad (5.15)$$

This form has the drawback that the adhesion area and the slip area explicitly enter into the minimalization problem. It has the advantage that for fixed  $E_g$  and  $E_h$ , for fixed  $w_x$  and  $w_y$  and if  $W_2$

and  $W_3$  are functions of  $(x,y)$  only, it is a least squares problem, since  $S$  and  $T$  are then quadratic in  $\tau_k$ . So it has a single stationary value which is actually the absolute minimum. A situation which approaches fixed  $(w_x, w_y)$  is that of pure creepage with vanishing POISSON'S ratio  $\sigma$ . The variation of  $E_g$  and  $E_h$  in all cases turns out to be simple: if at a certain point of the boundary  $W_2 T > W_3 S$ , then  $E_h$  should be increased, if  $W_2 T < W_3 S$ ,  $E_g$  should be increased. In the final solution  $W_2 T = W_3 S$  on the boundary. So, assuming that the solution continuously changes with the creepage, we see that in the case of pure creepage with  $\sigma=0$  we find the best solution in the sense of least squares, and assuming that this feature of (5.15) does not change when  $\sigma \neq 0$  and  $\phi \neq 0$ , we see that there is a strong presumption, that we will find the solution from the stationary value of (5.15).

Now, by a special choice of  $W_2$  and  $W_3$  we can obtain (5.9) back. One must then take  $W_2 = WS$ , and  $W_3 = WT$ . Note that now  $W_2$  and  $W_3$  depend also on  $T$  and  $S$ , which is different from what we assumed before. Seen in this light one can say that in (5.9)  $WT$  serves as a weight function on  $S$  in the adhesion area, so that the larger is the difference of the approximation of the traction and the COULOMB traction at a certain point, the more importance is attached to a small value of  $S$  at that point, while in the slip area  $S$  serves as a weight function on  $WT$ , so that the larger the slip at a certain point, the more importance is attached to a small difference between the approximation of the traction and the COULOMB traction at that point.

It was found that the results of (5.12) compared better with the experiment than those of (5.15). In view of the fact that by making (5.15) stationary one probably finds the absolute minimum, we conclude that the process (5.12) of making (5.9) stationary probably leads to the absolute minimum of (5.9).

Let us finally return for a moment to the fact that we have used the tractions of ch. 3, which are so that they vanish at the edge of the contact area. One might argue that this choice is not a necessary one, and that one could use any set of tractions which form a complete set of functions. So one could also use the tractions of ch. 2, which are infinite at the edge of the contact area. In that

case the displacement differences can be chosen arbitrarily, for instance

$$u = -u_x x + \phi xy, \quad v = -u_y x - \frac{1}{2} \phi x^2.$$

We see that  $u$  and  $v$  are second degree polynomials, and hence the corresponding traction in the contact area has the form

$$X = G \{1 - (x/a)^2 - (y/b)^2\}^{-\frac{1}{2}} (d_{00} + d_{10}x + d_{01}y + d_{20}x^2 + d_{11}xy + d_{02}y^2),$$

$$Y = G \{1 - (x/a)^2 - (y/b)^2\}^{-\frac{1}{2}} (e_{00} + e_{10}x + e_{01}y + e_{20}x^2 + e_{11}xy + e_{02}y^2).$$

Moreover, we see from (4.15c) that the relative slip  $(s_x, s_y) = (0, 0)$  throughout the contact area, so that the integral  $I$  of (5.9) actually vanishes. However,  $|(X, Y)| \gg \mu Z$  near the edge, from which it appears that we must reject this solution. So we see that the inequality  $|(X, Y)| \leq \mu Z$  is indeed essential for the solution of the problem, and we see that we cannot use the tractions of ch. 2 in a calculation in which the inequality is verified afterwards. Instead, we use the tractions of ch. 3, which, as we recall, have the form

$$(X, Y) = G \{1 - (x/a)^2 - (y/b)^2\}^{+\frac{1}{2}} \sum (d_{pq}, e_{pq}) x^p y^q.$$

These tractions already reflect something of the inequality  $|(X, Y)| \leq \mu Z$ , namely, they behave correctly at the edge of the contact area, and the inequality reduces to

$$|\left( \sum d_{pq} x^p y^q, \sum e_{pq} x^p y^q \right)| \leq \frac{3\mu N}{2\pi abG}.$$

This relationship is much easier to satisfy than the inequality

$$|\left( \sum d_{pq} x^p y^q, \sum e_{pq} x^p y^q \right)| \leq \frac{3\mu N}{2\pi abG} \{1 - (x/a)^2 - (y/b)^2\}$$

which obtains in the case that we use the tractions of ch. 2. Indeed, the tractions of ch. 3 lead to an acceptable approximative solution in a great many cases, while, as we saw, the tractions of ch. 2 do not.

## 5.2. The computer programme.

In the subsections of the present section, we discuss several features of the ALGOL-60 computer programme which was written to perform the iteration described by (5.12). The input is described in



5.21, in order to give some impression of the degree of generality of the programme. The possibility to use several forms of the integrand is described in 5.22, the optimization of the programme is discussed in 5.23, and in 5.24 the output is described with the aid of an example (fig. 12).

### 5.21. The input.

To be specified at input are:

- a) The degree  $M$  of the traction polynomials;
- b) The ratio of the axes  $a/b$  of the contact ellipse;
- c) POISSON'S ratio  $\sigma$ ;
- d) The points for the calculation of the integral;
- e) The number  $\delta$  of (5.12c);
- f) The maximum number of iterations;
- g) Creepage and spin;
- h) If necessary, the starting values  $\tau_k^0$ ;
- i) Several features of the output.

- a) The importance of the generality of  $M$  hardly needs adstruction. Owing to the large amount of machine time involved, (see (5.13)), only small values of  $M$  (say, up to 6) are of interest. So the load-displacement equations can be kept in core storage, which is important with a view to calculating speed.
- a,b,c) The most difficult to adapt to the demand of variable  $M$ ,  $a/b$ , and  $\sigma$  was the construction of the load-displacement equations. They are constructed by the machine in such a way that use is made of the fact that they fall apart into four independent systems of equations. This was done to avoid the occurrence of unnecessary zeros in the equations. The load-displacement equations are computed only once for a whole series of calculations. After they have been computed, the lengthy procedure needed for their calculation is placed on tape and the memory space occupied by it is again free for use.
- d) The points needed for the calculation of the integral are taken so that they form a rectangular network, the meshlength of which in the  $x$  and  $y$  directions can be specified separately.

e) Ordinarily, we took  $\delta=0.001$ . It should be noted that  $\max_k |\Delta\tau_k|$  in (5.12c) is an approximation of the error present in  $\tau_k^n$ . Since in (5.12b) terms of order  $\Delta\tau_k \Delta\tau_\ell$  are neglected, the  $\tau_k^{n+1}$  which we obtain at the end of the iteration contains errors of order

$$\left\{ \frac{\max_k |\Delta\tau_k|}{\max_k |\tau_k|} \right\}^2, \text{ that is, of order } \delta^2 = 10^{-6}.$$

f) Ordinarily, we set the maximum number of iterations equal to 12. If after these 12 iterations the inequality (5.12c) is not satisfied, the machine concludes that the calculation diverges, and proceeds to another case.

g) Creepage and spin are put in in terms of the significant data of the following triple loop:

```

for  $\chi := \chi_0$  step  $\Delta\chi$  until  $\chi_e$  do
for  $\alpha := \alpha_0$  step  $\Delta\alpha$  until  $\alpha_e$  do
for  $\ell := 1$  step 1 until  $\ell_e$  do
begin  $\xi := v[\ell] \cos \alpha$ ;  $\eta := v[\ell] \sin \alpha$ ;
perform the calculation;
end;

```

(5.16)

Here,  $v[1: \ell_e]$  is an array the dimension  $\ell_e$  elements of which are given in the input.  $\alpha$  is the angle between the vector  $(\xi, \eta)$  and the x-axis; it is given in degrees.

h) The programme works in a chainlike fashion, taking the resulting  $\tau_k$  as the starting value  $\tau_k^0$  for the next case. In the first case to be treated,  $\tau_k^0$  is set equal to zero, unless it is specified otherwise. The presence of a set of starting values  $\{\tau_k^0\}$  in the input is indicated by a control word in the input.

i) The features of the output which are under control of the input are discussed in sec. 5.24.

## 5.22. The form of the integrand.

It was the object during the writing of the programme to put as

few restrictions on the form of the integrand of I as was possible in view of the fact that hardly any loss of machine time may be suffered. So we chose as a general form of the integrand the function  $f(x,y,a,b,T,S)$ .  $f$  is calculated by a procedure which gives the values of

$$\left. \begin{array}{l} f, f^*, f^{\cdot}, f^{**}, f^{*\cdot}, f^{\cdot\cdot}, \\ \cdot : \text{differentiation with respect to } S, \\ * : \text{differentiation with respect to } T, \end{array} \right\} \quad (5.17)$$

which are all that is needed from  $f$  in the course of the calculation, as we will see in sec. 5.23. Another function  $f$  can easily be tried by a modification of the body of the f-procedure alone. In order to facilitate this, the f-procedure is kept separate from the rest of the programme. More specifically, it is a pretranslated procedure in the Delft TR4.

Up to now, we have extensively tried  $f=TS$  and  $f=W_1TS$ . We also tried  $f=\sqrt{W_1}TS$ . It should be noted in this connection that the form (5.15) is not caught in this way: a separate programme was written for it, which actually preceded the present programme in time.

### 5.23. Optimisation of the programme.

With a view to the formidable amount of machine time, the programme had to be optimized as much as possible. Consequently, the first demand is that the load-displacement equations, which are constantly referred to in the course of the calculation, should be immediately available at all times. Hence they were placed in core storage. The procedure which computes them is used only once for a whole series of cases, so it was placed on magnetic tape in order to save space.

Since every point of the network covering the contact area gives its contribution to every one of the  $(M+1)^2(M+2)^2$  coefficients of the linear equations (5.12b), the generation of these equations takes up most of the machine time. Consequently, these equations are placed in core storage, and special case is taken to perform the calculation as efficiently as possible. This optimisation took the

form of reducing the number of operations in the innermost loop of the programme as much as possible. We will give here the analysis involved.

We introduce the following notations:

$$\left. \begin{aligned} P &= s_x / \mu f_{00}, \quad Q = s_y / \mu f_{00} \implies S = P^2 + Q^2; \\ ,k &: \text{differentiation with respect to } \tau_k; \\ * &: \text{differentiation with respect to } T; \\ \cdot &: \text{differentiation with respect to } S. \end{aligned} \right\} \quad (5.18)$$

Hence, by (5.10),

$$\left. \begin{aligned} w_x &= P/\sqrt{S}, \quad w_y = Q/\sqrt{S}, \quad P_{,k} = \sum_{j=1}^q z_j^! u_{jk}, \\ Q_{,k} &= \sum_{j=1}^q z_j^! v_{jk}, \quad X'_{,k} = x_k, \quad Y'_{,k} = y_k. \end{aligned} \right\} \quad (5.19)$$

Also, we set

$$U = X' - w_x, \quad V = Y' - w_y \implies T = U^2 + V^2. \quad (5.20)$$

We differentiate  $f(x, y, a, b, T, S)$  with respect to  $\tau_k$ . That gives

$$f_{,k} = f^* T_{,k} + f^{\cdot} S_{,k}. \quad (5.21)$$

We differentiate (5.21) with respect to  $\tau_l$ ,

$$\left. \begin{aligned} f_{,kl} &= f^* T_{,kl} + f^{\cdot} S_{,kl} + \\ &+ f^{**} T_{,k} T_{,l} + f^{*\cdot} (T_{,k} S_{,l} + T_{,l} S_{,k}) + f^{\cdot\cdot} S_{,k} S_{,l}. \end{aligned} \right\} \quad (5.22)$$

We observe that in  $f_{,k}$  and  $f_{,kl}$  occur only the quantities (5.17) which are produced by the f-procedure.

In order to be able to evaluate (5.21) and (5.22), we must have the derivatives  $T_{,k}$ ,  $S_{,k}$ ,  $T_{,kl}$ ,  $S_{,kl}$ :

$$\left. \begin{aligned} S_{,k} &= 2PP_{,k} + 2QQ_{,k}, \\ S_{,kl} &= 2P_{,k} P_{,l} + 2Q_{,k} Q_{,l}, \end{aligned} \right\} \quad (5.23)$$

the latter, since according to (5.19)  $P_{,k}$  and  $Q_{,k}$  are independent of  $\tau_l$ . Also,

$$\left. \begin{aligned}
 T_{,k} &= 2UU_{,k} + 2VV_{,k}, \\
 U_{,k} &= X'_{,k} - (P/\sqrt{S})_{,k} = X'_{,k} + \frac{1}{S\sqrt{S}} (PQQ_{,k} - Q^2P_{,k}) = \\
 &= X'_{,k} + \frac{1}{\sqrt{S}} (w_x w_y Q_{,k} - w_y^2 P_{,k}), \\
 V_{,k} &= Y'_{,k} - (Q/\sqrt{S})_{,k} = Y'_{,k} + \frac{1}{S\sqrt{S}} (PQP_{,k} - P^2Q_{,k}) = \\
 &= Y'_{,k} + \frac{1}{\sqrt{S}} (w_x w_y P_{,k} - w_x^2 Q_{,k}).
 \end{aligned} \right\} (5.24)$$

We differentiate  $T_{,k}$  with respect to  $\tau_{\ell}$ . That gives after some calculation, if we recall that  $X'_{k\ell} = Y'_{k\ell} = 0$ :

$$\begin{aligned}
 T_{,k\ell} &= 2U_{,k}U_{,\ell} + 2V_{,k}V_{,\ell} + 2UU_{,k\ell} + 2VV_{,k\ell}, \\
 U_{,k\ell} &= \frac{1}{S} P_{,\ell} [3w_x w_y^2 P_{,k} + (w_y - 3w_x w_y^2) Q_{,k}] + \\
 &\quad + \frac{1}{S} Q_{,\ell} [(w_y - 3w_x w_y^2) P_{,k} + (w_x - 3w_x w_y^2) Q_{,k}]; \\
 V_{,k\ell} &= \frac{1}{S} P_{,\ell} [(w_y - 3w_x w_y^2) P_{,k} + (w_x - 3w_x w_y^2) Q_{,k}] + \\
 &\quad + \frac{1}{S} Q_{,\ell} [(w_x - 3w_x w_y^2) P_{,k} + 3w_y w_x^2 Q_{,k}].
 \end{aligned} \tag{5.25}$$

We introduce (5.23), (5.24), and (5.25) into (5.22). Clearly,  $f_{,k\ell}$  is a bilinear form in  $(X'_{,k}, Y'_{,k}, P_{,k}, Q_{,k})$  and  $(X'_{,\ell}, Y'_{,\ell}, P_{,\ell}, Q_{,\ell})$ . We write it in matrix form, as follows:

$$f_{,k\ell} = (X'_{,\ell} \ Y'_{,\ell} \ P_{,\ell} \ Q_{,\ell}) \begin{bmatrix} A_{11} & A_{12} & A_{13} & A_{14} \\ A_{21} & A_{22} & A_{23} & A_{24} \\ A_{31} & A_{32} & A_{33} & A_{34} \\ A_{41} & A_{42} & A_{43} & A_{44} \end{bmatrix} \begin{bmatrix} X'_{,k} \\ Y'_{,k} \\ P_{,k} \\ Q_{,k} \end{bmatrix}, \tag{5.26a}$$

with

$$A_{ij} = A_{ji}, \quad X'_{,\ell} = x_{\ell}, \quad Y'_{,\ell} = y_{\ell}, \quad P_{,\ell} = \sum_{j=1}^q z_j^! u_{j\ell}, \quad Q_{,\ell} = \sum_{j=1}^q z_j^! v_{j\ell}, \tag{5.26b}$$

and

$$\left. \begin{aligned}
 A_{11} &= 2f^* + 4f^{**}U^2, & A_{12} &= 4f^{**}UV, \\
 A_{13} &= -\frac{2}{\sqrt{S}} f^* w_y^2 + 4f^{**}UP - 4f^{**}Uw_y(Uw_y - Vw_x)/\sqrt{S}, \\
 A_{14} &= \frac{2}{\sqrt{S}} f^* w_x w_y + 4f^{**}UQ + 4f^{**}Uw_x(Uw_y - Vw_x)/\sqrt{S}, \\
 A_{22} &= 2f^* + 4f^{**}V^2,
 \end{aligned} \right\} (5.26c)$$

$$\begin{aligned}
 A_{23} &= \frac{2}{\sqrt{S}} f^* w_x w_y + 4f^{**} PV - 4f^{***} V w_y (U w_y - V w_x) / \sqrt{S}, \\
 A_{24} &= -\frac{2}{\sqrt{S}} f^* w_x^2 + 4f^{**} VQ + 4f^{***} V w_x (U w_y - V w_x) / \sqrt{S}, \\
 A_{33} &= \frac{2}{S} f^* \{w_y^2 + 3U w_x w_y^2 + V(w_x - 3w_x w_y^2)\} + 2f^* + \\
 &\quad + \frac{4}{S} f^{**} w_y^2 (U w_y - V w_x)^2 - 8f^{**} w_x w_y (U w_y - V w_x) + 4f^{**} P^2, \\
 A_{34} &= \frac{2}{S} f^* \{-w_x w_y + U(w_y - 3w_y w_x^2) + V(w_x - 3w_x w_y^2)\} + \\
 &\quad - \frac{4}{S} f^{**} w_x w_y (U w_y - V w_x)^2 + 4f^{**} (w_x^2 - w_y^2) (U w_y - V w_x) + 4f^{**} PQ, \\
 A_{44} &= \frac{2}{S} f^* \{w_x^2 + 3V w_y w_x^2 + U(w_y - 3w_y w_x^2)\} + 2f^* + \\
 &\quad + \frac{4}{S} f^{**} w_x^2 (U w_y - V w_x)^2 + 8f^{**} w_x w_y (U w_y - V w_x) + 4f^{**} Q^2.
 \end{aligned} \tag{5.26c}$$

It should be noted that all three factors of (5.26a) are position dependent. It should also be observed that if  $f=W_1TS$  or  $f=TS$ , only  $A_{21}=A_{12}$  vanishes identically. So, very little is gained by writing a special programme dealing with these cases only. The greater generality of  $f$  in the present programme is thus obtained at hardly any cost.

A programme which computes the coefficients  $\int f_{,kl} = \int f_{,lk}$  of the equations (5.12b) in a way which is based on the form (5.26a) of  $f_{,kl}$ , is easily given. Its innermost loop might look as follows:

```

Generate the 4 arrays X',k, Y',k, P',k, Q',k;
comment here and only here the load-displacement
equations are used;
Generate the Aij;
comment no array to save time;
p:= (M+1)(M+2);
for k:= 1 step 1 until p do
begin C1:= A11X',k + A12Y',k + A13P',k + A14Q',k;
      C2:= ...; C3:= ...; C4:= ...;
      comment the Ci form no array to save time;
      for l:= k step 1 until p do
          ∫f',kl:= ∫f',kl + C1X',l + C2Y',l + C3P',l + C4Q',l;
      end;

```

(5.27)

By making use of the fact that half of the numbers  $X'_{,l}$  and  $Y'_{,l}$

vanish, (see (5.26b) and (5.1)), more calculation time can be saved. We avoid the use of subscripted variables as much as possible, since the call of a subscripted variable takes more time than the call of an ordinary variable.

#### 5.24. The output.

In the course of time, the output underwent a number of changes. We will discuss here only the final version, which was introduced when 75% of the calculations described in sec. 5.33 were finished. A page of this output is reproduced in fig. 12. We will discuss this figure in some detail, in order to give an impression of the verification of the inequality in (5.9).

The format of the numbers in fig. 12 has three forms:

*.*xx <sub>10</sub> *.*xx:	a floating number with exponent at the right (fl);	}	(5.28)	
*.*xx.*.*xx	: a fixed point number			(fi);
*.*xx	: an integer			(in).

It should be remembered that throughout the programme the major semi-axis  $l$  is unit of length.

SPIN, MICROSLIP, HOEK:  $a_1(fi) a_2(fi) a_3(fi)$

with  $a_1=x$ ,  $a_2=v$ ,  $a_3=\alpha$ , see (5.16).

Specification of creepage and spin.

UPSX, UPSY, PHI:  $a_1(fi) a_2(fi) a_3(fi)$

with  $a_1=v_x/\mu f_{00}$ ,  $a_2=v_y/\mu f_{00}$ ,  $a_3=\phi l/\mu f_{00}$ .

TOEG GEV  $a_1(fl) a_2(fl) GEMAFW a_3(fl)$

with  $a_1 = \delta \max_k |\tau_k^{n+1}|$ ,  $a_2 = \max_k |\Delta \tau_k|$ , see (5.12c),

$$a_3 = \frac{1}{m} \sum_1^m f^{(n)}(x,y,a,b,T,S), \quad m: \text{number of points in contact area.}$$

We can see from the series of lines TOEG GEV etc. how fast the iteration process converges. It should be noted that  $a_2$  gives an approximation of the error in the previous iteration. In combination with the fast convergence when  $a_2$  gets small (here even faster than quadratic, when  $a_2 \ll 1$ ) this justifies us to give  $\delta$  the

Fig. 12. A page of the output,  $a/b=0.5$ ,  $\sigma=0.28$ .

```

SPIN,MICROSLIP,HOEK: 2.0000 1.7000 - 30.00
UPSX,UPSY,PHI : 0.9077 - 0.5241 1.7439
TOEG GEV+.310202512545- 2 +.825463503290- 0 GEMAFN:+.124967846745- 1
TOEG GEV+.325191548046- 2 +.196467231468- 0 GEMAFN:+.655982139915- 2
TOEG GEV+.325668086279- 2 +.243485761775- 1 GEMAFN:+.636476356704- 2
TOEG GEV+.325667730896- 2 +.223328902102- 3 GEMAFN:+.636289979821- 2
CONVER
FX FY MZ: 0.6249 -0.1220 0.3437
TAU
+.908286119491+ 0 -.349367884271+ 0 -.598682684580+ 0 -.713134273210+ 0 -.412520882910+ 0 -.123865208908+ 1
+.196130755753+ 1 -.166438669774+ 0 +.339905894663+ 0 -.764905620933+ 0 +.363984163655- 1 +.122234826366+ 1
+.281355484607+ 0 -.166314884292+ 1 +.591234429808+ 0 -.376036296511+ 0 -.106033563398+ 1 -.325667730905+ 1
+.153874845084+ 0 -.432568316460+ 0
UVX
+.408529460241+ 0 -.131612477230+ 1 -.920601446923+ 0 +.970207865077+ 0 +.891314856189+ 0 +.107945629140+ 0
+.102304109803+ 1 +.381801540534+ 0 +.156971880339+ 1 +.354127720002- 1 -.316159336350+ 1 +.795568278409+ 1
-.117220801720+ 1 +.806106721342+ 0 -.621773461409- 1 +.1866643096240- 1 +.460620005888+ 0 +.204563654260+ 0
-.270534609240+ 1 -.111786684778+ 1 -.203120076839+ 0 +.307240536349+ 1 -.129517249693+ 1 +.803580199801+ 0
-.162104008915+ 0 +.213857179240+ 1 +.587589341798+ 1 -.110478684091+ 0 +.119064418005+ 1 -.622240009372- 1
AFWIJKINGEN:
T,S,Y,X,F,S,HOEK:+.996538670152- 1 +.782010710173- 1 5 2 1.2805 0.2796 7.3
G,H,A,OPP: 1 1 1 22
CONTACTVLAK:
- 4 . . . . . 0 0 0 -1 -1 -1 -1 0 0 0
- 3 . . . . . 0 -1 -1 -1 -1 -1 -1 -1 -1 0
- 2 . . . . . 0 -1 -1 -1 -1 -1 -1 -1 -1 0
- 1 . . . . . -1 -1 -1 -1 -1 -1 -1 -1 -1
0 . . . . . H H H H H -1 -1 -1 -1 -1 -1 -1 -1
1 . . . . . H H H H H -1 -1 -1 -1 -1 -1 1 1 1
2 . . . . . H H H H H -1 -1 -1 -1 1 1 1 1 1
3 . . . . . H H H H H -1 -1 -1 1 1 1 1 1 1
4 . . . . . H H H H H -1 -1 -1 1 1 1 1 1 1
5 . . . . . A 0 0 0 -1 -1 -1 1 0 0 0
T,S,INT,X,F,FM,ANF,WS,ARS:
Y: -0.5000
+.166133321545- 2 +.961605765187+ 1 +.415362375452- 2 -0.3500 0.9599 0.4894 - 27.3 3.1010 - 27.0
+.151439686305- 3 +.736778676230+ 1 +.557887658033- 3 -0.2500 1.0088 0.7134 - 21.6 2.7144 - 22.1
+.500945898238- 3 +.538701820158+ 1 +.178107908342- 2 -0.1500 1.0224 0.8306 - 16.3 2.3210 - 16.3
+.260215543676- 3 +.382747524121+ 1 +.737016727598- 3 -0.0500 1.0131 0.8715 - 10.9 1.9564 - 10.4
+.172421023307- 3 +.267835781729+ 1 +.341735844771- 3 0.0500 0.9940 0.8551 - 5.6 1.6366 - 4.9
+.514759714861- 3 +.184769929270+ 1 +.627739966291+ 3 0.1500 0.9773 0.7940 - 0.2 1.3593 - 0.2
+.138197710311- 2 +.122851534659+ 1 +.848890038696- 3 0.2500 0.9735 0.6884 4.6 1.1084 3.1
+.29427305031- 2 +.736370221307+ 0 +.563404169512- 3 0.3500 0.9907 0.5051 8.4 0.8581 5.3
Y: 0.5000
+.124776151060- 1 +.191754441562+ 1 +.622085910368- 2 -0.3500 0.8932 0.4555 - 77.9 1.3848 - 79.9
+.168548618210+ 0 +.429966799773+ 0 +.362351549890- 1 -0.2500 0.5998 0.4241 - 66.3 0.6557 - 73.1
+.417216103353+ 0 +.389698802534- 1 +.107308486478- 1 -0.1500 0.3714 0.3018 - 47.8 0.1974 - 61.8
+.122841013490+ 1 +.239830621106- 2 +.218011670564- 2 -0.0500 0.2321 0.1996 - 14.2 0.0490 97.9
+.111114408529+ 1 +.170290990747- 1 +.140021192089+ 1 0.0500 0.2038 0.1753 28.9 0.1305 128.7
+.110524486022+ 1 +.174456342756- 1 +.127259204268- 1 0.1500 0.2213 0.1798 56.6 0.1321 153.9
+.117756519309+ 1 +.144254949480- 1 +.849348037218- 2 0.2500 0.2069 0.1463 71.1 0.1201 180.1
+.102047302975+ 1 +.111194503863- 1 +.295024578860- 2 0.3500 0.1276 0.0651 78.5 0.1054 169.4

```



modest value of 0.001. It should also be noted that  $a_3$  gives the mean value of  $f$  for  $\tau_k = \tau_k^n$  rather than  $\tau_k^{n+1}$ , which is the one generated by the iteration. When the last value of  $a_3$  is smaller than all the previous ones, we conjecture that the stationary value is a minimum. It is seen that in the present case this condition is satisfied.

CONVER

After the machine concludes that the iteration is finished according to the criterium (5.12c), the word "conver" is printed. If the iteration is not finished after the number of iterations specified at input, the word "cycle" is printed and a new case is taken up.

$$FX \text{ } FY \text{ } MZ: a_1(fi) \quad a_2(fi) \quad a_3(fi)$$

with  $a_1 = f_x = F_x / \mu N$ ,  $a_2 = f_y = F_y / \mu N$ ,  $a_3 = m_z = M_z / \mu N c$ .

The total force and the torsional couple exerted on the lower body by the upper body.

TAU

(a number of lines of floating numbers)

The  $\tau_k$  of the solution. Taking the inner product with  $x_k^M$  and  $y_k^M$  (see (5.1)) gives the traction polynomials  $X' = X / \mu Z$ , and  $Y' = Y / \mu Z$  respectively. It should be recalled in computing  $X'$  and  $Y'$  that the major semi-axis of the ellipse is the unit of length.

UVX

(a number of lines of floating numbers)

The slip polynomials. Taking the inner product with  $2x_k^{M+1}$  and  $2y_k^{M+1}$  (see (5.1)) gives  $P$  and  $Q$ . The contributions of the creepage and the spin, which are first degree polynomials, are accounted for in UVX.

AFWIJKINGEN:

$$T, S, Y, X, F, S, HOEK: a_1(fl) a_2(fl) a_3(in) a_4(in) a_5(fi) a_6(fi) a_7(fi)$$

with  $a_1 = T$ ,  $a_2 = S$ ,  $(a_4, a_3) =$  coordinates in the network of the point under consideration,  $a_5 = \sqrt{X'^2 + Y'^2}$ ,  $a_6 = \sqrt{S}$ ,  $a_7 =$  angle between traction and slip in degrees.

This is a list of all the aberrations, i.e. the points of the network with  $T > S$ ,  $|(X', Y')| > 1$ , that is, the points in which the inequality of (5.9) is not satisfied in the critical case that  $T > S$ . In the present

case, we have that the aberration occurs at the edge of the contact area, while  $T$  is only a little larger than  $S$ . So the solution is acceptable.

G,H,A,OPP:  $a_1(\text{in})$   $a_2(\text{in})$   $a_3(\text{in})$   $a_4(\text{in})$

with  $a_1$ =number of separate areas of slip;  $a_2$ =number of separate areas of adhesion;  $a_3$ =number of aberrations;  $a_4$ =number of points in  $E_h$ . This line gives some statistics regarding the solution. It should be observed that the solution itself does not specify the division of the contact area in areas of slip and locked areas. One can only say that a point with  $T < S$  belongs to the area of slip, while a point with  $T > S$  belongs to the area of adhesion. Quite arbitrarily, we set the boundary between an area of slip and an area of adhesion at the line  $T=S$ . It will be seen later on that in the case represented by fig. 12 the region where  $T \approx S$  is narrow, so that there is in fact a sharp distribution between the locked region  $E_h$  and the slip region  $E_g$ .

CONTACTVLAK:

```
-4 ...      0 0 0 -1 -1 -1 -1 0 0 0
etc.                etc.
```

This is a crude picture of the division of the contact area in areas of slip and adhesion. The numbers at the right were only used to generate the picture on the left, and to compute the statistics of G,H, etc. In the picture on the left, the column of integers indicates the line number (y-coordinate). A point indicates that the point belongs to the area of slip, an H indicates that it belongs to the locked area, and an A indicates an aberration. Complete data regarding the solution at an aberration are found in the AFWIJKINGEN list. It is seen from the picture in fig. 12 that we took a rectangular mesh of points which has at most 10 points in the x-direction and 10 points in the y-direction giving a total of 80 points in the contact area.

T,S,INT,X,F,FW,ANF,WS,ARS:

Y:  $a_0(\text{fi})$

$a_1(\text{fl})$   $a_2(\text{fl})$   $a_3(\text{fl})$   $a_4(\text{fi})$   $a_5(\text{fi})$   $a_6(\text{fi})$   $a_7(\text{fi})$   $a_8(\text{fi})$   $a_9(\text{fi})$

etc.

with  $a_0 = y$ -coordinate of the points listed below;  $a_1=T$ ,  $a_2=S$ ,  $a_3=f$ ,  
 $a_4 = x$ -coordinate of the point,  $a_5 = \sqrt{X'^2+Y'^2}$ ,  $a_6 = \sqrt{X^2+Y^2}/\mu f_{00}G$ ,  
 $a_7 =$  angle between traction and  $x$ -axis in degrees,  $a_8 = \sqrt{S}$ ,  
 $a_9 =$  angle between slip and  $x$ -axis in degrees. The angles  $a_7$  and  
 $a_9$  are between  $0^\circ$  and  $90^\circ$ , when  $X'>0$ ,  $Y'>0$ ;  $S_x >0$ ,  $S_y >0$ .

This is a specification of the solution at the point  $(a_4, a_0)$ , where it should be recalled that the major semi-axis is unit of length. The values of  $(a_4, a_0)$  are specified in the input. From this list we can judge the quality of the solution. In the case represented by fig.12 one can see from the T and S of the points  $(-0.35, 0.5)$ ,  $(-0.25, 0.5)$ , and  $(-0.15, 0.5)$  that the distinction between locked area and slip area is sharply defined. It is also seen that the solution at  $y = -0.5$  is of good quality. The angle between slip and traction is satisfactorily small (up to  $3^\circ$ ), and the traction is quite close to the COULOMB value (error up to 4%). The values of  $f$  are all below average, see GEMAFW. The values of  $f$  at  $y = +0.5$  are above average, and it is seen that the quality of the solution is much worse than at  $y = -0.5$ . It is worst at the separatrix  $T = S$ .

### 5.3. Numerical results.

The present section is divided into three parts. In 5.31, we calculate several cases with the object of comparing them with the experiments of JOHNSON [1,3], and of HAINES and OLLERTON [1]. In 5.31 we treat only cases with circular contact area, since most of the experimental evidence is so confined.

In 5.32, we try to give a qualitative survey of the behaviour of the surface stresses occurring under conditions of rolling with creepage and spin.

Finally, we direct our attention in 5.33 to the total force exerted by the upper body on the lower body.

#### 5.31. Comparison with the experiment.

We calculated the cases of pure creepage in the  $x$  and  $y$  directions respectively, of pure spin and of combined lateral creepage and spin all for a circular contact area, with the object of comparing them with the experiments. The results are shown in

figs. 13 to 17.

In fig. 13, the dimensionless forces  $f_x = F_x/\mu N$  and  $f_y = F_y/\mu N$  are plotted against the creepage parameters  $\xi = v_x \rho/\mu c$ , and  $\eta = v_y \rho/\mu c$ , respectively. Also plotted in fig. 13 are JOHNSON'S experimental values taken from [1]. As the theoretical curves for the degrees  $M=2,3,4$  nearly coincide, we show only one viz.  $M=2$  for the  $\xi-f_x$  diagram, and  $M=4$  for the  $\eta-f_y$  diagram. The weight function  $W=1$ . The agreement is quite satisfactory.

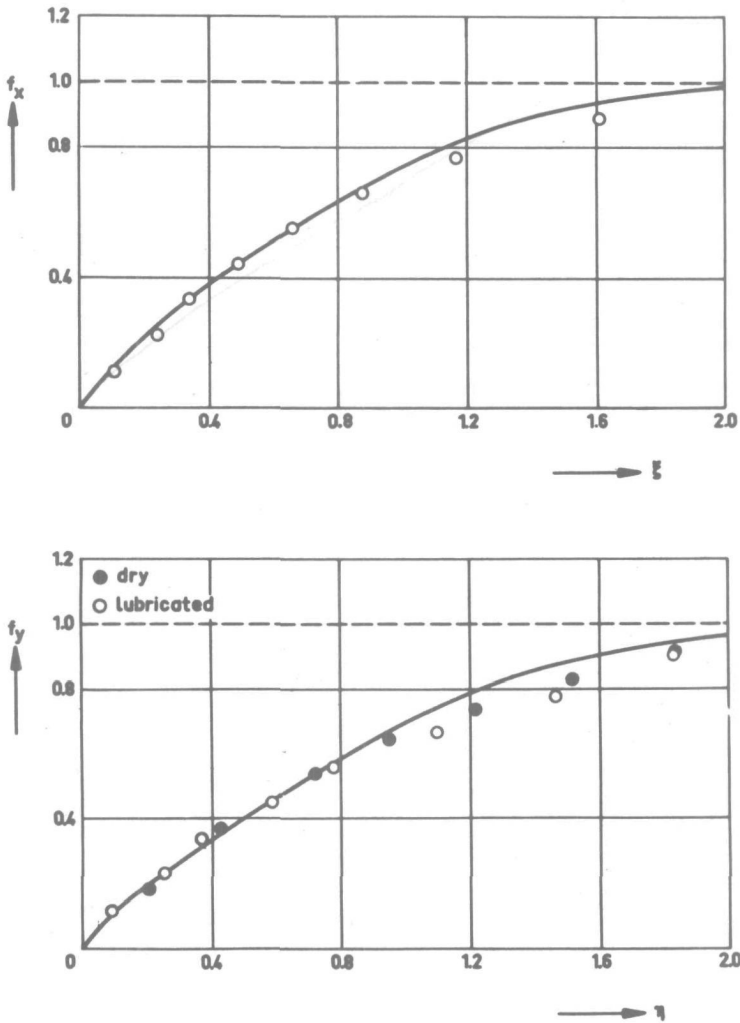


Fig. 13. The total force due to longitudinal and lateral creepage.  $a/b=1$ ,  $\sigma=0.28$ ,  $\chi=0$ .

In fig. 14,  $f_y$  is plotted as a function of the spin parameter  $\chi = \phi\rho/\mu$ , for zero creepage. The weight function  $W=W_1$ . Curves for  $M=2,3,4$  are shown; where not drawn, the curve for  $M=2$  follows the curve for  $M=3$ . Also given are experimental results taken from K.L. JOHNSON [3, fig. 8]. The coefficient of friction was not known; it was adjusted to fit the curve  $M=4$  best ( $\mu=0.094$ ). It is seen that the curve of  $M=3$  lies markedly higher in the region  $\chi=0.7$  to  $\chi=2$ . In this region, a change in the coefficient of friction has little effect upon the fit of theory and experiment. The curve of  $M=4$  in that region lies somewhat lower than the curve of  $M=3$ , but still above the experimental values.

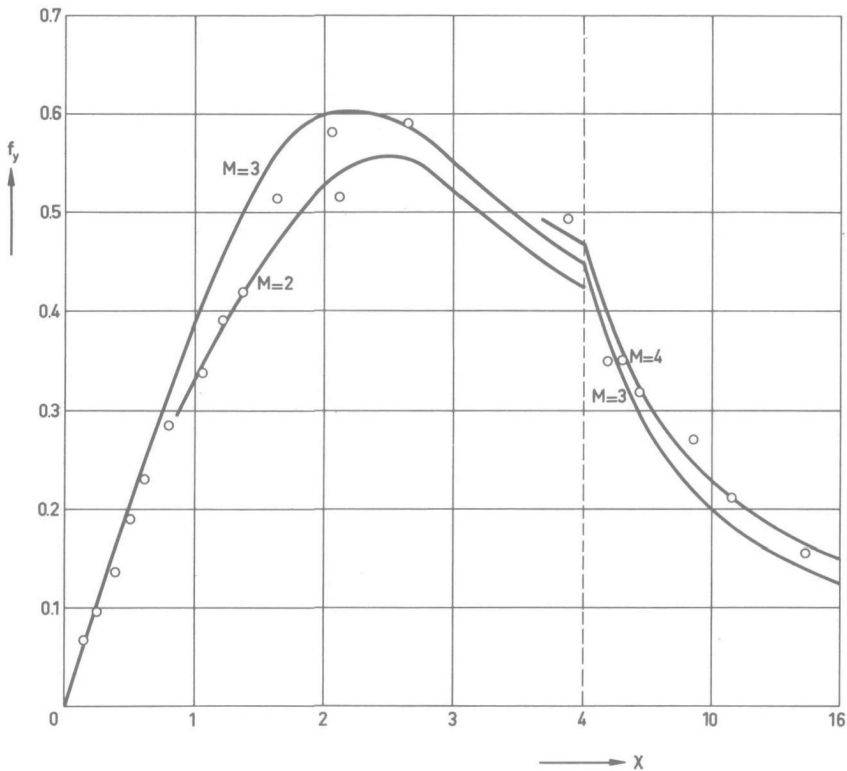


Fig. 14. The total force due to pure spin for various degrees  $M$  in comparison with experiments by JOHNSON.  $a/b=1$ ,  $\sigma=0.28$ ,  $\mu=0.094$  (estimated).

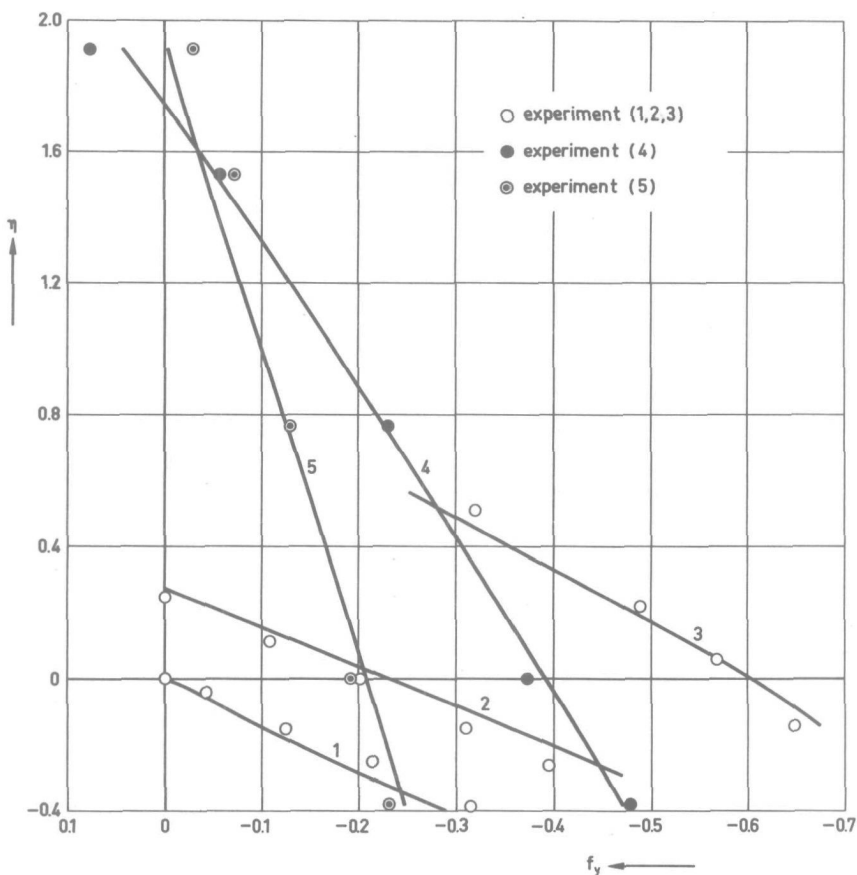


Fig. 15. The total force due to combined lateral creepage and spin in comparison with experiments by JOHNSON.  $a/b=1$ ,  $\sigma=0.23$ .  
 1:  $\chi=0$ ; 2:  $\chi=-0.561$ ; 3:  $\chi=-2.25$ ; 4:  $\chi=-4.78$ ; 5:  $\chi=-9.58$ .  
 1,2,3:  $\mu=0.0845$ ; 4,5:  $\mu=0.1044$ .

In fig. 15, the results of the numerical theory are compared with the experimental evidence of JOHNSON [3] on combined lateral creepage and spin, i.e.  $v_x=0$ ,  $(v_y, \phi) \neq (0,0)$ . The numerical results were obtained with the weight function  $W=W_1$  and the degree  $M=3$ . Here also, the coefficient of friction  $\mu$  was not known; however, the differences between theory and experiment are rather insensitive to

changes in  $\mu$  for the curves 1 and 2 of fig. 15 which represent small values of the spin, so that they give a clear impression of the deviation of theory and experiment for small spin. The curves 1,2,3 were measured with the same apparatus, so that it seemed natural to suppose that the coefficient of friction was the same in all three cases. It was adjusted so as to minimize the difference between theory and experiment for the curve 3 ( $\mu=0.085$ ). As a consequence of the way in which  $\mu$  was estimated, the correlation between experiment and theory for curve 3 is not necessarily as good as the one shown in fig. 15. JOHNSON performed the experiments for the curves 4 and 5 (large spin) by means of a different apparatus, so that it seems justified in assuming for curves 4 and 5 a coefficient of friction which differs from the one taken in curves 1,2,3. The  $\mu$  for 4 and 5 was chosen so as to minimize the differences between theory and experiment in those curves ( $\mu=0.104$ ). The differences appeared to be very sensitive to changes in  $\mu$ . Consequently the correlation between experiment and theory is not necessarily as good for the curves 4 and 5 as the one shown in fig. 15.

The moment  $M_z$  agreed badly with the experiments. However, it was pointed out by JOHNSON [3] that a moment due to elastic hysteresis is present in the experiments, which is of the same, or even larger order of magnitude than the moment due to surface friction. So there is little practical significance attached to the moment  $M_z$  as we calculate it, and consequently we omit it from our further considerations.

In fig. 16, the results for pure longitudinal creepage, calculated with  $W=W_1$  and  $M=3$ , are compared with the photoelastic work of HAINES and OLLERTON [1]. In the upper left part of fig. 16, the circular contact area is divided into an area of adhesion and an area of slip, the separatrix being assumed to be the line  $T=S$ . The distinction between  $E_g$  and  $E_h$  is quite sharp. Also shown is the separatrix according to HAINES and OLLERTON. It is seen that the lines are quite close. Also shown in fig. 16 is a comparison between HAINES and OLLERTON's surface stress and our results. The agreement is best for  $y=0$ , and worst for  $y=0.80$ . The value of  $P$  (see (5.18)) is shown for  $y=0$ . It is seen that it rises sharply in the slip

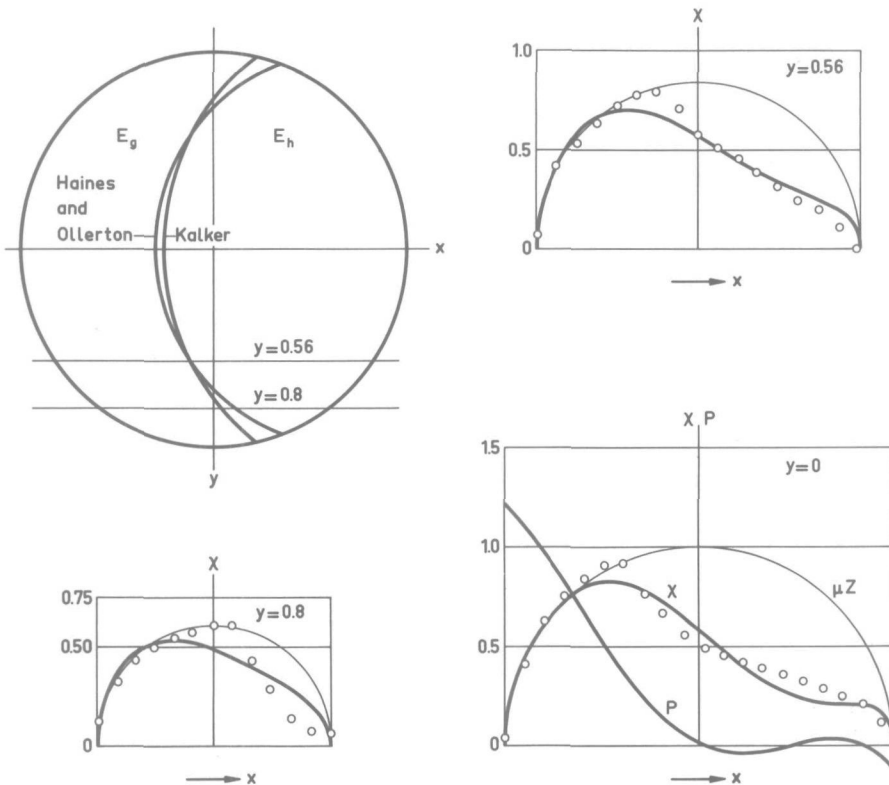


Fig. 16. A comparison with the photoelastic results of HAINES and OLLERTON.  
 $a/b=1$ ,  $\sigma=0.5$ ,  $\eta=\chi=0$ ,  $\xi=0.90$ .

zone, and winds itself about zero in the adhesion zone.

In fig. 17, we show the division of the contact area in areas of slip and adhesion according to the numerical theory, the strip theory (KALKER [2]), and the experimental evidence of JOHNSON [4], which consists of a photograph of the track of a rubber ball rolling over a sooted transparent plate (JOHNSON [4], fig.8b). The value of the spin parameter  $\chi=1.20$ , and POISSON'S ratio  $\sigma=0.50$  (for, taking the rubber ball as the upper body, we have that  $G^+ > G^-$ ,  $\sigma^- = 0.50$ ; hence, according to (2.10),  $G=2G^+$ ,  $\sigma=0.50$ ,  $\kappa=0$ ). The longitudinal creepage  $v_x=0$ , so that  $F_x=0$ , and  $v_y$  is chosen so that  $F_y$  also vanishes: that is, we are in fig. 15 at the intersection of the line



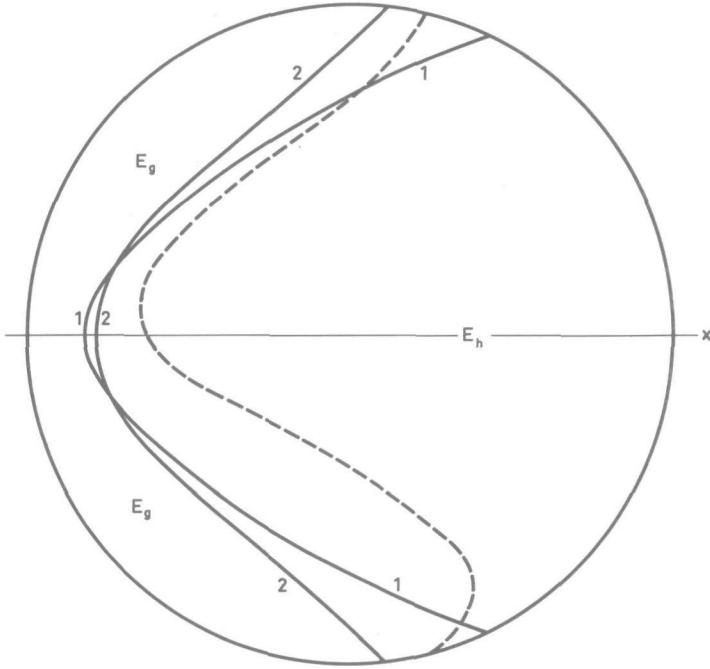


Fig. 17. The separatrix for combined lateral creepage and spin.  
 $\sigma=0.5$ ,  $f_y=0$ ,  $\chi=1.20$ ,  $\eta=-0.57$ .  
 1: strip theory. 2: numerical theory.  
 Broken line: a photograph by JOHNSON.

$\chi=1.20$  (not shown) with the  $\eta$ -axis. The theoretical separatrix is the line  $T=S$ , the degree  $M=3$ , the weight function  $W=W_1$ . It is seen that JOHNSON's contour is asymmetric with respect to the  $x$ -axis, while our contour is symmetric, as it should be with  $v_x=0$ , see (4.26). This is attributed by JOHNSON to the fact that the soot is swept into the adhesion area in the lower part of the figure, while it is swept away from the adhesion area in the upper part.

### 5.32. Qualitative behaviour of the solution.

In the present section and its subsections, we will make some observations on the qualitative behaviour of the solution in the case of pure creepage ( $\phi=0$ , sec. 5.321), pure spin ( $v_x=v_y=0$ , sec. 5.322), and arbitrary creepage and spin (sec. 5.323).

### 5.321. Pure creepage.

In the case of pure creepage, the area of adhesion borders on the leading edge of the contact area, and it is, according to the numerical theory, approximately symmetric about the x-axis. In the cases of purely longitudinal or purely lateral creepage, the form of the area of adhesion is well predicted by the strip theory of KALKER [2], which is a generalization of the strip theory due to HAINES and OLLERTON [1]. According to KALKER [2], the separatrix is found by shifting the trailing edge of the contact area parallel to itself along the x-axis, see fig. 18, where the case of a circular contact

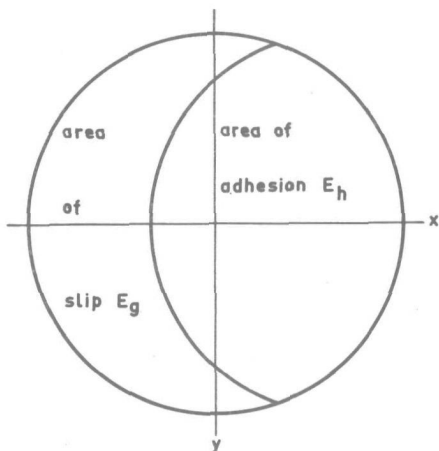


Fig. 18. Separatrix according to KALKER [2] for pure creepage.

area is shown. So, in the theory of KALKER [2], the area of adhesion is symmetric about the x-axis when there is combined longitudinal and lateral creepage, but no spin. When the total creepage increases, the separatrix comes to lie further and further from the trailing edge, until there is no area of adhesion left and gross sliding commences. Adhesion areas of this type have been observed by HAINES-OLLERTON [1] for pure longitudinal creepage, and by HAINES [2] for pure lateral creepage.

The behaviour of the absolute value of the traction can be seen from fig. 16. Going in the rolling direction along a line parallel to

the x-axis, the tangential traction first increases according to  $|(X,Y)|=\mu Z$  in the slip area, then falls below  $\mu Z$  near the separatrix, and stays below  $\mu Z$  in the locked area. According to the strip theory of HAINES and OLLERTON [1] and of KALKER [2], the curve representing the traction would have a vertical tangent at the separatrix.

The traction vectors are in general not parallel to each other. In the case of pure longitudinal creepage, the traction direction behaves qualitatively as sketched in fig. 19a. The division of the contact area in areas of adhesion and slip is not shown, our considerations are valid both for the area of slip and for the area of adhesion.  $\gamma$  is the angle between the traction and the x-axis. It is seen that the angle  $\gamma$  vanishes on the x-axis, since the traction is mirror-symmetric about the x-axis, see (4.27). When the longitudinal creepage changes sign, the direction of the traction is reversed, that is, the arrows in fig. 19a are reversed. To give an idea of the magnitude of  $\gamma$ , we give some values for  $\xi=0.8$ ,  $\eta=\psi=0$ ,  $a/b=1$ ,  $\sigma=0.28$ . Then  $\gamma_3 = -\gamma_1 = 3^\circ$ , and  $\gamma_4 = -\gamma_2 = 3^\circ$ . For increasing  $|y|$ , the absolute value of  $\gamma$  increases. For increasing longitudinal creepage  $|\xi|$ ,  $|\gamma|$  decreases. For increasing values of POISSON'S ratio  $\sigma$ ,  $|\gamma|$  increases up to values of about  $20^\circ$  for  $\sigma=0.5$ . For values near unity of the excentricity  $|e|$  of the contact ellipse,

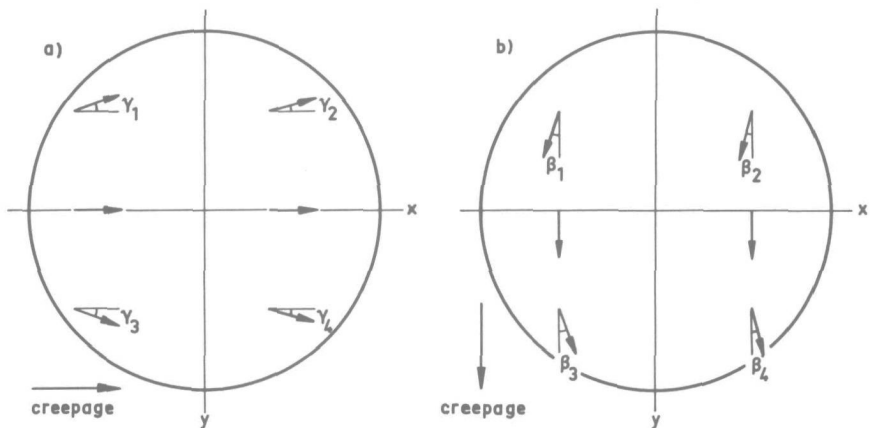


Fig. 19. An impression of the direction of the traction for  
a) longitudinal, b) lateral creepage, without spin.

$|\gamma|$  decreases. It should be remarked that the foremost points of fig. 19a lie in the area of adhesion or close to it, when  $|\xi|=0.8$ . Deeper in the adhesion area, and for smaller values of  $|\xi|$ , the traction becomes much smaller than the COULOMB value, and its direction according to the numerical method tends to be erratic. One should not place undue reliance on the fact that the direction of  $(X', Y')$  is erratic when  $|(X', Y')| \ll 1$ , since the error in the numerical method may drown the information. We also meet this phenomenon later on.


In the case of pure lateral creepage ( $v_x = \phi = 0$ ), the traction direction behaves qualitatively as sketched in fig. 19b. It is seen from fig. 19b that on the x-axis the angle  $\beta = 0$ , since according to (4.26), the traction and slip are mirror anti-symmetric about the x-axis, whenever  $v_x = 0$ . Also, when under the conditions of fig. 19b the lateral creepage changes sign, traction and slip are reversed. If  $\eta = 0.8$ ,  $\xi = \psi = 0$ ,  $a/b = 1$ ,  $\sigma = 0.28$ , then  $\beta_1 = -\beta_3 = 7^\circ$ , and  $\beta_2 = -\beta_4 = 3^\circ$ .  $|\beta|$  increases for increasing  $|\gamma|$ ;  $|\beta|$  decreases for  $|e| \uparrow 1$ , and for increasing  $|\eta|$ . The foremost points of fig. 19b lie in the area of adhesion or close to it when  $|\eta| = 0.8$ . Deeper in the adhesion area, and for smaller values of  $|\eta|$ , the traction becomes much smaller than the COULOMB value, and its direction according to the numerical theory tends to be erratic.

We finally observe that the maximum values of  $|\gamma|$  and  $|\beta|$  found here are of the same order of magnitude as the angle  $\theta_m$  of (4.46), which is the maximum angle between slip and traction in the problem of infinitesimal creepage and spin. The same values also occur in the strip theory of KALKER [2], fig. 4.


We leave the discussion of the total force exerted on the lower body to section 5.33.

### 5.322. Pure spin.


In the case of pure spin, the area of adhesion is symmetric about the x-axis, in accordance with the symmetry relations (4.26). In fig. 20, we sketched the division of the contact area into areas of slip and adhesion for different values of the spin parameter  $\chi$ . The separatrix is assumed to be the line  $T=S$ . All three figures correspond to  $a/b = 1$ ,  $\sigma = 0.28$ ,  $v_x = v_y = 0$ . The adhesion areas are shown

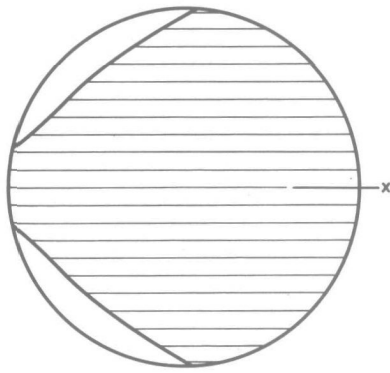


a)  $\chi=0.53$

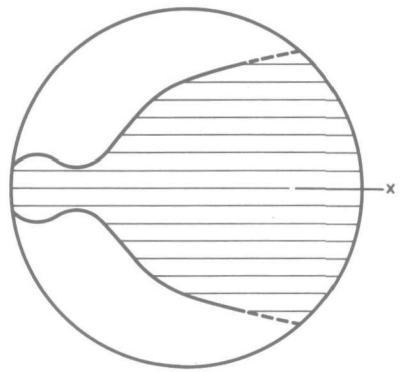


b)  $\chi=1.24$

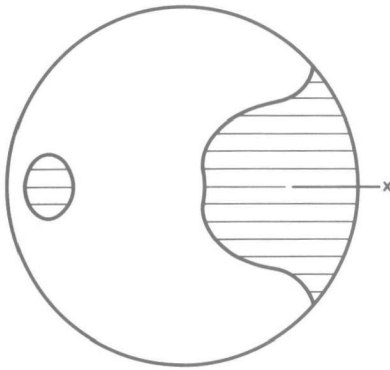


c)  $\chi=1.95$

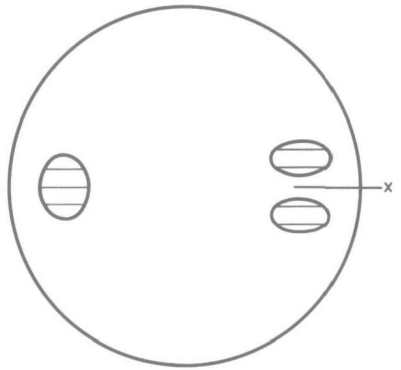

d)  $\chi=2.65$

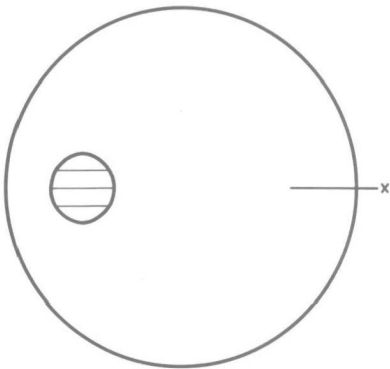

e)  $\chi=3.36$

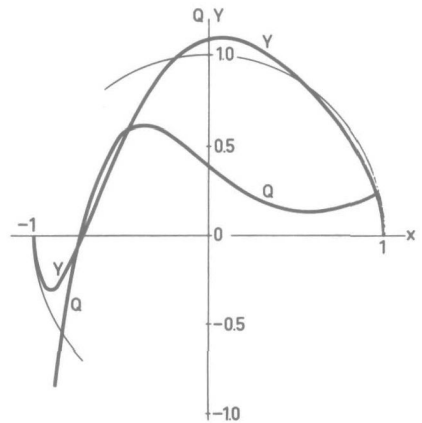

f)  $Y$  and  $Q$  for  $y=0$ ,  $\chi=2.65$

Fig. 20. a/e: Areas of adhesion (shown shaded) and slip for pure spin.  $a/b=1$ ,  $\sigma=0.28$ . f: Traction  $Y$  and slip  $Q$  on the  $x$ -axis for  $\chi=2.65$ .

shaded. The trivial case  $\psi=0$  has not been sketched; the adhesion area then covers the whole of the contact area (free rolling). In fig. 20a, the case  $\chi=0.53$  has been sketched. It is seen that slip commences at the trailing edge of the contact area, but that the x-axis lies entirely in the adhesion zone. For increasing values of the spin, the areas of slip grow, while the x-axis remains in the adhesion zone; the adhesion area becomes narrow in the y-direction (see fig. 20b,  $\chi=1.24$ ), and finally splits into two parts (fig. 20c  $\chi=1.95$ ). The island on the left is the adhesion area about the point with  $X=Y=s_x=s_y=0$ . The traction vectors from a rotating field about this adhesion area, see fig. 21. Both slip and traction have a large gradient there in the numerical solution, see fig. 20f. With further increasing spin, the adhesion area on the right of fig. 20c decreases in size; then it breaks up into small parts (fig. 20d,  $\chi=2.65$ ), and finally vanishes (fig. 20e,  $\chi > 3$ ). The island on the left remains, retains the character outlined above, but moves inward toward the centre of the contact area, where the spin pole of LUTZ [1,2,3] and WERNITZ [1,2] is situated (see (4.93)). The behaviour of the solution on the x-axis, upon which the island lies, can be gathered from fig. 20f, in which is sketched the relative slip  $Q$  (see (5.18)) and the distribution of the traction  $Y$ , both on the x-axis. The circle represents the COULOMB value of the traction. It is seen that slip and traction vanish at about the same point in the adhesion island on the left. It is also seen that going in the rolling direction the relative slip  $Q$  increases sharply with increasing  $x$ , attains a maximum, and decreases again with a much smaller gradient. This clearly shows the influence of the two small adhesion areas on the right of fig. 20d. It should be observed, finally, that it is doubtful whether the two small adhesion areas on the right of fig. 20c actually exist. Indeed  $T > S$ , but the difference is small, and, moreover, the largest contribution to  $T$  stems from the fact that the angle between slip and traction is rather large (up to  $14^\circ$ ). In fact, for slightly different values of  $\psi$ ,  $\eta$ , and  $\xi$ , aberrations occur in that region, in the sense that  $|(X,Y)| > \mu Z$ , and  $T > S$ . The occurrence of the island on the left is also somewhat doubtful. It is entirely possible that the tractions have a discontinuity there, and that the

slip has there a simple zero.

In fig. 21, the traction distribution in the contact area is shown for various values of the spin. Only half of the contact area has been drawn. The traction distribution is given in the form of curves of constant ratio between the resultant surface stress  $|(X,Y)|$  and the COULOMB traction  $\mu Z$  in percents. These lines are symmetric about the x-axis. The arrows represent the direction of the traction exerted on the lower body; according to (4.26), the tangential traction is mirror anti-symmetric about the x-axis, see fig. 19b.

It is seen from fig. 21 that the tractions form a rotating field with somewhat varying centre of rotation. The spin pole of LUTZ and WERNITZ lies in the centre of the contact area, but it is seen that there is no point  $X=Y=0$  inside the contact area when  $\chi=0.53$  (fig. 21a), such a point enters the contact area, (fig. 21b,  $\chi=1.24$ ), and slowly moves towards the centre of the contact area with increasing spin (fig. 21c,  $\chi=2.65$ ).

#### 5.323. Arbitrary creepage and spin.

The case of arbitrary creepage and spin lies between the cases of the spin pole at infinity (pure creepage) and of the spin pole at the center of the contact area (pure spin). An example is sketched in fig. 22, in the manner of fig. 21. The determining parameters of fig. 22 are:  $\chi=0.70$ ,  $\xi=-\eta=0.50$ ,  $a/b=1$ ,  $\sigma=0.28$ ,  $M=3$ ,  $W=W_1$ . The spin pole of LUTZ and WERNITZ lies on the circle, and has the coordinates  $(0.71a, 0.71a)$ , where  $a$  is the radius of the contact circle. The point  $X=Y=0$  lies approximately at  $(0.25a, 0.50a)$ . Since the traction is small near this point, it is not clearly defined. Also, when the parameters  $\xi, \eta, \psi$  get larger in absolute value in such a way that the spin pole retains its position, the absolute value  $|(X,Y)|$  of the traction has a minimum inside the contact area, but no zero. However, the accuracy of the numerical method is not so that one can come to a decision on the point whether there is a zero or not. It is seen from fig. 22 that the traction again forms a rotating field with the centre somewhere in the first quadrant  $x>0, y>0$ . In this quadrant, the values of the traction are small, and, especially near the point  $X=Y=0$ , the direction is erratic; this is possibly a case of the error

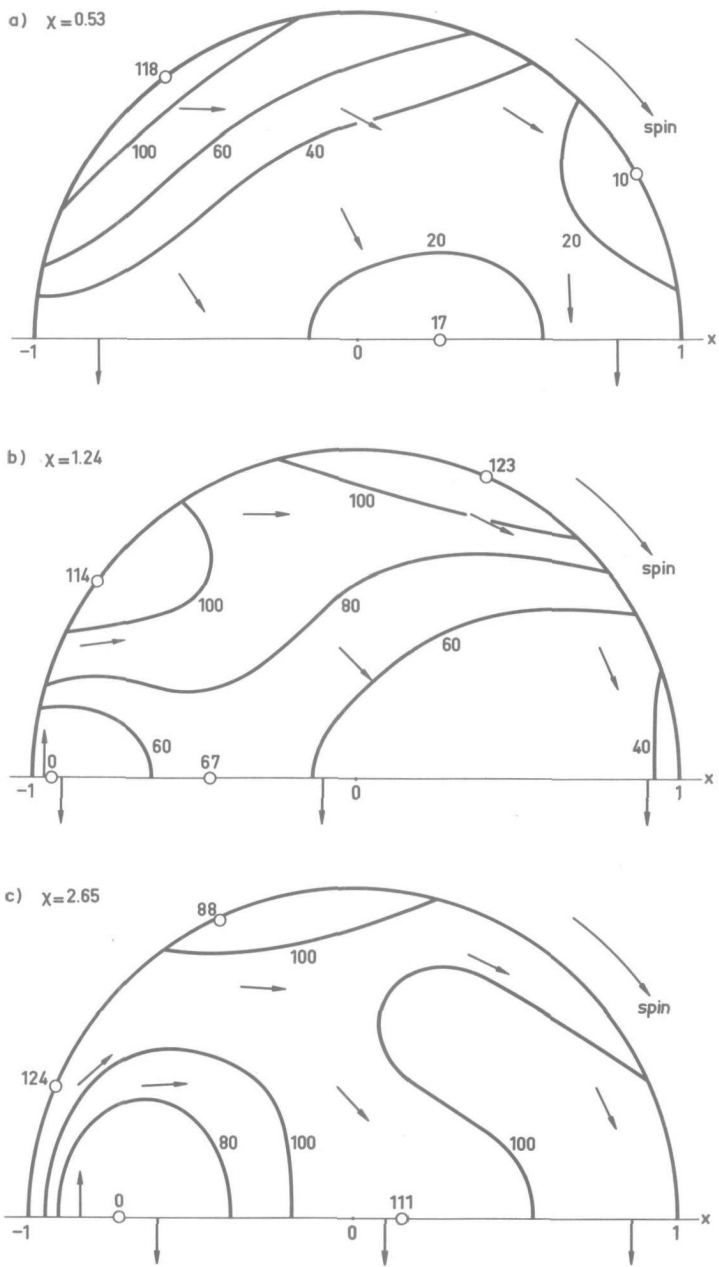


Fig. 21. Traction distribution for various values of the spin.  
 $a/b=1, \sigma=0.28, \xi=\eta=0.$



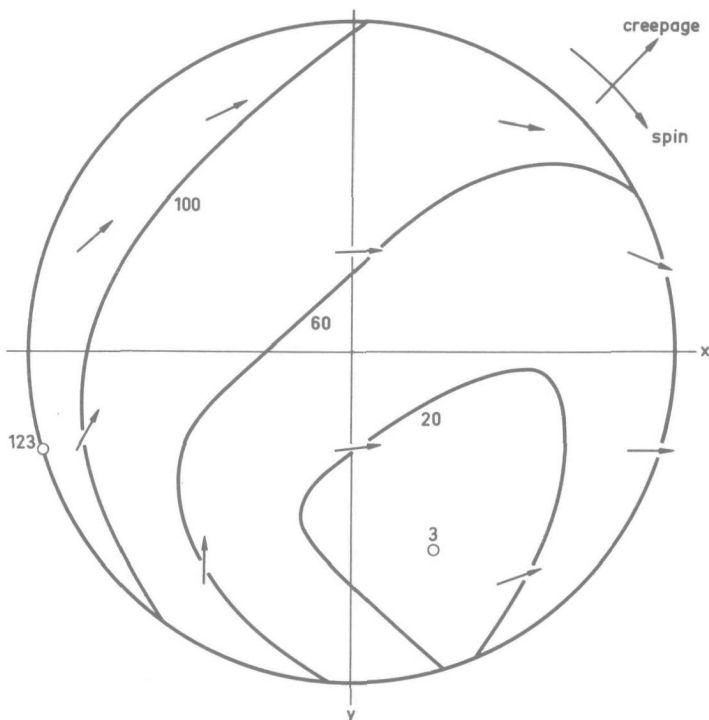


Fig. 22. Traction distribution for a case of combined creepage and spin.

$$a/b=1, \sigma=0.28, \chi=0.7, \alpha = -45^{\circ}.$$

in the calculation dropping the information.

### 5.33. The total force transmitted to the lower body.

For fixed ratio of the axes  $a/b$  and fixed POISSON'S ratio  $\sigma$ , one can imagine surfaces of constant creepage  $v=\sqrt{\xi^2+\eta^2}$  in the three-dimensional  $(f_x, f_y, \chi)$ -space. The surfaces of constant creepage all lie inside the cylinder  $f_x^2 + f_y^2 = 1$ , or, equivalently,  $F_x^2 + F_y^2 = \mu^2 N^2$ . This cylinder represents the limiting case that  $\xi^2 + \eta^2 \rightarrow \infty$ , see fig. 24a,b,c. It was found that the surfaces  $v=\text{constant}$  form tubes in the  $\chi$ -direction which lie inside each other, and which have a roughly circular intersection with the planes  $\chi=\text{constant}$ , the radius of the tube increasing as  $v$  increases. The radius decreases when the spin

becomes larger, i.e. as  $|\chi|$  increases, see fig. 24a,b,c, In the limit  $\chi \rightarrow \infty$ , the force is determined solely by the parameters  $c\xi/\chi$ , and  $-c\eta/\chi$ , which are the coordinates of the spin pole, see (4.93). So the "radius" of the tube is roughly determined by the quantity  $\nu/|\chi|$ , as  $\chi \rightarrow \infty$ .

It follows from the considerations of symmetry of sec. 4.2 that the  $(\chi, f_y)$ -plane is a plane of symmetry of the tubes, for when the point  $(f_x, f_y, \chi)$  corresponds to  $(\xi, \eta)$ , then  $(-f_x, f_y, \chi)$  corresponds to  $(-\xi, \eta)$ , see (4.23f). It follows from (4.22e) that the tubes are symmetric about the origin, for if the point  $(f_x, f_y, \chi)$  corresponds to  $(\xi, \eta)$ , then  $(-f_x, -f_y, -\chi)$  corresponds to  $(-\xi, -\eta)$ . Hence we need for the construction of the tubes only the pertinent information in the quarter space  $f_x \geq 0, \chi \geq 0$ . When  $\xi = \eta = 0$ , the tube degenerates into a line in the  $(f_y, \chi)$ -plane. This is the case of pure spin, which is given in fig. 23 for four values of the parameter  $a/b$ , with POISSON'S ratio  $\sigma = 0.28$ .

The total force transmitted to the lower body was calculated in a great number of cases, with the degree  $M=3$ , the weight function  $W=W_1$ , and  $\sigma=0.28$ . First, we calculated the case of pure spin  $\xi=\eta=0$  for  $a/b=2, 1, 0.5, 0.2$ . The results are shown in fig. 23. Then we calculated  $f_x$  and  $f_y$  as functions of  $\xi$  and  $\eta$ , for fixed values of spin, POISSON'S ratio, and ratio of the axes  $a/b$ . The values of  $\chi$  were chosen so that we obtain the plane of pure creepage ( $\chi=0$ ), then two values of  $\chi$  before the peak in fig. 23, one at the peak, and two after. In fact, we calculated

$$\left. \begin{array}{l} \sigma=0.28, a/b=2; \quad \chi=0, \frac{1}{2}, 1, 2, 3\frac{1}{2}, 7; \text{ variable } \xi \text{ and } \eta. \\ \sigma=0.28, a/b=1; \quad \chi=0, \frac{1}{2}, 1, 2, 5, 10; \text{ variable } \xi \text{ and } \eta. \\ \sigma=0.28, a/b=0.5; \quad \chi=0, 1, 2, 3, 5, 10; \text{ variable } \xi \text{ and } \eta. \\ \sigma=0.28, a/b=0.2; \quad \chi=0, \frac{1}{2}, 1, 2, 5, 10; \text{ variable } \xi \text{ and } \eta. \end{array} \right\} \quad (5.29)$$

The case  $\chi = \infty$  has been treated in sec. 4.4, fig. 10 and 11.

The results of these calculations will be laid down in a report of the Laboratorium voor Technische Mechanica of the Delft Technological University. Some results of the calculations with  $\chi = \text{constant}$  are given in fig. 24, all for  $a/b=1, \sigma=0.28$ .

We also attempted to calculate the case  $a/b=5$ , but here the

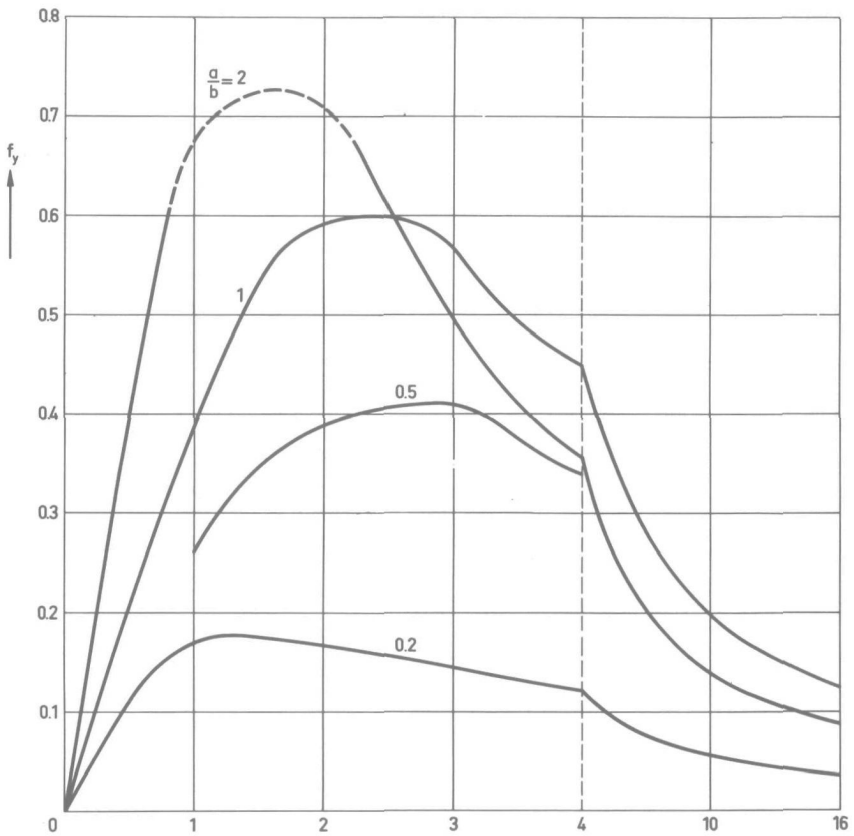


Fig. 23.  $f_y$ - $x$  diagram for various values of  $a/b$ .  
 $\sigma=0.28$ ,  $\xi=\eta=0$ .

numerical method failed to give results in a large portion of the curve of pure spin, situated around the peak. Either the iteration process (5.12) failed to converge, or it gave incorrect results, with aberrations covering nearly the entire contact area, and with  $f_x^2 + f_y^2$  exceeding unity. By taking special care in the choice of the initial value  $\tau_k^0$ , the trouble could be concentrated in a smaller position of the curve of pure spin, but even so the solutions obtained showed many aberrations. We decided to drop the case altogether in view of the formidable amount of machine time needed to obtain any results at all, which would be of poor quality as well. Also, the case would

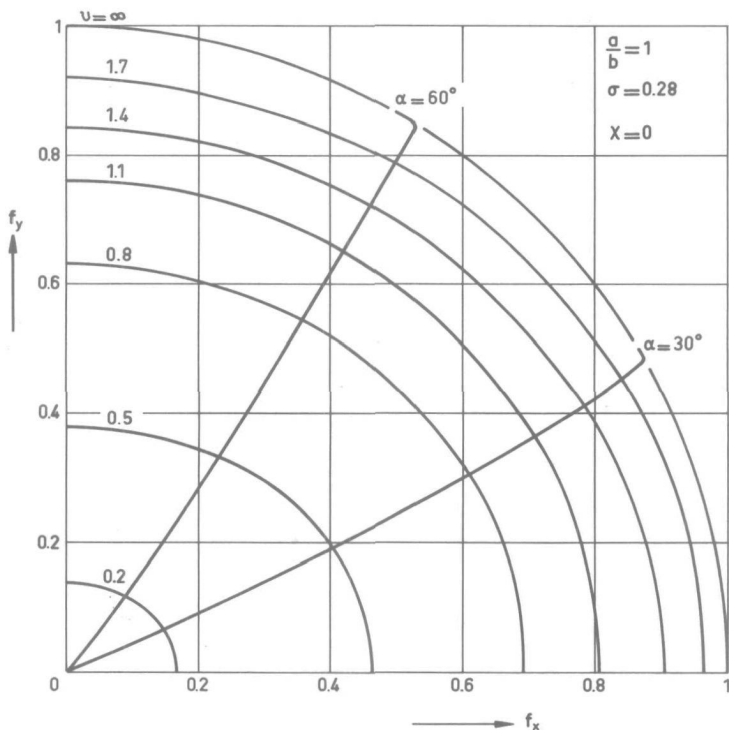


Fig. 24a. Lines of constant  $v$  and  $\alpha$  as functions of  $f_x$  and  $f_y$ ,  
 $a/b=1$ ,  $\sigma=0.28$ ,  $\chi=0$ .

seem to have little practical interest: it is the case of a contact area which is narrow in the lateral direction, an extreme case of which is a circular knife rolling over a plane. The trouble in the case  $a/b=5$  was already foreshadowed in the calculations of the case  $a/b=2$ , where near the peak many aberrations  $T > S$ ,  $|(X,Y)| > \mu Z$  occurred. In pure spin also, the resulting values near the peak of  $f_y$  for  $a/b=2$  were somewhat erratic, which is the reason why that portion of the curve of  $f_y$  for  $a/b=2$  is given in fig. 23 with a broken line.

In fig. 23 we show the case of pure spin, for different values of  $a/b$ . The curve for  $a/b=0.5$  is shown only partially; it goes through the origin in the same way as the other curves, and on the right the curve  $a/b=0.5$  is very close to the curve  $a/b=2$ . In fact,

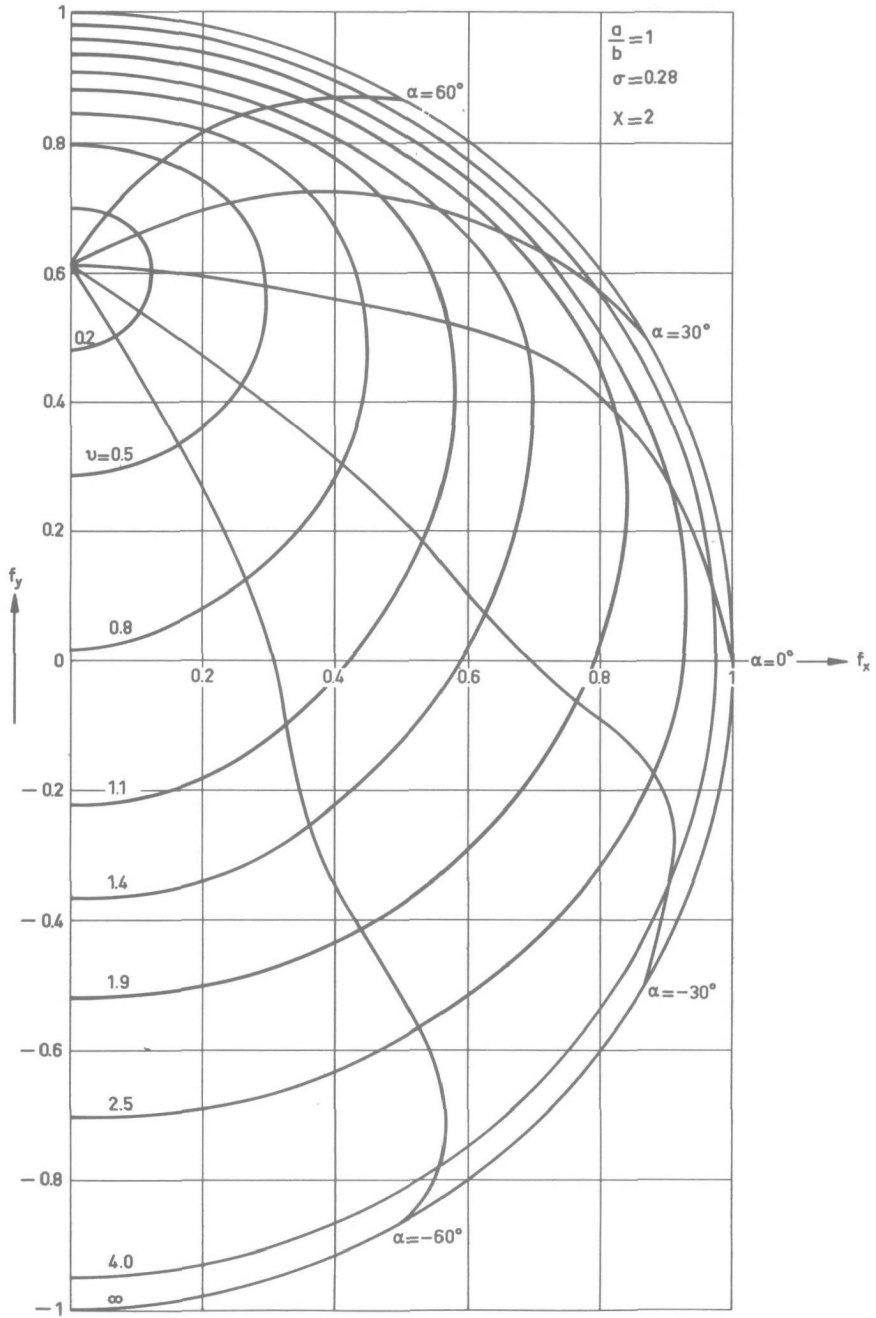


Fig. 24b. Lines of constant  $\nu$  and  $\alpha$  as functions of  $f_x$  and  $f_y$ .  
 $a/b=1, \sigma=0.28, \chi=2.$

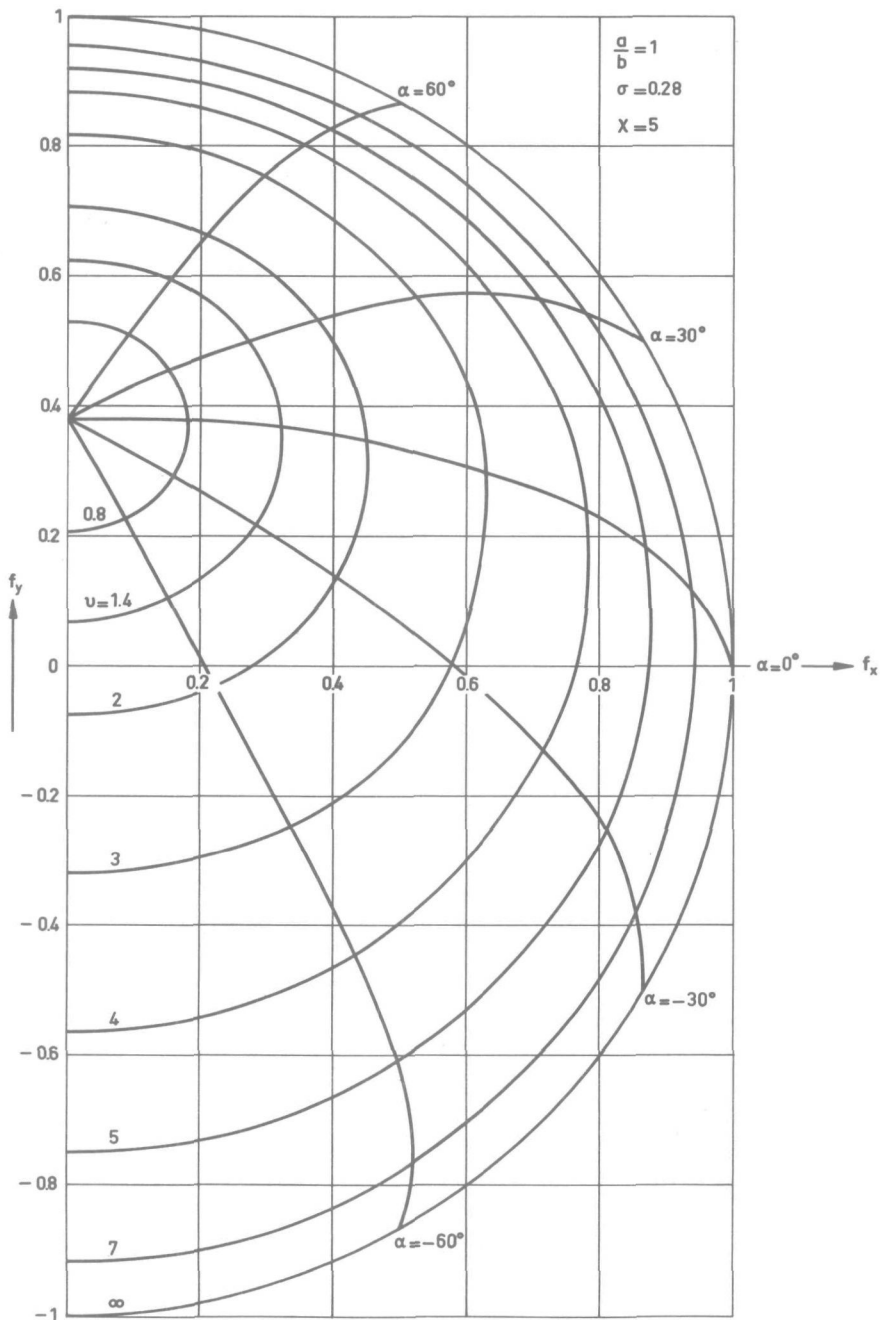


Fig. 24c. Lines of constant  $\nu$  and  $\alpha$  as functions of  $f_x$  and  $f_y$ .  
 $a/b=1$ ,  $\sigma=0.28$ ,  $\chi=5$ .

the values of  $f_y$  lie slightly higher in the case  $a/b=0.5$ , but not significantly so. It is seen that the curves of  $f_y$  as functions of  $\chi$  increase from zero to a maximum, then decrease again, approaching zero asymptotically. Two competing mechanisms are at work. For small values of  $|\chi|$ , the effective spin pole lies far from the origin, see fig. 21. However, the area of adhesion is large, which keeps the mean absolute value of the traction down as a consequence of elastic deformation. As  $|\chi|$  increases, the area of adhesion becomes smaller, and the mean absolute value of the tractions grows. At the same time, however, the effective spin pole moves towards the origin. Consequently, the direction of the traction becomes diversified, which tends to diminish the total force. Especially for small values of  $a/b$ , the effects appear to keep each other in check for a large range of values of  $\chi$  around the maximum, for the maximum is very flat.

It is seen from fig. 23, that the value of the maximum decreases when  $a/b$  decreases, that is, when the ellipse becomes narrower in the rolling direction. If we assume tentatively that the effective spin pole lies in the point  $(-\alpha a, 0)$ , where  $\alpha$  is some function of  $\chi$  independent of the ratio  $a/b$ , it is clear that with decreasing  $a/b$  the area occupied by points with a large  $x$ -component of the traction increases, while in the determination of the total force the  $x$ -components cancel each other, owing to the mirror antisymmetry of the traction.

It is also seen from fig. 23 that the value of  $\chi$  at which the maximum is reached, first increases with decreasing  $a/b$ , reaches a maximum at  $a/b \approx 0.5$ , when  $\sigma=0.28$ , and then decreases again. This is partially because for the same value of the spin parameter  $\phi c$ , a slender ellipse has a larger area of slip than a non-slender ellipse, so that the effect of the elastic deformation described above, dies out for a smaller value of  $\phi c$ .

We now turn our attention to the figures 24. They represent the case  $\sigma=0.28$ ,  $a/b=1$ . In the three-dimensional  $(f_x, f_y, \chi)$ -space introduced above, they are planes of constant  $\chi$ . In fig. 24a,  $\chi = 0$  (pure creepage). Fig. 24b represents a value of  $\chi$  near the peak of fig. 23 ( $\chi = 2$ ). Fig. 24c represents a value of  $\chi$  beyond the peak,

for which  $f_y(v_x=0, v_y=0) \approx \frac{1}{2} \max_{\chi} f_y: \chi = 5$ . In the figures, the tangentials are lines of constant creepage  $v \equiv \sqrt{\xi^2 + \eta^2} = \text{constant}$ . The radials are lines of constant  $\alpha$ , where

$$\xi = v \cos \alpha, \quad \eta = v \sin \alpha, \quad v = \sqrt{\xi^2 + \eta^2}, \quad \alpha \text{ in degrees}, \quad (5.30)$$

in accordance with (5.16).

In fig. 24a, only the first quadrant is shown because when  $\chi = 0$ , there is symmetry about both the  $f_x$  and  $f_y$  axes. It is seen that the lines  $\alpha = 30^\circ$  and  $\alpha = 60^\circ$  are nearly straight, except at the end  $v \rightarrow \infty$ , where they make a sharp turn. This means that the ratio  $f_x/f_y$  depends principally on the ratio  $\xi/\eta$  for values of  $v$  up to 1.7. In fact,

$$\left. \begin{aligned} 25^\circ < \tan^{-1}(f_y/f_x) < 27.6^\circ \text{ when } \alpha = 30^\circ, 0 < v < 1.7; \\ 53^\circ < \tan^{-1}(f_y/f_x) < 56.7^\circ \text{ when } \alpha = 60^\circ, 0 < v < 1.7. \end{aligned} \right\} \begin{array}{l} a/b=1 \\ \sigma=0.28 \end{array} \quad (5.31a)$$

According to the theory of JOHNSON and VERMEULEN [5], these angles are constant, and

$$\left. \begin{aligned} \tan^{-1}(f_y/f_x) &= 25.8^\circ \text{ when } \alpha = 30^\circ, v > 0; \\ \tan^{-1}(f_y/f_x) &= 55.4^\circ \text{ when } \alpha = 60^\circ, v > 0; \\ a/b=1, \sigma &= 0.28. \end{aligned} \right\} \quad (5.31b)$$

In figs. 24b and 24c, only the first and fourth quadrants are shown, since the  $f_y$ -axis is a line of symmetry. The curves  $v=\text{constant}$  are egg-shaped, with the flat end up. In fig. 24b ( $\chi = 2.0$ ), the curves for  $\alpha = -30^\circ$  and  $\alpha = -60^\circ$  show some waviness. It is not at all certain whether this waviness actually occurs in practice: it is quite possible that it is due to errors in the numerical calculation. It is seen from fig. 24c that the waviness is completely gone for  $\chi = 5$ . In fig. 24c, the effect of the diminishing radius of the tube  $v=\text{constant}$  with increasing  $\chi$  is clearly shown.



## 6. Conclusion.

In this final chapter we will review in 6.1 the results which have been achieved in this thesis, and in 6.2 we will make some observations on further research.

### 6.1. Results achieved.

In this thesis, we confine ourselves to contact problems between purely elastic bodies which can be approximated by half-spaces, while the contact area is elliptic in form. The method for the solution of contact problems with friction which is discussed in this thesis is, strictly speaking, only valid when the elastic constants of the bodies are the same, or when both bodies are incompressible. The method gives an approximation in case that these conditions are not satisfied. A crude estimate of the error of this approximation is given in sec. 2.1.

In chapters 2 and 3, we discuss the general theory. It was shown in 2.2 that a generalized version of GALIN's theorem (GALIN [1], ch. 2, sec. 8) can be established without recourse to LAME's ellipsoidal harmonics. As a consequence of this, DOVNOROVICH's method [1] for the calculation of contact problems without friction on the basis of GALIN's theorem could be adapted in 2.3 to contact problems in which there are also frictional forces. DOVNOROVICH's method was generalized in 2.4 sqq. in the sense that the connection between tractions and displacement differences was given explicitly for any degree  $M$  of the determining polynomials. In 3.1, the theory is worked out for the case without traction singularity at the edge of the contact area. DOVNOROVICH also considered this problem, but he did not arrive at the simple relationship (3.15). The examples treated in 3.2 sqq. are all well-known.

In chapters 4 and 5, we discuss the problem of contact in steady rolling. The boundary conditions are well established, see e.g. DE PATER [1] and KALKER [1]; they are set up in section 4.1. In 4.2., we derive a number of symmetry relations between the surface tractions and the slip on the one hand, and creepage and spin on the other hand. These relations lead to a number of symmetry properties of the

total force and the total torsional moment as functions of creepage and spin. It is also found that the determining parameters of the problem are  $a/b$ ,  $\xi$ ,  $\eta$ ,  $\chi$ , and  $\sigma$ . We have not found the symmetry relations in this form in the literature.

The limiting case of infinitesimal creepage and spin (sec. 4.3 sqq.) was treated before in the literature, but we generalized it to elliptic contact areas. KALKER's proof (see [1], p. 168-169) that no slip takes place at the leading edge of the contact area when creepage and spin are infinitesimal, and which is valid for circular contact areas and vanishing POISSON's ratio, was extended in sec. 4.31 to elliptic contact areas and arbitrary POISSON's ratio. The creepage and spin coefficients  $C_{ij}$  (p.91 to 93) coincided with those obtained in KALKER [1], pg. 174, when the contact area is circular. It was found in KALKER [1] that the creepage and spin coefficients agree with JOHNSON's experiments [1,2,3], when the contact area is a circle. In a comparison with the experiments of JOHNSON and VERMEULEN [5], it was found that  $C_{22}$  agrees well with the experiment when the contact area is an ellipse. The curious and unexplained phenomenon that  $C_{23} = -C_{32}$ , which was noted in KALKER [1], occurred also with elliptic contact areas.

The theory of LUTZ [1,2,3] and WERNITZ [1,2] for very large creepage and spin, which is confined to the case that  $v_x=0$  or  $v_y=0$  when the contact area is an ellipse, was generalized in sec. 4.4 to the case that  $v_x \neq 0$ ,  $v_y \neq 0$ .

The numerical theory of ch. 5 for steady rolling with arbitrary creepage and spin, which consists of the minimalization of a certain integral, appeared to work reasonably well for the degree  $M=3$ , and the weight function  $W=W_1$ . The error in the total force is at most about 10%, see fig. 15. The error in the traction distribution is larger, see fig. 16. A qualitative description of the tractions in steady rolling is given in sec. 5.32 sqq. The calculations were carried out for a large number of the defining parameters  $a/b$ ,  $\xi$ ,  $\eta$ ,  $\chi$  (see (5.29)); POISSON's ratio was kept at  $\sigma=0.28$  throughout. The calculations proved to be exceedingly lengthy, so that in our opinion the main significance of the theory of ch. 5 lies in the possibility that existing approximate theories (JOHNSON [1,2,3,4,5]),

LUTZ [1,2,3] - WERNITZ [1,2], DE PATER [1] - KALKER (sec. 4.3 sqq.), HAINES - OLLERTON [1], KALKER [2]) or theories that will be developed yet can be tested with the numerical theory.

## 6.2. Further research.

It would be of interest to have a deeper insight in the interaction between the normal and the tangential problem, when  $\kappa \neq 0$ .

Such an interest is mainly academic in the case of the influence of the tangential traction on the normal problem. An interesting aspect of such a theory is the change of the contact area as a consequence of tangential tractions. A simple, non-trivial problem of this sort is the problem of gross sliding in Hertzian contact. In that case, the boundary conditions are

$$\left. \begin{array}{l} w = -Ax^2 - By^2 + \alpha, \\ X = \mu Z, Y = 0 \end{array} \right\} \text{ in } E, \quad (6.1)$$

$$\left. \begin{array}{l} w > -Ax^2 - By^2 + \alpha, \\ X = Y = Z = 0 \end{array} \right\} \text{ on } z = 0, \text{ outside } E, \quad (6.2)$$

$$\text{Displacements and stresses vanish at infinity.} \quad (6.3)$$

In the rotationally symmetric case of pure spin about the z-axis,

$$X = -\frac{\mu y Z}{\sqrt{x^2 + y^2}}, \quad Y = +\frac{\mu x Z}{\sqrt{x^2 + y^2}},$$

the normal problem is unaffected by the tangential tractions, see SNEDDON [1], ch. V, sec. 31.

The case of the normal problem influencing the tangential problem is of greater practical interest, especially in the case of a small coefficient of friction  $\mu$ . This would be an investigation into the second approximation of sec. 2.1. This has already been carried out for the two-dimensional case of two cylinders rolling freely over each other, see JOHNSON [4]. In the general three-dimensional case of rolling contact, the treatment would differ only slightly from the one given in chapter 5. The only new thing needed is

$$\frac{\partial u^H}{\partial x} = \left[ \frac{\partial u}{\partial x} \right]_{X=Y=0}, \quad \frac{\partial v^H}{\partial x} = \left[ \frac{\partial v}{\partial x} \right]_{X=Y=0} \quad (6.4)$$

which can be given as a surface integral derived from (2.11a,b), with the Hertzian normal pressure

$$Z(x', y') = G f_{00} \sqrt{1 - (x'/a)^2 - (y'/b)^2}. \quad (6.5)$$

By means of the substitutions of the fundamental lemma of sec. 2.2, the double integral derived from (2.11) can be reduced to a single integral with periodic continuous integrand which is integrated over the period. So the quantities (6.4) are brought in a numerically accessible form. The relative slip is then given by (4.15c):

$$\left. \begin{aligned} s_x &= v_x - \phi y + \left[ \frac{\partial u}{\partial x} \right] = v_x - \phi y + \left[ \frac{\partial u}{\partial x} \right]_{X=Y=0} + \left[ \frac{\partial u}{\partial x} \right]_{Z=0}, \\ s_y &= v_y + \phi x + \left[ \frac{\partial v}{\partial x} \right] = v_y + \phi x + \left[ \frac{\partial v}{\partial x} \right]_{X=Y=0} + \left[ \frac{\partial v}{\partial x} \right]_{Z=0}; \end{aligned} \right\} \quad (6.6)$$

the only difference with the theory of ch. 5 is, that a known function is added to  $s_x$  and  $s_y$  at each point.

An analytical investigation into JOHNSON'S problem of free rolling is also feasible in the case of a circular contact area. The problem is:

Determine  $v_x$ ,  $v_y$  and  $\phi$  so, that

$$\left. \begin{aligned} s_x &\equiv v_x - \phi y + \left[ \frac{\partial u}{\partial x} \right]_{X=Y=0} + \left[ \frac{\partial u}{\partial x} \right]_{Z=0} = 0 \text{ in } E, \\ s_y &\equiv v_y + \phi x + \left[ \frac{\partial v}{\partial x} \right]_{X=Y=0} + \left[ \frac{\partial v}{\partial x} \right]_{Z=0} = 0 \text{ in } E; \end{aligned} \right\} \quad (6.7)$$

No singularity at the edge of the contact area;

$$Z = f_{00} G \sqrt{1 - x^2/a^2 - y^2/a^2}.$$

This investigation could be based on potential theory, using the methods developed in KALKER [1].

As a final project we mention the case of instationary rolling: it is perhaps possible that the theory of ch. 5 can be adapted to some problems of unsteady rolling.

References.

- CAIN, B.S. [1] Discussion of the paper by H. PORITSKY: Stresses and deflections of cylindrical bodies in contact, with application to contact of gears and of locomotive wheels. Discussion: J. Appl. Mech. (1950) p. 465.
- CARTER, F.W. [1] On the action of a locomotive driving wheel. Proc. Roy. Soc. A112 (1926) p. 151-157.
- CATTANEO, C. [1] Sul contatto di due corpi elastici: distribuzione locale degli sforzi. Rend. Acad. Lincei, ser. 6, vol. XXVII, 1938 pp. 342-348, 434-436, 474-478.
- DOWNOROVICH, V.I. [1] Three-dimensional contact problems in the theory of elasticity. Minsk (1959) (in Russian).
- ERDELYI, A. et al. [1] Higher transcendental functions Vol. 1, Mc.Graw-Hill, 1953.
- GALIN, A.L. [1] Contact problems in the theory of elasticity. Moscow (1953) (in Russian). Also in English translation, at the North Carolina State College, 1961.
- HAINES, D.J. and E. OLLERTON [1] Contact stress distributions on elliptical contact surfaces subjected to radial and tangential forces. Proc. Inst. Mech. Engrs. Vol. 177 (1963) p. 95-114.
- HAINES, D.J. [2] Contact stresses in flat elliptical contact surfaces which support radial and shearing forces during rolling. Proc. Inst. Mech. Engrs. 1964-65, Vol. 179, part 3.
- JAHNKE, E. and F. EMDE [1] Tables of functions. Dover publications, New York, 1943.
- JOHNSON, K.L. [1] The effect of a tangential contact force upon the rolling motion of an elastic sphere on a plane. J. Appl. Mech. 25 (1953) p. 339-346.  
[2] The effect of spin upon the rolling motion of an elastic sphere upon a plane. J. Appl. Mech.

- JOHNSON, K.L. 25 (1958) p. 332-338.
- [3] The influence of elastic deformation upon the motion of a ball rolling between two surfaces. Proc. Inst. Mech. Engrs. 173 (1959) 34 p. 795-810.
- [4] Tangential tractions and microslip in rolling contact, Proc. Symp. Rolling Contact Phenomena ed. J.B. BIDWELL, Elsevier 1962, p. 6-28.
- JOHNSON, K.L. and [5] Contact of nonspherical bodies transmitting tangential forces. J. Appl. Mech. (1964) P.J. VERMEULEN p. 338-340.
- KALKER, J.J. [1] The transmission of force and couple between two elastically similar rolling spheres. Proc. Kon. Ned. Akad. Wet. Amsterdam, B67 (1964) p. 135-177.
- [2] A strip theory for rolling with slip and spin, Proc. Kon. Ned. Akad. Wet. Amsterdam, B70 (1967) p. 10-62.
- LEE, A.J.C. and [1] The photoelastic investigation of rolling with spin. VDI-Berichte nr. 102, 1966, S. 25/28. E. OLLERTON
- LOVE, A.E.H. [1] A treatise on the mathematical theory of elasticity. 4th ed. Cambridge U.P. 1952.
- LUTZ, O. [1] Grundsätzliches über stufenlos verstellbare Wälzgetriebe. Konstruktion 7 (1955) 9, p. 330-335.
- [2] Same title. Konstruktion 9 (1957) 5, p. 169-171.
- [3] Same title. Konstruktion 10 (1958) 11, p. 424-427.
- MINDLIN, R.D. [1] Compliance of elastic bodies in contact. J. Appl. Mech. 16 (1949) p. 259 sqq.
- DE PATER, A.D. [1] On the reciprocal pressure between two bodies. Proc. Symp. Rolling Contact Phenomena. ed. J.B. BIDWELL, Elsevier 1962 p. 29-75.
- POON, S.Y. [1] An experimental study of the shear traction distribution in rolling with spin. Wear,

10 (1967) no. 1, p. 61-69.

SNEDDON, I.N.

- [1] The use of transform methods in elasticity, Techn. Rept. AFOSR 64-1789. North Carolina State College, (1964).

WERNITZ, W.

- [1] Wälz-Bohrreibung. F. Vieweg & Sohn, Braunschweig 1958, p. 68-81.
- [2] Friction at Hertzian contact with combined roll and twist. Proc. Symp. Rolling Contact Phenomena, ed. J.B. BIDWELL, Elsevier 1962, p. 132-156.

Notations.

Underlined symbols designate vectors. A superscript<sup>+</sup> indicates that the quantity belongs to the lower body. A superscript<sup>-</sup> indicates that the quantity belongs to the upper body. We list only symbols the meaning of which extends beyond the section where they are defined.

Symbol	Meaning	Definition, etc.
$a$	In sec. 1.1: half width of contact area Elsewhere: semi-axis of contact ellipse in x-direction	Fig. 2 (1.5a)
$a_{mn}$	Coefficient of u-polynomial	(1.10)
$\underline{B}$	(No vector) A complete elliptic integral	(3.17)
$b$	In sec. 1.1: coordinate of trailing edge of locked area Elsewhere: semi-axis of contact ellipse in y-direction	Fig. 2 (1.5a)
$b_{mn}$	Coefficient of v-polynomial	(1.10)
$C_{ij}$	In sec. 4.32: creepage coefficient	(4.86), Fig. 8 Table 3
$\underline{C}$	(No vector) A complete elliptic integral	(3.17), Table 1
$c$	$= \sqrt{ab}$ , geometric mean of semi-axes of contact ellipse	(3.50)
$c_{mn}$	Coefficient of w-polynomial	(1.10)
$\underline{D}$	(No vector) A complete elliptic integral	(3.17), Table 1
$d$	Integer with special meaning	(2.67)
$d_{pq}$	Coefficient of X'-polynomial	(1.9), (4.63)
$E$	(Elliptic) contact area	(1.5a)
$E_g$	Slip area	
$E_h$	Area of adhesion, also called locked area	



Symbol	Meaning	Definition, etc.
$E_{mn}^{h;pq}$	A certain integral	(2.35), (2.48), (2.53)
$E_{2m+\epsilon, 2n+\omega}^{h; 2p+\epsilon, 2q+\omega}$		
$\underline{E}$	(No vector) Complete elliptic integral of the 2nd kind	(3.17), Table 2
$e$	Signed excentricity of contact ellipse	(2.63), Table 2
$e_{pq}$	Coefficient of $Y'$ -polynomial	(1.9), (4.63), (5.1)
$(F_x, F_y)$	$(x, y)$ components of total tangential force on lower body. See also $(f_x, f_y)$	(4.24)
$F_{mn}^{h;pq}$	Coefficients derived from $E_{mn}^{h;pq}$	(3.4), (3.15)
$F_{2m+\epsilon, 2n+\omega}^{h; 2p+\epsilon, 2q+\omega}$		
$f$	In 5.22, 5.23: integrand of I	sec. 5.22
$(f_x, f_y)$	Components of dimensionless total force exerted on lower body	(4.19), Figs. 3, 8, 10, 11, 13, 14, 15, 23, 24
$G, G^+, G^-$	Modulus of rigidity: combined, upper body, lower body	(2.4), (2.10)
$g$	$=\min(a/b, b/a)$ . Ratio of axes of contact ellipse	(2.63), Table 2
$I$	In ch. 5: an integral to be minimized	(5.9)
$I(d, i, j, e)$	A complete elliptic integral	(2.74), (3.14), (3.21)
$J(x, y)$	"Square root singularity"	(2.21a)
$J(d, i, j, e)$	A complete elliptic integral	(3.13), (3.14), (3.21)
$K$	Integer connected with the degree: $M=2K+v$	(2.54)
$\underline{K}$	(No vector) Complete elliptic integral of the 1st kind	(3.17), Table 2
$l$	Integer; also: major semi-axis of contact ellipse $\max(a, b)$	

Symbol	Meaning	Definition, etc.
M	Degree of traction polynomial	(1.9)
$M_z$	Total moment about the z-axis on lower body	(4.24)
$m_z$	Dimensionless total moment about z-axis	(4.19)
N	Total normal force	(3.50)
O	Origin of cartesian coordinate system, centre of contact area. Also: order of magnitude symbol	
P	Proportional to x-component of relative slip	(5.18)
p	In ch. 5 only: number of degrees of freedom	(5.1)
Q	Proportional to y-component of relative slip	(5.18)
q	In ch. 5 only: summation limit	(5.1)
R	Distance between two points on the surface	(2.9)
$R_x^+, R_y^+, R_x^-, R_y^-$	Radii of curvature of bodies in xz, yz plane	sec. 3.221
r	Distance from origin to a point of the plane z=0 (except in sec. 2.1)	(2.33)
S	Positive definite function of relative slip	(5.6)
s	Minor semi-axis of contact ellipse min(a,b)	(2.63)
$\underline{s}(s_x, s_y)$	Relative slip (vector and components) of upper body over lower	(4.15)
T	Positive definite function of traction difference	(5.6)
t	Time	

Symbol	Meaning	Definition, etc.
$(u, v, w)$	Displacement differences, <u>except</u> in 2.41 and 4.31	(1.4), (1.6b)
$\underline{u}^\pm (u^\pm, v^\pm, w^\pm)$	Elastic displacement of lower/ upper body	
$V$	Magnitude of rolling velocity, except in sec. 5.23	(4.9), (4.10)
$W$	Weight function	(5.8)
$W_1$	A special weight function	(5.14)
$(w_x, w_y)$	Components of unit vector in the direction of the slip	(1.8a)
$(X, Y, Z)$	$(x, y, z)$ components of surface tractions on lower body	
$(X, Y)$	Tangential traction components	
$(X', Y')$	Traction polynomials	(4.40), (4.63), (5.5)
$(x, y, z)$	Cartesian coordinate system	sec. 2
x-direction	(Nearly the) rolling direction	(4.10)
y-direction	Lateral direction	
z-direction	Inner normal on lower body at centre of contact area	
$Z$	Normal pressure distribution, mostly Hertzian	(1.5b)
$z_j$	Standard polynomial	(5.1)
$z_j!$	x-derivative of $z_j$	(5.2)
$\alpha$	Angle between creepage and x-axis in degrees	(4.104), (5.30)
$\delta$	A small positive number with several meanings	(2.38); (4.10); (5.12c)
$\epsilon, \epsilon'$	Parity numbers (0 or 1); $\epsilon + \epsilon' = 1$	(2.54)
$\eta$	Lateral creepage parameter	(4.20)
$\kappa$	An elastic constant (neglected in the present work)	(2.10)
$\mu$	Coefficient of friction, assumed	

Symbol	Meaning	Definition, etc.
	to be constant	
$\nu, \nu'$	Parity numbers (0 or 1); $\nu + \nu' = 1$	(2.54)
$\xi$	Longitudinal creepage parameter	(4.20)
$\rho$	Characteristic length of the bodies	(3.38)
$\sigma, \sigma^+, \sigma^-$	Poisson's ratio: combined, upper body, lower body	(2.4), (2.10)
$\tau_k$	Coefficients of traction polynomials	(5.1)
$\nu$	Creepage. In ch. 5:	(5.16), (5.30)
$\underline{u}(u_x, u_y)$	Creepage vector, longitudinal and lateral creepage	(4.11), (4.14a)
$\phi$	Spin	(4.12), (4.14a)
$\chi$	Spin parameter	(4.20)
$\omega, \omega'$	Parity numbers (0 or 1); $\omega + \omega' = 1$	(2.54)

## STELLINGEN

### I

Het door KIRCHOFF gegeven bewijs van de ondubbelzinnigheid van het verplaatsings- en spanningsveld in elastische lichamen is niet geldig voor contactproblemen. De ondubbelzinnigheidsstelling kan worden uitgebreid tot het geval van wrijvingsloos contact, en het blijkt dat het elastische veld onafhankelijk is van de voorgeschiedenis van de uiteindelijke belasting en de configuratie. In het geval van contactproblemen met droge wrijving met constante wrijvingscoëfficiënt, waarbij de elastische lichamen gedurende de gehele belastingstijd zowel meetkundig als elastisch elkaars spiegelbeeld zijn ten opzichte van een plat vlak door de contactgebieden, is de ondubbelzinnigheid van het elastische veld eveneens gewaarborgd, echter in afhankelijkheid van de geschiedenis van de uitwendige belasting en de configuratie.

A.E.H. LOVE, A treatise on the mathematical theory of elasticity, Cambridge 1927, par. 113.

### II

Voor het oplossen van halfruimtecontactproblemen met cirkelvormig contactvlak kan men de elastische veldgrootheden uitdrukken in drie potentiaalfuncties. Deze potentiaalfuncties kunnen worden bepaald met behulp van de methode van splitsing der variabelen in een afgeplat spheroïdaal coördinatenstelsel

$$x+iy = a \sqrt{(1-\omega^2)(1+\eta^2)} e^{i\psi}, \quad z = a\omega\eta, \\ -1 \leq \omega \leq 1, \quad 0 \leq \eta < \infty, \quad 0 \leq \psi < 2\pi.$$

In de halfruimte  $\omega \geq 0$  hebben de basispotentialen, waarvan de gevraagde potentialen lineaire combinaties zijn, de vorm

$$K_n^m(\omega) Q_n^m(i\eta) e^{im\psi}, \quad m, n: \text{positief geheel.}$$

Hierin is  $Q_n^m(t)$  de geassocieerde legendrefunctie van de tweede soort.  $K_n^m(\omega)$  is de geassocieerde legendrefunctie van de eerste soort, waarbij men kan kiezen tussen  $P_n^m(\omega)$  (positieve orde) en  $P_n^{-m}(\omega)$  (negatieve orde).

Het is voordelig de functies met negatieve orde te gebruiken.

J.J. KALKER, The transmission of force and couple between two elastically similar rolling spheres, I, II, Proc.Kon.Ned.Akad.Wet. Ser. B, 1964, p. 135-164.

### III

Men laat twee elastische lichamen snel over elkaar glijden. Zij zijn zodanig gevormd dat bij afwezigheid van wrijving het contactvlak cirkelvormig zou zijn. Wrijving is echter aanwezig, met coëfficiënt  $\mu$ , zodat de tangentiële spanning wordt gegeven door  $Y=0$ ,  $X=\mu Z$ . De elastische constanten van de lichamen zijn ongelijk, hetgeen tot uitdrukking wordt gebracht door een van nul verschillende gecombineerde elasticiteitsconstante  $\kappa$ ; zie vgl. (2.10) van dit proefschrift. Het blijkt dat het probleem wordt beheerst door een constante  $q=\kappa\mu/(1-\sigma)$ , waarin  $\sigma$  het gecombineerde poissongetal is. Men kan de oplossing ontwikkelen naar machten van  $q$ . De term evenredig met  $q^0$  levert de hertzverdeling. De term evenredig met  $q^1$  leidt tot een verschuiving van het contactvlak evenwijdig aan de glijdrichting. De term evenredig met  $q^2$  leidt tot verandering van de indringdiepte en maakt dat het contactvlak elliptisch wordt, terwijl termen evenredig met hogere machten van  $q$  resulteren in niet-elliptische contactvlakken.

### IV

Uit een onderzoek naar het gedrag van spanning en slip in het contactvlak van twee niet-stationair rollende elastisch symmetrische cilindrs met evenwijdige assen is het volgende gebleken:

1. De grens tussen hecht- en glijdgebied kan discontinu verspringen;
2. Het hechtgebied kan zich splitsen in twee of meer delen;
3. De overgangsverschijnselen zijn vrijwel uitgestorven als de bij constante totale kracht afgelegde rolweg 1 à 2 contactbreedten bedraagt.

### V

In een ongesmeerd, langzaam draaiend hoekcontactlager zonder kooi, waarbij voor elk van de kogels het contactvlak met de buitenring congruent is met het contactvlak met de binnenring, rollen de kogels met zuivere spin.

## VI

Door HUANG wordt met behulp van een perturbatiemethode de periodieke beweging van twee massa's behandeld, waarvan de eerste enerzijds aan een vaste wand is gekoppeld door middel van een lineaire veer, en anderzijds met de tweede massa is verbonden door middel van een niet-lineaire veer met een karakteristiek met een kleine derdegraadsterm. Een parallel met de niet-lineaire veer geschakelde kleine viskeuze demping is al of niet aanwezig. De tweede massa wordt geëxciteerd door een kleine periodieke kracht waarvan de frequentie in de buurt van een eigenfrequentie van het gelineariseerde tweemassasysteem ligt. Zowel de oplossing van de nulde-orde vergelijking als de behandeling van de seculiere termen worden door HUANG onjuist gegeven. Dit blijkt te leiden tot onjuiste resultaten.

T.C. HUANG, Harmonic oscillations of non-linear two-degree-of-freedom systems, J.Appl.Mech. 22 (1955) p. 107-110.

## VII

Door Mevr. C.M. KALKER-KALKMAN is het probleem behandeld van een cylinder waarin warmte wordt ontwikkeld en waarvan het oppervlak wordt gekoeld met uitzondering van een klein cirkelvormig gebiedje. De oplossing wordt gevonden door op de temperatuur die uit de koeling van het gehele oppervlak resulteert, een stoortemperatuur te superponeren, waarmee de onderbreking van de koeling in rekening wordt gebracht. De stoortemperatuur werd berekend door de cylinder te vervangen door een halfruimte. Deze benadering nu is slechts bruikbaar indien de koelingscoëfficiënt groot is.

C.M. KALKER, The influence of local absence of cooling on the cladding temperature of a fuel rod, Nuclear Eng. Des. 3(1966) p. 1-10.

## VIII

In een kernreactor waar de koeling op zodanige wijze plaats vindt dat

- 1<sup>o</sup> een volmaakt warmtecontact heerst tussen splijtstof en koelmiddel;
- 2<sup>o</sup> de temperatuur in een doorsnede loodrecht op de bewegingsrichting

van het koelmiddel constant kan worden genomen;  
3° de warmtegeleiding in de bewegingsrichting kan worden verwaarloosd,  
is het temperatuursverloop bij een tijdsafhankelijke koelmiddelsnelheid gelijk aan het temperatuursverloop bij een constante koelmiddelsnelheid, doch met een andere, tijdsafhankelijke, warmteproduktie in de splijtstaaf.

C.F. BONILLA et al., Formal heat transfer solutions, Nucl. Sci. Eng. 9(1961)3, p. 323-331.

## IX

Het verdient aanbeveling de toelichting op de wet tot regeling van het voortgezet onderwijs zodanig te wijzigen, dat de mogelijkheid om eindexamen te doen in een andere moderne taal dan één der drie talen Frans, Duits of Engels - op zichzelf een wenselijkheid - on-dubbelzinnig blijkt.

Wet op het voortgezet onderwijs, Tjeenk Willink 1962, art. 29 en 12.2°.

Ontwerp van wet tot regeling van het voortgezet onderwijs, deel 5, overgangswet W.V.O., Staatsuitgeverij 1966, p. 78.