

The Acoustic Simulation of Performing Area in the Auditorium Some Examples in Italy

Vodola, Vincenzo; Nastasi, Benedetto; Manfren, Massimiliano; Merli, Francesca

Publication date
2020

Document Version
Final published version

Published in
Proceedings - Building Simulation Applications, BSA 2019

Citation (APA)

Vodola, V., Nastasi, B., Manfren, M., & Merli, F. (2020). The Acoustic Simulation of Performing Area in the Auditorium: Some Examples in Italy. In G. Pernigotto, F. Patuzzi, A. Prada, V. Corrado, & A. Gasparella (Eds.), *Proceedings - Building Simulation Applications, BSA 2019: 4th IBPSA-Italy Conference* (pp. 245-250). (Building Simulation Applications; Vol. 2020-June). Free University of Bozen Bolzano.

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Konferenzbeiträge / Atti / Proceedings

Building Simulation Applications BSA 2019

4th IBPSA-Italy Conference

Bozen-Bolzano, 19th–21st June 2019

Edited by

Giovanni Pernigotto, Francesco Patuzzi,

Alessandro Prada, Vincenzo Corrado, Andrea Gasparella

bu,press

bozen
bolzano
university
press

Scientific committee

Ian Beausoleil-Morrison, Carleton University, Canada
Jan L.M. Hensen, Technische Universiteit Eindhoven, The Netherlands
Gregor P. Henze, University of Colorado Boulder, USA
Ardeshir Mahdavi, Technische Universität Wien, Austria
Athanasios Tzempelikos, Purdue University, USA
Reinhard Radermacher, University of Maryland, USA
Francesco Asdrubali, Università degli Studi Roma Tre, Italy
Paolo Baggio, Università degli Studi di Trento, Italy
Maurizio Cellura, Università degli Studi di Palermo, Italy
Cristina Cornaro, Università degli Studi di Tor Vergata, Italy
Vincenzo Corrado, Politecnico di Torino, Italy
Andrea Gasparella, Free University of Bozen-Bolzano, Italy
Livio Mazzarella, Politecnico di Milano, Italy
Adolfo Palombo, Università degli Studi di Napoli Federico II, Italy

Students Tutoring Scientific Committee

Fabian Ochs, Universität Innsbruck, Austria
Matthias Schuss, Technische Universität Wien, Austria
Alessia Arteconi, Università Politecnica delle Marche, Italy
Ilaria Ballarini, Politecnico di Torino, Italy
Annamaria Buonomano, Università degli Studi di Napoli Federico II, Italy
Marco Caniato, Free University of Bozen-Bolzano, Italy
Francesca Cappelletti, Università IUAV di Venezia, Italy
Gianpiero Evola, Università degli Studi di Catania, Italy
Francesco Patuzzi, Free University of Bozen-Bolzano, Italy
Giovanni Pernigotto, Free University of Bozen-Bolzano, Italy
Anna Laura Pisello, Università degli Studi di Perugia, Italy
Alessandro Prada, Università degli Studi di Trento, Italy

Organizing committee

Paolo Baggio, Università degli Studi di Trento, Italy
Marco Baratieri, Free University of Bozen-Bolzano, Italy
Marco Caniato, Free University of Bozen-Bolzano, Italy
Francesca Cappelletti, Università IUAV di Venezia, Italy
Vincenzo Corrado, Politecnico di Torino, Italy
Andrea Gasparella, Free University of Bozen-Bolzano, Italy
Norbert Klammsteiner, Energytech G.m.b.H./S.r.l -Bozen, Italy
Fabian Ochs, Universität Innsbruck, Austria
Francesco Patuzzi, Free University of Bozen-Bolzano, Italy
Giovanni Pernigotto, Free University of Bozen-Bolzano, Italy
Alessandro Prada, Università degli Studi di Trento, Italy
Fabio Viero, Manens – Tifs, Italy



This work—excluding the cover and the quotations—is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License.

Cover design: DOC.bz

© 2020 by Bozen-Bolzano University Press

Free University of Bozen-Bolzano

All rights reserved

1st edition

www.unibz.it/universitypress

ISSN 2531-6702

ISBN 978-88-6046-176-6

The Acoustic Simulation of Performing Area in the Auditorium: Some Examples in Italy

Vincenzo Vodola – University of Bologna, Italy – vincenzo.vodola2@unibo.it

Benedetto Nastasi – Delft University of Technology, The Netherlands – benedetto.nastasi@outlook.com

Massimiliano Manfredi – University of Southampton, United Kingdom – m.manfredi@soton.ac.uk

Francesca Merli – University of Bologna, Italy – francesca.merli8@unibo.it

Abstract

The design of auditoria and opera houses requires particular care for the stage area, where several different requirements should be achieved for the performers. Among these, the acoustic quality represents a fundamental aspect, and it differs from the listeners' perspective. Moreover, the performing area in concert halls is often an important area for non-acoustic reasons, since lighting, thermal plants, etc. are often placed in this special zone, and should be properly designed in order to guarantee a high level of global comfort. This paper presents some examples of how to design exhibition zones in opera houses and auditoriums that show both acoustic and technical improvements, both in theory and in architecture.

1. Introduction

The performance area is one of the most important aspects of acoustic design in the design of music spaces and in particular of opera houses. In addition, opera houses have two different spaces, the orchestra pit and the stage, and these are quite different in terms of their acoustics. However, even though in most cases both the singers (on stage) and the musicians (in the pit) cannot hear each other very well, the conductor (visible to both singers and musicians) is able to lead the performance because both the fence and the proscenium can receive direct sound and reflection. The design process should therefore consider many different aspects, ranging from acoustical requirements and flexibility.

In this paper, some example of the design of performing zones in opera houses and auditoria are

presented, showing both the theoretical and architectural requirements for acoustical and technical enhancements. Specifically, three main aspects of the design process are analysed: the design of the orchestra pit, the design of the diffusion in the stage, and the design of the acoustic chamber.

2. Materials and Methods

2.1 The Design of the Orchestra Pit

An orchestra pit holds all the musicians during the performance of an opera, which is the reason why this small area is very important when musicians and singers perform together. Since the stage and the pit are in different locations in opera halls, musicians have many difficulties during a performance. Moreover, in the event of a lack of balance between stage and orchestra pit, the acoustic quality of the theatre can be reduced. The acoustic design of the pit should aim to improve the balance between musicians and singers in order to solve these problems (Gade, 1989) and to improve the performance of singers moving across the stage during an opera.

The acoustic design should offer a very flexible variety of acoustics in the orchestra pit, while the fence must provide a satisfactory early reflection from the pit to the point and vice versa, in order to properly link the specific sound characteristics of each musical instrument (Farina et al., 1998; Farina and Tronchin, 2000; Tronchin 2012; Tronchin and Coli, 2015; Tronchin et al., 2020).

Final acoustic design was obtained for the Teatro Comunale in Treviso, simulating different pit configurations that could be moved up in height depending on the type of performance (opera, concert, drama) and the performance of the singers and instruments, as in other theatres (Tronchin, 2013; Tronchin and Knight, 2016).



Fig. 1 – The theatre and the orchestra pit

A series of rotating acoustic boards, made of wood, were hung on the ceiling of the pit: one side of the panels is able to capture and tune at different frequencies, while the other side reflects the direct waveforms. The motion of the boards towards the stalls could generate a cavity below the stage, with a distinct volume and neck, and therefore tuned to different frequencies.

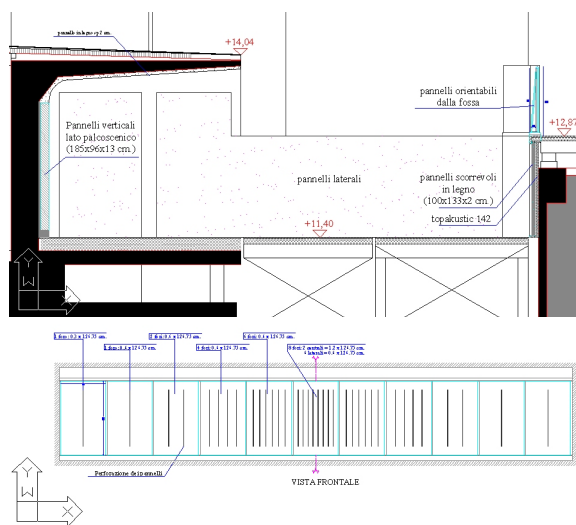


Fig. 2 – The orchestra pit: details

Particular attention was given to the aesthetics and acoustics of the fencing, which is located in front of the orchestra pit. The fence creates a strong early reflection of the sound from the pit to the stage, acting as a sound barrier from pit to stalls, based on its direction. For these reasons, its boundary can contribute to the diffusion of the sound in the room and significantly affects the balance between pit

and stage. The fence was therefore designed with different orientations, helping performers to perform better on the stage and in the pit.

2.2 The Design of Diffusion in the Stage

The stage in an opera is generally rectangular and the walls are made of concrete. This kind of shape, with two parallel side walls, does not provide the performers, particularly the musicians, with great acoustics throughout the stage. Furthermore, although a good acoustic chamber could solve these difficulties in orchestral configuration, some strong reflections cannot be avoided during a performance. To solve these issues, a series of diffusing panels were installed on the stage of the Teatro Vittorio Emanuele in Messina, Sicily, together with solutions for sound insulation (Caniato et al., 2015, 2016 and 2018).

The calculation followed the well-known number theory (Tronchin et al., 2020), and consequently diffractal boards were drawn up in accordance with the resulting frequencies. The stage dimensions permitted the design of modular, low frequency tuned panels, as shown in Fig. 4. A series of diffusing panels was also introduced to the orchestra pit, at the same theatre. A pyramid tracing software package, which could properly take diffusion into consideration, was used to detect the suitable position of panels both on stage and in the orchestra pit. The numerical model is shown in Fig. 3.

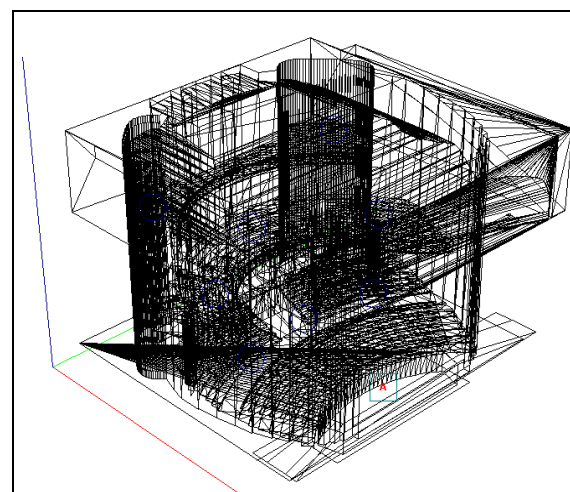


Fig. 3 – The model of the theatre Vittorio Emanuele in Messina

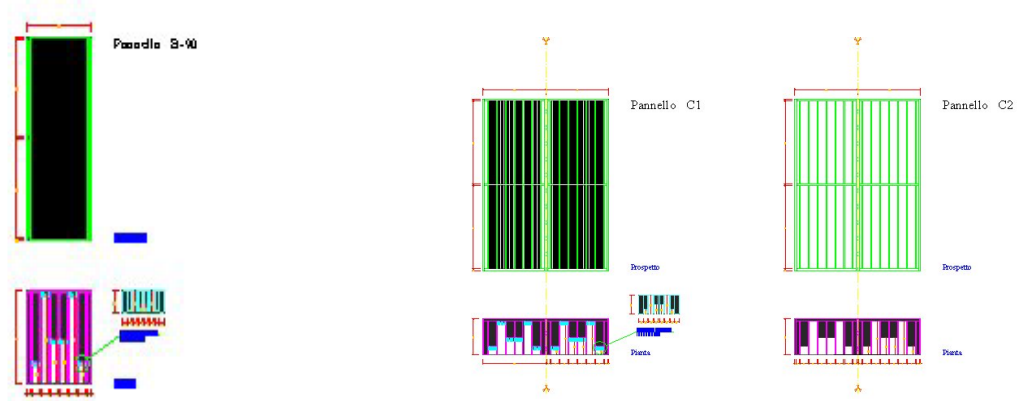


Fig. 4 – Diffusing panels in the orchestra pit (left) and in the stage (right)

Due to the energetic decay in the computed impulse responses, the optimal distribution of the diffusing surface was also calculated. In Figs 5–7, distinct feasible panel locations are shown, with the corresponding energy decay impulse responses achieved for each setup.

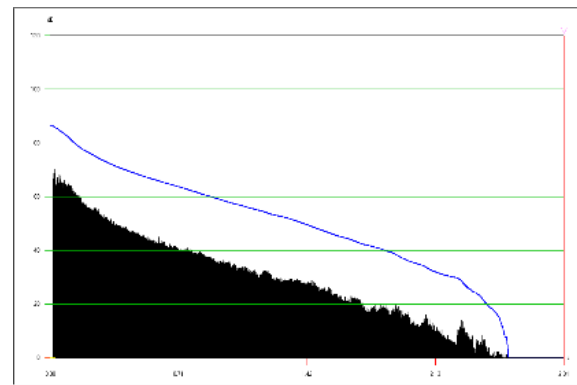
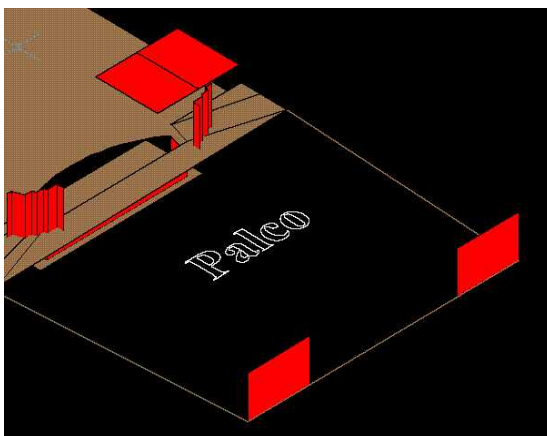


Fig. 5 –Solution A for the placement of the diffusing panels and their influence on the IRs

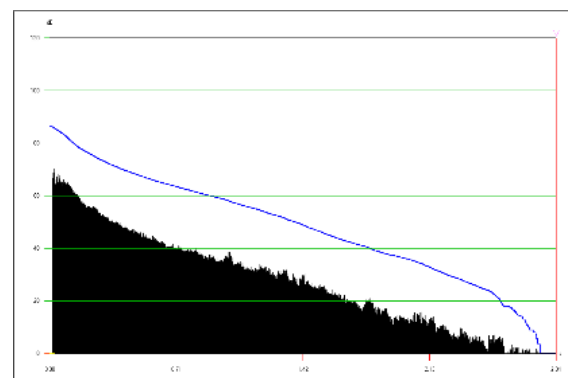
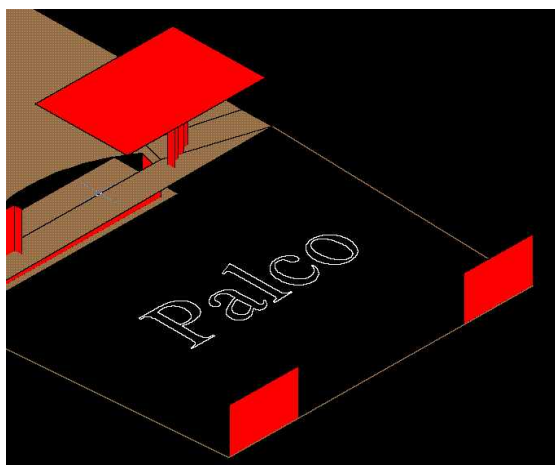


Fig. 6 – Solution B for the placement of the diffusing panels and their influence on the IRs


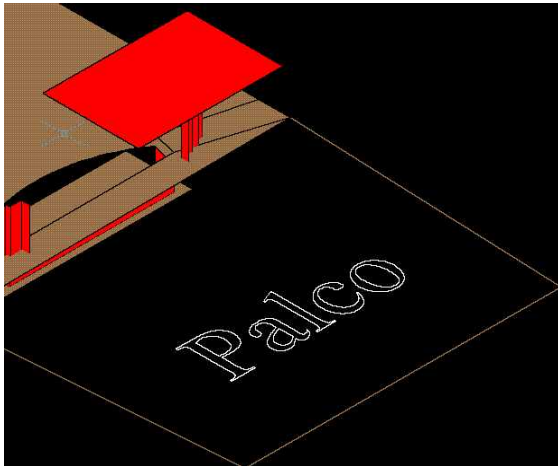


Fig. 7 – Solution C for the placement of the diffusing panels and their influence on the IRs

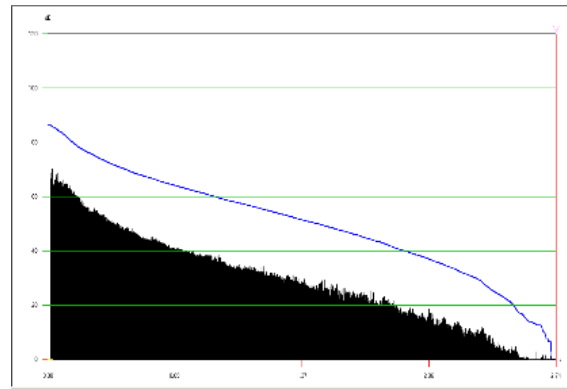

2.3 The Design of the Acoustic Chamber

Today, the acoustic design of the performing area in concert halls and especially in opera houses also includes the realization of the orchestra chamber, since an effective design of this can significantly improve the balance between all orchestral sections. However, the effectiveness of the chamber depends not only on its acoustic properties: it also depends on other variables such as simplicity, versatility and quickness of assembling and disassembling. In the Teatro Comunale in Treviso, the acoustic chamber was designed with three different configurations of the hall with reference to the position of the orchestra pit and, consequently, the type of performance. Considering a performance by a soloist, for example, the pit can be elevated to the stage level and cover the whole area of the acoustic chamber, which was specifically designed for this theatre. Support (ST1) and Early Ensemble Level (EEL), are among the most important acoustic parameters for the perception of music by the performer (Shimokura et al., 2011). With a triangular acoustic chamber, the optimum ST1 values of -11 to -13 dB were achieved. Furthermore, the strength and reverberation times in the receiver positions in stalls with a triangular shape were preferable.

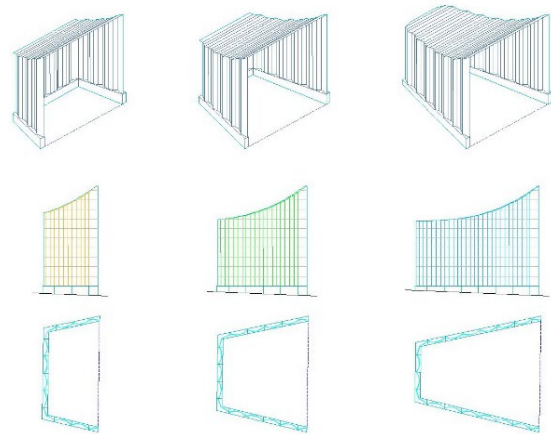


Fig. 8 – The three configurations of the acoustic chamber

3. Results

The results discussed in this paper emphasise the fact that the design process involves many different considerations, ranging from acoustic requirements to flexibility. What has been shown is that the systematic and detailed study of the various problems that can occur within a space dedicated to musical performance can lead to simple and effective solutions from the point of view of both the architecture and the quality of the acoustics. This is also replicable in infrastructures where prefabricated components are assembled and its modelling is crucial for performance (Caniato et al., 2019; Tronchin and Fabbri, 2017; Tronchin and Knight, 2018; Tronchin et al., 2018). Moreover, these solutions allow performers to perform their work in the best way, thus also guaranteeing better experience for end users.

4. Conclusion

In this paper, some examples of devices which can enhance the acoustic quality in opera houses were presented. However, the design process should not only consider acoustic performance but also many different aspects, including flexibility and costs. It is worth noting that in several cases, very valuable examples of acoustic devices (e.g. turning panels, etc.) are not normally used by the staff, i.e. technicians working in the theatre. In order to avoid this circumstance, the staff should be fully involved in the design process.

References

- Caniato, M., F. Bettarello, L. Marsich, A. Ferluga, O. Sbaizero and C. Schmid. 2015. "Time-depending performance of resilient layers under floating floors." *Construction and Building Materials* 102(1). doi: 10.1016/j.conbuildmat.2015.10.176
- Caniato, M., F. Bettarello, C. Schmid and P. Fausti. 2016. "Assessment criterion for indoor noise disturbance in the presence of low frequency sources." *Applied Acoustics* 113(1): 22–33.
- Caniato, M., S. Favretto, F. Bettarello, C. Schmid. 2018. "Acoustic Characterization of Resonance Wood." *Acta Acustica united with Acustica* 104(6) 1030–1040. doi: 10.3813/AAA.919269
- Caniato, M., F. Bettarello, C. Schmid, P. Fausti. 2019. "The use of numerical models on service equipment noise prediction in heavyweight and lightweight timber buildings." *Building Acoustics* 26(1): 35–55. <https://doi.org/10.1177/1351010X18794523>
- Farina, A., A. Langhoff and L. Tronchin. 1998. "Acoustic Characterisation of "virtual" Musical Instruments: Using MLS Technique on Ancient Violins." *Journal of New Music Research* 27(4): 359–379. doi:10.1080/09298219808570753
- Farina, A., and L. Tronchin. 2000. "On the "Virtual" Reconstruction of Sound Quality of Trumpets." *Acustica* 86(4): 737–745.
- Gade, A.C. 1989. "Investigation of musicians' room acoustics in concert halls: Part I and II." *Acustica* 69: 193–203.
- Shimokura, R., L. Tronchin, A. Cocchi and Y. Soeta. 2011. "Subjective Diffuseness of Music Signals Convolved with Binaural Impulse Responses." *Journal of Sound and Vibration* 330(14): 3526–3537. doi:10.1016/j.jsv.2011.02.014
- Tronchin, L. 2012. "The Emulation of Nonlinear Time-Invariant Audio Systems with Memory by Means of Volterra Series." *AES: Journal of the Audio Engineering Society* 60(12): 984–886.
- Tronchin, L. 2013a. "Francesco Milizia (1725–1798) and the Acoustics of His Teatro Ideale (1773)." *Acta Acustica united with Acustica* 99(1): 91–97. doi:10.3813/AAA.918592
- Tronchin, L. 2013b. "On the acoustic efficiency of road barriers: The reflection index" *International Journal of Mechanics* 7(3): 318–326.
- Tronchin, L., and V. L. Coli. 2015. "Further Investigations in the Emulation of Nonlinear Systems with Volterra Series." *AES: Journal of the Audio Engineering Society* 63(9): 671–683. doi:10.17743/jaes.2015.0065
- Tronchin, L., and D. J. Knight. 2016. "Revisiting Historic Buildings through the Senses Visualising Aural and Obscured Aspects of San Vitale, Ravenna." *International Journal of Historical Archaeology* 20(1): 127–145.
- Tronchin, L., and K. Fabbri. 2017. "Energy and Microclimate Simulation in a Heritage Building: Further Studies on the Malatestiana Library." *Energies* 10(10). doi:10.3390/en10101621
- Tronchin, L., and D.J. Knight. 2018. "Transmitting acoustic phenomena and aural illusions: Examples from Athanasius Kircher's *Phonosophia anacamptica*." *Building Acoustics* 25(2): 101–110. doi: 10.1177/1351010X18772709
- Tronchin, L., M. Manfren and P.A. James. 2018. "Linking design and operation performance analysis through model calibration: Parametric assessment on a Passive House building." *Energy* 165 (A): 26–40. doi:10.1016/j.energy.2018.09.037
- Tronchin, L., M. Manfren, V. Vodola. 2020a. "The carabattola - vibroacoustical analysis and intensity of acoustic radiation (IAR)." *Applied Sciences* 10(2), 641.
- Tronchin, L., M. Manfren, V. Vodola. 2020b. "Sound characterization through intensity of acoustic radiation measurement: A study of

persian musical instruments." *Applied Sciences* 10(2), 633.

Tronchin, L., F. Merli, M. Manfren, B. Nastasi. 2020c. "The sound diffusion in Italian Opera Houses: Some examples." *Building Acoustics*, in press. doi:10.1177/1351010X20929216

Tronchin, L., F. Merli, M. Manfren, B. Nastasi. 2020d. "Validation and application of three-dimensional auralisation during concert hall renovation." *Building Acoustics*, in press. doi:10.1177/1351010X20926791