



Delft University of Technology

Pollutant Emissions Chemistry in Axial Turbines

Augusto Viviani Perpignan, Andre; Tomasello, Stella; Gangoli Rao, Arvind

Publication date

2018

Document Version

Final published version

Citation (APA)

Augusto Viviani Perpignan, A., Tomasello, S., & Gangoli Rao, A. (2018). *Pollutant Emissions Chemistry in Axial Turbines*. Abstract from Combura 2018, Soesterberg, Netherlands.

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

*This work is downloaded from Delft University of Technology.
For technical reasons the number of authors shown on this cover page is limited to a maximum of 10.*

October 9 & 10

COMBURA



NVV  2018

Book of Abstracts

NVV 
Nederlandse Vereniging
voor Vlamonderzoek



Pollutant Emissions Chemistry in Axial Turbines

A.A.V. Perpignan^{*}, S.G. Tomasello^{*,+} and A. Gangoli Rao^{*}

^{*}Faculty of Aerospace Engineering, Delft University of Technology, The Netherlands

⁺Department of Industrial Engineering, University of Florence, Italy

A.A.V.Perpignan@tudelft.nl / A.GangoliRao@tudelft.nl

The need to reduce pollutants emitted by aircraft engines requires advances in combustion, fuels, and aircraft configuration. The reduction in CO₂ emissions might only be achieved by increase in efficiency or the use of alternative energy sources such as H₂, liquefied natural gas (LNG), biofuels or electric propulsion. The reduction of nitrogen oxides (NO_x), sulphur oxides (SO_x) and CO is, on the other hand, mostly dependent on the combustion technology.

As an attempt to overcome these challenges, a hybrid engine configuration has been proposed¹: cryogenic fuels (either H₂ or LNG) stored in tanks inside the blended-wing body would fuel the first combustion chamber, while conventional or biofuels would fuel the Interturbine burner - ITB (see Fig. 1). The configuration has shown promising results with respect to efficiency², and it can potentially attain the Flameless combustion regime more easily, which is advantageous especially because of its lower NO_x emissions³.

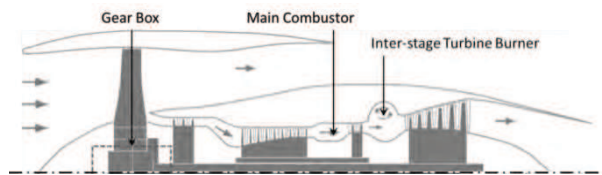


Figure 1 – Engine concept with sequential combustion chambers¹.

The high pressure turbine (HPT) is located between the two combustion chambers. Usually, the chemistry in turbine sections is considered to be “frozen”, with the composition at the end of the combustion chamber being considered as the engine’s emissions. The increasing trend in turbine inlet temperatures and pressures in order to achieve higher efficiencies makes the behaviour within the turbine relevant for the prediction of emissions⁴. Moreover, the progression of chemistry in the turbine is even more important for the dual-combustor configuration, since the composition at the inlet of the ITB depends on it.

Simulations aiming at investigating the chemistry in the HPT were performed. A CRN (Chemical Reactor Network) was developed based on the operational conditions of the hybrid engine² and the Aachen turbine stator geometry⁵. Simulations were performed using Cantera and the GRI 3.0 chemical reaction mechanism. The perfectly stirred reactors were arranged along the estimated flow path, as to form a plug flow reactor (Fig.

2). Residence times were determined based on the estimated flow velocities of a modern transonic turbine. Pressure and temperature were assumed to drop linearly within the turbine, in accordance with the preliminary design calculations². The composition at the inlet was estimated using another CRN representing the first combustor burning LNG.

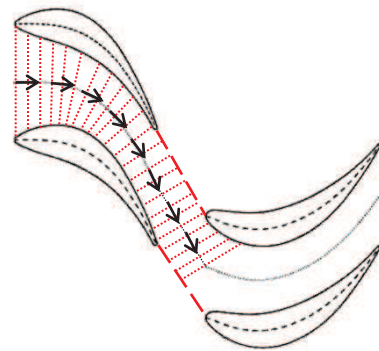


Figure 2 – Representation of the created CRN with the reactors defined along the flow path of the Aachen turbine⁵.

The results of Fig. 3 show significant variation in both CO and NO_x values. The oxidation of CO seems to continue in the stator, while NO_x has a non-monotonic behaviour. The concentration of NO seems to dictate the NO_x trend, as NO₂ values are lower and display the opposite trend (a peak around 0.05 m). Previous analyses did not show the effect on CO emissions, while NO_x showed a similar trend⁴. However, it is not yet clear what parameters affect the chemistry or which reaction pathways are active.

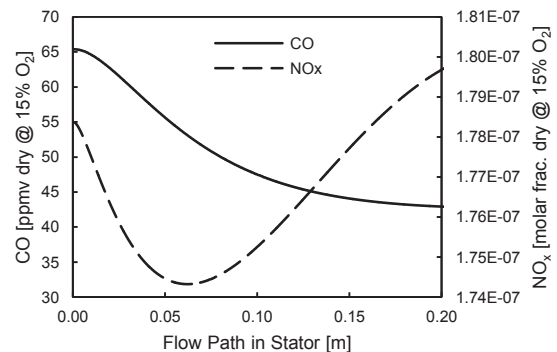


Figure 3 – CO and NO_x along the turbine stator in the CRN calculation.

In order to investigate the three-dimensional effects on the chemistry of pollutants, the next step in the research

is the simulation of a turbine stator in CFD. The chosen geometry was the General Electric's two-stage HPT presented within the framework of the Energy Efficient Engine program⁶, due to its operating conditions and available geometry and experimental data. The 46-blade first stage stator geometry was employed.

The CFD simulations were performed in ANSYS CFX®, and the fully hexahedral meshes were created in TurboGrid. Mesh independence tests were conducted, and a mesh composed of 2.04 million elements was selected (Fig. 4). Total pressure and temperature were imposed at the inlet, while static pressure was imposed at the outlet.

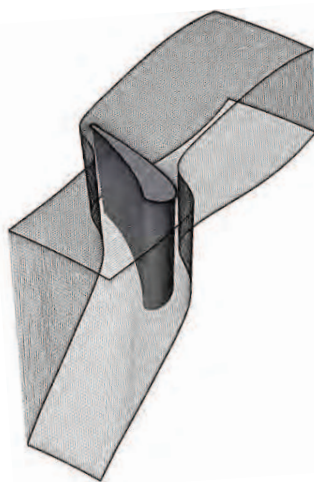


Figure 4 – Computational mesh of the stator.

Simulations were performed using RANS equations along with the $k-\omega$ SST turbulence model. Comparison to experimental data was performed, as the vane efficiency displayed in Fig. 5. The error was less than 1% (except for the data point at 95% span), showing good agreement.

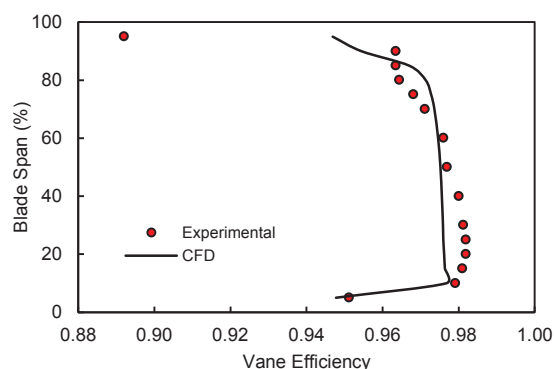


Figure 5 – Comparison between simulated and experimental values of vane efficiency as defined by Timko⁶ measured between the stator and the rotor.

The comparison of the blade pressure distribution also has good agreement. Fig. 6 displays the distribution in

the form of the isentropic Mach number for two different blade spans. Given the good agreement, the fluid model was considered validated. Operating conditions were then modified to match those of the hybrid engine, while aiming to maintain the Mach number distribution across the stator.

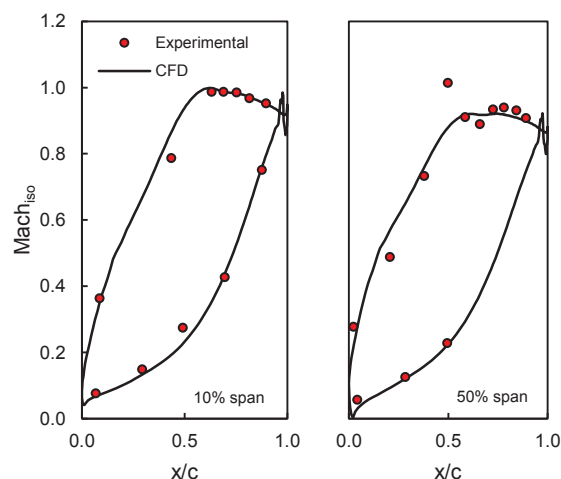


Figure 6 – Comparison between simulated and experimental values of isentropic Mach number for two blade spans.

Within the work in progress, CFD simulations including chemistry will be performed in order to access the effect of local conditions and flow structures on the reaction rates. Finite-rate chemistry with a reduced chemical reaction mechanism will be employed, as well as approaches considering turbulence-chemistry interaction (Eddy Dissipation Model and Eddy Dissipation Concept). This approach shall identify the importance of turbulence for the reaction rates for the conditions found in axial turbines. Additionally, higher operating pressures and temperatures shall be tested.

References

- [1] Rao, AG; Yin, F; van Buijtenen, JP. *A hybrid engine concept for multi-fuel blended wing body*. Aircraft Engineering and Aerospace Technology: An International Journal 86 n. 6, 483-493, 2014.
- [2] Yin, F; Rao, AG. *Performance analysis of an aero engine with inter-stage turbine burner*. The Aeronautical Journal, 1-22, 2017.
- [3] Perpignan, AAV; Rao, AG; Roekaerts, DJEM. *Flameless combustion and its potential towards gas turbines*. Progress in Energy and Combustion Science 69, 28-62, 2018.
- [4] Nguyen, TH; Nguyen-Tri, P; Vancassel, X; Garnier, F. *Aero-thermodynamic and chemical process interactions in an axial high-pressure turbine of aircraft engines*. International Journal of Engine Research, 1-17, 2018.
- [5] Stephan, B; Gallus, HE; Niehuis, R. *Experimental investigations of tip clearance flow and its influence on secondary flows in a 1-1/2 stage axial turbine*. ASME Turbo Expo 2000.
- [6] Timko, L.P. *Energy efficient engine high pressure turbine component test performance report*. NASA Lewis Research Center, 1984.