

A stability criterion for elasto-viscoplastic constitutive relationships

Pisano, F; di Prisco, C

DOI

[10.1002/nag.2395](https://doi.org/10.1002/nag.2395)

Publication date

2016

Document Version

Accepted author manuscript

Published in

International Journal for Numerical and Analytical Methods in Geomechanics

Citation (APA)

Pisano, F., & di Prisco, C. (2016). A stability criterion for elasto-viscoplastic constitutive relationships. *International Journal for Numerical and Analytical Methods in Geomechanics*, 40(1), 141-156.
<https://doi.org/10.1002/nag.2395>

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

A stability criterion for elasto-viscoplastic constitutive relationships

F. Pisanò^{a,*}, C. di Prisco^b

^a*Assistant Professor – Delft University of Technology, Dept. of Geoscience and Engineering*

^b*Full Professor – Politecnico di Milano, Dept. of Civil and Environmental Engineering*

Abstract

In this paper the onset of mechanical instability in time-sensitive elasto-viscoplastic solids is theoretically analyzed at the constitutive level and associated with the occurrence of “spontaneous accelerations” under stationary external perturbations. For this purpose, a second-order form of Perzyna’s constitutive equations is first derived by time differentiation, and a sufficient stability condition is identified for general mixed loading programs. These loading conditions are in fact the most general in both laboratory tests and real boundary value problems, where a combination of certain stress and strain components is known/prescribed.

The theoretical analysis leads to find precise stability limits in terms of material hardening modulus. In the case of constitutive relationships with isotropic strain-hardening, no instabilities are possible while the hardening modulus is larger than the so-called “controllability modulus” defined for (inviscid) elasto-plastic materials. It is also shown that the current stress/strain rate may also directly influence the occurrence of elasto-viscoplastic instability, which is at variance with elasto-plastic inviscid media.

Keywords: viscoplasticity, Perzyna, rate-dependence, stability, controllability, mixed loading

*Corresponding author

Email addresses: `f.pisano@tudelft.nl` (F. Pisanò), `claudio.diprisco@polimi.it` (C. di Prisco)

1. Introduction

Modeling and predicting failure phenomena in solid media is of utmost importance in many applied and engineering sciences. Meaning the concept of “failure” in its broadest sense, the collapse of both natural and manmade systems can be induced by a wide variety of failure/instability processes at the material level. This statement especially applies to geomaterials (Sulem and Vardoulakis, 1995; Darve and Vardoulakis, 2004; Bažant and Cedolin, 2010; Daouadji et al., 2011): indeed, these are characterized by complex granular structures with either loose or interconnected grains, they interact with interstitial fluids and may suffer degradation and fracture processes caused by mechanical, hydraulic, thermal and chemical solicitations. As a consequence, defining a priori the whole range of situations under which geomaterials “fail” is not trivial and is still intensively discussed within the scientific community (Darve et al., 2004; Chambon, 2005).

In the context of continuum-based theories, most approaches for the inelastic analysis of solids and structures have been developed in the framework of rate-independent (or inviscid) plasticity (Koiter, 1960; Vermeer and De Borst, 1984; Lubliner, 1990; Lemaitre and Chaboche, 1990), that is under the assumptions that (i) unrecoverable deformations take place instantaneously and (ii) no role is played by the external perturbation rate. Although elasto-plasticity has been proven to capture most features of the inelastic response of geomaterials, the assumption of rate-independence prevents some important experimental evidences to be reproduced, such as creep and relaxation processes.

To overcome this intrinsic limitation of standard elasto-plasticity, the theory of elasto-viscoplasticity was purposely introduced. Although different viscoplastic approaches are available in literature (Perzyna, 1963, 1966; Duvaut and Lions, 1972; Wang et al., 1997; Heeres et al., 2002), viscoplastic models are all based on the concept of “delayed plastic flow”, implying that a finite amount of time is required for irreversible (viscoplastic) strains to develop. As a result, the time variable actively

1 contributes to the global material response, which is in turn determined by the in-
2 teraction between the intrinsic material rate-sensitiveness and the external loading
3 rate. In what follows, the most widespread viscoplastic framework introduced by
4 Perzyna (1963) will be exclusively considered.

5 The experimental investigation of rate effects in geomaterials has led to regard
6 elasto-viscoplasticity as a suitable framework for conceiving constitutive relation-
7 ships (Adachi and Oka, 1982; Borja and Kavazanjian, 1985; Desai and Zhang,
8 1987; di Prisco and Imposimato, 1996; Georgin and Reynouard, 2003) and repro-
9 ducing certain material instabilities (Oka et al., 1994; di Prisco and Imposimato,
10 1997; Lade et al., 1997). In addition to experimental motivations, viscoplastic-
11 ity has also gained further popularity as a simple regularization technique in fi-
12 nite element computations, since it mitigates the mesh-dependence effects arising
13 from bifurcated responses (e.g. strain localization) (Loret and Prevost, 1990, 1991;
14 Needleman, 1988; Wang et al., 1997).

15 In the light of the above premises, the stability analysis of viscoplastic consti-
16 tutive equations is needed to assess: (i) the suitability of viscoplastic models for
17 geomaterials; (ii) the reliability/objectivity of numerical analyses accounting for
18 material rate-sensitiveness.

19 In the last decades, several authors devoted both theoretical and numerical
20 studies to investigate instabilities in rate-sensitive materials, such as metals (Anand
21 et al., 1987; Shawki and Clifton, 1989) and soils (Oka et al., 1994, 1995; di Prisco
22 et al., 2000). Nevertheless, a general framework establishing when viscoplastic con-
23 stitutive instabilities can occur under mixed stress-strain loading programs (Nova,
24 1994; Imposimato and Nova, 1998) is still missing in literature. These are actu-
25 ally very relevant in practice, since the loading processes in both experimental
26 tests and real boundary value problems are usually characterized by a prescribed
27 combination of certain stress and strain components.

28 This paper provides a sufficient condition for small-strain mechanical stability

by explicitly taking into account the time-dependent response of geomaterials. As will be further clarified, the proposed theoretical framework exhibits strict connections to the elasto-plastic “theory of controllability”, first proposed and developed by Nova and coworkers (Nova, 1994; Imposimato and Nova, 1998; Buscarnera et al., 2011). It will be shown that, despite the different mathematical structures of constitutive equations, the results from the rate-dependent and inviscid theories are closely connected.

Notation

For analytical convenience, a matrix notation is hereafter adopted. Column vectors and square matrices are used to represent second- and fourth-order tensors, respectively. Vectors and matrices are denoted by bold symbols, while the superscript T stands for transposition. The partial derivative operator is ∂/∂ , whereas total derivatives are meant by d/d . Dots and double dots are also employed for first and second total time derivatives. Henceforth, t will be standing for physical time.

2. Loss of stability/controllability in inviscid elasto-plastic solids

Some relevant concepts about the loss of stability and controllability in rate-insensitive solids are hereafter summarized. While in this section only essential details for following developments are recalled, interested readers can find in the wide works by Petryk (2000); Chambon et al. (2004); Bonelli et al. (2011); Bigoni (2012) in-depth explanations (and more references) about stability issues in elasto-plastic continua.

In the context of single potential elasto-plasticity, incremental non-linearity is lumped into the two options of elasto-plastic loading and elastic unloading (only two tensorial stress zones exist (Darve, 1978; Darve and Labanieh, 1982)), so that stability analyses are meaningful in the inelastic regime exclusively.

It is first important to recall the well-known stability criterion proposed by Hill (1958), stating that the material response is stable as long as the second-order work density d^2W is positive under any incremental perturbation (Chambon et al., 2004):

$$d^2W = \frac{1}{2}d\boldsymbol{\sigma}^T d\boldsymbol{\varepsilon} > 0 \quad \forall \quad d\boldsymbol{\varepsilon} \quad (1)$$

in which $d\boldsymbol{\sigma}$ and $d\boldsymbol{\varepsilon}$ are the incremental stress and strain (column) vectors. The Hill's sufficient stability condition was then applied by Maier and Hueckel (1979) to highlight the implications of non-associated plastic flow rules.

Years later, Buscarnera et al. (2011) further pointed out the meaning of the analysis by Maier and Hueckel (1979) in the light of the “theory of controllability” introduced by Nova and coworkers (Nova, 1994; Imposimato and Nova, 1998). In fact, it is possible to demonstrate that the admissibility of the elastic-plastic response depends on the current hardening modulus H and the hardening limits H_1 and H_2 defined by Maier and Hueckel (1979):

1. if $H > H_1$, then existence and uniqueness are guaranteed for any incremental loading path and any loading control (*unconditional stability*);
2. if $H_2 \leq H \leq H_1$, then existence and uniqueness of the incremental response are a function of the loading program (*conditional stability*);
3. if $H < H_2$, then either the incremental response does not exist or the solution is not unique (*unconditional instability*).

Buscarnera et al. (2011) drew these conclusions by analyzing the incremental elastic plastic-response under mixed loading conditions, i.e. by assuming that certain stress and strain components $\boldsymbol{\sigma}_\alpha$ and $\boldsymbol{\varepsilon}_\beta$ are controlled during the loading process. In general, any mixed loading control can be formulated by defining in $I = \{i \in \mathbb{N} : i = 1, 2, \dots, 6\}$ two subsets α and β containing the row indexes of the

1 controlled stress and strain components, respectively:

$$\begin{aligned} \alpha &\subseteq I, \beta \subseteq I \\ \alpha \cap \beta &= \emptyset, \alpha \cup \beta = I \Rightarrow |\alpha| + |\beta| = |I| = 6 \end{aligned} \quad (2)$$

2 where $|\cdot|$ denotes the set cardinality (number of elements in the set). Compat-
 3 ible α and β are, for instance, $\alpha = \{1, 3, 5\}$ and $\beta = \{2, 4, 6\}$, or $\alpha = \{2, 3\}$ and
 4 $\beta = \{1, 4, 5, 6\}$, etc. Mixed loading programs spontaneously induce a rearrange-
 5 ment of the incremental constitutive relationship, separating known and unknown
 6 stress/strain components:

$$\begin{Bmatrix} d\boldsymbol{\sigma}_\alpha \\ d\boldsymbol{\varepsilon}_\beta \end{Bmatrix} = \begin{bmatrix} \mathbf{D}_{\alpha\alpha}^{ep} - \mathbf{D}_{\alpha\beta}^{ep} (\mathbf{D}_{\beta\beta}^{ep})^{-1} \mathbf{D}_{\beta\alpha}^{ep} & \mathbf{D}_{\alpha\beta}^{ep} \\ -(\mathbf{D}_{\beta\beta}^{ep})^{-1} \mathbf{D}_{\beta\alpha}^{ep} & (\mathbf{D}_{\beta\beta}^{ep})^{-1} \end{bmatrix} \begin{Bmatrix} d\boldsymbol{\varepsilon}_\alpha \\ d\boldsymbol{\sigma}_\beta \end{Bmatrix} \quad (3)$$

7 where $\mathbf{D}^{ep}$ the tangent elasto-plastic stiffness matrix (inverse of the compliance
 8 matrix $\mathbf{C}^{ep}$).

9 The partitioned matrix form (3) is meaningful only on condition that the non-
 10 negativeness of the plastic multiplier Λ is ensured, whose general expression for
 11 mixed loading programs is (Buscarnera et al., 2011):

$$\Lambda = \frac{1}{H - H_\chi} \frac{\partial f^T}{\partial \boldsymbol{\sigma}} d\boldsymbol{\sigma}^{tr}, \quad H = -\frac{\partial f^T}{\partial \mathbf{q}} \frac{\partial \mathbf{q}}{\partial \boldsymbol{\varepsilon}^p} \frac{\partial g}{\partial \boldsymbol{\sigma}} \quad (4)$$

12 where (i) the yield function f depends on $\boldsymbol{\sigma}$ and a vector $\mathbf{q}$ of hardening variables,
 13 (ii) the gradient of the plastic potential g identifies the direction of the plastic
 14 strain increment, (iii) the so-called incremental trial stress $d\boldsymbol{\sigma}^{tr}$ is a function of the
 15 prescribed stress/strain increments ($d\boldsymbol{\sigma}_\alpha$ and $d\boldsymbol{\varepsilon}_\beta$) and of certain sub-blocks of the
 16 elastic stiffness/compliance matrices $\mathbf{D}^{el}/\mathbf{C}^{el}$ (Buscarnera et al., 2011).

17 Equation (4) points out that the plastic multiplier tends to infinity as the

1 hardening modulus H approaches the so-called “modulus of controllability“ H_χ :

$$\begin{aligned}
 H_\chi &= -\frac{\partial f}{\partial \boldsymbol{\sigma}_\beta}^T \left[\mathbf{D}_{\beta\beta}^{el} - \mathbf{D}_{\beta\alpha}^{el} (\mathbf{D}_{\alpha\alpha}^{el})^{-1} \mathbf{D}_{\alpha\beta}^{el} \right] \frac{\partial g}{\partial \boldsymbol{\sigma}_\beta} = \\
 &= -\frac{\partial f}{\partial \boldsymbol{\sigma}_\beta}^T (\mathbf{C}_{\beta\beta}^{el})^{-1} \frac{\partial g}{\partial \boldsymbol{\sigma}_\beta}
 \end{aligned}
 \tag{5}$$

2 The definition H_χ depends on the actual loading constraints through α and β in
 3 (2), and suggests the formulation of the following stability/controllability criterion
 4 (Buscarnera et al., 2011):

$$H > H_\chi \tag{6}$$

5 ensuring the positiveness of the plastic multiplier in (4). Incidentally, it could be
 6 demonstrated that H_χ is always in the range bounded by H_1 and H_2 as defined by
 7 (Maier and Hueckel, 1979).

8 Condition (6) can be specialized for the cases of pure stress and strain control
 9 (Maier and Hueckel, 1979):

$$\text{stress control: } \alpha = I, \beta = \emptyset \implies H > H_\chi = 0 \tag{7}$$

$$\begin{aligned}
 &10 \\
 &\text{strain control: } \alpha = \emptyset, \beta = I \implies H > H_\chi = H_c, \quad H_c = -\frac{\partial f}{\partial \boldsymbol{\sigma}}^T \mathbf{D}^{el} \frac{\partial g}{\partial \boldsymbol{\sigma}}
 \end{aligned}
 \tag{8}$$

11 where H_c is the so-called critical hardening modulus (Maier, 1966).

12 The above approach is in essence very simple and flexible, but not employable
 13 for elasto-viscoplastic solids. Indeed, the incremental form (3) with tangent stiff-
 14 ness/compliance matrices can never be retrieved for elasto-viscoplastic constitutive
 15 relationships (Ju, 1990).

16 3. Perzyna’s theory for rate-dependent plasticity

17 3.1. General concepts

18 The theory of elasto-viscoplasticity relies on the assumption that the reversible
 19 (elastic) and the unrecoverable (viscoplastic) components of the total deformation

1 combine additively. This implies that the total strain rate can be decomposed as:

$$\frac{d\boldsymbol{\varepsilon}}{dt} = \frac{d\boldsymbol{\varepsilon}^{el}}{dt} + \frac{d\boldsymbol{\varepsilon}^{vp}}{dt} \quad (9)$$

2 where the superscripts *el* and *vp* stand for elastic and viscoplastic, respectively.
 3 The simplest assumption of isotropic linear response is here introduced for the
 4 elastic deformation:

$$\frac{d\boldsymbol{\varepsilon}^{el}}{dt} = \mathbf{C}^{el} \frac{d\boldsymbol{\sigma}}{dt} \quad \text{or} \quad \frac{d\boldsymbol{\sigma}}{dt} = \mathbf{D}^{el} \frac{d\boldsymbol{\varepsilon}^{el}}{dt} \quad (10)$$

5 while the viscoplastic strain rate is here obtained through the well-known Perzyna's
 6 approach (Perzyna, 1963, 1966):

$$\frac{d\boldsymbol{\varepsilon}^{vp}}{dt} = \Phi(f) \frac{\partial g}{\partial \boldsymbol{\sigma}} \quad (11)$$

7 According to Equation (11), the scalar Φ function (the so-called “viscous nucleus”)
 8 has a major influence on the magnitude of the viscoplastic strain rate¹, while its
 9 direction in the strain rate space is given by the stress gradient of the plastic
 10 potential g . The enforcement of the plastic consistency condition is unnecessary,
 11 since the time rate of $\boldsymbol{\varepsilon}^{vp}$ is directly derived from Φ . As a consequence, when
 12 plastifications take place, the stress state is not constrained to lie on the yield
 13 locus $f = 0$ and “overstresses” occur.

14 In most cases, the viscous nucleus Φ is a non-negative non-decreasing function
 15 of the yield function f ($\Phi \geq 0$ and $d\Phi/df \geq 0$) (di Prisco and Imposimato, 1996).
 16 Provided the analytical definitions of the yield locus, the plastic potential and the
 17 hardening rules, a constitutive model can be easily formulated as either elasto-
 18 plastic or elasto-viscoplastic depending on the flow rule adopted. In this respect,

¹Strictly speaking, there is also an influence of the plastic potential gradient. This could be easily eliminated by introducing $\frac{\partial g}{\partial \boldsymbol{\sigma}} / \left| \frac{\partial g}{\partial \boldsymbol{\sigma}} \right|$ in Equation (11)

1 the following property holds (di Prisco and Imposimato, 1996):

$$\{\Phi \geq 0 \quad \forall f \geq 0; \quad \Phi = 0 \quad \forall f < 0\} \implies \int_0^{+\infty} \frac{d\boldsymbol{\varepsilon}^{vp}}{dt} dt = d\boldsymbol{\varepsilon}^p \quad (12)$$

2 where $d\boldsymbol{\varepsilon}^p$ is the plastic strain increment produced by the corresponding inviscid
3 flow rule. In other words, statement (12) implies that, as long as no viscoplastic
4 strains develop when $f < 0$, the viscoplastic strain increment induced by a given
5 perturbation tends, after an infinite amount of time, to the instantaneous plastic
6 response: from this standpoint, standard plasticity can be regarded as the limit of
7 viscoplasticity at vanishing rate-sensitiveness (or infinitely slow loading). It could
8 be also proven that, as the elasto-plastic limit is approached, $\Phi \rightarrow \infty$ (infinite
9 plastic strain rate) and $f \rightarrow 0$ (consistency satisfied).

10 3.2. Second-order form of constitutive equations

11 As a preliminary step, the following stability analysis requires a second-order
12 form of Perzyna constitutive equations to be derived by time differentiation for
13 mixed loading programs.

14 For this purpose, the authors assumed that (i) $d\mathbf{D}^{el}/dt = d\mathbf{C}^{el}/dt = \mathbf{0}$ (constant
15 elastic parameters), (ii) the yield function f and the plastic potential g depend on
16 time only through the stress vector $\boldsymbol{\sigma}$ and the vectors of hardening variables $\mathbf{q}$ and
17 $\mathbf{p}$:

$$f(t) = f\{\boldsymbol{\sigma}(t), \mathbf{q}[\boldsymbol{\varepsilon}^{vp}(t)]\} \quad (13)$$

$$g(t) = g\{\boldsymbol{\sigma}(t), \mathbf{p}[\boldsymbol{\varepsilon}^{vp}(t)]\} \quad (14)$$

19 Relationships (13)-(14) come from the assumption of strain-hardening material,
20 whereas no dependence of the hardening variables on the inelastic strain rate is
21 considered (Oka et al., 1994; Wang et al., 1997; di Prisco et al., 2000). Accordingly,
22 the second time derivative of the viscoplastic strain rate can be easily obtained by

1 deriving the Perzyna's flow rule (11):

$$\begin{aligned} \frac{d^2 \boldsymbol{\varepsilon}^{vp}}{dt^2} &= \frac{d\Phi}{dt} \frac{\partial g}{\partial \boldsymbol{\sigma}} + \Phi \frac{d}{dt} \left(\frac{\partial g}{\partial \boldsymbol{\sigma}} \right) = \\ &= \frac{d\Phi}{df} \left(\frac{\partial f^T}{\partial \boldsymbol{\sigma}} \frac{d\boldsymbol{\sigma}}{dt} - \Phi H \right) \frac{\partial g}{\partial \boldsymbol{\sigma}} + \Phi \left(\frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \boldsymbol{\sigma}} \frac{d\boldsymbol{\sigma}}{dt} + \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} \frac{\partial \mathbf{p}}{\partial \boldsymbol{\varepsilon}^{vp}} \frac{d\boldsymbol{\varepsilon}^{vp}}{dt} \right) \end{aligned} \quad (15)$$

2 in which the viscous nucleus Φ and its f -derivative, the hardening modulus H and
3 the derivatives of g with respect to $\boldsymbol{\sigma}$ and $\mathbf{p}$ appear.

4 For the sake of clarity, the time derivation of constitutive equations is first
5 performed for the simpler cases of full stress and strain control; then, the general
6 mixed loading case is addressed. The most cumbersome analytical developments
7 are skipped here and summarized in AppendixA.

8 3.2.1. Stress control ($\alpha = I, \beta = \emptyset$)

9 Under full stress control, a stress vector time history $\boldsymbol{\Sigma}(t)$ is prescribed:

$$\boldsymbol{\sigma}(t) = \boldsymbol{\Sigma}(t) \Rightarrow \frac{d\boldsymbol{\varepsilon}^{vp}}{dt} = \frac{d\boldsymbol{\varepsilon}}{dt} - \mathbf{C}^{el} \dot{\boldsymbol{\Sigma}} \quad (16)$$

10 so that the second time derivative of the (unknown) strain vector can be expressed
11 as:

$$\frac{d^2 \boldsymbol{\varepsilon}}{dt^2} = \frac{d^2 \boldsymbol{\varepsilon}^{el}}{dt^2} + \frac{d^2 \boldsymbol{\varepsilon}^{vp}}{dt^2} = \mathbf{C}^{el} \ddot{\boldsymbol{\Sigma}} + \frac{d^2 \boldsymbol{\varepsilon}^{vp}}{dt^2} \quad (17)$$

12 By combining the strain splitting (17) with the stress control constraint (16)
13 and the second-order flow rule (15), the following ODE² system is retrieved (see
14 AppendixA):

$$\frac{d\mathbf{X}}{dt} = \mathbf{A}_\sigma \mathbf{X} + \mathbf{F}_\sigma \quad (18)$$

15 in which $\mathbf{X} = \frac{d\boldsymbol{\varepsilon}}{dt}$ has been set and:

$$\mathbf{A}_\sigma = -\frac{d\Phi}{df} \left(H + \frac{H \dot{\boldsymbol{\Sigma}}}{\Phi} \right) \mathbf{I}_I + \Phi \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} \frac{\partial \mathbf{p}}{\partial \boldsymbol{\varepsilon}^{vp}} \quad (19)$$

²Ordinary Differential Equation

$$\mathbf{F}_\sigma = \mathbf{C}^{el} \ddot{\boldsymbol{\Sigma}} + \Phi \left(\frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \boldsymbol{\sigma}} - \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} \frac{\partial \mathbf{p}}{\partial \boldsymbol{\varepsilon}^{vp}} \mathbf{C}^{el} \right) \dot{\boldsymbol{\Sigma}} + \frac{d\Phi}{df} \left(H + \frac{H_{\dot{\boldsymbol{\Sigma}}}}{\Phi} \right) \mathbf{C}^{el} \dot{\boldsymbol{\Sigma}} \quad (20)$$

$$H_{\dot{\boldsymbol{\Sigma}}} = - \frac{\partial f^T}{\partial \boldsymbol{\sigma}} \dot{\boldsymbol{\Sigma}} \quad (21)$$

$\mathbf{I}_I$ stands for a 6×6 -sized identity matrix (its size coincides with the cardinality of the set I).

The linear system (18) governs the strain acceleration (rate of the total strain rate) under a prescribed stress history. It is also worth observing that:

- since the entries of the matrix $\mathbf{A}_\sigma$ evolve with the stress-strain state, system (18) is time-varying (non-stationary);
- the vector $\mathbf{F}_\sigma$ vanishes for creep loading conditions (i.e. under constant stress and $\dot{\boldsymbol{\Sigma}} = \ddot{\boldsymbol{\Sigma}} = \mathbf{0}$), and so does the scalar $H_{\dot{\boldsymbol{\Sigma}}}$ in (21) – which will be henceforth referred to as “stress rate modulus”.

3.2.2. Strain control ($\alpha = \emptyset, \beta = I$)

In case the loading program is fully strain-controlled, the total strain vector time history $\mathbf{E}(t)$ is prescribed:

$$\boldsymbol{\varepsilon}(t) = \mathbf{E}(t) \Rightarrow \frac{d\boldsymbol{\varepsilon}^{vp}}{dt} = \dot{\mathbf{E}} - \mathbf{C}^{el} \frac{d\boldsymbol{\sigma}}{dt} \quad (22)$$

and the onset of positive accelerations can be detected by monitoring the second time derivative of the (unknown) stress vector:

$$\frac{d^2 \boldsymbol{\sigma}}{dt^2} = \mathbf{D}^{el} \left(\frac{d^2 \boldsymbol{\varepsilon}}{dt^2} - \frac{d^2 \boldsymbol{\varepsilon}^{vp}}{dt^2} \right) = \mathbf{D}^{el} \ddot{\mathbf{E}} - \mathbf{D}^{el} \frac{d^2 \boldsymbol{\varepsilon}^{vp}}{dt^2} \quad (23)$$

After some derivations similar to those performed for the stress-controlled case (see AppendixA), the following ODE system is found:

$$\frac{d\mathbf{X}}{dt} = \mathbf{A}_\varepsilon \mathbf{X} + \mathbf{F}_\varepsilon \quad (24)$$

1 where $\mathbf{X} = d\boldsymbol{\sigma}/dt$ and:

$$\mathbf{A}_\varepsilon = \left[-\frac{d\Phi}{df} \left(H - H_c + \frac{H_{\dot{E}}}{\Phi} \right) \mathbf{I}_I - \Phi \mathbf{D}^{el} \left(\frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \boldsymbol{\sigma}} - \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} \frac{\partial \mathbf{p}}{\partial \boldsymbol{\varepsilon}^{vp}} \mathbf{C}^{el} \right) \right] \quad (25)$$

$$\begin{aligned} \mathbf{F}_\varepsilon &= \mathbf{D}^{el} \ddot{\mathbf{E}} + \frac{d\Phi}{df} \left(H - H_c + \frac{H_{\dot{E}}}{\Phi} \right) \mathbf{D}^{el} \dot{\mathbf{E}} - \Phi \mathbf{D}^{el} \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \boldsymbol{\beta}} \frac{\partial \boldsymbol{\beta}}{\partial \boldsymbol{\varepsilon}^{vp}} \dot{\mathbf{E}} = \\ &= \mathbf{D}^{el} \ddot{\mathbf{E}} + \mathbf{D}^{el} \left[\frac{d\Phi}{df} \left(H - H_c + \frac{H_{\dot{E}}}{\Phi} \right) \mathbf{I}_I - \Phi \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} \frac{\partial \mathbf{p}}{\partial \boldsymbol{\varepsilon}^{vp}} \right] \dot{\mathbf{E}} \end{aligned} \quad (26)$$

$$H_{\dot{E}} = -\frac{\partial f^T}{\partial \boldsymbol{\sigma}} \mathbf{D}^{el} \dot{\mathbf{E}} \quad (27)$$

3 Apparently, systems (18) and (24) possess the same mathematical structure. In
4 the latter, the assumption of prescribed strain vector leads to retrieve the critical
5 softening modulus H_c in Equation (8) (Maier and Hueckel, 1979), along with the
6 newly defined “strain rate modulus” $H_{\dot{E}}$ in (27).

7 3.2.3. Mixed stress-strain control

8 Under general mixed loading, a combination of certain stress ($\boldsymbol{\sigma}_\alpha$) and strain
9 ($\boldsymbol{\varepsilon}_\beta$) components is known/controlled. By following the approach recalled in Sec-
10 tion 2, the total strain vector and its elastic and viscoplastic components can be
11 partitioned as follows³:

$$\frac{d}{dt} \begin{Bmatrix} \boldsymbol{\varepsilon}_\alpha \\ \boldsymbol{\varepsilon}_\beta \end{Bmatrix} = \begin{bmatrix} \mathbf{C}_{\alpha\alpha} & \mathbf{C}_{\alpha\beta} \\ \mathbf{C}_{\beta\alpha} & \mathbf{C}_{\beta\beta} \end{bmatrix} \frac{d}{dt} \begin{Bmatrix} \boldsymbol{\sigma}_\alpha \\ \boldsymbol{\sigma}_\beta \end{Bmatrix} + \Phi \begin{Bmatrix} \frac{\partial g}{\partial \boldsymbol{\sigma}_\alpha} \\ \frac{\partial g}{\partial \boldsymbol{\sigma}_\beta} \end{Bmatrix} \quad (28)$$

12 Hereafter, the constraints on the prescribed stress and strain components are given
13 to define the loading program:

$$\boldsymbol{\sigma}_\alpha(t) = \boldsymbol{\Sigma}_\alpha(t) \quad \boldsymbol{\varepsilon}_\beta(t) = \mathbf{E}_\beta(t) \quad (29)$$

³In what follows, the superscript *el* for the elastic stiffness/compliance matrices will be avoided to simplify the notation

1 whence the following relationships for the viscoplastic strain rates result:

$$\begin{aligned}\frac{d\boldsymbol{\varepsilon}_\alpha^{vp}}{dt} &= \frac{d\boldsymbol{\varepsilon}_\alpha}{dt} - \mathbf{C}_{\alpha\alpha} \frac{d\boldsymbol{\sigma}_\alpha}{dt} - \mathbf{C}_{\alpha\beta} \frac{d\boldsymbol{\sigma}_\beta}{dt} = \frac{d\boldsymbol{\varepsilon}_\alpha}{dt} - \mathbf{C}_{\alpha\alpha} \dot{\boldsymbol{\Sigma}}_\alpha - \mathbf{C}_{\alpha\beta} \frac{d\boldsymbol{\sigma}_\beta}{dt} \\ \frac{d\boldsymbol{\varepsilon}_\beta^{vp}}{dt} &= \frac{d\boldsymbol{\varepsilon}_\beta}{dt} - \mathbf{C}_{\beta\alpha} \frac{d\boldsymbol{\sigma}_\alpha}{dt} - \mathbf{C}_{\beta\beta} \frac{d\boldsymbol{\sigma}_\beta}{dt} = \dot{\mathbf{E}}_\beta - \mathbf{C}_{\beta\alpha} \dot{\boldsymbol{\Sigma}}_\alpha - \mathbf{C}_{\beta\beta} \frac{d\boldsymbol{\sigma}_\beta}{dt}\end{aligned}\quad (30)$$

2 The substitution of the loading constraints (29) into the constitutive law (28)

3 generalizes the Perzyna's flow rule (11) in the sense of mixed loading programs.

4 Accordingly, the rates of the uncontrolled stresses and strains assume the form:

$$\frac{d}{dt} \begin{Bmatrix} \boldsymbol{\varepsilon}_\alpha \\ \boldsymbol{\sigma}_\beta \end{Bmatrix} = \Phi \begin{bmatrix} \mathbf{I}_{\alpha\alpha} & -\mathbf{C}_{\alpha\beta} \mathbf{C}_{\beta\beta}^{-1} \\ \mathbf{0} & -\mathbf{C}_{\beta\beta}^{-1} \end{bmatrix} \begin{Bmatrix} \frac{\partial g}{\partial \boldsymbol{\sigma}_\alpha} \\ \frac{\partial g}{\partial \boldsymbol{\sigma}_\beta} \end{Bmatrix} + \begin{Bmatrix} \dot{\boldsymbol{\Omega}}_\alpha \\ \dot{\boldsymbol{\Omega}}_\beta \end{Bmatrix}\quad (31)$$

5 where the vector $\boldsymbol{\Omega}$:

$$\begin{Bmatrix} \dot{\boldsymbol{\Omega}}_\alpha \\ \dot{\boldsymbol{\Omega}}_\beta \end{Bmatrix} = \begin{Bmatrix} \mathbf{C}_{\alpha\alpha} \dot{\boldsymbol{\Sigma}}_\alpha + \mathbf{C}_{\alpha\beta} \mathbf{C}_{\beta\beta}^{-1} (\dot{\mathbf{E}}_\beta - \mathbf{C}_{\beta\alpha} \dot{\boldsymbol{\Sigma}}_\alpha) \\ \mathbf{C}_{\beta\beta}^{-1} (\dot{\mathbf{E}}_\beta - \mathbf{C}_{\beta\alpha} \dot{\boldsymbol{\Sigma}}_\alpha) \end{Bmatrix}\quad (32)$$

6 vanishes at constant $\boldsymbol{\Sigma}_\alpha$ and $\mathbf{E}_\beta$. Then, both the equations in system (31) are

7 further differentiated with respect to time:

$$\begin{aligned}\frac{d^2 \boldsymbol{\varepsilon}_\alpha}{dt^2} &= \frac{d}{dt} \left(\Phi \frac{\partial g}{\partial \boldsymbol{\sigma}_\alpha} - \mathbf{C}_{\alpha\beta} \mathbf{C}_{\beta\beta}^{-1} \Phi \frac{\partial g}{\partial \boldsymbol{\sigma}_\beta} + \dot{\boldsymbol{\Omega}}_\alpha \right) = \\ &= \frac{d\Phi}{dt} \frac{\partial g}{\partial \boldsymbol{\sigma}_\alpha} + \Phi \frac{d}{dt} \left(\frac{\partial g}{\partial \boldsymbol{\sigma}_\alpha} \right) - \frac{d\Phi}{dt} \mathbf{C}_{\alpha\beta} \mathbf{C}_{\beta\beta}^{-1} \frac{\partial g}{\partial \boldsymbol{\sigma}_\beta} - \Phi \mathbf{C}_{\alpha\beta} \mathbf{C}_{\beta\beta}^{-1} \frac{d}{dt} \left(\frac{\partial g}{\partial \boldsymbol{\sigma}_\beta} \right) + \ddot{\boldsymbol{\Omega}}_\alpha\end{aligned}\quad (33)$$

$$\frac{d^2 \boldsymbol{\sigma}_\beta}{dt^2} = \frac{d}{dt} \left(-\mathbf{C}_{\beta\beta}^{-1} \Phi \frac{\partial g}{\partial \boldsymbol{\sigma}_\beta} + \dot{\boldsymbol{\Omega}}_\beta \right) = -\frac{d\Phi}{dt} \mathbf{C}_{\beta\beta}^{-1} \frac{\partial g}{\partial \boldsymbol{\sigma}_\beta} - \Phi \mathbf{C}_{\beta\beta}^{-1} \frac{d}{dt} \left(\frac{\partial g}{\partial \boldsymbol{\sigma}_\beta} \right) + \ddot{\boldsymbol{\Omega}}_\beta \quad (34)$$

1 Even in this case, some more demanding manipulations (AppendixA) enable to
 2 recast equations (33)-(34) as a time-varying ODE system:

$$\frac{d\mathbf{X}}{dt} = \mathbf{A}\mathbf{X} + \mathbf{F} \Rightarrow \frac{d^2}{dt^2} \begin{Bmatrix} \boldsymbol{\varepsilon}_\alpha \\ \boldsymbol{\sigma}_\beta \end{Bmatrix} = \begin{bmatrix} \mathbf{A}_{\alpha\alpha} & \mathbf{A}_{\alpha\beta} \\ \mathbf{A}_{\beta\alpha} & \mathbf{A}_{\beta\beta} \end{bmatrix} \frac{d}{dt} \begin{Bmatrix} \boldsymbol{\varepsilon}_\alpha \\ \boldsymbol{\sigma}_\beta \end{Bmatrix} + \begin{Bmatrix} \mathbf{F}_\alpha \\ \mathbf{F}_\beta \end{Bmatrix} \quad (35)$$

3 For the sake of analytical convenience, the sub-blocks in (35) are now specified for
 4 the special case:

$$\frac{\partial}{\partial \mathbf{p}} \left(\frac{\partial g}{\partial \boldsymbol{\sigma}} \right) = \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} = \mathbf{0} \quad (36)$$

5 meaning no influence of the g -hardening variables on the direction of the viscoplas-
 6 tic flow (Equation (11)). This assumption implies some loss of generality but still
 7 allows to address relevant cases, including perfectly-viscoplastic (no hardening) and
 8 Cam-Clay-type (isotropic strain-hardening) constitutive relationships. In partic-
 9 ular, the latter are widely used to model the non-linear behavior of soils under
 10 monotonic loading (see e.g. Wood (2003) for details).

11 The simplification (36) leads to the following sub-block expressions:

$$\mathbf{A}_{\alpha\alpha} = -\frac{d\Phi}{df} \left(H - H_\chi + \frac{H\dot{\Sigma}\dot{E}}{\Phi} \right) \mathbf{I}_{\alpha\alpha} \quad (37)$$

$$\mathbf{A}_{\alpha\beta} = \Phi \left(\frac{\partial^2 g}{\partial \boldsymbol{\sigma}_\alpha \otimes \partial \boldsymbol{\sigma}_\beta} - \mathbf{C}_{\alpha\beta} \mathbf{C}_{\beta\beta}^{-1} \frac{\partial^2 g}{\partial \boldsymbol{\sigma}_\beta \otimes \partial \boldsymbol{\sigma}_\beta} \right) \quad (38)$$

$$\mathbf{A}_{\beta\alpha} = \mathbf{0} \quad (39)$$

$$\mathbf{A}_{\beta\beta} = -\frac{d\Phi}{df} \left(H - H_\chi + \frac{H\dot{\Sigma}\dot{E}}{\Phi} \right) \mathbf{I}_{\beta\beta} - \Phi \mathbf{C}_{\beta\beta}^{-1} \frac{\partial^2 g}{\partial \boldsymbol{\sigma}_\beta \otimes \partial \boldsymbol{\sigma}_\beta} \quad (40)$$

1 and:

$$\begin{aligned} \mathbf{F}_\alpha = \ddot{\mathbf{Q}}_\alpha + \frac{d\Phi}{df} \left(H - H_\chi + \frac{H_{\dot{\Sigma}\dot{E}}}{\Phi} \right) \left[\mathbf{C}_{\alpha\alpha} \dot{\Sigma}_\alpha - \mathbf{C}_{\alpha\beta} \mathbf{C}_{\beta\beta}^{-1} \left(\mathbf{C}_{\beta\alpha} \dot{\Sigma}_\alpha - \dot{\mathbf{E}}_\beta \right) \right] + \\ + \Phi \left(\frac{\partial^2 g}{\partial \boldsymbol{\sigma}_\alpha \otimes \partial \boldsymbol{\sigma}_\alpha} - \mathbf{C}_{\alpha\beta} \mathbf{C}_{\beta\beta}^{-1} \frac{\partial^2 g}{\partial \boldsymbol{\sigma}_\beta \otimes \partial \boldsymbol{\sigma}_\alpha} \right) \dot{\Sigma}_\alpha \end{aligned} \quad (41)$$

$$\begin{aligned} \mathbf{F}_\beta = \ddot{\mathbf{Q}}_\beta - \frac{d\Phi}{df} \left(H - H_\chi + \frac{H_{\dot{\Sigma}\dot{E}}}{\Phi} \right) \mathbf{C}_{\beta\beta}^{-1} \left(\mathbf{C}_{\beta\alpha} \dot{\Sigma}_\alpha - \dot{\mathbf{E}}_\beta \right) + \\ - \Phi \mathbf{C}_{\beta\beta}^{-1} \frac{\partial^2 g}{\partial \boldsymbol{\sigma}_\beta \otimes \partial \boldsymbol{\sigma}_\alpha} \dot{\Sigma}_\alpha \end{aligned} \quad (42)$$

2 where:

$$H_{\dot{\Sigma}\dot{E}} = - \left(\frac{\partial f^T}{\partial \boldsymbol{\sigma}_\alpha} \dot{\Sigma}_\alpha + \frac{\partial f^T}{\partial \boldsymbol{\sigma}_\beta} \dot{\mathbf{Q}}_\beta \right) \quad (43)$$

3 has been posed. From the above relationships, it is possible to infer that:

- 4 – as in the elasto-plastic case, the response to mixed loading programs is in-
- 5 fluenced by the controllability modulus H_χ introduced by Buscarnera et al.
- 6 (2011) (see in (5));
- 7 – the definition (43) of the so-called “stress/strain rate modulus” $H_{\dot{\Sigma}\dot{E}}$ spon-
- 8 taneously arises as a generalization of $H_{\dot{\Sigma}}$ and $H_{\dot{E}}$. $H_{\dot{\Sigma}\dot{E}}$ vanishes when the
- 9 prescribed rates $\dot{\Sigma}_\alpha$ and $\dot{\mathbf{E}}_\beta$ are nil;
- 10 – the nullity of the sub-block $\mathbf{A}_{\beta\alpha}$ is not a consequence of the simplifying
- 11 assumption (36), but it stems from the general structure of system (31).
- 12 In other words, the properties exhibited by $\mathbf{A}$ because of $\mathbf{A}_{\beta\alpha} = \mathbf{0}$ would
- 13 keep holding also for hardening models with non-isotropic/homothetic strain-
- 14 hardening.

15 4. Analysis of elasto-viscoplastic constitutive stability

16 Since Perzyna-type relationships cannot be written in the incremental form (3)

17 (Ju, 1990), the elasto-plastic approach in Section 2 for the analysis of material

1 stability is not suitable for viscoplastic continua. Conversely, the above second-
 2 order Perzyna equations can be fruitfully exploited to the same purpose.

3 The second-order Perzyna relationship (35) is in the form of a linear ODE
 4 system:

$$\frac{d\mathbf{X}}{dt} = \mathbf{A}\mathbf{X} + \mathbf{F}$$

5 On condition that $\mathbf{F}(t) = \mathbf{0}$, stationary motion conditions ($d\mathbf{X}/dt = \mathbf{0}$) are at-
 6 tained when $\mathbf{X}(t) = \mathbf{0}$, which is thus referred to as “equilibrium trajectory”. In
 7 the present context, $\mathbf{X}$ is composed of stress/strain rate components and the equi-
 8 librium $\mathbf{X} = \mathbf{0}$ actually denotes a quasi-static evolution of the constitutive response
 9 (i.e. at negligible stress/strain time rates).

10 According to the well-known Lyapunov’s definition (Lyapunov, 1892; Seydel,
 11 1988; Chambon et al., 2004), the equilibrium trajectory $\mathbf{X}(t) = \mathbf{0}$ is stable over
 12 the time set $T = [t_0, +\infty)$ if:

$$\begin{aligned} \forall t \in T, \quad \forall \varepsilon > 0 \quad \exists \delta(\varepsilon) > 0 \\ \|\mathbf{X}(t_0)\| < \delta \implies \|\mathbf{X}(t)\| < \varepsilon \end{aligned} \tag{44}$$

13 Roughly speaking, the stationary trajectory is said to be stable if other “close”
 14 trajectories at a given initial time keep “staying close” to it as time elapses. Posing
 15 $\mathbf{F} = \mathbf{0}$ to analyze the stability of the trajectory $\mathbf{X}(t) = \mathbf{0}$ has a clear physical
 16 motivation: stability is in fact an intrinsic property of the system under free motion
 17 conditions, whereas instability can be triggered any time by enforcing appropriate
 18 perturbations.

19 In the case of linear ODE systems, Lyapunov’s theory of stability (Lyapunov,
 20 1892; Seydel, 1988) establishes a direct link between the spectral properties of the
 21 system matrix $\mathbf{A}$ and the stability of the equilibrium solution. In particular, it can
 22 be proven that:

23 **1.** $\mathbf{X} = \mathbf{0}$ is a stable equilibrium in the sense of (44) if the real parts of all the

1 *eigenvalues in $\Lambda(\mathbf{A})$ (spectrum of $\mathbf{A}$) are non-positive.*

2 However, since matrix $\mathbf{A}$ is actually time-varying in the viscoplastic regime, the
 3 above stability criterion is sufficient for stability, not necessary: in fact, if positive
 4 eigenvalues arise at some time t , the subsequent evolution of the system can be
 5 either stable or unstable depending on the actual $\mathbf{A}$ entries at elapsing time. It is
 6 only ensured that instability cannot occur while $\Lambda(\mathbf{A})$ is all formed by non-positive
 7 eigenvalues at each time t .

8 As is discussed in AppendixB, all the eigenvalues in $\Lambda(\mathbf{A})$ for $\dot{\Sigma}_\alpha = \mathbf{0}$ and
 9 $\dot{\mathbf{E}}_\beta = \mathbf{0}$ (nil external loading rates in (35)) are real and semisimple under very
 10 reasonable assumptions. As a consequence, the fulfillment of the sufficient stability
 11 condition (i.e. non-positive eigenvalues) also implies that $\mathbf{A}$ is negative semi-
 12 definite:

$$\lambda^i \leq 0 \quad \forall \lambda^i \in \Lambda(\mathbf{A})$$

$$\implies \mathbf{X}^T \mathbf{A} \mathbf{X} \leq 0 \quad \forall \mathbf{X} \neq \mathbf{0} \quad (45)$$

$$\implies \mathbf{X}^T \frac{d\mathbf{X}}{dt} \leq 0 \quad \forall \mathbf{X} \neq \mathbf{0} \wedge \mathbf{F} = \mathbf{0}$$

13 whose mechanical interpretation is given here below.

14 *4.1. Mechanical interpretation*

15 Corollary (45) enables an enlightening mechanical/geometrical interpretation,
 16 which can be easily illustrated in the case of stress-controlled conditions (creep
 17 tests). Figure 1 qualitatively depicts in the strain rate space a situation in which
 18 the stability of the constitutive response is no longer ensured. At time t , an instan-
 19 taneous increase in the strain rate norm is produced by a positive strain acceleration
 20 and a necessary step towards instability is taken. Apparently, this can never hap-
 21 pen while $\dot{\epsilon}$ and $\ddot{\epsilon}$ are orthogonal (constant $\dot{\epsilon}$ norm) or the angle in between them
 22 is acute (decreasing $\dot{\epsilon}$ norm). This is in essence what corollary (45) states and

clarifies the effect of acceleration terms on the onset of constitutive instabilities (Oka et al., 1994, 1995; di Prisco and Imposimato, 1997; di Prisco et al., 2000).

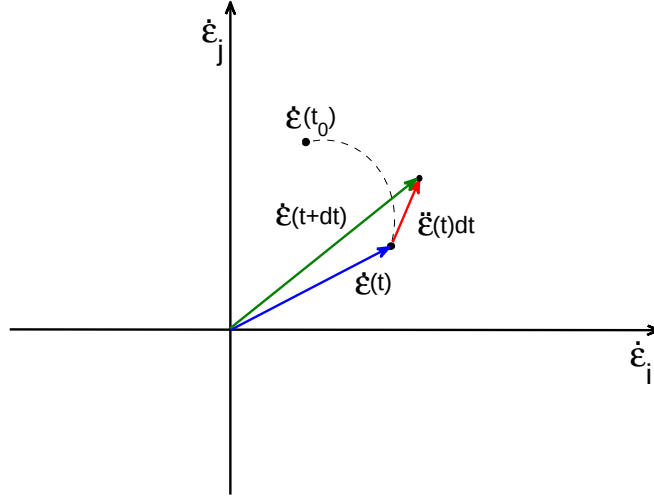


Figure 1: Representation of strain acceleration in the strain rate space

For the sake of clarity, corollary (45) is rewritten with explicit reference to mixed loading variables:

$$\frac{d}{dt} \begin{Bmatrix} \epsilon_\alpha \\ \sigma_\beta \end{Bmatrix}^T \cdot \frac{d^2}{dt^2} \begin{Bmatrix} \epsilon_\alpha \\ \sigma_\beta \end{Bmatrix} < 0 \quad (46)$$

where σ_β and ϵ_α are still the uncontrolled stress/strain components. As Imposimato and Nova (1998) proved for elasto-plastic problems, a condition similar to (46) can be also derived for loading programs in which work-conjugate variables are defined as a linear combination of certain stress and strain components (for instance, volumetric and deviatoric stress/strain invariants under triaxial loading conditions).

4.2. Determination of viscoplastic stability limits

In the light of the above criterion, the viscoplastic stability analysis requires the whole spectrum $\Lambda(\mathbf{A})$ to be determined. For this purpose, Figure 2 illustrates the general structure of matrix $\mathbf{A}$ in terms of nil and non-nil entries (Equations

(37)–(40)), implying that $\Lambda(\mathbf{A})$ can be obtained by combining the spectra $\Lambda(\mathbf{A}_{\alpha\alpha})$ and $\Lambda(\mathbf{A}_{\beta\beta})$:

$$\Lambda(\mathbf{A}) = \Lambda(\mathbf{A}_{\alpha\alpha}) \cup \Lambda(\mathbf{A}_{\beta\beta}) \quad (47)$$

$$\mathbf{A} = \begin{bmatrix} \mathbf{A}_{\alpha\alpha} & \mathbf{A}_{\alpha\beta} \\ \mathbf{A}_{\beta\alpha} & \mathbf{A}_{\beta\beta} \end{bmatrix} = \begin{bmatrix} \bullet & 0 & | & \bullet & \bullet & \bullet & \bullet \\ 0 & \bullet & | & \bullet & \bullet & \bullet & \bullet \\ - & - & + & - & - & - & - \\ 0 & 0 & | & \bullet & \bullet & \bullet & \bullet \\ 0 & 0 & | & \bullet & \bullet & \bullet & \bullet \\ 0 & 0 & | & \bullet & \bullet & \bullet & \bullet \\ 0 & 0 & | & \bullet & \bullet & \bullet & \bullet \end{bmatrix}$$

Figure 2: General structure of the partitioned matrix $\mathbf{A}$

In particular, since $\mathbf{A}_{\alpha\alpha}$ is proportional to the identity matrix, each i^{th} eigenvalue $\lambda_{\alpha\alpha}^i$ in $\Lambda(\mathbf{A}_{\alpha\alpha})$ assumes the following form for $\dot{\Sigma}_\alpha = \mathbf{0}$ and $\dot{\mathbf{E}}_\beta = \mathbf{0}$:

$$\lambda_{\alpha\alpha}^i \Big|_{\dot{\Sigma}_\alpha=\mathbf{0}, \dot{\mathbf{E}}_\beta=\mathbf{0}} = -\frac{d\Phi}{df}(H - H_\chi) \in \Lambda(\mathbf{A}_{\alpha\alpha}) \quad (48)$$

Similarly, as $\mathbf{A}_{\beta\beta}$ is the sum of a diagonal matrix and a full matrix, it results:

$$\lambda_{\beta\beta}^i \Big|_{\dot{\Sigma}_\alpha=\mathbf{0}, \dot{\mathbf{E}}_\beta=\mathbf{0}} = -\frac{d\Phi}{df}(H - H_\chi) - \Phi\mu^i \in \Lambda(\mathbf{A}_{\beta\beta}) \quad (49)$$

where (see Equation (40)):

$$\mu^i \in \Lambda(\mathbf{M}), \quad \mathbf{M} = \mathbf{C}_{\beta\beta}^{-1} \frac{\partial^2 g}{\partial \boldsymbol{\sigma}_\beta \otimes \partial \boldsymbol{\sigma}_\beta} \quad (50)$$

As is discussed in AppendixB, the eigenvalues μ^i in $\mathbf{M}$ are all positive on condition that the plastic potential g is convex in the stress space. If μ_{max} is the maximum μ^i , then only the following options are given (Figure 3):

1. $H \geq H_\chi$: all the eigenvalues in $\Lambda(\mathbf{A})$ are non-positive and so does the quadratic form in (45) for any non-nil $\mathbf{X}$ (rate of the uncontrolled stress/strain components);

- 1 2. $H_\chi - \frac{\Phi}{d\Phi/df} \mu_{max} < H < H_\chi$ ⁴: $\Lambda(\mathbf{A})$ is composed of both positive and
2 negative eigenvalues and the current sign of the quadratic form depends on
3 the actual $\mathbf{X}$ value;
- 4 3. $H \leq H_\chi - \frac{\Phi}{d\Phi/df} \mu_{max}$: all the eigenvalues in $\Lambda(\mathbf{A})$ are non-negative and the
5 quadratic form is positive semi-definite.

	$H_\chi - \frac{\Phi}{d\Phi/df} \mu^{\max}$	$H_\chi - \frac{\Phi}{d\Phi/df} \mu^{\min}$	H_χ	
$\lambda_{\alpha\alpha}$	+	+	+	-
$\lambda_{\beta\beta}^{\max}$	+	+	-	-
$\lambda_{\beta\beta}^{\min}$	+	-	-	-

Figure 3: Sign of the eigenvalues in $\Lambda(\mathbf{A}_{\alpha\alpha})$ and $\Lambda(\mathbf{A}_{\beta\beta})$ as a function of the hardening modulus

6 As Figure 3 puts in evidence, the sufficient condition for viscoplastic stability
7 is fulfilled as long as:

$$H > H_\chi \quad (51)$$

8 This means that no viscoplastic constitutive instabilities can occur under mixed
9 creep/relaxation programs while the hardening modulus H is larger than the con-
10 trollability modulus H_χ : the connection to the elasto-plastic condition given by
11 Buscarnera et al. (2011) is self-evident. Importantly, option 2 testifies the existence
12 of a H -range in which $\Lambda(\mathbf{A})$ includes both positive and negative eigenvalues and
13 stability can no longer be ensured (either beneficial or detrimental accelerations will
14 arise depending on the current $\mathbf{X}$). This also means that, in rate-sensitive solids,
15 the state of the material is not only determined by “static” variables (stresses,
16 strains and hardening variables), but by their time rate as well.

17 To further highlight the link between the viscoplastic and the elasto-plastic
18 theories, it is worth showing what the viscous approach predicts at decreasing

⁴The properties of Φ recalled in Section 3.1 imply the positiveness of the ratio $\frac{\Phi}{d\Phi/df}$

1 viscosity. For this purpose, a common analytical expression for Φ^5 is taken as a
 2 reference:

$$\Phi(f) = \eta \langle f \rangle^m = \begin{cases} \eta f^m & f \geq 0 \\ 0 & f < 0 \end{cases} \quad (52)$$

3 in which η (“fluidity parameter”) and m are two constitutive parameters governing
 4 the material rate-sensitivity. Although other options are available (di Prisco and
 5 Imposimato (1996); Freitas et al. (2012)), function (52) fulfills property (12) and
 6 the elasto-viscoplastic response tends to the elasto-plastic limit at vanishing rate-
 7 sensitiveness (i.e. at increasing η and/or m). If e.g. $m = 1$ is set in (52), then:

$$\lambda_{\beta\beta}^i \Big|_{\dot{\mathbf{S}}_\alpha=\mathbf{0}, \dot{\mathbf{E}}_\beta=\mathbf{0}} = -\eta [(H - H_\chi) + f\mu^i] \quad (53)$$

8 and the inviscid limit reads:

$$\eta \rightarrow \infty \implies f \rightarrow 0$$

$$\lambda_{\beta\beta}^i \Big|_{\dot{\mathbf{S}}_\alpha=\mathbf{0}, \dot{\mathbf{E}}_\beta=\mathbf{0}}^{\eta \rightarrow \infty} \rightarrow -\eta (H - H_\chi) = \lambda_{\alpha\alpha}^i \Big|_{\dot{\mathbf{S}}_\alpha=\mathbf{0}, \dot{\mathbf{E}}_\beta=\mathbf{0}} \quad (54)$$

9 Limit (54) shows that the eigenvalues in $\Lambda(\mathbf{A}_{\beta\beta})$ and $\Lambda(\mathbf{A}_{\alpha\alpha})$ tend to coincide
 10 as the fluidity parameter η approaches infinity. This stems from the fact that, at
 11 vanishing rate-sensitiveness, the constitutive equations produce lower and lower
 12 overstresses and the fulfillment of plastic consistency ($f = 0$) is progressively re-
 13 gained. As a consequence, the intermediate range $H_\chi - \frac{\Phi}{d\Phi/df} \mu_{max} < H < H_\chi$
 14 in Figure 3 tends to disappear and the sign of the quadratic form in (45) is no
 15 longer affected by the rate vector $\mathbf{X}$. This mathematically translates that, in invis-
 16 cid solids, the stress/strain rate has no influence on defining the current material
 17 state, nor on the triggering of constitutive instabilities.

⁵the yield function f must be dimensionless

5. Concluding remarks

In this paper a theoretical approach for the analysis of constitutive instabilities in elasto-viscoplastic solids has been proposed. At variance with previous works on the subject, general mixed loading conditions have been considered, accounting for the fact that in real laboratory tests and boundary value problems not all the stress or strain components are known/prescribed, but rather a combination of some of them. While the same problem was previously tackled by other authors for rate-insensitive elasto-plastic materials, a different approach has been followed here to overcome the lack of the tangent stiffness operator in Perzyna-type constitutive equations.

Under the assumption of isotropic/homothetic strain-hardening, it has been shown that instabilities are not possible while the hardening modulus is larger than the so-called controllability modulus H_χ – which is consistent with the rate-independent theory developed by Buscarnera et al. (2011). While the scalar modulus H_χ contains information about the static state of the material (stresses and hardening variables) and the specific loading constraints, it has been also found that, below the H_χ limit, instabilities may occur depending on the current stress/strain rate. As a consequence, the latter actively contribute to define the global state of the material. It is worth remarking that, as the theory provides an “instantaneous” condition, the actual development of macroscopic instability requires positive local accelerations to last over a sufficient amount of time.

The framework proposed in this paper extends the previous rate-independent theory and will enable to cope with relevant problems where time effects can play a major role.

Acknowledgements

The authors gratefully thank Dr. Giuseppe Dattola for the valuable suggestions provided during the development of this research.

1 Appendix A. Analytical derivations

2 The main analytical derivations skipped in Section 3.2 are hereafter reported.

3 *Stress control* ($\alpha = I, \beta = \emptyset$)

4 Under the stress control $\boldsymbol{\sigma}(t) = \boldsymbol{\Sigma}(t)$, the terms in Equation (15) can be
5 specified as it follows:

$$\begin{aligned} \frac{d\Phi}{dt} &= \frac{d\Phi}{df} \left(\frac{\partial f^T}{\partial \boldsymbol{\sigma}} \frac{d\boldsymbol{\sigma}}{dt} + \frac{\partial f^T}{\partial \mathbf{q}} \frac{\partial \mathbf{q}}{\partial \boldsymbol{\varepsilon}^{vp}} \frac{d\boldsymbol{\varepsilon}^{vp}}{dt} \right) = \\ &= \frac{d\Phi}{df} \frac{\partial f^T}{\partial \boldsymbol{\sigma}} \dot{\boldsymbol{\Sigma}} + \Phi \frac{d\Phi}{df} \frac{\partial f^T}{\partial \mathbf{q}} \frac{\partial \mathbf{q}}{\partial \boldsymbol{\varepsilon}^{vp}} \frac{\partial g}{\partial \boldsymbol{\sigma}} = -\Phi \frac{d\Phi}{df} H + \frac{d\Phi}{df} \frac{\partial f^T}{\partial \boldsymbol{\sigma}} \dot{\boldsymbol{\Sigma}} \end{aligned} \quad (\text{A.1})$$

6 and, exploiting the equality $\frac{dg}{d\boldsymbol{\sigma}} = \frac{1}{\Phi} \frac{d\boldsymbol{\varepsilon}^{vp}}{dt}$ (from the Perzyna's flow rule) along
7 with Equation (16):

$$\begin{aligned} \frac{d\Phi}{dt} \frac{\partial g}{\partial \boldsymbol{\sigma}} &= -\Phi \frac{d\Phi}{df} H \frac{\partial g}{\partial \boldsymbol{\sigma}} + \frac{d\Phi}{df} \left(\frac{\partial f^T}{\partial \boldsymbol{\sigma}} \dot{\boldsymbol{\Sigma}} \right) \frac{1}{\Phi} \frac{d\boldsymbol{\varepsilon}^{vp}}{dt} = \\ &= -\frac{d\Phi}{df} H \mathbf{I} \frac{d\boldsymbol{\varepsilon}^{vp}}{dt} + \frac{d\Phi}{df} \frac{1}{\Phi} \left(\frac{\partial f^T}{\partial \boldsymbol{\sigma}} \dot{\boldsymbol{\Sigma}} \right) \mathbf{I} \frac{d\boldsymbol{\varepsilon}^{vp}}{dt} = \\ &= -\frac{d\Phi}{df} \left(H + \frac{H \dot{\boldsymbol{\Sigma}}}{\Phi} \right) \mathbf{I} \frac{d\boldsymbol{\varepsilon}}{dt} + \frac{d\Phi}{df} \left(H + \frac{H \dot{\boldsymbol{\Sigma}}}{\Phi} \right) \mathbf{C} \dot{\boldsymbol{\Sigma}} \end{aligned} \quad (\text{A.2})$$

$$\begin{aligned} \Phi \frac{d}{dt} \left(\frac{\partial g}{\partial \boldsymbol{\sigma}} \right) &= \Phi \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \boldsymbol{\sigma}} \frac{d\boldsymbol{\sigma}}{dt} + \Phi \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} \frac{\partial \mathbf{p}}{\partial \boldsymbol{\varepsilon}^{vp}} \frac{d\boldsymbol{\varepsilon}^{vp}}{dt} = \\ &= \Phi \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \boldsymbol{\sigma}} \dot{\boldsymbol{\Sigma}} + \Phi \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} \frac{\partial \mathbf{p}}{\partial \boldsymbol{\varepsilon}^{vp}} \frac{d\boldsymbol{\varepsilon}}{dt} - \Phi \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} \frac{\partial \mathbf{p}}{\partial \boldsymbol{\varepsilon}^{vp}} \mathbf{C} \dot{\boldsymbol{\Sigma}} \end{aligned} \quad (\text{A.3})$$

8 The above relationships are then substituted into Equation (17):

$$\begin{aligned} \frac{d^2 \boldsymbol{\varepsilon}}{dt^2} &= \mathbf{C} \ddot{\boldsymbol{\Sigma}} - \frac{d\Phi}{df} \left(H + \frac{H \dot{\boldsymbol{\Sigma}}}{\Phi} \right) \mathbf{I} \frac{d\boldsymbol{\varepsilon}}{dt} + \Phi \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} \frac{\partial \mathbf{p}}{\partial \boldsymbol{\varepsilon}^{vp}} \frac{d\boldsymbol{\varepsilon}}{dt} + \\ &+ \frac{d\Phi}{df} \left(H + \frac{H \dot{\boldsymbol{\Sigma}}}{\Phi} \right) \mathbf{C} \dot{\boldsymbol{\Sigma}} + \Phi \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \boldsymbol{\sigma}} \dot{\boldsymbol{\Sigma}} - \Phi \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} \frac{\partial \mathbf{p}}{\partial \boldsymbol{\varepsilon}^{vp}} \mathbf{C} \dot{\boldsymbol{\Sigma}} \end{aligned} \quad (\text{A.4})$$

9 and the final form (18) is readily obtained.

1 *Strain control* ($\alpha = \emptyset, \beta = I$)

2 Under the strain control $\boldsymbol{\varepsilon}(t) = \mathbf{E}(t)$, the combination of Equations (15) and
 3 (23) gives rise to the following terms:

$$\frac{d\Phi}{dt} = \frac{d\Phi}{df} \left(\frac{\partial f^T}{\partial \boldsymbol{\sigma}} \frac{d\boldsymbol{\sigma}}{dt} + \frac{\partial f^T}{\partial \mathbf{q}} \frac{\partial \mathbf{q}}{\partial \boldsymbol{\varepsilon}^{vp}} \frac{d\boldsymbol{\varepsilon}^{vp}}{dt} \right) = \frac{d\Phi}{df} \left(\frac{\partial f^T}{\partial \boldsymbol{\sigma}} \frac{d\boldsymbol{\sigma}}{dt} - \Phi H \right) \implies \quad (\text{A.5})$$

$$\begin{aligned} & \implies -\mathbf{D} \frac{d\Phi}{dt} \frac{\partial g}{\partial \boldsymbol{\sigma}} = -\frac{d\Phi}{df} \left[\mathbf{D} \frac{\partial f^T}{\partial \boldsymbol{\sigma}} \frac{d\boldsymbol{\sigma}}{dt} \frac{\partial g}{\partial \boldsymbol{\sigma}} - H \mathbf{D} \left(\dot{\mathbf{E}} - \mathbf{C} \frac{d\boldsymbol{\sigma}}{dt} \right) \right] = \\ & = -\frac{d\Phi}{df} \left[\mathbf{D} \frac{\partial f^T}{\partial \boldsymbol{\sigma}} \left(\mathbf{D} \dot{\mathbf{E}} - \mathbf{D} \Phi \frac{\partial g}{\partial \boldsymbol{\sigma}} \right) \frac{1}{\Phi} \left(\dot{\mathbf{E}} - \mathbf{C} \frac{d\boldsymbol{\sigma}}{dt} \right) - H \mathbf{D} \dot{\mathbf{E}} + H \mathbf{I} \frac{d\boldsymbol{\sigma}}{dt} \right] = \\ & = -\frac{d\Phi}{df} \left[-\frac{H \dot{\mathbf{E}}}{\Phi} \mathbf{D} \dot{\mathbf{E}} + H_c \mathbf{D} \dot{\mathbf{E}} + \frac{H \dot{\mathbf{E}}}{\Phi} \mathbf{I} \frac{d\boldsymbol{\sigma}}{dt} - H_c \mathbf{I} \frac{d\boldsymbol{\sigma}}{dt} - H \mathbf{D} \dot{\mathbf{E}} + H \mathbf{I} \frac{d\boldsymbol{\sigma}}{dt} \right] = \\ & = -\frac{d\Phi}{df} \left(\frac{H \dot{\mathbf{E}}}{\Phi} + H - H_c \right) \mathbf{I} \frac{d\boldsymbol{\sigma}}{dt} + \frac{d\Phi}{df} \left(\frac{H \dot{\mathbf{E}}}{\Phi} + H - H_c \right) \mathbf{D} \dot{\mathbf{E}} \end{aligned} \quad (\text{A.6})$$

4 and

$$\begin{aligned} & \implies -\mathbf{D} \Phi \frac{d}{dt} \left(\frac{\partial g}{\partial \boldsymbol{\sigma}} \right) = -\Phi \mathbf{D} \left[\frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \boldsymbol{\sigma}} \frac{d\boldsymbol{\sigma}}{dt} + \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} \frac{\partial \mathbf{p}}{\partial \boldsymbol{\varepsilon}^{vp}} \left(\dot{\mathbf{E}} - \mathbf{C} \frac{d\boldsymbol{\sigma}}{dt} \right) \right] = \\ & -\Phi \mathbf{D} \left(\frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \boldsymbol{\sigma}} - \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} \frac{\partial \mathbf{p}}{\partial \boldsymbol{\varepsilon}^{vp}} \mathbf{C} \right) \frac{d\boldsymbol{\sigma}}{dt} - \Phi \mathbf{D} \frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \mathbf{p}} \frac{\partial \mathbf{p}}{\partial \boldsymbol{\varepsilon}^{vp}} \dot{\mathbf{E}} \end{aligned} \quad (\text{A.7})$$

5 which can easily be recast in the compact form (24).

6 *Mixed stress-strain control*

7 Since mixed control conditions involve both stress and strain controls, the ODE
 8 system (35) can be derived by wisely combining the analytical techniques employed
 9 above for both the pure stress and pure strain control cases. Reporting here all
 10 the details does not seem to be particularly instructive, the partitioned struc-
 11 ture of the generalized Perzyna's relationship (31) is just to be carefully handled.

1 The analytical derivations can be significantly simplified if the assumption (36)
 2 (isotropic-homothetic strain-hardening) is retained from the beginning.

3 **Appendix B. Spectral properties of the matrix $\mathbf{A}$**

4 – *All the eigenvalues of $\mathbf{A}$ are real and semisimple*

5 According to standard matrix algebra, the eigenvalues of a $n \times n$ matrix are
 6 defined as *semisimple* if their algebraic (m_{alg}) and geometrical (m_{geo}) multiplicities
 7 coincide (m_{geo} is the dimension of the associated eigenspace). As was stated in
 8 section 4.2, the peculiar structure of $\mathbf{A}$ (Figure 2) implies:

$$\Lambda(\mathbf{A}) = \Lambda(\mathbf{A}_{\alpha\alpha}) \cup \Lambda(\mathbf{A}_{\beta\beta}) \quad (\text{B.1})$$

9 As for $\Lambda(\mathbf{A}_{\alpha\alpha})$, the eigenvalue $-\frac{d\Phi}{df}(H - H_\chi)$ in (48) is such that $m_{alg} = m_{geo} =$
 10 $|\alpha|$ because $\mathbf{A}_{\alpha\alpha}$ is proportional to $\mathbf{I}_{\alpha\alpha}$.

11 Conversely, the properties of $\Lambda(\mathbf{A}_{\beta\beta})$ depend on the adopted g function, but
 12 there is no general reason to infer the existence of eigenvalues with $m_{alg} > 1$.
 13 Unless for very particular cases, $\mathbf{A}$ has $|\beta| + 1$ semisimple real eigenvalues.

14 – *Eigenvalues of $\mathbf{A}_{\beta\beta}$*

15 It is possible to determine the sign of the eigenvalues $\lambda_{\beta\beta}^i$ on the basis of ex-
 16 pression (49).

17 While the elastic compliance matrix $\mathbf{C}$ (and its inverse too) is positive definite
 18 to guarantee positive elastic strain energy, the Hessian matrix $\frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \boldsymbol{\sigma}}$ generated
 19 by the plastic potential g is also positive definite on condition that g is strictly
 20 convex in the stress space – which is the case of most constitutive relationships.

21 Then, it can be proven that $\mathbf{C}_{\beta\beta}^{-1}$ and $\frac{\partial^2 g}{\partial \boldsymbol{\sigma}_\beta \otimes \partial \boldsymbol{\sigma}_\beta}$ are sub-matrices from two
 22 matrices which are similar to $\mathbf{C}^{-1}$ and $\frac{\partial^2 g}{\partial \boldsymbol{\sigma} \otimes \partial \boldsymbol{\sigma}}$, respectively (through the linear
 23 transformation needed to reorder the controlled/uncontrolled variables). There-
 24 fore, since (i) similarity transformations do not alter the spectrum and (ii) all the

principal minors of symmetric positive definite matrices are positive (Sylvester's criterion), it turns out that $\mathbf{C}_{\beta\beta}^{-1}$ and $\frac{\partial^2 g}{\partial \boldsymbol{\sigma}_\beta \otimes \partial \boldsymbol{\sigma}_\beta}$ are positive definite as well.

Provided that the product of symmetric positive definite matrices produces a positive definite matrix, it can be stated that the matrix $\mathbf{M} = \mathbf{C}_{\beta\beta}^{-1} \frac{\partial^2 g}{\partial \boldsymbol{\sigma}_\beta \otimes \partial \boldsymbol{\sigma}_\beta}$ is positive definite. The latter observation and the positiveness of Φ (in the viscoplastic regime) prove that all the eigenvalues of $\Phi \mathbf{M}$ are strictly positive, so that all the eigenvalues in $\Lambda(\mathbf{A}_{\beta\beta})$ are lower than $-\frac{d\Phi}{df}(H - H_\chi)$.

References

- Adachi, T. and Oka, F. (1982). Constitutive equations for normally consolidated clay based on elasto-viscoplasticity. *Soils and Foundations*, 22(4):57–70.
- Anand, L., Kim, K., and Shawki, T. (1987). Onset of shear localization in viscoplastic solids. *Journal of the Mechanics and Physics of Solids*, 35(4):407–429.
- Bažant, Z. P. and Cedolin, L. (2010). *Stability of structures: elastic, inelastic, fracture and damage theories (3rd edition)*. World Scientific.
- Bigoni, D. (2012). *Nonlinear solid mechanics: bifurcation theory and material instability*. Cambridge University Press.
- Bonelli, S., Dascalu, C., and Nicot, F. (2011). *Advances in Bifurcation and Degradation in Geomaterials: Proceedings of the 9th International Workshop on Bifurcation and Degradation in Geomaterials*, volume 11. Springer Science & Business Media.
- Borja, R. and Kavazanjian, E. (1985). A constitutive model for the stress-strain-time behaviour of wet clays. *Géotechnique*, 3:283–298.
- Buscarnera, G., Dattola, G., and di Prisco, C. (2011). Controllability, uniqueness and existence of the incremental response: A mathematical criterion for elastoplastic constitutive laws. *International Journal of Solids and Structures*, 48(13):1867 – 1878.
- Chambon, R. (2005). Some theoretical results about second-order work, uniqueness, existence and controllability independent of the constitutive equation. In *Mathematics and Mechanics of Granular Materials*, pages 53–61. Springer.
- Chambon, R., Caillerie, D., and Viggiani, G. (2004). Loss of uniqueness and bifurcation vs instability: some remarks. *Revue française de génie civil*, 8(5-6):517–535.
- Daouadji, A., Darve, F., Al Gali, H., Hicher, P., Laouafa, F., Lignon, S., Nicot, F., Nova, R., Pinheiro, M., Prunier, F., et al. (2011). Diffuse failure in geomaterials: Experiments, theory

and modelling. *International Journal for Numerical and Analytical Methods in Geomechanics*, 35(16):1731–1773.

Darve, F. (1978). *Une formulation incrémentale des lois rhéologiques, application aux sols*. PhD thesis, Institut de Mécanique de Grenoble.

Darve, F. and Labanieh, S. (1982). Incremental constitutive law for sands and clays: simulations of monotonic and cyclic tests. *International Journal for Numerical and Analytical Methods in Geomechanics*, 6(2):243–275.

Darve, F., Servant, G., Laouafa, F., and Khoa, H. (2004). Failure in geomaterials: continuous and discrete analyses. *Computer Methods in Applied Mechanics and Engineering*, 193(27):3057–3085.

Darve, F. and Vardoulakis, I. (2004). *Degradations and Instabilities in Geomaterials*, volume 461. Springer.

Desai, C. S. and Zhang, D. (1987). Viscoplastic model for geologic materials with generalized flow rule. *International Journal for Numerical and Analytical methods in Geomechanics*, 11(6):603–620.

di Prisco, C. and Imposimato, S. (1996). Time dependent mechanical behaviour of loose sands. *Mechanics of Cohesive-frictional Materials*, 1(1):45–73.

di Prisco, C. and Imposimato, S. (1997). Experimental analysis and theoretical interpretation of triaxial load controlled loose sand specimen collapses. *Mechanics of Cohesive-frictional Materials*, 2(2):93–120.

di Prisco, C., Imposimato, S., and Vardoulakis, I. (2000). Mechanical modelling of drained creep triaxial tests on loose sand. *Géotechnique*, 50(1):73–82.

Duvaut, G. and Lions, J. L. (1972). *Les inéquations en mécanique et en physique*, volume 18. Dunod Paris.

Freitas, T., Potts, D., and Zdravkovic, L. (2012). Implications of the definition of the Φ function in elastic-viscoplastic models. *Géotechnique*, 62(7):643–648.

Georgin, J. and Reynouard, J. (2003). Modeling of structures subjected to impact: concrete behaviour under high strain rate. *Cement & concrete composites*, 25 (1):131–143.

Heeres, O. M., Suiker, A. S., and de Borst, R. (2002). A comparison between the perzyna viscoplastic model and the consistency viscoplastic model. *European Journal of Mechanics-A/Solids*, 21(1):1–12.

Hill, R. (1958). A general theory of uniqueness and stability in elastic-plastic solids. *Journal of the Mechanics and Physics of Solids*, 6(3):236–249.

Imposimato, S. and Nova, R. (1998). An investigation on the uniqueness of the incremental

1 response of elastoplastic models for virgin sand. *Mechanics of Cohesive-frictional Materials*,
2 3(1):65–87.

3 Ju, J. (1990). Consistent tangent moduli for a class of viscoplasticity. *Journal of Engineering*
4 *Mechanics*, 116(8):1764–1779.

5 Koiter, W. T. (1960). *General theorems for elastic-plastic solids*. North-Holland Amsterdam.

6 Lade, P., Yamamuro, J., and Bopp, P. (1997). Influence of time effects on instability of granular
7 materials. *Computers and Geotechnics*, 20(3/4):179–193.

8 Lemaitre, J. and Chaboche, J. (1990). *Mechanics of solid materials*. Cambridge University Press,
9 Cambridge.

10 Loret, B. and Prevost, J. (1990). Dynamic strain localization in elasto-(visco-)plastic solids.
11 *Computer Methods in Applied Mechanics and Engineering*, 83 (3):247–273.

12 Loret, B. and Prevost, J. (1991). On the existence of solutions in layered elasto-(visco-)plastic
13 solids with negative hardening. *European Journal of Mechanics. A/Solids*, 10:575–586.

14 Lubliner, J. (1990). *Plasticity theory*. Mac Millan.

15 Lyapunov, A. M. (1892). The general problem of motion stability. *Kharkovskoye Matematicheskoe*
16 *Obshchestvo*, 11.

17 Maier, G. (1966). Sui legami associati tra sforzi e deformazioni incrementali in elastoplasticita.
18 *Istituto Lombardo, Rendiconti, Classe di Scienze*.

19 Maier, G. and Hueckel, T. (1979). Nonassociated and coupled flow rules of elastoplasticity for
20 rock-like materials. *International Journal of Rock Mechanics and Mining Sciences*, 16(2):77–
21 92.

22 Needleman, A. (1988). Material rate dependence and mesh sensitivity in localization problems.
23 *Computer Methods in Applied Mechanics and Engineering archive*, 67 (1):69–85.

24 Nova, R. (1994). Controllability of the incremental response of soil specimens subjected to
25 arbitrary loading programmes. *Journal of the Mechanical behavior of Materials*, 5(2):193–202.

26 Oka, F., Adachi, T., and Yashima, A. (1994). Instability of an elasto-viscoplastic constitutive
27 model for clay and strain localization. *Mechanics of materials*, 18:119–129.

28 Oka, F., Adachi, T., and Yashima, A. (1995). A strain localization analysis using a viscoplastic
29 softening model for clay. *International journal of plasticity*, 11:523–545.

30 Perzyna, P. (1963). The constitutive equations for rate sensitive plastic materials. *Quarterly of*
31 *Applied Mathematics*, 20:321–332.

32 Perzyna, P. (1966). Fundamental problems in viscoplasticity. *Advances in Applied Mechanics*,
33 9:243–377.

34 Petryk, H. (2000). *Theory of material instability in incrementally nonlinear plasticity*. Springer.

- 1 Seydel, R. (1988). *From equilibrium to chaos*. Elsevier.
- 2 Shawki, T. and Clifton, R. (1989). Shear band formation in thermal viscoplastic materials.
- 3 *Mechanics of Materials*, 8(1):13–43.
- 4 Sulem, J. and Vardoulakis, I. (1995). *Bifurcation analysis in geomechanics*. Taylor & Francis.
- 5 Vermeer, P. A. and De Borst, R. (1984). Non-associated plasticity for soils, concrete and rock.
- 6 Wang, W. M., Sluys, L. J., and de Borst, R. (1997). Viscoplasticity for instabilities due to
- 7 strain softening and strain-rate softening. *International Journal for Numerical Methods in*
- 8 *Engineering*, 40(20):3839–3864.
- 9 Wood, D. M. (2003). *Geotechnical modelling*, volume 1. Taylor & Francis.