

Do Macroscopic Changes Affect Mesoscopic Light Transport?

Rates, Alfredo; Adam, Aurele J.L.; IJzerman, Wilbert L.; Lagendijk, Ad; Vos, Willem L.

Publication date

2022

Document Version

Final published version

Published in

Optics InfoBase Conference Papers

Citation (APA)

Rates, A., Adam, A. J. L., IJzerman, W. L., Lagendijk, A., & Vos, W. L. (2022). Do Macroscopic Changes Affect Mesoscopic Light Transport? *Optics InfoBase Conference Papers*, Article NoTh1E.7.

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Green Open Access added to TU Delft Institutional Repository

'You share, we take care!' - Taverne project

<https://www.openaccess.nl/en/you-share-we-take-care>

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

Do Macroscopic Changes Affect Mesoscopic Light Transport?

Alfredo Rates,^{1,*} Aurèle J. L. Adam,² Wilber L. IJzerman,^{3,4} Ad Lagendijk,¹ and Willem L. Vos¹

¹*Complex Photonic Systems (COPS), MESA+ Institute for Nanotechnology, University of Twente, P.O. Box 217, 7500AE Enschede, The Netherlands*

²*Optics Research Group, Department of Imaging Physics, Delft University of Technology, Lorentzweg 1, 2628 CJ Delft, The Netherlands*

³*CASA, Department of Mathematics and Computer Science, Eindhoven University of Technology, PO Box 513, 5600MB Eindhoven, The Netherlands*

⁴*Signify Research, High Tech Campus 7, 5656AE Eindhoven, The Netherlands*

*a.ratessoriano@utwente.nl

Abstract: In most previous studies about light scattering, no geometry is used besides a slab. In this work, we study how macroscopic changes in the geometry affects light scattering using the Wavefront Shaping technique. © 2022 The Author(s)

1. Introduction

When studying light transport in scattering media, both in theory and in experiments, the geometry is commonly unaltered: a slab shape. Slabs are cuboid objects with a finite small size in one dimension and infinite on the others two. This geometry is especially comfortable for simulations, but at the same time very distant from real-life applications.

Due to fabrication and material limitations, the geometry of scattering media used in industrial applications is mostly free-form. This is also the case for bio-imaging applications. Because of the lack of research on free-form scattering optics, there is still the enigma of how this change of geometry at the macroscopic scale affects light transport.

In this paper, we use the Wavefront Shaping (WFS) technique to optimize light intensity through a flexible scattering sample [1, 2], and we change its geometry to compare the outcome.

2. Free-form sample

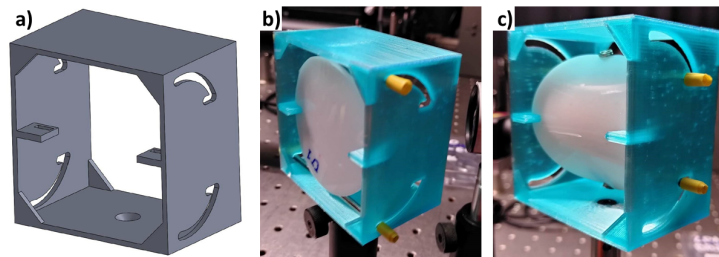


Fig. 1. Free form sample used for the experiments. a) 2D design of the tailored made holder, b) picture of silicone sample with flat surface, and c) picture of silicon sample with curved surface.

For the experiments, we implemented the WFS technique using a Digital Micromirror Device (DMD, DLP7000 Texas Instruments). To control the phase of the incoming wavefront, we used the Lee Holography technique to convert the binary modulation of the DMD to phase modulation [3]. The experimental details of this experiment were presented elsewhere [4].

The sample we used for this experiment is shown in Fig. 1. The sample is made out of TiO₂ particles suspended in silicone. We exploit the flexibility of silicone to compare WFS performance with two sample geometries, namely a flat surface - which approximates to a slab - and a curved surface. To realize these two sample geometries, we used a tailored-made sample holder fabricated with a 3D printer. This holder is also visible in Fig. 1.

3. Intensity enhancement

The figure of merit of WFS is the intensity enhancement η . If we define a limited area on the CCD where we want to optimize intensity, the enhancement is defined as

$$\eta \equiv \frac{I_{\text{opt}}}{\langle I_0 \rangle}, \quad (1)$$

Where I_{opt} is the intensity at the target area after optimization and $\langle I_0 \rangle$ is the average intensity with random incident wavefronts. η depends on the number of segments N ($\eta \equiv \eta(N)$). These are the individual areas on the DMD which we control their phases. The larger the number of segments, the larger is the enhancement.

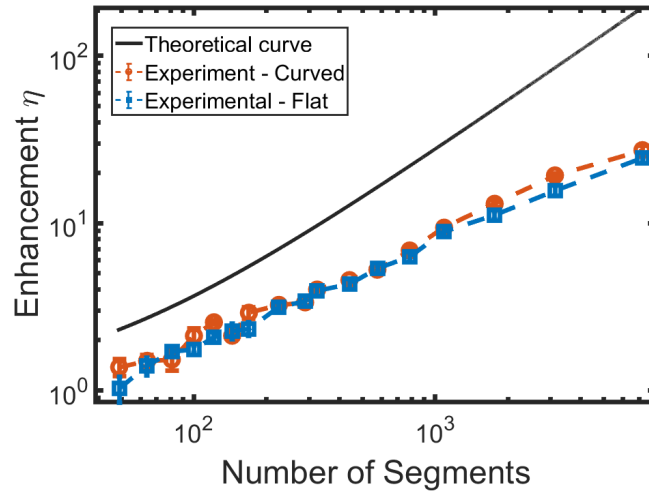


Fig. 2. Enhancement versus number of segments. The black curve is the theoretical limit, the orange circles are the enhancement for a curved sample, and the blue squares are the enhancement for a flat sample. The error bars are of the size of the markers.

To study the performance of WFS when comparing different geometries, we are interested in $\eta(N)$ for both cases. We present the results of this experiment in Fig. 2. The theoretical limit is the maximum enhancement possible, corrected by the speckle size [5]. We see that the trend for both geometries - flat and curved surface - is the same. Importantly, for each repetition, the optimization started from a plane wave. Thus, the resulting phase pattern for each case is not necessarily the same.

4. Discussion

The results we present in this study show that the performance of the WFS technique does not depend on the geometry of the object under study. This means that for real-life applications, no special treatment is needed to apply the WFS technique.

To expand these results, we are currently working on studying how the optimization and speckle correlation evolves when continuously changing the curvature, which we expect to help us to understand its effect at the mesoscopic scale.

References

1. I. M. Vellekoop and A. P. Mosk, "Focusing coherent light through opaque strongly scattering media," *Opt. Lett.* **32**, 2309–2311 (2007).
2. A. P. Mosk, A. Lagendijk, G. Leroose, and M. Fink, "Controlling waves in space and time for imaging and focusing in complex media," *Nat. Photonics* **6**, 283–292 (2012).
3. D. B. Conkey, A. M. Caravaca-Aguirre, and R. Pietsch, "High-speed scattering medium characterization with application to focusing light through turbid media," *Opt. Express* **20**, 1733–1740 (2012).
4. A. Rates, A. J. L. Adam, W. L. IJzerman, A. Lagendijk, and W. L. Vos, "Focusing light through a free-form scattering medium," in *2021 Conference on Lasers and Electro-Optics Europe European Quantum Electronics Conference (CLEO/Europe-EQEC)*, (2021), pp. 1–1.
5. O. S. Ojambati, J. T. Hosmer-Quint, K.-J. Gortler, A. P. Mosk, and W. L. Vos, "Controlling the intensity of light in large areas at the interfaces of a scattering medium," *Phys. Rev. A* **94**, 043834 (2016).