



Delft University of Technology

Immiscible N₂ Injection for EOR: An Experimental Comparison Study

Janssen, Martijn; Azimi, Fardin; Zitha, Pacelli

Publication date

2017

Document Version

Submitted manuscript

Citation (APA)

Janssen, M., Azimi, F., & Zitha, P. (2017). *Immiscible N₂ Injection for EOR: An Experimental Comparison Study*.

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

*This work is downloaded from Delft University of Technology.
For technical reasons the number of authors shown on this cover page is limited to a maximum of 10.*

International Conference on Porous Media INTERPORE TEHRAN



Email the completed form to tehran@interpore.org

Authors and affiliations: Fardin Azimi¹, Martijn Janssen¹ and Pacelli Zitha¹.

¹Delft University of Technology, Delft, The Netherlands

Presenting author: Martijn Janssen

Email address: M.T.G.Janssen@tudelft.nl

Preference: Oral presentation and/or poster oral presentation

Title: Immiscible Nitrogen Injection for Enhanced Oil Recovery: An Experimental Comparison Study.

Abstract:

Gas injection is a widely applied Enhanced Oil Recovery (EOR) method. The main mechanism for incremental oil recovery by this method is its lower residual oil saturation compared to water flooding (Lake, 1989; Green and Willhite, 1998; Simjoo, 2012). However, poor vertical and areal sweep efficiency result in inefficient oil displacement by gas injection. Water-Alternating-Gas (WAG) injection has been widely used for controlling gas mobility, aiming at more stable oil displacement.

It has been established that miscible gas flooding is based on the following main displacement mechanisms (Lake, 1989; Bhoendie *et al.*, 2014): 1) oil swelling, 2) viscosity reduction of the oil phase and 3) reduction of the interfacial tension (IFT) between the oil and displacing phase. However, a knowledge gap exists regarding the displacement mechanisms for immiscible gas flooding methods.

The purpose of this study is to investigate how rock-fluid and fluid-fluid interactions control the immiscible gas flooding processes. To this end several well-controlled core-flood experiments were conducted using the following EOR schemes: 1) continuous nitrogen injection at varying increasing pressure, 2) continuous nitrogen injection at constant pressure of 5 bar, 3) continuous nitrogen injection at constant pressure of 10 bar, 4) water flooding followed by continuous nitrogen injection and 5) WAG injection. Nitrogen was injected into Bentheimer sandstone saturated with n-hexadecane either at connate water saturation or at residual oil saturation to water flood. X-ray CT images were taken during water and gas propagation to map the fluid saturations distributions over time and to gain insight in the displacement mechanism responsible for the enhanced oil production.

Figure 1 presents an overview of the ultimate recovery factors corresponding to the tests conducted in this study. It shows an improvement in oil recovery during WAG injection of approximately 10% of the oil initially in place (OIIP) compared to continuous gas injection. The first three cycles contributed the most to the enhanced oil recovery (Figure 2B).

The anomalously high incremental oil recovery in the WAG experiment is most likely due to an increase in trapped gas saturation. During imbibition cycles, water saturation increases as well as the trapped gas saturation, resulting in a lower gas relative permeability. Subsequently this can cause oil mobilization and a reduction of the three-phase residual oil saturation.

From this comparison study the following conclusions can be drawn:

- From the injection strategies studied, WAG resulted in the highest ultimate recovery factor (approximately 59.0 % of the OIIP).
- An increase in pressure favours oil recovery during continuous nitrogen injection at initial oil saturation.
- Continuous nitrogen injection gave rise to higher ultimate recovery factors than water flooding conducted at initial oil saturation.
- Residual oil saturation for immiscible nitrogen flooding is lower under three-phase flow conditions compared to two-phase flow (Figure 1,2A).

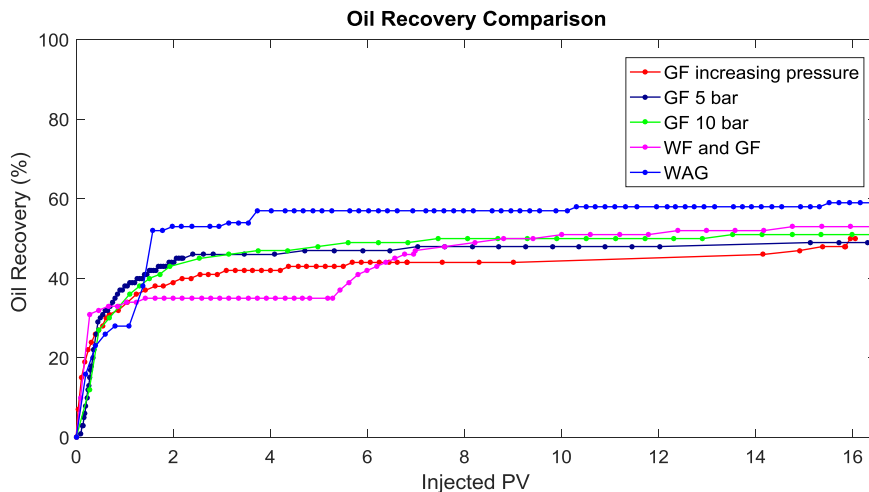


Figure 1: Oil recovery comparison between the tests conducted. GF, WF and WAG stand for gas flooding, water flooding and Water-Alternating-Gas injection respectively. Note that in test 4 water was injected and subsequently gas flooding took place. In test 5 a WAG injection scheme consisting of 12 cycles has been applied. The first three tests correspond to continuous immiscible gas flooding.

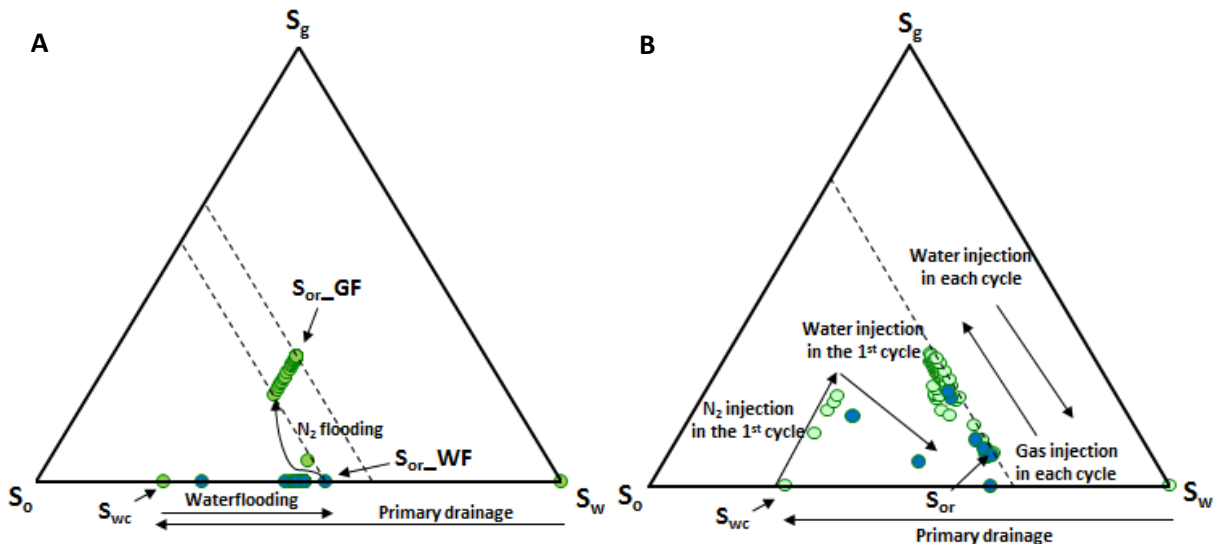


Figure 2: Schematic representation of the injection paths during A) water flooding followed by nitrogen injection and B) WAG. S_w , S_o , S_g , S_{or} and S_{wc} represent the water, oil, gas, residual oil and connate water saturations respectively. Note that the water injections are coloured blue.

Bhoendie, K., Let, M.S., Priscilla, K., Li, T., and Zitha, P.L.J. 2014. Laboratory Evaluation of Gas-Injection EOR for the Heavy-Oil Reservoirs in Suriname. In *SPE Heavy and Extra Heavy Oil Conference: Latin America*. Society of Petroleum Engineers.

Green, D.W., and Willhite, G.P. 1998. Enhanced oil recovery, SPE Textbook Series, Vol. 6, Richardson, TX.

Lake, L.W. 1989. Enhanced oil recovery, Prentice-Hall, Englewood Cliffs, New Jersey.

Simjoo, M. 2012. Immiscible foam for enhancing oil recovery. TU Delft, Delft University of Technology.

Keywords: Immiscible gas injection, Immiscible Water-Alternating-Gas injection, CT-assisted core-flood.