TU Delft

Delft University of Technology

Document Version
Accepted author manuscript

Citation (APA)
Vishal, V., Singh, U., Bakshi, T., Chandra, D., Verma, Y., & Kumar Tiwari, A. (2022). Optimal source-sink matching and prospective hub-cluster configurations for CO2 capture and storage in India. *Geological Society Special Publication*, *528*(1), 209-225. https://doi.org/10.1144/SP528-2022-76

Important note
To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright
In case the licence states “Dutch Copyright Act (Article 25fa)”, this publication was made available Green Open Access via the TU Delft Institutional Repository pursuant to Dutch Copyright Act (Article 25fa, the Taverne amendment). This provision does not affect copyright ownership.
Unless copyright is transferred by contract or statute, it remains with the copyright holder.

Sharing and reuse
Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy
Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

*This work is downloaded from Delft University of Technology.*

# Title Page

**Manuscript title:**

Optimal source-sink matching and prospective hub-cluster configurations for CO2 capture and storage in India

**Authors:**

Vikram Vishal[1,2,3*], Udayan Singh[4], Tuli Bakshi[1], Debanjan Chandra[1,5], Yashvardhan Verma[1,6,7], Ashwani Kumar Tiwari[8]

[1] Department of Earth Sciences, Indian Institute of Technology Bombay, Mumbai - 400076, India

[2] National Centre of Excellence in Carbon Capture and Utilization, Indian Institute of Technology Bombay, Mumbai - 400076, India

[3] Interdisciplinary Programme in Climate Studies, Indian Institute of Technology Bombay, Mumbai - 400076, India

[4] Department of Chemical and Biological Engineering, Northwestern University, Evanston, IL, 60208, United States

[5] Department of Geoscience and Engineering, Delft University of Technology, 2628 CN, Delft, The Netherlands

[6] Department of Civil Engineering, Monash University, Melbourne, Victoria, 3800, Australia

[7] IITB-Monash Research Academy, Indian Institute of Technology Bombay, Mumbai, 400076, India

[8] School of Environmental Sciences, Jawaharlal Nehru University, New Delhi, India

*Address for correspondence:

Vikram Vishal, PhD
Associate Professor
Computational and Experimental Geomechanics Laboratory
Department of Earth Sciences
Indian Institute of Technology (IIT) Bombay
Powai, Mumbai - 400076, India
Ph: +91-22-2576-7254
Fax: +91-22-2576-7253
Web: https://www.geos.iitb.ac.in/index.php/vv/
Email: v.vishal@iitb.ac.in

# Optimal source-sink matching and prospective hub-cluster configurations for $CO_2$ capture and storage in India


**Abstract**

At COP-26, India announced strong climate commitments of reaching net-zero greenhouse gas emissions by 2070. Meeting this target would likely require substantial deployment of $CO_2$ capture and storage (CCS) to decarbonize existing large point sources of $CO_2$. This study attempts to evaluate opportunities for deployment of CCS in India in the forthcoming decades. A GIS based approach was adopted for mapping existing sources of $CO_2$ with the sinks. The results show that regionally-appropriate ways of moving towards CCS at scale exist in both the power and industrial sectors. Coupled analysis of these sectors with sinks shows that 8 clusters may be developed throughout the country to sequester 403 Mt-$CO_2$ annually. These clusters are concentrated near Category-I oil basins and the Category-I coalfields (Damodar valley), which may also create suitable financial incentives by incremental oil and coalbed methane recovery respectively. Furthermore, a first-order costing analysis evaluates that the cost of avoidance across basins may range from \$31 to \$107/t-$CO_2$, depending on the type of storage reservoir and the proximity to large point sources. A total of 12 suitable hubs and clusters were created based on annual emissions above 1 Mt of each large point source and their proximity with geological sinks.

# 1. Introduction

India's $CO_2$ emissions have risen from 980 Mt-$CO_2$ in 2000 to 2630 Mt-$CO_2$ in 2019. This represents a cumulative average growth rate (CAGR) of 5.3 % over the past two decades (Garg et al., 2017a). Capacity addition in electricity generation and large-point industrial sources such as iron and steel, cement, fertilisers, and refineries have largely contributed to this increase. In order to achieve sustained economic and societal growth, a similar trajectory in such infrastructure could be anticipated.

An increase in energy and industrial production alongside rapid reductions in $CO_2$ emissions requires a number of technological platforms for decarbonisation. India's nationally determined resolutions, which were submitted during the Paris Climate Agreement in 2015, committed the nation to the reducing of the greenhouse intensity of the economy (the ratio of GHG emissions to gross domestic product) by 33–35 %. The pledged reductions were primarily based on potential additions to renewable-energy capacities by 2022. The capacity addition goals have been met before time (Busby and Shidore, 2021). However, the Prime Minister of India recently committed at the Glasgow Climate Summit that India would reach net-zero $CO_2$ emissions by 2070. In light of this committment, India would likely need a much steeper decline in $CO_2$ emissions, which will require the decarbonisation of existing large-point sources. Integrated assessment modelling literature shows that a key feature of energy transitions that are compatible with net-zero emissions is the integration of such infrastructure with $CO_2$ capture and storage (CCS) (Davis et al., 2018; Fennell et al., 2021; Vishal et al., 2021a; Vishal and Singh, 2016). Analyses by the modelling community show that CCS would be responsible for at least 15% of reductions in $CO_2$ emissions in net-zero energy systems (Baik et al., 2021; Gabrielli et al., 2020). Currently operational CCS facilities can permanently store 40 Mt of $CO_2$ every year, which is far from the minimum 6000 Mtpa that is needed to meet net-zero targets (Haszeldine et al., 2018). A massive gap seems to exist globally between the current global CCS provision and that which is required to meet the anticipated CCS targets.

In the context of Indian energy systems, modelling exercises further suggest that CCS deployment in the power sector alone could be as high as ~850 Mt-$CO_2$/year in 2 °C scenarios and ~1000 Mt-$CO_2$/year in 1.5 °C scenarios in peak years (Vishwanathan et al., 2021; Vishwanathan and Garg, 2020). When combined with the CCS of the industry sector, this would lead to a requirement of 7–10 Gt-$CO_2$ cumulatively by 2050 (Denis et al., 2018). In addition to the decarbonisation benefits of CCS, there are other value additions. (Vishal et al.,

2021a) quantitatively highlight the projected benefits that CCS could provide through enhanced energy security, grid resilience and reduced risks of stranded assets. Moreover, the Glasgow agreement focuses on a 'phase down' of coal instead of a 'phase out' (Andreoni, 2022). In the light of this, CCS could play a pivotal role in the gradual reduction of emissions from the coal sector, particularly coal-fired power plants which account for 44 % of India's $CO_2$ emissions.

Academic literature about India's CCS readiness is large, diversified and includes policy outlooks (Viebahn et al., 2015; Vishal et al., 2021a), assessment of the potential for geologic storage (Singh et al., 2006, 2021; Vishal et al., 2021b), and retrofitability of existing infrastructure. A critical gap here is system integration through source-sink mapping for which only a single study exists (Garg et al., 2017b). On the basis of India's 2015 large-point sources and geologic sink locations, Garg et al (2017) proposed clusters in which siting future powerplants would be viable. Subsequently, there have been several developments that could help evolve this exercise. First, the Garg et al. (2017) analysis did not consider the actual storage potential in individual sinks due to data limitations at that point. Lately, our group has developed newer estimates for such sinks (Vishal et al., 2021b). Second, nine ultra-mega powerplants (UMPPs) of a capacity of 4 GW each were considered as the central locations around which these clusters would be developed. However, assessments of economic, regulatory and climate risks have led to the cancelling or postponing of several of these UMPPs. Finally, there is an increased drive from the NTPC (previously referred as National Thermal Power Corporation) to blend biomass in existing coal-fired powerplants. This could be an avenue for carbon dioxide removal (CDR) for India.

To address these gaps, this study undertakes a new source-sink mapping, which incorporates new potential estimates, bio-infrastructure and investment decisions that were made after 2015. In line with global literature, we also seek to inform policy-making through the design of the hubs-and-cluster concept. A second novelty of this study is that it incorporates key costing parameters to address the economic versus storage readiness of individual hubs and clusters. Countries such as India, which have no operational commercial facilities and limited hydrocarbon reserves, could benefit from a hubs-and-clusters strategy that promotes the implementation of this CCS technology. The CCS hubs-and-clusters operations effectively connect a number of nearby $CO_2$ emitters and storage sites by using shared transportation facilities, which would expedite the development of CCS (Sun et al., 2021a). This appreciably reduces the overall costs and risks when compared to those of standalone projects. Examples

of proposed/conceptualized CCS clusters include the Northern Lights facility in Northern Europe (Gough and Mander, 2022) and industrial hubs in the Permian Basin in Texas, United States (Singh and Dunn, 2022).

# 2. Methods

As discussed above, our analysis focuses on evolving the past source-sink mapping work that was carried out by Garg et al. (2017); we also introduce several methodological improvements. Figure 1 shows the overarching framework that has been used in this study. The following paragraphs describe the process of the identification of key $CO_2$ sources, the sinks that were mapped out in this analysis, the data sources for the location, and the characterisation of these sources and sinks. Furthermore, we discuss approaches for the demarcation of hubs and clusters based on defined criteria and the costing methodology that has been used in the analysis to prioritise the defined clusters.

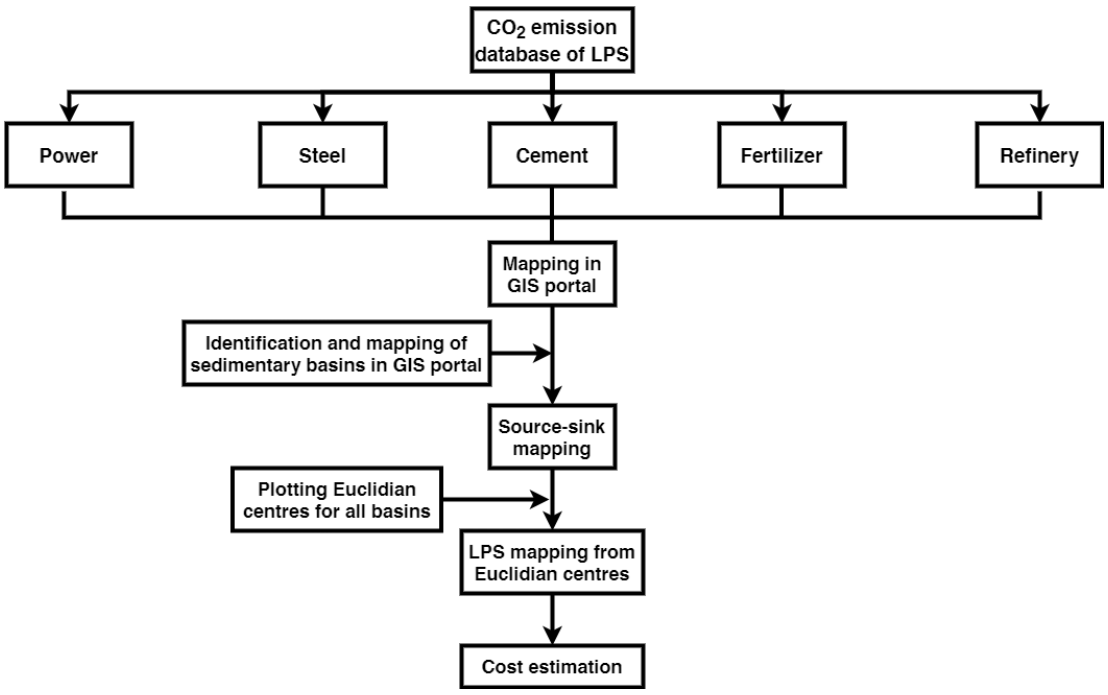



***Figure 1: Methodological framework for this analysis***

## 2.1. Identifying large point sources of India

In line with the previous study by Garg et al (2017), we focussed on five types of large point sources (LPS). These were power, steel, cement, fertilizers and refineries. These sectors represent an estimated 69% of India's $CO_2$ emissions spread out across 23 states. Considering the wide range of sources with disparate emissions, a geographic information system (GIS) platform was soft-linked to estimation of emissions associated with such infrastructure.

Initially, the basemap of India was downloaded from the Bharat Maps portal. Subsequently, layers for LPS and storage sites were added onto it.

The power sector has been accompanied by several key changes since the past source-sink analysis was published. One major policy initiative is the increased penetration of biopower plants: both through blending as well as in standalone plants. As such, we mapped out biopower plants in addition to coal and gas fired power plants. Note that $CO_2$ emissions from biopower plants and other biogenic sources are considered as zero. However, in the CCS clusters, they do emit $CO_2$ emissions, capturing and storing which then entail so-called "negative emissions" (Bui et al., 2018; Muratori et al., 2020). The data for the locations and the capacity for power plants was downloaded from the World Resources Institute. This dataset was filtered on the basis of primary fuel type. The capacity of these power plants was multiplied by a capacity factor of 81.5%, based on the average utilization rate published by the Central Electricity Authority (CEA). Some plants also have a lower capacity factor due to intermittent fuel shortages, cooling water scarcity and so forth. However, Singh et al., (2017) have estimated that CCS power plants with capacity factors lower than 80% will not be financially appealing even with a carbon price of >\$100/t-$CO_2$. As such, the aforementioned capacity factor is assumed as the standard value for all power plants. Use of a constant capacity factor also allows for ease of comparison with the past analyses. A total of 192 LPSs were identified and mapped on the basis of their $CO_2$ emission in Arc-GIS. The data sources were identified from previously published work of Garg et al., (2017a) and other web sources (CIS, 2021; IBM, 2020; OGIS, 2022; PDIL, 2022; WRI, 2021). These LPSs include powerplants, cement, fertilizer, steel, biomass plants and refineries. For the source clustering, only LPSs having more than 1 Mt annual $CO_2$ emission were considered, whereas for source-sink matching, all 192 LPSs were considered. The emission factors from the IPCC Emission Factor Database are used to estimate net-emissions.

Once the geospatial data for all the sources were collected and overlayed on the basemap, the emissions associated with individual sources were calculated. This was done by multiplying the production of the relevant product of the facility by the emission factors shown in Table 1. A notable feature of the emission factors assumed in Table 1 is that they correspond to national averages in India for the key sectors, which may be different from global averages. For instance, the higher-efficiency, low-emission plants in China have an average emission factor of <0.8 t-$CO_2$/MWh. However, because of higher-ash coal and lower plant efficiency in older

159 Indian coal-fired plants, the emission factors here correspond more accurately to the area of
160 interest in this study.

161 ***Table 1: Key characteristics of large point sources considered in this analysis***

| LPS type | Unit Generation | Emission per unit generation (t-$CO_2$) | Reference |
|---|---|---|---|
| Coal-fired power | 1 MWh | 0.98 | CEA, (2019) |
| Gas-fired power | 1 MWh | 0.43 | CEA, (2019) |
| Biomass-fired power | 1 MWh | 0.80 | Singh et al., (2021) |
| Steel | 1 t | 1.85 | Garg et al., (2017a) |
| Cement | 1 t | 0.9 | |
| Refinery | 1 t | 1.1 | |
| Fertilizers | 1 bbl | 48.5 | Jing et al., (2020) |

162

## 163 2.2. Identifying $CO_2$ sinks

164 $CO_2$ storage is considered in three type of formations: saline aquifers, enhanced oil recovery
165 (EOR) and enhanced coalbed methane (ECBM), in this study. While other analyses do project
166 a substantial basalt storage capacity in India, it is not considered due to lower technological
167 readiness. A total of 26 sedimentary basins that cover an area of 3.4 million sq. km (DGH,
168 2020) represent enormous $CO_2$ storage potential in India. However, only seven are deemed at
169 a high storage readiness level (Vishal et al., 2021b). The accurate estimation of the storage
170 potential of any reservoir depends on the volume of data available; therefore, the cumulative
171 $CO_2$ storage capacity in India has varied over time. Previous studies have indicated storage
172 capacities of between 105 and 572 Gt across saline aquifers, basalts and depleted oil and gas
173 reservoirs in India (Dooley et al., 2005; Holloway et al., 2008; Kearns et al., 2017; Singh et al.,
174 2006). However, our recent analysis has indicated 291 Gt of effective $CO_2$ storage capacity in
175 saline aquifers and 97–316 Gt in basalt formations, which is significant. EOR and ECBM could
176 provide an additional 2.9 Gt and 3.7 Gt of $CO_2$ can be stored in depleted oil and unminable
177 coal reservoirs, respectively (Vishal et al., 2021b). Although these capacities are significantly
178 lower than those of saline aquifers (Table 2), the financial incentives and ready infrastructure
179 that is available for storage through these pathways render them much more lucrative as sinks.
180 Even the CCUS Roadmap for India by the Technology Information, Forecasting and
181 Assessment Council (TIFAC, 2018) has recommended $CO_2$-enhanced oil recovery (EOR) and
182 enhanced coalbed methane (ECBM) recovery as the primary drivers to implement CCS at a

large scale in India. The more recent 2030 Roadmap for CCUS for oil and gas sector in India lists several policy reocmmendations in short, medium and long term and also identify key projects on EOR and ECBMR for $CO_2$ storage with/without petroleum recovery (MoPNG, 2022).

Storage reservoirs are often spread across large geographical areas with volumes >2000 $km^3$. As such, the Euclidean centres for these reservoirs are considered at the location of injection in this source-sink analysis. In order to locate the Euclidean centre for the reservoirs, the reservoir shapefiles were adapted from our previous work (Vishal et al, 2021b) and the "Find Centroid" tool was used in ArcGIS. Vishal et al (2021b) and others (Holloway et al., 2009) have reported that locations with promising saline aquifers are often co-located with oil and gas reservoirs. Thus, the key sedimentary basins analyzed in our study are shown in Table 1. These basins were selected because they have active oil and gas extraction being carried out for the past several decades. $CO_2$-EOR operations generally commence when the primary and secondary extraction approaches have been used, and $CO_2$ could be instrumental in recovering residual oil in place. Vishal et al (2021b) concluded that these seven basins have 3.4 Gt-$CO_2$ sequestration capacity within oil and gas reservoirs. The cumulative hydrocarbon in place in these basins is 11023 MMTOE and the above capacity is estimated by assuming that 10% of this repository could be extracted with $CO_2$ injection.

While the above basins are prominent for oil and gas extraction, they are also considered as "Category I" basins for storage in saline aquifers. These basins have adequate reservoir data available for the hydrocarbon industry and also the Directorate General of Hydrocarbons. The cumulative $CO_2$ storage capacity in these basins is 108.66 Gt-$CO_2$. Note that there are an additional 19 "Category II" and "Category III" basins where another 182 Gt-$CO_2$ may be stored in saline aquifers. However, these basins are not incorporated into our analysis due to large data uncertainty, low storage prospectivity and often, lower storage capacities in many of these basins.

***Table 2: Sedimentary basins with $CO_2$ storage potential via EOR as well as aquifer injection considered in this study (data adapted from Vishal et al, 2021b)***

| Basins | EOR | Saline aquifers |
|---|---|---|

| | EOR (at 10%) (MMTOE) | $CO_2$ storage capacity (Mt) | Depth classification | Lithology | Volume | $CO_2$ storage capacity (Gt-$CO_2$) |
|---|---|---|---|---|---|---|
| **Krishna–Godavari** | 197.7 | 658.69 | Median | Sandstone | 6,900.00 | 13.39 |
| **Mumbai** | 479.4 | 1597.24 | Median | Limestone | 6,360.00 | 9.26 |
| **Assam shelf** | 186.8 | 667.48 | Deep | Sandstone | 2,520.00 | 14.16 |
| **Rajasthan** | 93.8 | 312.52 | Median | Sandstone | 3,780.00 | 7.34 |
| **Cauvery** | 29.2 | 99.5 | Median | Shale | 8,100.00 | 16.08 |
| **Assam–Arakan** | 17.8 | 67.01 | Deep | Sandstone | 5,455.69 | 32.3 |
| **Cambay** | 180 | 657.25 | Deep | Sandstone | 2,808.75 | 16.13 |

Coal in India occurs through more than 16 operational coalfields and several unallotted coal blocks. While initial expert elicitations showed the coalbed methane (CBM) extraction could be feasible in several of these, on-the-ground operations have revealed that only four of these have appealing resources: Raniganj, Jharia, East Bokaro and North Karanpura. Incidentally, these coalfields are all located within proximity of each other (within a 300 km radius) and are considered within the Damodar Valley basin. Thus, the entire basin is considered as a single reservoir. The cumulative storage capacity - based on relative methane and $CO_2$ sorption capacities – of these coalfields is 57 TCF or 1.42 Gt-$CO_2$. It may be noted that these estimates vary widely based on the methodology used and assumptions surrounding the rate of coal extraction in such coalfields.

We selected the four coalfields in the Damodar Valley basin as the only potential sinks for ECBM recovery. This was done because existing literature shows that only these coalfields satisfy the technical criteria for profitable CBM operations on the basis of depth, porosity, permeability and gas resources (Singh and Hajra, 2018). This is also reflected in the field experience of CBM extraction, where a vast majority of production has taken place in these coalfields (Kelafant, 2020). Extensive experimental studies have been carried out to understand the flow-deformation attributes of liquid and supercrticial CO2 in coal from these basins (Vishal et al., 2013c; Vishal 2017a, 2017b; Vishal and Singh, 2015). Preliminary numerical models for Jharia and Raniganj coalfields indicate high potential for these coal to uptake $CO_2$ with/without CBM recovery (Vishal, 2017a, 2017b; Vishal et al., 2015b, 2013a; Vishal and Singh, 2015). Indeed, the tertiary coalfields in northeastern India generally occur at a shallower depth (<300m) (Mishra and Ghosh, 1996). And while the Cambay Basin and Barmer-Sanchor coalfields in Eastern India might be viable candidate purely from a geographical standpoint, these are mostly lignite reserves with low gas production potential.

## 2.3. Source-sink mapping

Once sources and sinks of $CO_2$ are separately mapped out on ArcGIS, we consider the "hubs and clusters" concept for demarcation of suitable regions with high CCS potential. This concept essentially demarcates "clusters", i.e., regions with high density of LPS and adjoining $CO_2$ storage locations. In some cases, the storage location may not be conveniently located in close proximity to the sources. These cases require dedicated "hubs", which are locations where $CO_2$ from all the LPS may be transported to, and then cumulatively transported to the storage location to introduce economies of scale. In some regions, the storage location may be fortituously located near the centre of the LPS and it may automatically be designated as the "hub".

In our analysis, we did not consider sector-specific clusters. Instead, all sectors were assumed to potentially contribute to a particular cluster. This is because the Garg et al (2017b) work already showed that integrated clusters showed a cost optimization of \$10/t-$CO_2$ over sector-specific clusters. We used the "Shortest route" function in ArcGIS for each cluster in different combinatorial sink locations and the storage locations were demarcated as the following (Garg et al., 2017b):

$$X_{storage} = \sum_{S=1}^{5} \left( \frac{\sum x_i e_i}{\sum e_i} \right) + \Delta_x \qquad \text{Eq. 1}$$

$$Y_{storage} = \sum_{S=1}^{5} \left( \frac{\sum y_i e_i}{\sum e_i} \right) + \Delta_y \qquad \text{Eq. 2}$$

Here, $S$ = 1 to 5 denotes the LPS sectors: power, steel, cement, fertilizer and refinery. The $e_i$ values denote the emissions associated with an LPS, $i$ while $x_i$ and $y_i$ are the associated longitude and latitude. The $\Delta_x$ and $\Delta_y$ values denote the distance between the hub and the storage location of that cluster. Based on expert elicitations, it was assumed that the radii of these clusters would not exceed 150 km. This was due to large multiple infrastructural challenges associated with pipeline construction. As such, the number of sources within 50 km, 100 km and 150 km radii of each of the sinks were located.

## 2.4. Costing analysis

The cost estimation was carried out for each of the clusters visualized based on the aforementioned methods. The cost components estimated here are: cost of $CO_2$ capture, cost of $CO_2$ transportation, costs associated with $CO_2$ storage (including injection and monitoring) and also, any revenues (negative costs) based on additional resource recovery in the case of EOR and ECBM. All the costs are estimated based on a per t-$CO_2$ basis with the relevant parameters shown in Table 3.

***Table 3: Cost parameter assumptions for CCS supply chain***

| Parameter | Cost | Reference |
|---|---|---|
| ***$CO_2$ capture (values in \$/t-$CO_2$)*** | | |
| Coal-fired power plant | 54 | (Singh et al., 2017b) |
| Gas-fired power plant | 120 | (Rubin and Zhai, 2012; Singh and Sharma, 2016) |
| Biopower plant | 200 | (Muratori et al., 2017) |
| Steel plant | 74 | (Global CCS Institute, 2017) |
| Cement plant | 129 | |
| Fertilizer | 28 | |
| Refinery | 65 | (Yao et al., 2018) |
| ***$CO_2$ transport (\$/t-$CO_2$/km)*** | | |
| Pipeline transport | 0.01 | (Singh et al., 2020) |
| ***$CO_2$ storage (\$/t-$CO_2$)*** | | |
| Saline aquifers | 9-30 | Based on reservoir parameters; calculated in IECM framework |
| EOR | Negative (15-31) | |
| ECBM | Negative (5.2) | |

Depending on the point source, the costs of $CO_2$ capture may be similar or higher for the Indian context, as compared to global analogues. For instance, the capture cost for a coal-fired power plant (\$54/t-$CO_2$) is nearly the same as those based in the United States (Pilorgé et al., 2020). However, the capture costs for gas-fired power plants is about 50% higher in India due to historically lower capacity factors for such plants and increased costs of imported natural gas (Singh and Sharma, 2016). In the case of sectors where considerable CCS experience already exists in India – such as fertilizers – the capture costs are close to the lower bounds of global averages.

The costs for $CO_2$ capture and storage were adapted from the literature, as shown in Table 3. Storage costs were calculated separately for each basin. The Integrated Environmental Control Model (IECM), developed at the Carnegie Mellon University, was used for these estimations. IECM is a graphical-user interface software and accepts the reservoir parameters (thickness,

depth, temperature, porosity and permeability) to yield the storage costs. For EOR and ECBM, we also assumed that the market price of crude oil and methane are $60/bbl and $6/mmBtu.

# 3. Results and Discussion

## 3.1. Evaluating $CO_2$ capture prospects from large point sources

### *3.1.1. Power sector*

We describe the power sector and industrial sources separately due to a number of reasons. First, most of the existing costing literature on CCS in India is related to the power sector (Singh et al., 2017a; Yadav et al., 2016), which provides lesser uncertainty to the cost parameters assumed in Table 3. Second, the power sector has a disproportionately large share of LPS emissions in India due to a higher share of coal in the energy mix. This is different from economies such as the United States, where the transport sector is the highest $CO_2$ emitter. Third, because of the regulatory structure of the Indian government, the power sector's control is exercised by a single ministry, whereas the industrial sector comes within the oversight of several different ministries (Garg et al, 2017). Finally, the capture technologies associated within the power sector may be different from say, the refinery sector, where the $CO_2$ stream is derived from multiple different unit operations (Yao et al, 2017).

Figure 2 shows the locations and emission intensity associated with key large point sources in India. The maps deliver several pieces of interesting insights. For instance, there is a concentration of large number of coal-fired power plants in the central India. Gas-fired power plants, on the other hand, are located towards northern India as air pollution concerns have created a momentum towards coal phasedown in the region. For instance, the Badarpur power station was shut down as 30-40 % of Delhi's air pollution could be attributed to it. Some pockets of gas-fired plant clusters may also be seen in the western, northeastern and east coastal parts of India due to proximity to indigenous gas resources. The capacity of bioenergy power plants has also been notable with total emissions of 6 Mt-$CO_2$. This is largely due to co-firing with coal power plants in western India, though such trends are likely to intensify in the future (section 2.4). Currently, there is a presence of biopower infrastructure in Maharashtra, Karanataka, Haryana and Gujarat, in addition to smaller units in other states.

As noted earlier, India's annual $CO_2$ emissions were 2.6 Gt-$CO_2$ in 2019. Large point sources emit around 80% of this $CO_2$, which makes CCS retrofitting an appealing possibility. In our analysis, we did not consider all types of LPS due to data limitations. Specifically, our analysis

accounts for 1.88 Gt-$CO_2$ emissions or more than 96% of the LPS emissions. Our analysis shows the relative influence of the power sector in India's GHG emission inventory. For instance, coal-fired power plants alone emit 1.43 Gt-$CO_2$. This trend has intensified since prior national analysis of GHG inventory, due to commissioning of several new subcritical and supercritical units in existing coal-fired power plants. Moreover, there has been a thrust on larger power plants to increase their capacity factors. Consider the case of the Vindhyachal Super Thermal Power Station in Madhya Pradesh, which is the largest LPS in the county with a capacity of 4,760 MW. The power plant registered a 100% capacity factor last year and the last unit addition for the plant occurred in 2015. As such, the emissions associated with the plant have increased both due to increased capacity and capacity factor. Other large power plants with capacity factors above 90% include: Kahalgaon, Sipat, Talcher and Sasan. This is relevant because expert elicitations indicate that while capacity additions of coal may slow down, increased utilization of existing facilities may add the use of 300 Mt-coal over the next decade. This corresponds to increased $CO_2$ emissions of 860 Mt-$CO_2$ by 2030. Interestingly, most of these plants are towards the central part of the country, which has interesting ramifications in terms of hubs and cluster formation, as discussed later.

Gas-fired power plants in India currently do not indicate a major source for CCS in India by themselves. Even though a substantial capacity for gas plants exists (26 GW), the operational capacity factor is low, i.e. 22.6%. This may partly be attributed to the low gas availability. For instance, the 2017 gas requirement for these power plants 117 MMSCMD. However, the actual gas supply remained at 31 MMSCMD or about 26% of this demand. That said, the development of CCS hubs and clusters could lead to a financial incentive for CCS for two reasons. First, many such plants could become part of integrated clusters close to larger coal power plants, thus reducing the transport costs and infrastructural liability if they choose to retrofit with CCS. Moreover, many CCS clusters might come around sites which could increase gas production through ECBM (discussed in section 2.4).

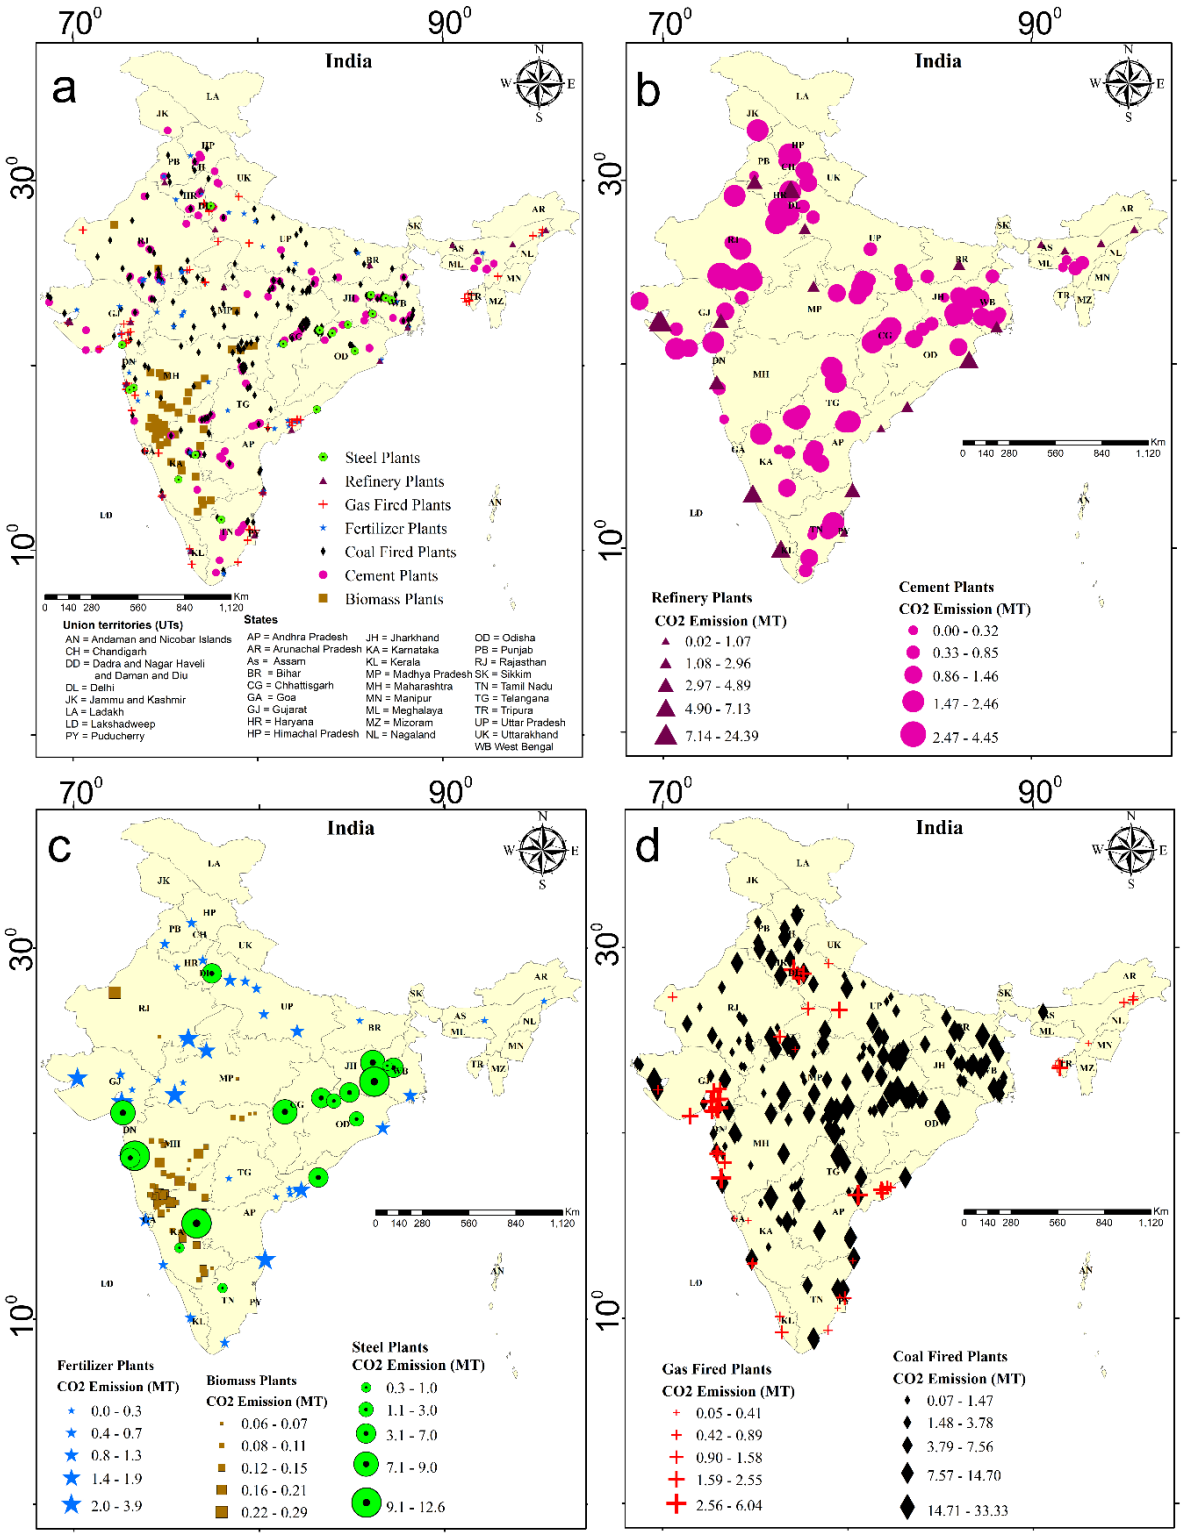



***Figure 2: Locations and $CO_2$ emission intensities of all large point sources in India. (b) only for cement industries and refineries. (c) only for steel plants, biomass and fertilizer plants. (d) only for coal and gas-fired power plants***

### *3.1.2. Industrial sector*

In addition to the power sector, industrial sectors (steel, cement, fertilizer, refinery) emitted ~600 Mt of $CO_2$ into the atmosphere. The global CCS literature has provided prominent coverage to industrial sources of $CO_2$, particularly in developed economies. For instance, Pilorge et al (2020) estimate a $CO_2$ avoidance potential of 69 Mt-$CO_2$ at <\$40/t-$CO_2$. The avoidance potential here may be defined as the reduction in $CO_2$ emissions without changing the total produced power/commodity at a given cost. One of the reasons here is the decreasing emissions of power sector $CO_2$ emissions in such countries, which is not the case for India. Nevertheless, our analysis does provide locations where such conditions may be feasible. For instance, steel plants are largely concentrated in eastern and western India due to ease of sourcing of indigenous and imported coking coal respectively. Cement and fertilizer plants, on the other hand, are present throughout the country due to the ubiquitous demand for these products.

In India, several key opportunities for industrial $CO_2$ capture do exist. For instance, we estimate 47 Mt-$CO_2$ from the fertilizer sector. The Indian fertilizer market is anticipated to register a 11% CAGR in production over the next five years, with the government considering an additional subsidy of \$3.8 billion. This sector also exhibits a technological readiness for $CO_2$ capture with the Jagdishpur fertilizer plant capturing 150 t-$CO_2$ daily for internal reuse. With a lower cost of $CO_2$ capture, there may be a possibility for this sector to pivot to CCS. Other opportunities may exist in the cement sector which emit close to 148 Mt-$CO_2$ based on our analysis. The Dalmia cement group recently announced plans to retrofit one of their facilities to capture 0.5 Mt-$CO_2$. The steel sector emits 180 Mt-$CO_2$ based on a total capacity of 144 Mt. This is anticipated to almost double based on government policy initiatives over the next decade. While the cost of $CO_2$ capture in this sector is similar to the power sector, there has been a recent industrial breakthrough with Tata Steel commissioning a modular 5 t-$CO_2$/day capture facility. India also ranks first and second in sponge iron and crude steel production, respectively, which is a result of a rapid increase in high-capacity steel plants since 2005. However, since the efficiency of the plants has increased over time, the $CO_2$ emission per ton of steel produced has steadily decreased, and it currently stands at 2.5 t$CO_2$/ton of crude steel. This has resulted in a decreasing cumulative emission of $CO_2$ from the steel sector since 2015 (MoS, 2020).

376 Emissions from refineries and other fuel production sectors contribute 89 Mt $CO_2$e annually.
377 The greenhouse gas (GHG) emission from refineries in India has increased 150 % between
378 2005 and 2019 due to the rapidly increasing capacity for refining. Of particular interest here is
379 the Jamnagar refinery, which is the world's largest refinery and emits 24 Mt-$CO_2$ annually.
380 While we discuss the geographical context of this LPS later, it has been deemed as a facility
381 that could enhance the blue hydrogen production at \$1.2-1.5/kg-$H_2$. This could reduce
382 significant $CO_2$ emissions here. However, refineries are composed of several $CO_2$ streams in
383 addition to steam methane reformation (where hydrogen is produced). Particularly, the catalytic
384 cracking unit leads to the largest process emissions within a refinery. Multiple $CO_2$ emissions
385 add an addition layer of complexity to $CO_2$ capture from refineries.

## 3.2. Identifying potential CCS clusters based on source-sink matching

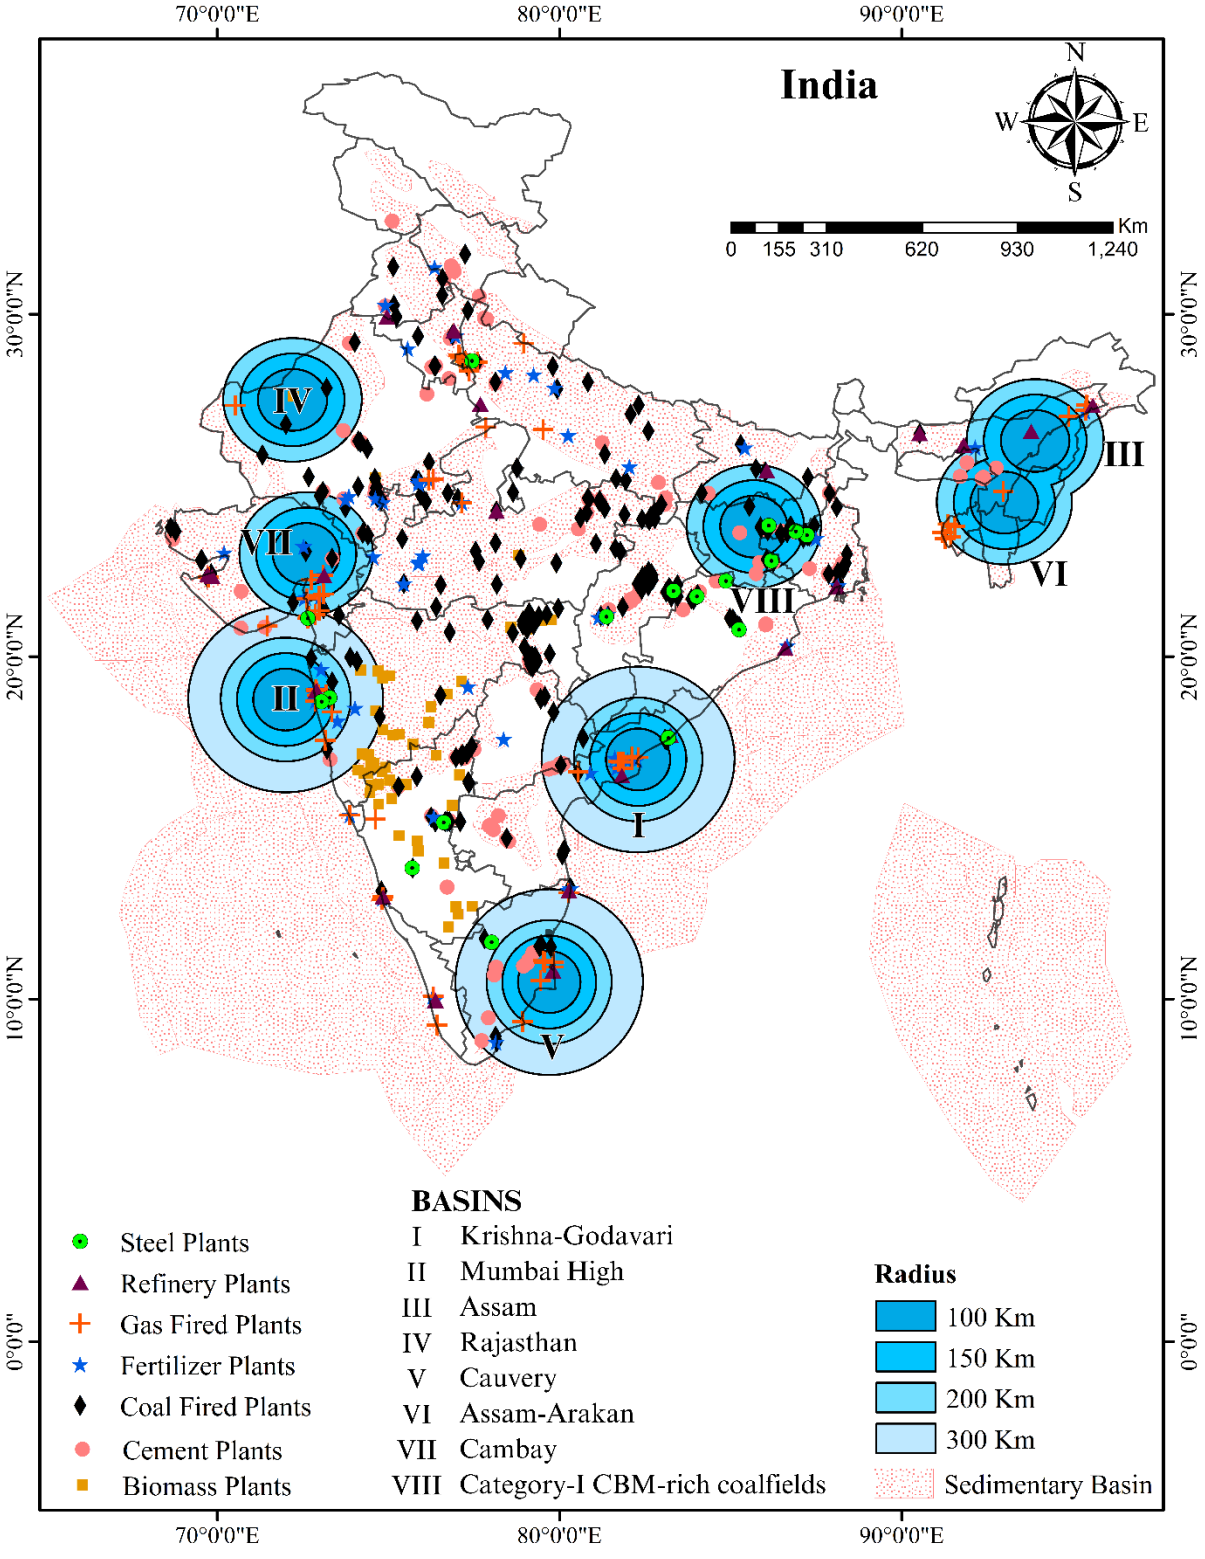



***Figure 3: Identified source-sink clusters for key sedimentary basins and coalfields in India. The concentric circles represent radial distance from the eucledian center of each sink.***

As discussed above, source-sink clusters in this study were designed in such a way that optimized the transport cost by reducing the $CO_2$ transport distance. Having a large number of emission intensive sources also reduced the storage cost due to economies of scale. It was observed that the formation of integrated clusters enabled cost optimisation through sectoral collaboration of industrial partners. Seven clusters were identified in this study around EOR basins and saline aquifers (which occur at similar locations due to their occurrence in sedminentary basin). Based on the abundance of $CO_2$ sources and their proximity to sink reservoirs, a total of 244 LPSs and seven Category I sedimentary basins (four onshore and three offshore basins) were considered as part of these sinks. By definition, these Category I reservoirs have a higher accessible volume, which implies a higher $CO_2$ storage capacity. Additionally, extensive studies on these basins have rendered the feasibility assessment of these basins for $CO_2$ storage easier. For this study, we considered clusters of LPSs that were present within certain distances from the sinks. For the onshore basins, we considered LPSs within 200 km of the sink. In contrast, we considered LPSs within 300 km for offshore basins, because the offshore basins had a higher reservoir capacity than their onshore counterparts. Our study shows that 62 LPSs (32%) of the sources are within a distance of 100 km from the sinks in these seven clusters, whereas 85 LPSs (43%) and 55 LPSs (25%) are within 100–200 km and 200–300 km, as shown in Figure 3 and Supplementary Figure 1. It was observed that coal-fired powerplants were significant contributors to the LPS frequency and to the total annual emission in each cluster.

***Table 4: Summary of potential CCS clusters based on matching LPS and theoretical sinks***

| Basin | Emissions (Mt-$CO_2$/year) | Number of LPS | Average distance of LPS to sink (km) | Emissions from power sector (%) | Percent of sequestration possible with additional resource recovery (%) | Storage potential needed for 30 years (Gt-$CO_2$) |
|---|---|---|---|---|---|---|
| ***Sedimentary basins (Category I oil and gas basins)*** | | | | | | |
| **Mumbai High** | 81 | 33 | 160 | 49 | 65 | 2.43 |
| **Krishna-Godavari** | 72 | 27 | 114 | 78 | 30 | 2.16 |
| **Cauvery** | 65 | 25 | 148 | 85 | 5 | 1.95 |
| **Cambay** | 49 | 23 | 119 | 78 | 45 | 1.47 |
| **Rajasthan** | 12 | 6 | 125 | 93 | 88 | 0.36 |
| **Assam-Arakar Fold Belt** | 2.0 | 6 | 102 | 22 | 100 | 0.06 |
| **Assam** | 1.7 | 2 | 82 | 38 | 100 | 0.05 |
| ***Coalfields (Category I CBM basins)*** | | | | | | |

| | | | | | | |
|---|---|---|---|---|---|---|
| **Damodar Valley** | 120 | 29 | 116 | 71 | 39 | 3.60 |

412

413 Analysis of these clusters reveals several interesting insights (Table 4). First, the maximum
414 abundance of emissions occurs near the Mumbai High basin (81 Mt-$CO_2$/year). This cluster
415 contains 33 LPS and is actually dominated by industrial sources which contribute to 51% of
416 the emissions here. Particularly, three steel plants near the basin emit 25 Mt-$CO_2$. This basin is
417 an offshore basin, due to which the distance of most LPS is high, with the average LPS being
418 152 km away from the Euclidean centre of the basin. This necessitates creation of an onshore
419 hub, where the $CO_2$ streams from various LPS may be assembled and then cumulatively
420 sequestered. The Krishna-Godavari basin may also be treated as a promising cluster with
421 adjoining emissions of 72 Mt-$CO_2$. Out of these, 78% emissions are from the power sector.
422 Analysis by Garg et al (2017) found that the emission clusters would develop around large
423 UMPPs with each of such plants emitting 28-29 Mt-$CO_2$. Because of evolving conditions of
424 lesser new plants coming online and addition of newer units on existing plants, this may not
425 always be the case. Thus, the Krishna-Godavari basins has 14 power plants in close proximity,
426 which emit an average of 4 Mt-$CO_2$. This is a major change in the ways clusters are likely to
427 be designed in the Indian context. Similar trends are seen in the Cauvery and Cambay basins
428 where adjoining emissions are 65 Mt-$CO_2$/year and 49 Mt-$CO_2$/year respectively. Again, the
429 average emission from a power plant in these clusters is only 3.5 Mt-$CO_2$/year and 2.5 Mt-
430 $CO_2$/year respectively, thus highlighting the increasing importance of several mid-sized power
431 plants to the formation of clusters.

432 Onshore basins are associated with lower emissions in close proximity. This is partly due to
433 lower density of infrastructure around the states considered (e.g. Assam) and also because of
434 more restrictive assumption around such clusters. Emissions around the Assam Basin and the
435 Assam Arakan basins are cumulatively only 3.7 Mt-$CO_2$. At such rates, the cost of emissions
436 are likely to be higher. Even though there is an opportunity for ~700 Mt-$CO_2$ sequestration via
437 EOR, it may not be utilized because there are minimal $CO_2$ sources nearby. This is similar to
438 the concept of "$CO_2$ deserts" proposed by Middleton et al. (2014), where there is a source-sink
439 "mismatch" at some locations.

440 The Damodar Valley coal basin in eastern India, particularly with four key coalfields
441 (Raniganj, Jharia, East Bokaro and North Karanpura) may be very suitable for formation of
442 clusters and sub-clusters. This was also suggested by Garg et al (2017), though there analysis

hinged on provision of $CO_2$ from three UMPPs (Deoghar, Banka and Tilaiya). As such, they estimated the availability of 218 Mt-$CO_2$/year in close proximity to the region. Our analysis shows that even in the absence of these UMPPs, this cluster still has 120 Mt-$CO_2$/year in proximity. This includes annual emissions of 85 Mt-$CO_2$ from power plants and the remaining 35 Mt-$CO_2$ from the industrial sector, thus depicting large diversity of sources.

### *3.2.1. Costs of CCS deployment at scale*

The costs of capture, transport, storage and additional revenue (for EOR and ECBM) were calculated for each cluster on a \$/t-$CO_2$ basis (Figure 4). One of the key features of this study is that we have developed a more detailed estimate of the storage costs as compared to past work, where a default value was assigned to the parameter.

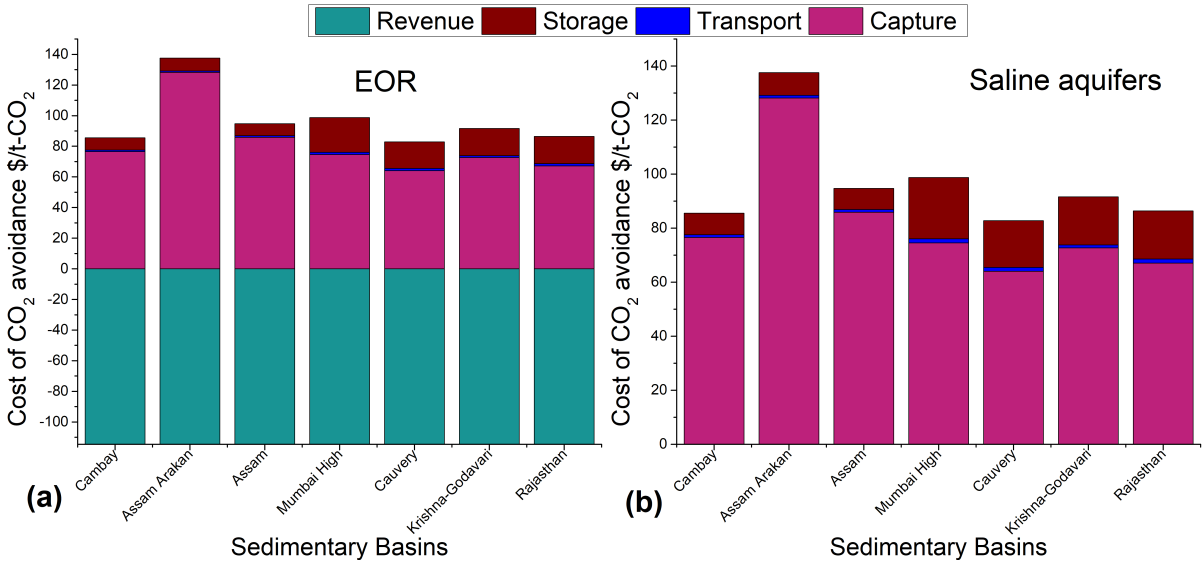



***Figure 4: Overall system cost of avoidance for sedimentary basins for storage in (a) EOR reservoirs and (b) saline aquifers***

The results for saline aquifers show that the overall cost for CCS in India is substantially higher than global averages (Clarke et al, 2022). This is, in part, due to higher capture costs at coal-fired power plants due to high ash content and lower efficiency. If we exclude the Assam Arakan Basin due to low emission sources in proximity, the costs of $CO_2$ avoidance are \$87-107/t-$CO_2$. This is notably due to higher storage cost (\$9-30/t-$CO_2$) of Indian aquifers. These aquifers often occur at a higher depth and a lower thickness. Moreover, the permeability is assumed at a default value of 40 mD, which is a conservative estimate. The economic prospects, however, change when EOR system costs are evaluated. The past study by Garg et al (2017) assumed a low crude oil price of \$15/bbl, and accordingly EOR storage costs were around \$-

16/t-$CO_2$. Our analysis assumes a crude oil price of $60/bbl based on current market conditions and an EOR effectiveness of 1.91 bbl/t-$CO_2$. This makes the overall system profitable by reducing the total system costs to negative $31-15/t-$CO_2$. The system costs present an interesting tradeoff. For instance, we discussed that the Mumbai High basin has a suitable prospect for EOR based on proximity to LPS. However, this cluster has a higher avoidance cost due to a low storage coefficient of 1.5%. Storage in coal basins is somewhat towards the middle of the two sedimentary basin cases and offers a overall system cost of $60/t-$CO_2$. We do caveat these results by saying that data limitations have led us to assume default values for critical parameters. As such, these metrics may be treated as indicative and we suggest further refinements based on field data.

## 3.3. Key opportunities for CCS deployment in proposed clusters

One aspect in which we have helped evolve the findings of Garg et al (2017) is by incorporating the actual storage potential estimates. In previous work, the emissions surrounding the clusters were estimated and it was assumed that sinks would contain the adequate storage capacity. This work presents further nuance on that. For instance, it is likely that the initial preferred storage in sedimentary basins would be EOR, followed by injection into saline aquifers as they are co-located. Similarly, in the case of coalfields, ECBM would be preferred followed by injection without incremental CBM recovery by considering all constraints in doing so (Pashin et al., 2018). CCS hubs and cluster strategy is often iterated as an effective strategy to share the responsibility of developing full-scale CCS projects. CCS chains developed with this strategy also has a potential to be independent of government subsidies upfront (Global CCS Institute, 2020). Responsibilities of establishing and expanding a hub can be shared among sharing parties, thereby reducing overall cost and risk compared to standalone CCS initiatives (Cavanagh and Ringrose, 2014; Sun et al., 2021b). Several implementations of hubs and cluster based CCS chains including Rotterdam CCUS Porthos in the Netherlands, Sun and Chen (2017) have validated the potential feasibility of this approach in NetZero Teeside in UK and CarbonNet in Australia (Sun and Chen, 2017) attempted to construct a source-sink distance-based hubs and cluster network for China by k-means clustering using InfraCCS based models. All studies unanimously point towards a fact that this hubs and cluster model is more economically viable when the sinks are involved in EOR or ECBM recovery, which may offset the cost of capture, transportation and storage. For this study, we have used LPSs with > 1 Mt/yr $CO_2$ emission and based on their location and availability of sinks in proximity, 12 clusters have been formed (Figure 5). Here, we identify the key EOR and ECBM opportunities

identified with our clusters, followed by an understanding of the bioenergy with $CO_2$ capture and storage (BECCS) prospects in India.

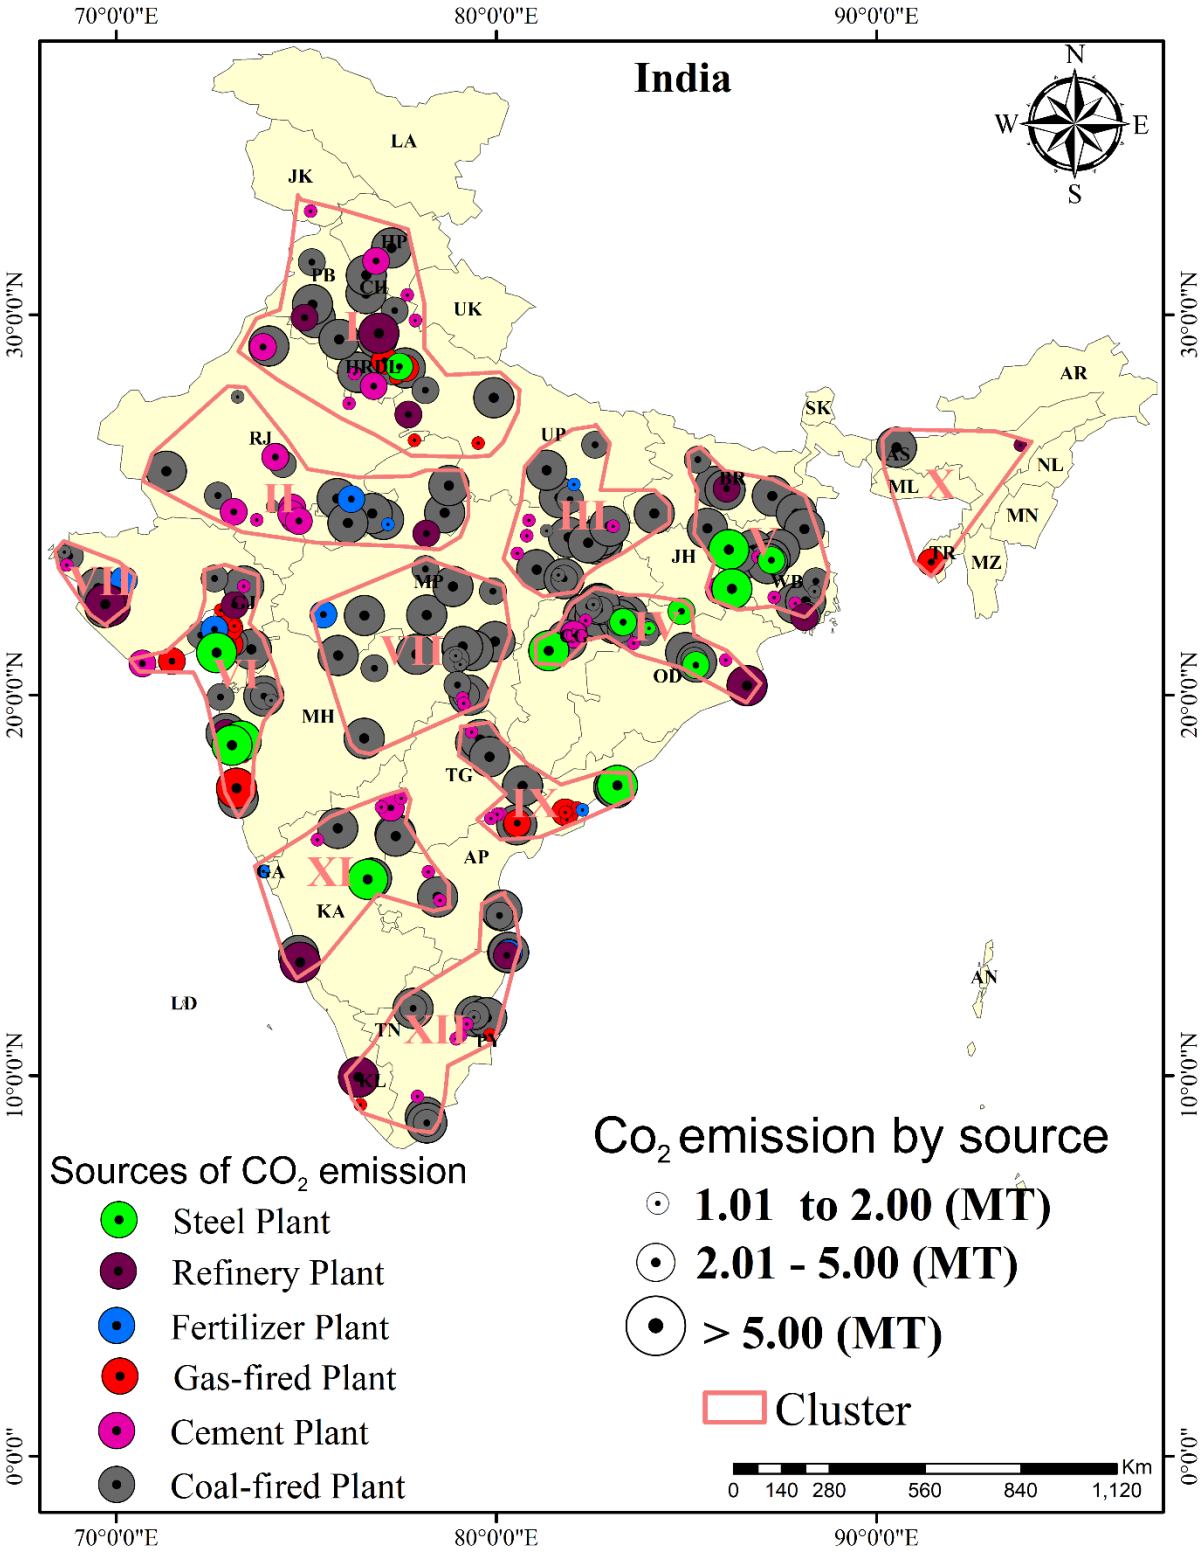



***Figure 5: The proposed hubs and clusters for implementing CCS network across India.***

### *3.3.1. EOR feasibility*

Table 4 shows the amount of $CO_2$ that may be stored in each sedimentary basin with EOR assuming that each cluster operates for 30 years. We discussed that the Mumbai High basin has the largest number of sources in proximity. It also, fortitiously, has the largest EOR capacity of 1.6 Gt-$CO_2$. As such, 65% of the $CO_2$ may be used to extract the incremental oil in the basin. This value is lower for the Krishna-Godavari Basin (30%) and the Cambay Basin (45%), depicting moderate economic feasibility if the EOR pathway is undertaken. The Cauvery Basin contains only 100 Mt-$CO_2$ EOR potential, which means that it is likely to rely on storage in saline aquifers. One key trend that is notable here is the potential deployment of EOR in the Cambay Basin with $CO_2$ sourced from the Indian Oil Koyali Refinery. This project is currently in the design and feasibility stages, and is anticipated to capture 5000 t-$CO_2$/day. This has also been highlighted by Patange et al. (2022) who note that availability of $CO_2$ sources in proximity could make EOR viable even below a crude oil price of $45/bbl.

The Rajasthan basin may sequester 88% of the $CO_2$ with EOR and the Assam and Assam-Arakan basins may sequester all the available $CO_2$ with EOR. In fact, the emissions adjoining the Assam Basin are only 8% of the EOR capacity over a 30-year period. Our past work reflected on potential opportunities in India where $CO_2$ could be captured from the ambient air with direct air capture (DAC). Because $CO_2$ injection in the Assam Basin could help in incremental oil recovery of 178 MMTOE, it is an opportune location for DAC, particularly when paired with the revenues of the California Low-Carbon Fuel Standard, that may incentivize a DAC facility anywhere. The electricity mix in Assam has also been decarbonized with the Assam Solar Energy Policy targeting a 590 MW solar target, which could provide a high carbon sequestration efficacy for such a project even after considering the emissions from the produced oil.

Overall, our estimates show potential recovery of 5290 MMbbl with currently existing LPS over 30 years. This corresponds to 14.5 MMbbl/year is equivalent to about 10% of India's annual oil importance. Thus, our study highlights a tangible potential with bridging the oil dependence through EOR.

### *3.3.2. ECBM feasibility*

The Damodar Valley cluster is highly emission-intensive with the emissions over 30 years corresponding to 39% of the available ECBM capacity. This means that an incremental 19 TCF of methane could be recovered over 30 years, that corresponds to 0.63 TCF annually. It is notable that India's current liquified natural gas imports are 1.2 TCF. Thus, ECBM could be

an even more important technology in reducing India's import dependence than EOR. Several studies have indicated on the massive ECBM potential of Damodar Valley coalfields (Chandra and Vishal, 2022; Vishal et al., 2013c, 2013b, 2015a, 2018). Several CBM blocks in the Damodar Valley are already seeing some level of peaking. For instance, the Raniganj Block of Essar Oil Limited saw a CAGR of 111% during 2011-17 and peaked at around 14 BCF. Thus, technical ECBM opportunities may open up over the next decade as production from more wells of private and public players begin to peak.

As ECBM does not provide adequate storage capacity to the region's $CO_2$ emissions, it is also important to understand possibilities to diversity storage opportunities. For instance, the Rajmahal basalt traps contains a storage capacity of 4.5 Gt-$CO_2$. Similarly, Singh et al (2021) project sizeable technical opportunities for storage in shale formations in the Damodar Valley. While storage in shales is not technologically established yet, it might develop over the next three decades and provide a backup storage opportunity. Several studies have shown that the shale samples in the region have a very high total organic carbon content, which correlates with high storage capacity per unit volume of shale (Chandra et al., 2020b, 2020a; Chandra and Vishal, 2020; Vishal et al., 2019). More studies looking at these reservoirs from the perspective of $CO_2$ storage are therefore recommended.

### *3.3.3. BECCS opportunities*

Multiple countries have mapped out the BECCS potential based on co-located bioenergy power plants and $CO_2$ storage sites. Since, modelling results show higher BECCS requirements in developed countries with high historical emissions, it has not been discussed in India. Our results, however, help shed some light on the early opportunities for BECCS in India. Notably, existing biopower plants emit 5.7 Mt-$CO_2$, which is low because the capacity of such plants is generally <50 MW. However, NTPC recently announced that it plans for 5% co-firing are in an advanced stage and the company has already ordered procurement of 3 Mt of biomass pellets(Kannappan, 2022). If we consider 5% co-firing for India's entire coal fleet, it would correspond to 70 Mt-$CO_2$ biogenic emissions. Thus, there is an opportunity for India to leverage so-called "negative emissions" or carbon dioxide removal from the atmosphere.

Apart from the electricity generating infrastructure, low-cost BECCS opportunities also exist in the bioethanol sector, which is likely to grow in Gujarat (near the Cambay Basin). This could also lead to a low-carbon transport fuel option with $CO_2$ capture possible at <\$45/t-$CO_2$. The Government of India has announced plans to expand bioethanol production to 10 billion litres

by 2025. While such facilities have not been considered in this analysis due to data limitations, it is another potential area of future research.

# 4. Conclusion

While several advances have been undertaken in the CCS domain in India, system integration analyses were lacking. Due to changing policy circumstances – especially with the announcement of the net-zero target – there is an increased need for overarching assessment of potential CCS clusters that could be developed in India. Our work looks at the existing LPS and aims to understand locations where hubs and clusters may be developed. We discuss the opportunities individually in the power sector and the industrial sector. The power sector offers a large-scale decarbonization of close to 1.5 Gt-$CO_2$. Cases of co-firing biomass with coal, the power sector could also be integrated with BECCS opportunities to readily offer negative emissions. Our analysis also discusses regions where industrial CCS may be more relevant and be helpful in reducing the emissions of hard-to-decarbonize sector. Here, we describe initiatives that are already being undertaken in the steel, cement, fertilizer and refinery sectors.

The source-sink matching effort in this paper attempts to use our group's novel estimates on the $CO_2$ storage capacity to describe seven clusters in sedimentary basins (with and without EOR) and one cluster in the Damodar Valley coalfields in eastern India. Cumulatively, these may sequester just over 400 Mt-$CO_2$/year. Over a 30-year duration, this corresponds to 12 Gt-$CO_2$, which is coincidentally close to the CCS target estimated by global energy modelling groups for India. We also carried out a first-order estimate of the costs of CCS in these clusters. These are estimated to be \$87-107/t-$CO_2$ in saline aquifers, - \$31 to -\$15/t-$CO_2$ for EOR, and \$60/t-$CO_2$. Financial revenues from EOR and ECBM are, therefore, necessary to jumpstart CCS in India.


## Acknowledgement

VV acknowledges the support from DST, India supported National Center of Excellence in Carbon Capture and Utilization (DST/TMD/CCUS/CoE/202/IITB) for successful completion of this study.

# References


Andreoni, V., 2022. Drivers of coal consumption changes: A decomposition analysis for Chinese regions. Energy 242, 122975. https://doi.org/10.1016/j.energy.2021.122975

Baik, E., Chawla, K.P., Jenkins, J.D., Kolster, C., Patankar, N.S., Olson, A., Benson, S.M., Long, J.C.S., 2021. What is different about different net-zero carbon electricity systems? Energy Clim. Chang. 2, 100046. https://doi.org/10.1016/J.EGYCC.2021.100046

Bui, M., Adjiman, C.S., Bardow, A., Anthony, E.J., Boston, A., Brown, S., Fennell, P.S., Fuss, S., Galindo, A., Hackett, L.A., Hallett, J.P., Herzog, H.J., Jackson, G., Kemper, J., Krevor, S., Maitland, G.C., Matuszewski, M., Metcalfe, I.S., Petit, C., Puxty, G., Reimer, J., Reiner, D.M., Rubin, E.S., Scott, S.A., Shah, N., Smit, B., Trusler, J.P.M., Webley, P., Wilcox, J., Mac Dowell, N., 2018. Carbon capture and storage (CCS): The way forward. Energy Environ. Sci. https://doi.org/10.1039/c7ee02342a

Busby, J.W., Shidore, S., 2021. Solar federalism: What explains the variation in solar capacity additions by India's states? Energy Res. Soc. Sci. 71, 101815. https://doi.org/10.1016/j.erss.2020.101815

Cavanagh, A., Ringrose, P., 2014. Improving Oil Recovery and Enabling CCS: A Comparison of Offshore Gas-recycling in Europe to CCUS in North America. Energy Procedia 63, 7677–7684. https://doi.org/10.1016/J.EGYPRO.2014.11.801

CEA, 2019. CO2 Baseline Database for the Indian Power Sector, Version 15. Government of India, Ministry of Power, Central Electricity Authority, Sewa Bhawan, R.K Puram. New Delhi, India.

Chandra, D., Vishal, V., 2022. A Comparative Analysis of Pore Attributes of Sub-Bituminous Gondwana Coal from the Damodar and Wardha Valleys: Implication for Enhanced Coalbed Methane Recovery. Energy and Fuels. https://doi.org/10.1021/ACS.ENERGYFUELS.2C00854/ASSET/IMAGES/LARGE/EF2C00854_0013.JPEG

Chandra, D., Vishal, V., 2020. A comparison of nano-scale pore attributes of Barakar Formation gas shales from Raniganj and Wardha Basin, India using low pressure sorption and FEG-SEM analysis. J. Nat. Gas Sci. Eng. 81, 103453. https://doi.org/10.1016/J.JNGSE.2020.103453

628 Chandra, D., Vishal, V., Bahadur, J., Sen, D., 2020a. A novel approach to identify accessible
629 and inaccessible pores in gas shales using combined low-pressure sorption and
630 SAXS/SANS analysis. Int. J. Coal Geol. 228, 103556.
631 https://doi.org/10.1016/J.COAL.2020.103556

632 Chandra, D., Vishal, V., Debbarma, A., Banerjee, D.S., Pradhan, S.P., Mishra, M.K., 2020b.
633 Role of composition and depth on pore attributes of Barakar Formation gas shales of Ib
634 Valley, India using a combination of low pressure sorption and image analysis. Energy
635 & Fuels acs.energyfuels.0c00746-acs.energyfuels.0c00746.
636 https://doi.org/10.1021/acs.energyfuels.0c00746

637 CIS, 2021. Department for Promotion of Industry And Internal Trade (DPIIT)- Cement
638 Information System- Company-wise Plant List [WWW Document]. URL
639 https://eaindustry.nic.in/cement/report2.asp (accessed 2.16.22).

640 Davis, S.J., Lewis, N.S., Shaner, M., Aggarwal, S., Arent, D., Azevedo, I.L., Benson, S.M.,
641 Bradley, T., Brouwer, J., Chiang, Y.-M., Clack, C.T.M., Cohen, A., Doig, S., Edmonds,
642 J., Fennell, P., Field, C.B., Hannegan, B., Hodge, B.-M., Hoffert, M.I., Ingersoll, E.,
643 Jaramillo, P., Lackner, K.S., Mach, K.J., Mastrandrea, M., Ogden, J., Peterson, P.F.,
644 Sanchez, D.L., Sperling, D., Stagner, J., Trancik, J.E., Yang, C.-J., Caldeira, K., 2018.
645 Net-zero emissions energy systems. Science (80-. ). 360, eaas9793.
646 https://doi.org/10.1126/science.aas9793

647 Denis, A., Jotzo, F., Skrabek, A., Rovere, E. La, Wills, W., Grottera, C., Bataille, C., Sawyer,
648 D., 2018. Pathways to Deep Decarbonization 2015.

649 DGH, 2020. India's Hydrocarbon Outlook 2019-20.

650 Dooley, J.J., Kim, S.H., Edmonds, J.A., Friedman, S.J., Wise, M.A., 2005. A first-order
651 global geological CO2-storage potential supply curve and its application in a global
652 integrated assessment model, in: Greenhouse Gas Control Technologies 7. Elsevier, pp.
653 573–581.

654 Fennell, P.S., Davis, S.J., Mohammed, A., 2021. Decarbonizing cement production. Joule 5,
655 1305–1311. https://doi.org/10.1016/j.joule.2021.04.011

656 Gabrielli, P., Gazzani, M., Mazzotti, M., 2020. The Role of Carbon Capture and Utilization,
657 Carbon Capture and Storage, and Biomass to Enable a Net-Zero-CO2 Emissions

658 Chemical Industry. Ind. Eng. Chem. Res. 59, 7033–7045.
659 https://doi.org/10.1021/acs.iecr.9b06579

660 Garg, A., Shukla, P.R., Kankal, B., Mahapatra, D., 2017a. CO2 emission in India: trends and
661 management at sectoral, sub-regional and plant levels. Carbon Manag. 8, 111–123.
662 https://doi.org/10.1080/17583004.2017.1306406

663 Garg, A., Shukla, P.R., Parihar, S., Singh, U., Kankal, B., 2017b. Cost-effective architecture
664 of carbon capture and storage (CCS) grid in India. Int. J. Greenh. Gas Control 66, 129–
665 146. https://doi.org/10.1016/j.ijggc.2017.09.012

666 Global CCS Institute, 2020. Global Status of CCS.

667 Global CCS Institute, 2017. Global Costs of Carbon Capture and Storage. Glob. CCS Inst. 7.

668 Gough, C., Mander, S., 2022. CCS industrial clusters: Building a social license to operate.
669 Int. J. Greenh. Gas Control 119, 103713. https://doi.org/10.1016/J.IJGGC.2022.103713

670 Haszeldine, R.S., Flude, S., Johnson, G., Scott, V., 2018. Negative emissions technologies
671 and carbon capture and storage to achieve the Paris Agreement commitments. Philos.
672 Trans. A. Math. Phys. Eng. Sci. 376, 20160447. https://doi.org/10.1098/rsta.2016.0447

673 Holloway, S., Garg, A., Kapshe, M., Deshpande, A., Pracha, A.S., Khan, S.R., 2008. A
674 regional assessment of the potential for CO2 storage in the Indian subcontinent. IEA
675 GHG R&D Program.

676 Holloway, S., Garg, A., Kapshe, M., Deshpande, A., Pracha, A.S., Khan, S.R., Mahmood,
677 M.A., Singh, T.N., Kirk, K.L., Gale, J., 2009. An assessment of the CO2 storage
678 potential of the Indian subcontinent, in: Energy Procedia. Elsevier, pp. 2607–2613.
679 https://doi.org/10.1016/j.egypro.2009.02.027

680 IBM, 2020. 57 th Edition SLAG-IRON & STEEL (FINAL RELEASE), GOVERNMENT OF
681 INDIA- MINISTRY OF MINES- INDIAN BUREAU OF MINES- Indian Minerals
682 Yearbook 2018 (Part-II Metals and Alloys).

683 Jing, L., El-Houjeiri, H.M., Monfort, J.C., Brandt, A.R., Masnadi, M.S., Gordon, D.,
684 Bergerson, J.A., 2020. Carbon intensity of global crude oil refining and mitigation
685 potential. Nat. Clim. Chang. 10, 526–532. https://doi.org/10.1038/s41558-020-0775-3

686 Kannappan, S., 2022. Biomass co-firing: NTPC retrofits 13 power stations. Will other

687 companies be able to follow suit? [WWW Document]. URL
688 https://www.downtoearth.org.in/blog/pollution/biomass-co-firing-ntpc-retrofits-13-
689 power-stations-will-other-companies-be-able-to-follow-suit--81272 (accessed 8.25.22).

690 Kearns, J., Teletzke, G., Palmer, J., Thomann, H., Kheshgi, H., Chen, Y.-H.H., Paltsev, S.,
691 Herzog, H., 2017. Developing a Consistent Database for Regional Geologic CO2
692 Storage Capacity Worldwide. Energy Procedia 114, 4697–4709.
693 https://doi.org/10.1016/j.egypro.2017.03.1603

694 Middleton, R.S., Clarens, A.F., Liu, X., Bielicki, J.M., Levine, J.S., 2014. CO2 deserts:
695 Implications of existing CO2 supply limitations for carbon management. Environ. Sci.
696 Technol. 48, 11713–11720.
697 https://doi.org/10.1021/ES5022685/SUPPL_FILE/ES5022685_SI_002.XLSX

698 Mishra, H.K., Ghosh, R.K., 1996. Geology, petrology and utilisation potential of some
699 Tertiary coals of the northeastern region of India. Int. J. Coal Geol. 30, 65–100.
700 https://doi.org/10.1016/0166-5162(95)00038-0

701 MoPNG, 2022. Draft 2030 Roadmap for Carbon Capture Utilization and Storage (CCUS) for
702 Upstream E&P Companies.

703 MoS, 2020. Ministry of Steel, Annual Report 2018-19.

704 Muratori, M., Bauer, N., Rose, S.K., Wise, M., Daioglou, V., Cui, Y., Kato, E., Gidden, M.,
705 Strefler, J., Fujimori, S., Sands, R.D., van Vuuren, D.P., Weyant, J., 2020. EMF-33
706 insights on bioenergy with carbon capture and storage (BECCS). Clim. Change.
707 https://doi.org/10.1007/s10584-020-02784-5

708 Muratori, M., Kheshgi, H., Mignone, B., Clarke, L., McJeon, H., Edmonds, J., 2017. Carbon
709 capture and storage across fuels and sectors in energy system transformation pathways.
710 Int. J. Greenh. Gas Control 57, 34–41. https://doi.org/10.1016/j.ijggc.2016.11.026

711 OGIS, 2022. Oil and Gas Inspection Services- List of Petroleum Refineries in India [WWW
712 Document]. URL http://www.ogis.in/pdf/List of Petroleum Refineries in India.pdf
713 (accessed 2.16.22).

714 Pashin, J.C., Pradhan, S.P., Vishal, V., 2018. Formation Damage in Coalbed Methane
715 Recovery. Form. Damage Dur. Improv. Oil Recover. Fundam. Appl. 499–514.
716 https://doi.org/10.1016/B978-0-12-813782-6.00013-0

PDIL, 2022. LIST OF CREDENTIALS OF PDIL IN GRASS-ROOT AMMONIA-UREA FERTILIZER PROJECTS [WWW Document]. URL https://www.pdilin.com/fertilisers.php (accessed 2.16.22).

Pilorgé, H., McQueen, N., Maynard, D., Psarras, P., He, J., Rufael, T., Wilcox, J., 2020. Cost Analysis of Carbon Capture and Sequestration of Process Emissions from the U.S. Industrial Sector. Environ. Sci. Technol. 54, 7524–7532. https://doi.org/10.1021/acs.est.9b07930

Rubin, E.S., Zhai, H., 2012. The cost of carbon capture and storage for natural gas combined cycle power plants. Environ. Sci. Technol. 46, 3076–3084. https://doi.org/10.1021/es204514f

Singh, A.K., Hajra, P.N., 2018. Coalbed Methane in India. SpringerBriefs in Energy. https://doi.org/10.1007/978-3-319-66465-1

Singh, A.K., Mendhe, V.A., Garg, A., 2006. CO2 storage potential of geologic formations in India, in: 8th Greenhouse Gas Technology Conference, Trondheim, Norway.

Singh, U., Dunn, J.B., 2022. Shale Gas Decarbonization in the Permian Basin: Is It Possible? ACS Eng. Au 2, 248–256. https://doi.org/10.1021/ACSENGINEERINGAU.2C00001

Singh, U., Loudermilk, E.M., Colosi, L.M., 2020. Accounting for the role of transport and storage infrastructure costs in carbon negative bioenergy deployment. Greenh. Gases Sci. Technol. https://doi.org/10.1002/ghg.2041

Singh, U., Rao, A.B., Chandel, M.K., 2017a. Economic Implications of CO2 Capture from the Existing as Well as Proposed Coal-fired Power Plants in India under Various Policy Scenarios, in: Energy Procedia. Elsevier Ltd, pp. 7638–7650. https://doi.org/10.1016/j.egypro.2017.03.1896

Singh, U., Rao, A.B., Chandel, M.K., 2017b. Economic Implications of CO2 Capture from the Existing as Well as Proposed Coal-fired Power Plants in India under Various Policy Scenarios, in: Energy Procedia. Elsevier Ltd, pp. 7638–7650. https://doi.org/10.1016/j.egypro.2017.03.1896

Singh, U., Sharma, N., 2016. Soft-computing approach to predict cost and performance of natural gas combined cycle (NGCC) plants using carbon dioxide capture. Ina. Lett. 1, 65–76. https://doi.org/10.1007/s41403-016-0013-5

747 Singh, U., Sharma, N., Dunn, J.B., 2021. Revisiting Geologic Storage Potential in
748 Unconventional Formations Is Key to Proactive Decision Making on CCS in India.
749 Front. Clim. 3, 1–9. https://doi.org/10.3389/fclim.2021.708320

750 Sun, L., Chen, W., 2017. Development and application of a multi-stage CCUS source–sink
751 matching model. Appl. Energy 185, 1424–1432.
752 https://doi.org/10.1016/J.APENERGY.2016.01.009

753 Sun, X., Alcalde, J., Bakhtbidar, M., Elío, J., Vilarrasa, V., Canal, J., Ballesteros, J.,
754 Heinemann, N., Haszeldine, S., Cavanagh, A., Vega-Maza, D., Rubiera, F., Martínez-
755 Orio, R., Johnson, G., Carbonell, R., Marzan, I., Travé, A., Gomez-Rivas, E., 2021a.
756 Hubs and clusters approach to unlock the development of carbon capture and storage –
757 Case study in Spain. Appl. Energy 300, 117418.
758 https://doi.org/10.1016/j.apenergy.2021.117418

759 Sun, X., Alcalde, J., Bakhtbidar, M., Elío, J., Vilarrasa, V., Canal, J., Ballesteros, J.,
760 Heinemann, N., Haszeldine, S., Cavanagh, A., Vega-Maza, D., Rubiera, F., Martínez-
761 Orio, R., Johnson, G., Carbonell, R., Marzan, I., Travé, A., Gomez-Rivas, E., 2021b.
762 Hubs and clusters approach to unlock the development of carbon capture and storage –
763 Case study in Spain. Appl. Energy 300, 117418.
764 https://doi.org/10.1016/J.APENERGY.2021.117418

765 TIFAC, 2018. Carbon Capture Utilization and Storage - A Roadmap for India. New Delhi,
766 India.

767 Viebahn, P., Vallentin, D., Höller, S., 2015. Prospects of carbon capture and storage (CCS) in
768 China's power sector - An integrated assessment. Appl. Energy 157, 229–244.
769 https://doi.org/10.1016/j.apenergy.2015.07.023

770 Vishal, V., 2017a. In-situ disposal of CO2: Liquid and supercritical CO2 permeability in coal
771 at multiple down-hole stress conditions. J. CO2 Util. 17, 235–242.
772 https://doi.org/10.1016/j.jcou.2016.12.011

773 Vishal, V., 2017b. Saturation time dependency of liquid and supercritical CO2permeability of
774 bituminous coals: Implications for carbon storage. Fuel 192, 201–207.
775 https://doi.org/10.1016/j.fuel.2016.12.017

776 Vishal, V., Chandra, D., Bahadur, J., Sen, D., Hazra, B., Mahanta, B., Mani, D., 2019.

Interpreting Pore Dimensions in Gas Shales Using a Combination of SEM Imaging, Small-Angle Neutron Scattering, and Low-Pressure Gas Adsorption. Energy and Fuels 33, 4835–4848. https://doi.org/10.1021/ACS.ENERGYFUELS.9B00442/ASSET/IMAGES/LARGE/EF-2019-00442P_0011.JPEG

Vishal, V., Chandra, D., Singh, U., Verma, Y., 2021a. Understanding initial opportunities and key challenges for CCUS deployment in India at scale. Resour. Conserv. Recycl. 175, 105829. https://doi.org/10.1016/J.RESCONREC.2021.105829

Vishal, V., Mahanta, B., Pradhan, S.P., Singh, T.N., Ranjith, P.G., 2018. Simulation of CO2 enhanced coalbed methane recovery in Jharia coalfields, India. Energy 159, 1185–1194. https://doi.org/10.1016/j.energy.2018.06.104

Vishal, V., Ranjith, P.G., Pradhan, S.P., Singh, T.N., 2013a. Permeability of sub-critical carbon dioxide in naturally fractured Indian bituminous coal at a range of down-hole stress conditions. Eng. Geol. 167, 148–156. https://doi.org/10.1016/J.ENGGEO.2013.10.007

Vishal, V., Ranjith, P.G., Singh, T.N., 2015a. An experimental investigation on behaviour of coal under fluid saturation, using acoustic emission. J. Nat. Gas Sci. Eng. 22, 428–436. https://doi.org/10.1016/j.jngse.2014.12.020

Vishal, V., Ranjith, P.G., Singh, T.N., 2013b. CO2 permeability of Indian bituminous coals: Implications for carbon sequestration. Int. J. Coal Geol. 105, 36–47. https://doi.org/10.1016/j.coal.2012.11.003

Vishal, V., Singh, L., Pradhan, S.P., Singh, T.N., Ranjith, P.G., 2013c. Numerical modeling of Gondwana coal seams in India as coalbed methane reservoirs substituted for carbon dioxide sequestration. Energy 49, 384–394. https://doi.org/10.1016/j.energy.2012.09.045

Vishal, V., Singh, T.N., 2016. Geologic carbon sequestration: Understanding reservoir behavior. Geol. Carbon Sequestration Underst. Reserv. Behav. 1–338. https://doi.org/10.1007/978-3-319-27019-7/COVER

Vishal, V., Singh, T.N., 2015. A Laboratory Investigation of Permeability of Coal to Supercritical CO2. Geotech. Geol. Eng. 33, 1009–1016. https://doi.org/10.1007/S10706-015-9882-8/FIGURES/8

Vishal, V., Singh, T.N., Ranjith, P.G., 2015b. Influence of sorption time in CO2-ECBM process in Indian coals using coupled numerical simulation. Fuel 139, 51–58. https://doi.org/10.1016/j.fuel.2014.08.009

Vishal, V., Verma, Y., Chandra, D., Ashok, D., 2021b. A systematic capacity assessment and classification of geologic CO2 storage systems in India. Int. J. Greenh. Gas Control 111, 103458. https://doi.org/10.1016/J.IJGGC.2021.103458

Vishwanathan, S.S., Garg, A., 2020. Energy system transformation to meet NDC, 2 °C, and well below 2 °C targets for India. Clim. Change. https://doi.org/10.1007/s10584-019-02616-1

Vishwanathan, S.S., Garg, A., Tiwari, V., Kapshe, M., Nag, T., 2021. SDG implications of water-energy system transitions in India, for NDC, 2 °c, and well below 2 °c scenarios. Environ. Res. Lett. 16. https://doi.org/10.1088/1748-9326/ac08bf

WRI, 2021. Global Power Plant Database - Datasets - Data | World Resources Institute [WWW Document]. URL https://datasets.wri.org/dataset/globalpowerplantdatabase (accessed 2.16.22).

Yadav, D., Chandel, M.K., Kumar, P., 2016. Suitability of CO2 capture technologies for carbon capture and storage in India. Greenh. Gases Sci. Technol. 6, 519–530. https://doi.org/10.1002/GHG.1579

Yao, Y., Marano, J., Morrow, W.R., Masanet, E., 2018. Quantifying carbon capture potential and cost of carbon capture technology application in the U.S. refining industry. Int. J. Greenh. Gas Control. https://doi.org/10.1016/j.ijggc.2018.04.020