

Agent-Based Modelling and Simulation of Trajectory Based Operations under Very High Traffic Demand

Blom, Henk; Bakker, GJ

Publication date

2016

Document Version

Final published version

Published in

Proceedings of the 6th SESAR Innovation Days

Citation (APA)

Blom, H., & Bakker, GJ. (2016). Agent-Based Modelling and Simulation of Trajectory Based Operations under Very High Traffic Demand. In *Proceedings of the 6th SESAR Innovation Days: Delft, The Netherlands*

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Agent-Based Modelling and Simulation of Trajectory Based Operations under Very High Traffic Demand

Henk A.P. Blom
National Aerospace Laboratory NLR &
Delft University of Technology
blom@nlr.nl

G.J. (Bert) Bakker
National Aerospace Laboratory NLR
Amsterdam, The Netherlands
bakker@nlr.nl

Abstract—Thanks to decades of evolutionary development, within conventional air traffic control the collaboration between the planning controller and the tactical controller has been optimized. Under the forthcoming paradigm shift to Trajectory Based Operations (TBO), there is need for a novel optimization of the collaboration of these two layers. Through agent-based modelling and simulation the authors have recently shown that these two layers can collaborate remarkably well under very high en-route traffic demand. Because this finding applied to a pure airborne self separation TBO concept, the EMERGIA project has applied agent-based modelling and simulation to ground-based versions of this remarkably well performing pure airborne TBO design. The aim of this paper is to present the main EMERGIA results and key findings. One key finding is that through an effective collaboration between TBO and tactical layers ground-based TBO has the potential to safely accommodate high en route traffic demands. The other key finding is that a pure airborne TBO has remarkable advantages over a pure ground-based TBO.

Keywords: *Air Traffic Management; Monte Carlo; rare events; safety risk assessment; Trajectory Based Operation, 4D trajectories*

I. INTRODUCTION

SESAR's concept of operations beyond 2020 (SESAR2020+) involves a series of changes relative to conventional Air Traffic Management (ATM) [1,2]. Central to these changes is Trajectory Based Operations (TBO), that stands for the paradigm shift that aircraft should fly according to agreed conflict-free four dimensional (4D) trajectory plans which are made known to all actors involved as Reference Business Trajectories (RBT's). A big unknown in this paradigm shift is how everything works under various kinds of uncertainty, as a result of which one or more aircraft may not realize their RBT's. There are several categories of uncertainty (including unexpected disturbances) that cannot be totally avoided, such as: meteorological uncertainties; data related uncertainties; human related uncertainties; and technical systems related uncertainties.

In principle the SESAR2020+ ConOps has been designed to take care of these kinds of uncertainty through the possibility of revising 4D trajectory plans, and also to allow air traffic control to issue tactical flight instructions to pilots if

the 4D planning in the TBO layer has run out of time. Although these tactical instructions are quite similar to the established way of working by an air traffic controller, there also are significant differences. For example, under SESAR2020+ an air traffic controller is also expected to handle significantly more aircraft in its sector. Therefore the SESAR2020+ ConOps also foresees dedicated tactical decision support tools for air traffic controllers. The key issue is how to optimize the socio-technical collaboration between the TBO layer and the tactical layer in order to manage air traffic most effectively while taking into account the various uncertainties.

In conventional ATM, medium-term planning is provided by the planning controller, flight crews and their Flight Management Systems (FMS), whereas the tactical loop is formed by the tactical controller and flight crews. Thanks to decades of evolutionary developments, the collaboration between these two layers has been optimized. For SESAR2020+ a similar optimization of the novel TBO layer with the tactical layer is needed. Because the collaboration between these layers involves dynamic interactions between human decision makers, technical support systems, aircraft evolution, weather and other uncertainties, the combined effects result in types of emergent behaviours that cannot be predicted from the sum of the elemental behaviours.

In [3-5], agent-based modelling and rare event simulation techniques have been used to evaluate an advanced airborne self-separation ConOps under very high en route traffic demand. This ConOps, shortly referred to as A3 ConOps, also makes use of a TBO layer and a tactical layer, though both are fully airborne. The key finding is that the TBO and tactical layers in this A3 ConOps work so well together that this leads to remarkably positive emergent behaviours, that go beyond expectations of the A3 concept developers. The three positive emergent behaviours that have been identified for this A3 ConOps are: 1) Tactical conflict resolution layer is working so well in combination with a TBO medium term resolution layer that the A3 ConOps can safely accommodate very high en-

route traffic demand; 2) To realize this high safety level, there is no need to use a buffer between TBO resolution minimum and separation minimum; and 3) Even under increase of en-route traffic demands to extremely high demand, there are no phase transitions happening. These three emergent properties go beyond the prior expectations of the A3 design team.

A very interesting follow-up question is whether A3's remarkably positive emergent behaviours can also be realized by a ground-based TBO concept. This follow-up question has been studied in the SESAR research project EMERGIA [6,7]. During the first phase of EMERGIA, agent-based modelling and rare-event simulation has been conducted for a ground-based version of A3, shortly referred to as A3G. In this A3G ConOps the sub-systems of the TBO and tactical layers in the A3 ConOps have been moved from the air to the ground, and also the tactical and planning controllers have been inserted in the loop. During the development of this A3G ConOps some decisions had to be made regarding the specific procedures to be followed by the tactical and planning controllers. In order to anticipate a large increase of traffic demand, it was decided to use datalink and to replace the current practice of the tactical controller awaiting positive read-back by the pilots by a ground system based verification of FMS downlinked information. The rare-event simulation results obtained for an A3G model [8,9] clearly showed that A3G performs far less than A3. Subsequently, an independent design team has used the A3G simulation findings as triggering points for the development of significantly improved A3G (iA3G) ConOps [10].

The aim of this paper is to report about the results obtained during the evaluation and A3 comparison of this iA3G ConOps under very high en route traffic demand. This paper is organized as follows. Section II reviews the A3 ConOps. Section III describes the iA3G ConOps improvements. Section IV presents the iA3G agent-based model. Section V presents iA3G simulation results for an 8 a/c encounter scenario. Section VI presents iA3G simulation results for very dense random traffic. Section VII draws conclusions.

II. A3 CONOPS

A. A3 overview

In [11], NASA's DAG-TM ConOps [12]¹ has been used as starting point for the development of an airborne self separation TBO ConOps for en route traffic, under the name A3 ConOps. This A3 ConOps intentionally addresses the hypothetical situation of 100% well-equipped aircraft, and it assumes no support at all from air traffic control on the ground. A3's Operational Services and Environmental

¹ NASA's DAG-TM ConOps has more recently been described in [13].

Description (OSED) is in [14]. Here we give a high level description of the A3 ConOps only.

Similar to the SESAR2020 ConOps [1,2], the A3 ConOps adopts TBO in the sense that each aircraft maintains an RBT (4D trajectory plan) that is shared with all other aircraft. In contrast to SESAR2020, however, RBT management in the A3 ConOps is done by each aircraft without any support from air traffic control on the ground. Each aircraft is assumed to be equipped with the same dedicated Airborne Separation Assistance System (ASAS) which is monitoring the surroundings and helps the flight crew to detect and resolve conflicts. Similar to NASA's DAG-TM ConOps [12], A3 uses two layers in the detection and resolution of potential conflicts: the TBO layer and the tactical layer. The TBO layer takes care of making updates of the RBT in case of a medium term conflict, whereas the tactical layer takes care of resolving short term conflicts. A3's ASAS therefore consists of two sub-systems: a Medium Term Conflict (detection and) Resolution (MTCR) system, and a Short Term Conflict (detection and) Resolution (STCR) system, that support the TBO layer and tactical layer respectively.

Both MTCR and STCR support systems are using Velocity Obstacle (VO), or Collision Cone, based conflict resolution [15,16]. In the A3 ConOps, VO based conflict resolution is used to generate horizontal course changing maneuvers only (i.e. no changes in height and neither in airspeed). VO-based conflict resolution uses implicit coordination in the sense that an aircraft stays away from the set of courses and velocities that lead to a predicted conflict with a VO of any other aircraft. In the literature, VO based conflict resolution is commonly applied in a tactical layer only, e.g. [17]. Hence, the application of VO-based conflict resolution not only in tactical layer but also in the TBO-layer of A3 is a significant development.

B. VO approach in A3's MTCR support system

MTCR uses VO's to identify ownship 4D trajectories which are free of planning conflict with the RBT's of higher priority aircraft over a time horizon of at least 15 minutes, such that centerlines stay 5Nm or 1000 ft. apart. When a medium term conflict with an RBT of another aircraft is detected, then the aircraft having lowest priority has to resolve the medium term conflict. An aircraft with a shorter remaining distance to destination has a higher priority, and therefore may stick to its RBT; lower priority aircraft should adapt their RBT in order to resolve the conflict as well as not creating a conflict with an RBT of any of the other aircraft that have higher priorities. MTCR detects planning conflicts (5Nm/1000ft) 10 min. ahead. An aircraft with lower priority has to make its 4D plan free of planning conflicts over a horizon of 15 min (i.e. 5 minutes more than the detection horizon) with all other plans. For each aircraft, the MTCR is doing so by determining an RBT advisory that consists of a sequence of Trajectory Change Points (TCPs) with minimum turning angle (to the left

or to the right) within the MTCR horizon. Upon acceptance by the flight crew, the 4D plan is entered into the FMS, and it is broadcasted as the new RBT.

A complementary feature of MTCR is that in the rare case that no feasible conflict free plan has been identified, then rather than doing nothing, MTCR will identify a plan that may have a TCP that creates a minimal undershooting of the 5Nm/1000ft criterion. In case of such undershooting, MTCR will flag then the 4D plan with a handicap flag. This handicap flag means that the priority of the handicapped aircraft is increased at the cost of a reduced priority for the other aircraft. Hence upon reception by other aircraft of an RBT with such handicap flag, these other aircraft become aware that they have now a lower priority than the handicapped aircraft, and therefore they become active in resolving conflicts that remain in the rare case of undershooting.

C. VO approach in A3's STCR support system

If a short term conflict is detected its resolution through RBT updating would take too much time. Hence a faster tactical resolution process is necessary, and STCR provides this tactical support. To start with, STCR detects potential infringements of its own aircraft RBT (4D plan) with the RBT's and maneuver info received from all other aircraft. This is done over a time horizon of 3 minutes, using 5 Nm/900 ft separation criteria. In contrast to MTCR, no conflict resolution priority rules apply for STCR, and a tactical conflict resolution is open loop, i.e. it does not include back-to-goal maneuvers. Upon detection of a conflict, an aircraft's STCR determines a course change that is conflict-free with VO's of other aircraft over a period of 4 minutes (i.e. 1 minute more than the detection horizon). The proposed tactical resolution is shown to the Pilot Flying (PF). The PF verifies the proposed resolution, and may reject or accept it. If accepted, the PF will implement the tactical resolution by switching the aircraft from Flight Management System (FMS) mode to manual (tactical Auto Pilot / Flight Director) mode and subsequently implementing the given course change. In parallel, ADS-B broadcasts the tactical course change to the other aircraft.

STCR also has an undershooting option in the rare case that no conflict-free course change has been found. If no such turning angle is possible below a certain value (e.g. 60 degrees) a turning angle that provides the lowest undershooting of the minimum separation criteria is identified. This implies that neighboring aircraft will help in resolving remaining short term conflict(s).

III. A3G AND IMPROVED A3G (IA3G)

A. From A3 to iA3G

Whereas under the A3 ConOps the responsibility for managing separation was completely moved to the air, under the A3G ConOps this responsibility is moved back to the ground. Hence under A3G the 4D trajectory plans and tactical resolutions are provided by Air Traffic Control (ATC).

Because the MTCR and STCR support systems have proven to work so well for A3, both are moved for each aircraft from the air to the ATC center on the ground to get A3G. In A3G, both MTCRs and STCRs form now support systems for ATC rather than for flight crews. In addition to this, in the A3G ConOps the ATC system will maintain a database containing all currently active RBTs.

Upon acceptance of a new MTCR resolution proposal by the controller, it is uplinked to the appropriate aircraft and evaluated by the flight crew. Upon acceptance by the flight crew a 4D trajectory plan is entered into the FMS and downlinked to the ATC system as the aircraft's new RBT. In the ATC system this downlinked RBT is then stored in the database of currently active RBTs. Similarly, STCR proposes candidate tactical resolution maneuvers to the controller for each of the aircraft involved. The controller selects one of these tactical resolution maneuvers and subsequently instructs the corresponding flight crew to implement this maneuver. This tactical maneuver instruction is then also inserted in the ATC database as a correction to the corresponding RBT.

An agent-based model of this A3G ConOps has been evaluated in [8,9]; the simulation results obtained clearly showed that A3G performance was far away from A3 performance. Hence, an independent design team has used the A3G simulation findings as triggering points for the development of a significantly improved A3G (iA3G) ConOps [10].

B. TBO layer of iA3G

Three improvements of the iA3G ConOps over the A3G ConOps concern the TBO layer:

1. Re-introducing a spacing buffer between the minimum distance between 4D plans and the horizontal separation minimum of 5 Nm;
2. Prior to involving the air traffic controller (ATCo) and pilots, the ATC system completes the iteration of MTCR's for all aircraft involved;
3. Uplinking of resolution instructions is done according to a time-to-conflict prioritization criterion rather than A3G's First-In-First-Out principle.

Improvement 1 means for the MTCR algorithm that planning conflict buffers are added to the corresponding minimum separation values. The right size of these planning conflict buffers will be evaluated through running Monte Carlo simulations with a model of iA3G. The third improvement simply means that the most urgent resolution instructions are not delayed by less urgent resolution instructions.

The second improvement is expected to have the largest impact on the RBT updating. Under the A3G ConOps, each time that the ATC system computes a new medium term conflict resolution for one of the aircraft, this activates ATCo and flight crew, and may cause new medium term conflicts for other aircraft. These new conflicts subsequently trigger the

ATC system to compute new 4D plans for each of these other aircraft, followed by activities by additional flight crew. In order to avoid that ATCo and pilots are involved in each step of this iteration, the [10] proposed improvement is to iteratively mimic all these activities within the ground based ATC system before sending any newly proposed 4D plan to an ATCo or a crew. In the iA3G ConOps this mimicking is done by a MTCR internal iteration system (MTCR-IIS). The resulting information flow in the TBO layer of iA3G is presented in Figure 1.

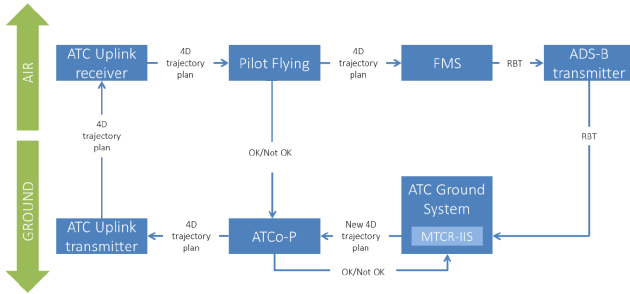


Figure 1. 4D trajectory plan information flow in TBO layer of iA3G ConOps; MTCR-IIS makes part of ATC ground system.

The information flow in Figure 1 works as follows. If ATCo-P accepts the MTCR-IIS proposed 4D plan(s), then these 4D plans are sent (uplinked) to the a/c, and they overwrite the current 4D plans in the data base of the ATC ground system. This assures that there is maximal one version of the 4D plan for each aircraft in this data base.

Upon receiving the uplinked 4D plan, the crew puts it into the FMS and the a/c downlinks the FMS Intent to ATC. Note that due to various kind of hazards [18] the 4D plan sent by the a/c may differ from the uplinked 4D plan received. Each time the ATC ground system receives an RBT, this RBT is compared with the 4D plan in the data base of the ATC ground system, and the latter is overwritten with the received RBT in case of a difference, and MTCR and ATCo are informed about this.

C. Tactical layer of iA3G

Regarding the tactical layer, there are five improvements of the iA3G ConOps over the A3G ConOps:

1. The tactical ATCo is no longer in the direct loop of approving a tactical resolution proposal, as a result of which a tactical resolution by the ATC system is directly uplinked to the pilot;
2. Preventing that a tactical conflict resolution is opposite to a preceding tactical conflict resolution;
3. Short term conflict resolution algorithm on the ground will anticipate that the implementation of such tactical resolution will happen with some non-deterministic delay;
4. Uplinking of short term resolutions is done with higher priority than medium term resolutions, and according

to a time-to-conflict prioritization criterion rather than A3G's First-In-First-Out principle;

5. Prior to uplinking a tactical resolution, the ATC system completes the iteration of STCR's for all aircraft involved.

Improvement 1 means that aircraft crew are the only human that remain directly in the tactical conflict resolution loop, just as it is under A3. Improvements 2-3 mean that the STCR algorithm takes both the previously issued instruction as well as the implementation delays into account. Improvement 4 assures that an urgent tactical resolution gets priority in uplinking over less urgent and 4D plan updates.

Improvement 5 has the largest impact on tactical conflict resolution. Under the A3G ConOps, each time that the ATC system has computed a new short term conflict resolution for one of the aircraft, this activates ATCo and flight crews and may cause new short term conflicts for other aircraft, which subsequently trigger the ATC ground system to compute new tactical resolutions for each of these other aircraft. These new tactical resolutions subsequently may trigger activities by other flight crews, etc. This iterative way of working also applied to the A3 ConOps, though then without any involvement of ATC. In order to get closer to A3, the improvement proposed for iA3G is to mimic all these ATCo and flight crew activities prior to involving any ATCo or pilot in this tactical resolution process. For the iA3G ConOps this implied that the ATC ground system has an STCR internal iteration system (STCR-IIS) that mimics this behaviour. The resulting information flow in the tactical layer of iA3G is presented in Figure 2.

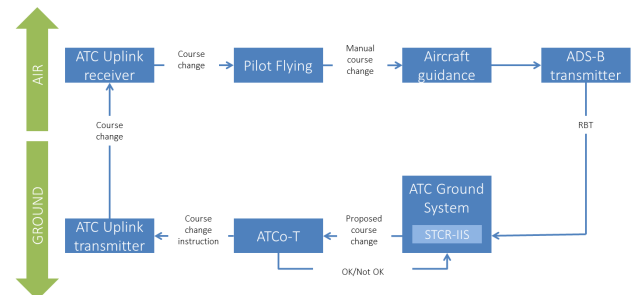


Figure 2. Information flow in the tactical layer of iA3G ConOps; STCR-IIS makes part of the ATC ground system.

The information flow in Figure 2 works as follows. Upon receiving STCR-IIS proposed new aircraft courses, the tactical ATCo (ATCo-T) accepts them all by default. Hence, the proposed courses are sent (uplinked) to the a/c and the 4D plans in the data base of the ATC ground system are overwritten accordingly, to assure that at most one version of the 4D plan exists for each aircraft in this data base. Upon receiving the uplinked course, the crew changes the aircraft course through Manual Mode control. Once this has been done, an RBT is constructed by the FMS and sent to the ground. Each time the ATC system receives a 4D plan, then this is compared with the 4D plan in the data base of the ATC ground system and overwritten if it differs. In the latter case, the ATC ground system notifies MTCR and the ATCo.

IV. AGENT-BASED MODEL OF IA3G

This section provides a high level explanation of the agent-based model of the iA3G ConOps. First, the main iA3G model assumptions are listed. Next, an overview of the agents in the iA3G model is given. Further details of this agent-based model are available in [19].

A. *iA³G model assumptions*

In developing the iA3G model, the following model assumptions have been adopted:

- A0.** R/T communication between ATCo and pilots is not used.
 - A1.** All aircraft are identical and fly at the same altitude with the same speed.
 - A2.** No emergency situations are modelled.
 - A3.** No Secondary Surveillance Radar (SSR) data is assumed to be available to ATC.
 - A4.** A 4D plan in the ATC system is considered to be unreliable if no timely ADS-B message about the corresponding RBT is received.
 - A5.** No ground based navigation support is available, i.e. navigation is based on Global Navigation Satellite System (GNSS) and Inertial Reference System (IRS) only.
 - A6.** ATCo-P always accepts an MTCR-IIS proposed 4D plan.
 - A7.** The ATCo-T always accepts and does not overrule the STCR-IIS proposed tactical changes..
 - A8.** The Pilots always accept the proposed 4D plans and tactical changes.
 - A9.** The Pilot always enters the received 4D plans and tactical changes correctly in the FMS
 - A10.** Datalink information exchange (ADS-B and ATC-uplinking) happens without corruption.
- The consequences of these iA3G model assumptions will later be taken into account when arguing about the parameter values used in the iA3G simulation results obtained.

B. *Agents in the iA³G model*

The agents in the iA3G model are:

- Aircraft-*i*, one for each aircraft *i*.
- Pilot-Flying-*i*,
- Pilot-Not-Flying-*i*,
- a/c-*i*'s Guidance, Navigation and Control (GNC),
- ATC ground system,
- MTCR-IIS within ATC ground system
- STCR-IIS within ATC ground system
- Air Traffic Controller (ATCo),
- Global Communication, Navigation & Surveillance.

For the specification of each agent and their interactions the formalism of Stochastically and Dynamically Coloured Petri Net (SDCPN) is used [20]. This formalism supports a compositional specification approach, which means that for each agent local Petri nets (LPN's) can be developed, using specific expert knowledge, without the need to bother about the connections between agents. Once the LPN's have been specified, the interactions between these LPN's are being developed; first for LPN's within an agent, and then between different agents. Further iA3G model details are in [19].

The resulting iA3G model comprises 63 different LPN's. With the exception of 12 LPNs in the ATC Ground system, 2 LPNs for the ATCo's, and 3 LPNs in the Global CNS, each LPN is copied for each aircraft in the model. Hence, for *N* aircraft, the iA3G model comprises $46N+17$ LPNs.

C. *Implementation and verification of the iA³G code*

The iA3G model has subsequently been implemented in Delphi XE3, i.e. the same language as used for the A3 and A3G model implementations. This allowed developing the iA3G model code in a stepwise way from the A3G code. After each of these steps, dedicated verification tests have been conducted to compare the new results with those obtained by the A3 model:

Step 1: Replace MTCR entities by MTCR-IIS agent

Step 1 has been realized by a systematic implementation, replacement and testing of the MTCR-IIS agent. This addresses TBO layer improvements 1 and 2.

Step 2: Replace STCR entities by STCR-IIS agent

Step 2 has been realized by a systematic implementation, replacement and testing of the STCR-IIS agent. This addresses tactical layer improvements 1-3 and 5.

Step 3: Implement a prioritization of uplink instructions

In step 3, the first-in-first-out uplinking principle is replaced by a prioritization based on time remaining to resolve the conflict. This addresses TBO layer improvement 3 and tactical layer improvement 4.

Step 4: Rare event verification of iA3G code

The verification tests conducted in steps 1-3 run a limited number of simulations of the implemented code. Hence, positive outcomes of these tests do neither catch code errors that have rare event impact only, nor differences in rare emergent behaviour of the iA3G model. In order to get hold on both, rare event MC simulations have been conducted for eight aircraft encounters. This has been done as part of the rare event simulations described in the next sections. Code errors identified have been corrected. Other rare event differences have been resolved by tuning iA3G model parameter values.

V. RARE EVENT SIMULATION OF 8 A/C ENCOUNTERS

This section addresses rare event simulation based tuning of iA3G model parameters, and what this means in terms of safety requirements, taking into account model assumptions.

A. *iA3G model parameter tuning on 8 a/c encounter scenario*

The iA3G simulation model has a total of 164 scalar parameters, the tuning of which has been done in [19] by conducting rare event Monte Carlo (MC) simulations of an eight-aircraft encounter scenario also used for A3 [3-5]. Initially, all iA3G model parameters were set at reference values such that the iA3G model performed better or equal than the A3 model. Subsequently the iA3G parameters have systematically been tested on the possibility to relax their values. Each such test required conducting another rare event MC simulation of the iA3G model on the eight-aircraft scenario. This resulted into the set of iA3G parameter baseline values, of which the main ones (P0-P9) are listed in Table 1.

TABLE I. IA3G MODEL PARAMETER BASELINE VALUES

P#	Key model parameter	Baseline
P0	ANP / Separation / Resolution <i>minima</i>	1/5/6 Nm
P1	GNSS receiver <i>failure prob.</i>	1.0E-7
P2	ADS-B transmitter <i>failure prob.</i>	1.0E-8
P3	ATC Ground system <i>failure prob.</i>	1.0E-7
P4	ADS-B ground receiver <i>failure prob.</i>	1.0E-7
P5	Uplink or ADS-B <i>frequencies occupied</i>	1.0E-7
P6	ATCo-T maximum <i>response time</i>	1 s
P7	ATCo-P maximum <i>response time</i>	30 s
P8	ATC uplink transmitter <i>sending duration</i>	1 s
P9	Pilot mean <i>response time</i>	5.7 s

The simulation results of the 8 a/c encounter scenario for iA3G with these baseline values are shown in Figure 3, together with the A3 curve for the same 8 a/c encounter scenario [5].

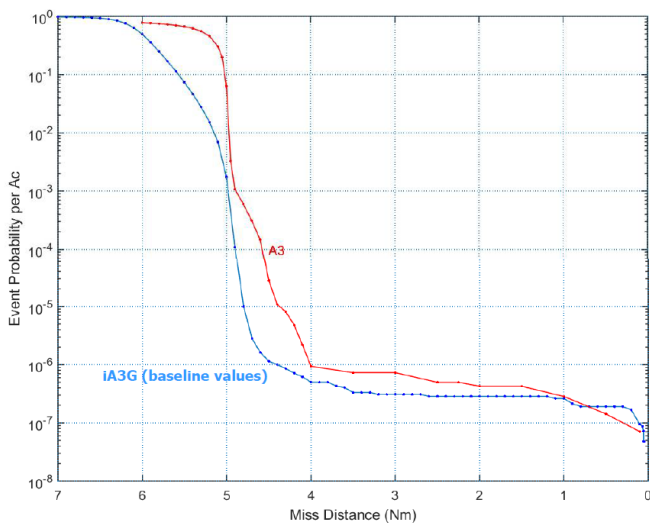


Figure 3. Estimated miss event probability per aircraft in the 8-a/c encounter scenario, as function of horizontal miss distance for the iA3G model vs. the A3 model; both using their baseline values.

In Figure 3, the iA3G curve is slightly better than the A3 curve. Firstly, the iA3G curve starts diving slightly earlier but less steep due to larger resolution distance (6 Nm vs. 5 Nm). Secondly, just beyond the 5 Nm miss distance, the iA3G curve makes a steeper dive than the A3 curve does; this reflects that iA3G's does not actively involve any pilot in iterations needed for identifying joint tactical resolutions. Thirdly, both the iA3G and A3 curves level off at levels that are largely defined by the baseline values used for P1-P5 in their simulations.

B. Discussion of iA3G model baseline values

Although the curves for A3 and for iA3G in Figure 3 level-off at similar values, there are significant differences in the way this is realized. Under A3, there still are ground systems, such as ground-based navigation and communication support, but no ATC system. This is reflected in the requirements to be posed on the iA3G parameter baseline values identified. The P0 parameter values affect the behaviour in the top of the curves in Figure 3 only. The P1 value (airborne GNSS

receiver failure) is high due to model assumption A5 (no other navigation means than GNSS). However, in reality this P1 requirement in Table 2 can be realized through a combination of navigation means (both under A3 and iA3G). P2-P5 requirements are challenging; this is explained next. P6 is no problem because the ATCo-T is assumed not to be in the direct loop under iA3G. P7 is a typical requirement. For P8 exists a similar type of requirement under A3, in the sense that under A3 it is assumed that RBT's received by the ground are without delay transferred to other aircraft using SWIM. The P9 value is the same in A3.

Under iA3G, the baseline values for P2-P5 are much more demanding than they are for related parameters under A3. This is due to the distributed nature of conflict resolution of A3. If under A3, the airborne ADS-B transmitter (P2) of aircraft-i fails than other aircraft-k are unable to receive state and intent information about aircraft-i. Without state and intent information from aircraft i, aircraft-k can neither detect nor resolve a conflict with aircraft i and thus does nothing. Because in the A3 model aircraft-i still receives state and intent information of aircraft-k, aircraft-i can and will resolve this conflict. In the iA3G model, however, separation is controlled from the ground. If the ADS-B transmitter of aircraft-i fails, then ATC ground system doesn't receive the state and intent information of aircraft-i. Hence no resolution with aircraft-k is possible. Similar reasoning applies to parameters of type P3-P5. So thanks to the A3's distributed nature of conflict detection and resolution, the safety requirement to be posed on parameters of type P2-P5 are orders of magnitude lower under A3 than it is under iA3G.

VI. SIMULATION OF VERY DENSE RANDOM TRAFFIC

In this section, rare event MC simulations of the iA3G model are conducted for very dense random en-route traffic scenarios at a single flight level.

A. Very dense random traffic scenario

The random traffic scenario simulates aircraft flying randomly through a virtually unlimited airspace. In order to accomplish this, the airspace is packed with rectangular boxes. Within each box a fixed number of eight aircraft ($i = 1, 2, \dots, 8$) fly at arbitrary position and in arbitrary direction at a ground speed of 250 m/s. Per box, the aircraft within it behave the same, and for aircraft that pass the boundary of a box a Periodic Boundary Condition (PBC) applies, e.g. [21]. This means that we have to simulate all aircraft in one box only, though apply the ASAS conflict prediction and resolution also relative to aircraft copies in neighboring boxes. By changing the box size we can vary traffic density. In order to avoid that an aircraft experiences a conflict with its own copy in a neighboring box, a box should not become too small. Similarly as was done for the evaluation of the A3 model [3-5], all aircraft are assumed to remain at a fixed flight level. This means we can work with a PBC box of 1000ft high. In order to simulate an aircraft density which is about 3 times the traffic density in one of the busiest en route sectors over Europe in 2005, we set the horizontal size of the PBC box to

62 Nm by 62 Nm, and simulate 8 aircraft per container. This comes down to an aircraft density of 20.8 aircraft per flight level and per square area of 100Nm by 100Nm, which is 12.8x the aircraft density in the example of [22], 1.5x the maximum density considered in [23], and similar to the maximum density considered in [24].

While the accuracy of wind forecasts has improved in recent years, it is known that occasional large errors can occur, which are known to significantly affect the performance of trajectory prediction tools [25]; which requires a testing of a ConOps on short term systematic wind prediction errors up to 60 knots or 30 m/s [24]. In the very dense random traffic scenario this is accomplished by simulation of systematic wind prediction errors of 0 m/s, 10 m/s, 20 m/s and 30 m/s respectively.

B. A3 dense random traffic simulation results

Figure 4 presents the risk curves obtained by running rare event MC simulations with the A3 model on the very busy random traffic scenario described above, under systematic wind prediction errors of 10 m/s, 20 m/s and 30 m/s. Even for a systematic wind prediction error of 30 m/s (60 knots) the curve remains well away from the reference bracket that indicates underscoring of 66% of the minimum separation value of 5Nm in current ATM. A systematic wind prediction error of 60 knots eats away about 1Nm separation buffer at the 10^{-5} event probability level. This is much less than the 3Nm reported in [24] for the strategic conflict resolution layer only. Moreover, Figure 4 shows that this 1Nm loss stays very well within the current bracket (I) at 66% of minimum separation. This means that A3 is able to safely resolve the significant wind induced deviations from 4D trajectory intents (RBT's).

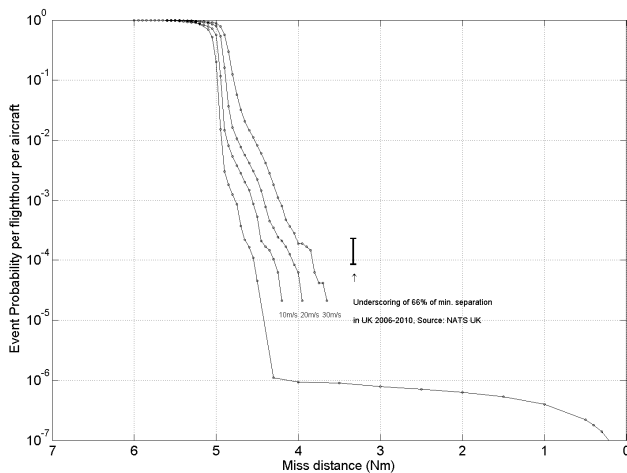


Figure 4. A3 model effect of systematic wind field prediction errors of 0, 10, 20 and 30 m/s. Figure 4 shows that even for a systematic wind field prediction error of 30 m/s the A3 model curve remains well away from the reference bracket I that indicates underscoring of 66% of the minimum separation value of 5Nm in current ATM. Source [5].

These very good results obtained under systematic wind prediction errors, mean that A3's STCR layer is very effective

in resolving tactical conflicts. Hence the question is whether this power of A3's STCR in the tactical layer is so good that there even is no need for MTCR in the TBO layer. In order to test this, [5] shows additional rare event MC simulation results for a crippled A3 version where the broadcasting of 4D intents is simply blocked, which reduces the effectiveness in conflict-free 4D planning by MTCR in the TBO layer. The rare event MC simulation results for this crippled A3 version showed that about once in each 10 flight hours the sharp edge in Figure 4 then changes into a very heavy tailed curve [5]. This is a clear demonstration that without the TBO layer, VO-based STCR in the tactical layer alone is not able to safely handle very high traffic demand. A similar finding regarding the shortcomings of a VO-based STCR in the tactical layer alone has recently been shown by [17].

C. Initial iA3G random traffic simulation results

The initial iA3G model rare-event simulation results on the random traffic scenario suffered from two problems that were not seen in random traffic simulations of the A3 model. One problem originated from the way how initial aircraft positions were generated in the random traffic scenario. The second problem was traced back to an overly sensitivity of ground-based conformance monitoring of an observed aircraft path versus its 4D plan.

The first problem has been resolved by adding the following test in the generation of random traffic situations: if an initial aircraft position is closer than 5 NM to any of the neighbouring aircraft positions, then another random initial aircraft position is generated.

The second problem was resolved by adopting the following changes in the conformance monitoring in the MTCR-IIS of the iA3G model:

- Decoupling of position and speed conformance monitoring buffers into along and transversal directions;
- Increasing the conformance monitoring buffers for position and speed by a factor 3 in along direction only;
- Increasing the conformance monitoring buffers for speed deviations by an extra factor 1.5.

With these relative simple improvements, rare-event simulations of the iA3G model yields the curves in Figure 5 for 0m/s wind prediction error and 30 m/s wind prediction error respectively. Neither the 0 m/s curve nor the 30 m/s curve is as good as those obtained for the A3 model (see Figure 4). Only the initial parts of both curves are similar as those for the A3 model. However, below the level 10^{-3} , the 0 m/s curve has a tail which is unknown for the A3 model. The 30 m/s curve has a similar tail below the level 10^{-2} . Investigation of cases in the tail has revealed that these tails are typically caused by rare cases where the pilot delay happens to be much larger than a mean value of 5.7 s.

D. Final iA3G dense random traffic simulation results

In order to give the PF some more space and time for the implementation of tactical instructions, the following additional parameter value changes have been adopted:

- The value of the MTCR used horizontal separation minimum is increased from 5Nm to 6 Nm;
- The waiting time until a repeat of short term conflict detection is shortened from 15 s to 5 s;
- The maximal turn of an aircraft is reduced from 90 degrees to 30 degrees; and
- Time slacks in the ATC ground system are increased.

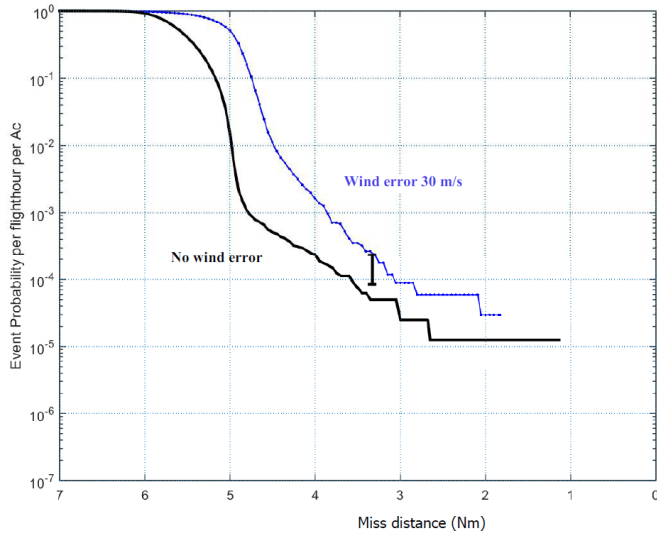


Figure 5: iA3G risk curves on random traffic of 3×2005 dense busy traffic. The 0 m/s and 30 m/s curves overlap with the reference bracket (I).

The resulting rare-event MC simulation results for the very dense random traffic scenario are given in Figure 6. Both the 0 m/s and the 30 m/s curves are significantly better than those in Figure 5, though not yet as good as those for A3 (Figure 4). Nevertheless, the 30 m/s curve stays now beyond the reference bracket (I). The main difference between iA3G results in Figure 6 and A3 results in Figure 4 is that below the $2 \cdot 10^{-5}$ level the iA3G curves tend to level off earlier than the A3 curves do.

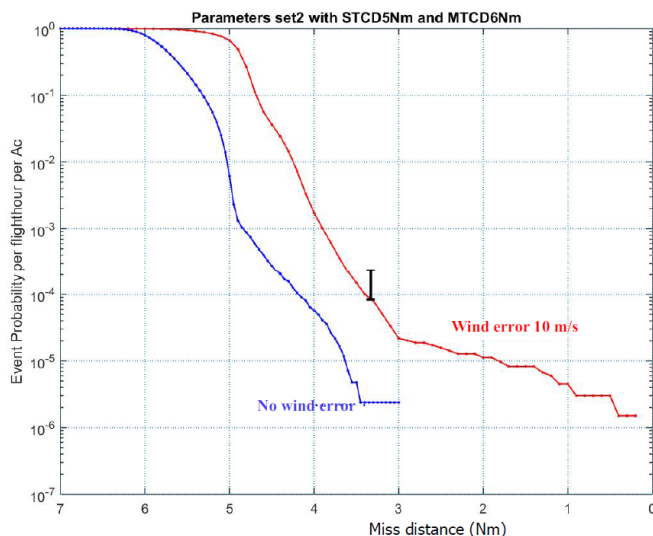


Figure 6: Further improved iA3G curves for 0 and 30 m/s wind prediction error.

Because the iA3G model requires far more computational power than the A3 model, there also is a difference in the statistical significance of the tails of the curves in Figures 4 and 6; those in Figure 6 are less reliable than those in Figure 4. In order to improve this, there is need for an order in magnitude extra acceleration in iA3G rare event MC simulation.

The very dense traffic scenarios have also been used to assess flight efficiency and air traffic controller workloads. For these results we refer to [26].

VII. CONCLUSIONS

A. EMERGIA main findings

The SESAR research project EMERGIA [6,7] addressed the question whether A3's powerful emergent behaviours can be maintained by ground-based TBO. The EMERGIA project has shown that the answer to this question is negative. This is due to various extra air-ground communication activities that cannot be avoided when adopting a centralized ground-based TBO ConOps instead of the distributed A3 ConOps. However, prior expectation was that the burden from these extra air-ground communication activities would be compensated in some way by an advantage of making use of a centralized joint conflict resolution capability. The EMERGIA project has shown that the latter advantage does not simply outweigh A3's advantage of distributed decision-making.

Complementary to this unexpectedly less positive finding for ground-based TBO, the EMERGIA project has also shown that in the large design space of future ATM, an advanced ground-based TBO ConOps, referred to as iA3G, has been identified for which it has been shown that it has the potential to safely accommodate higher en-route traffic demands than current ATM.

B. Future steps based on the outcomes of the project

Although the emergent behaviours of the iA3G model are not as positive as those of the A3 model, for very high en route traffic demands iA3G does not perform bad at all. Therefore the iA3G model can be used as a valuable reference point for the further research and development of the SESAR2020+ ConOps [2]. Important issues to be addressed are the differences between SESAR2020+ and iA3G, such as traffic demand, aircraft equipage percentage; time horizons of TBO and tactical layers; conflict resolution support to ATCo; conflict management architecture; closed-loop versus open-loop in tactical conflict resolution; and roles of ATCo's and pilots.

With the current iA3G model it is possible to investigate many of these differences by simply changing the model parameter values (e.g. traffic demand, time horizons). For some other differences (e.g. aircraft equipage percentage) it will be needed to also change the iA3G simulation model. Complementary to this, the further development of the iA3G model itself also is relevant, e.g. to incorporate climbing and descending traffic in the agent-based safety risk assessment. Another valuable research direction is to conduct bias and uncertainty analysis; this requires the development of a

significant extra factor in acceleration of the rare event MC simulations. A third direction of research is to evaluate operational concepts that are mixtures of ground-based and airborne self separation TBO.

VIII. DISCLAIMER

Opinions expressed in this work reflect the authors' view only and EUROCONTROL and/or the SJU shall not be considered liable for them or for any use that may be made of the information contained herein.

IX. REFERENCES

- [1] SESAR, "Concept of Operation, Sesar definition phase, Task 2.2.2, Milestone 3", Report DLT-0612-222-02-00, Version 2.0, October 2007.
- [2] SESAR-JU, Preliminary OSED_2, Final V2 OSED_1, November 2013.
- [3] H.A.P. Blom, G.J. Bakker, Safety of advanced airborne self separation under very high en-route traffic demand, Proc. SESAR Innovation Days, ENAC, Toulouse, 29 November-1 December 2011.
- [4] H.A.P. Blom & G.J. Bakker (2012). Can airborne self separation safely accommodate very high en-route traffic demand? 12th AIAA Aviation Technology, Integration, and Operations (ATIO) Conference. Indianapolis, Indiana: AIAA, Inc.
- [5] H.A.P. Blom, G. J. Bakker (JAIS2015), Safety Evaluation of Advanced Self-Separation Under Very High En Route Traffic Demand, Journal of Aerospace Information Systems, Vol. 12, No. 6 (2015), pp. 413-427. doi: 10.2514/1.1010243
- [6] EMERGIA (2013), Project plan, web site <http://emergia.nlr.nl>, 2013.
- [7] H.A.P. Blom, G.J. Bakker (2013). In search of positive emergent behaviour in Trajectory Based Operations. Proceedings of the Third SESAR Innovation days. Stockholm.
- [8] EMERGIA D2.2 (2014), Emergent behaviour of simulation model, EMERGIA report D2.2, December 2014.
- [9] H.A.P. Blom, G.J. Bakker, G. (ATIO2015). Can ground-based separation accommodate very high en route traffic demand as well as advanced self-separation? Proc. 12th AIAA Aviation Technology, Integration, and Operations (ATIO) Conference, Dallas, 22-26 June 2015, AIAA 2015-3180, pp. 1-15.
- [10] EMERGIA D3.1 (2015), Report on the proposed improvements of the A3G ConOps, EMERGIA report D3.1, March 2015.
- [11] G. Cuevas, I. Echegoyen, J. García, P. Cásek, C. Keinrath., F. Bussink, A. Luuk (2010), iFly Deliverable D1.3, Autonomous Aircraft Advanced (A3) ConOps, January 2010. Available on iFly website <http://ifly.nlr.nl/>
- [12] NASA (2004), "DAG-TM Concept element 5 en-route free maneuvering for user-preferred separation assurance and local TFM conformance operational concept description", NASA, Washington D.C., 2004.
- [13] D.J. Wing, W.B. Cotton, "For spacious skies: self-separation with "Autonomous Flight Rules" in US domestic airspace", Proc. 11th AIAA ATIO Conference 2011, Virginia Beach, VA, USA, September 2011.
- [14] E. Gelnarová, P. Cásek (2009), iFly report D9.1, "Operational Services and Environmental Description (OSED) of Airborne Self-Separation Procedure (SSEP)", August 2009.
- [15] P. Fiorini, Z. Schiller (1998), "Motion planning in dynamic environments using velocity obstacles", *The International Journal of Robotics Research*, Volume 17 (1998), pp. 760–772.
- [16] Y. Abe, M. Yoshiki (2001), "Collision avoidance method for multiple autonomous mobile agents by implicit cooperation", Proc. IEEE/RSJ Int. Conf. Intelligent Robots and Systems (IROS 01), pp. 1207–1212.
- [17] N. Durand, N. Barnier (2015), Does ATM need centralized coordination? Autonomous conflict resolution analysis in a constrained speed environment, Proc.11th USA/Europe ATM Seminar, Lisbon, 2015.
- [18] iFly report D7.1b (2009), Hazard Identification and Initial Hazard Analysis of A3 ConOps based operation, by H.A.P. Blom, G.J. Bakker, M.B. Klompstra and F.J.L. Bussink, 2009.
- [19] EMERGIA D4.1 (2016), Improved Simulation Model, EMERGIA report D4.1, April 2016.

- [20] M.H.C. Everdij, M.B. Klompstra, H.A.P. Blom, B. Klein Obbink (2006), Compositional specification of a multi-agent system by stochastically and dynamically coloured Petri nets, Eds: H.A.P. Blom, J. Lygeros (eds.), *Stochastic Hybrid Systems: Theory and safety critical applications*, Springer, 2006, pp. 325-350.
- [21] D.C. Rapaport, "The art of molecular dynamics simulation", Cambridge University Press, 2004
- [22] J.W. Andrews, H. Erzberger, J.D. Welch, "Safety analysis for advanced separation concepts", *Air Traffic Control Quarterly*, Vol. 14, 2006, pp. 5-24.
- [23] H.A.P. Blom, B. Klein Obbink, G.J. Bakker, "Simulated Safety Risk of an Uncoordinated Airborne Self Separation Concept of Operation", *Air Traffic Control Quarterly*, Volume 17 (2009) Number 1, pp. 63-93.
- [24] M. Consiglio, S. Hoadley and B.D. Allen, "Estimation of Separation Buffers for Wind-Prediction Error in an Airborne Separation Assistance System", Proc. 8th USA/Europe ATM Seminar, Nappa, CA, 2009.
- [25] M. Paglione, H. Ryan (2007), "Aircraft conflict probe sensitivity to weather forecast errors", Proc. 26th IEEE/AIAA Digital Avionics Systems Conference, 2007, pp. 3.D.1.1-10.
- [26] EMERGIA D4.2 (2016), Emergent behaviour of improved simulation model, EMERGIA report D4.2, June 2016.

ABBREVIATIONS

- 4D = Four dimensional
 A3 = Advanced airborne self-separation
 A3G = Ground-based version of A3
 a/c = aircraft
 ADS-B = Airborne Derived Surveillance – Broadcast
 ANP = Actual Navigation Performance
 ASAS = Airborne Separation Assistance System
 ATC = Air Traffic Control
 ATCo = Air Traffic Controller
 ATCo-P = ATCo-Planning
 ATCo-T = ATCo-Tactical
 ATM = Air Traffic Management
 ConOps = Concept of Operations
 FMS = Flight Management System
 ft = foot
 GNC = Guidance Navigation and Control
 GNSS = Global Navigation Satellite System
 iA3G = improved version of A3G
 IRS = Inertial Reference System
 LPN = Local Petri Net
 MC = Monte Carlo
 MTCR = Medium Term Conflict (detection and) Resolution
 MTCR-IIS = MTCR Internal Iteration System
 Nm = Nautical mile
 OSED = Operational Services and Environmental Description
 PBC = Periodic Boundary Condition
 PF = Pilot Flying
 RBT = Reference Business Trajectory
 SDCPN = Stochastically and Dynamically Coloured Petri Net
 SSR = Secondary Surveillance Radar
 STCR = Short Term Conflict (detection and) Resolution
 STCR-IIS = STCR Internal Iteration System
 SWIM = System Wide Information Management
 TBO = Trajectory Based Operations
 TCP = Trajectory Change Point
 VO = Velocity Obstacle