

Fabrication and performance verification of a 961 pixel Kinetic Inductance Detector system for future space borne observatories 9914-138

Baselmans, J.; Bueno, J.; Yurduseven, O.; Yates, S.; Llombart, N.; Murugesan, V.; Thoen, D.; Baryshev, A.; Endo, A.; Driessen, E.

Publication date

2018

Document Version

Final published version

Citation (APA)

Baselmans, J., Bueno, J., Yurduseven, O., Yates, S., Llombart, N., Murugesan, V., Thoen, D., Baryshev, A., Endo, A., Driessen, E., Neto, A., & More Authors (2018). *Fabrication and performance verification of a 961 pixel Kinetic Inductance Detector system for future space borne observatories 9914-138*. Poster session presented at SPIE Astronomical Telescopes and Instrumentation 2016, Edinburgh, United Kingdom.

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Green Open Access added to TU Delft Institutional Repository

'You share, we take care!' - Taverne project

<https://www.openaccess.nl/en/you-share-we-take-care>

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

PROCEEDINGS OF SPIE

[SPIDigitalLibrary.org/conference-proceedings-of-spie](https://spiedigitallibrary.org/conference-proceedings-of-spie)

Poster Previews for Conference 9914 Millimeter, Submillimeter, and Far- Infrared Detectors and Instrumentation for Astronomy VIII

, "Poster Previews for Conference 9914 Millimeter, Submillimeter, and Far-Infrared Detectors and Instrumentation for Astronomy VIII," Proc. SPIE 10015, Poster Previews: SPIE Astronomical Telescopes and Instrumentation 2016, 100150L (16 June 2016); doi: 10.1117/12.2248400

SPIE.

Event: SPIE Astronomical Telescopes + Instrumentation, 2016, Edinburgh, United Kingdom

Fabrication and performance verification of a 961 pixel Kinetic Inductance Detector system for future space borne observatories 9914-138

J. Baselmans^{1,2}, J. Bueno², O. Yurduseven², S. Yates¹, N. Lombart², V. Murugesan¹, D. Thoen², A. Baryshev^{1,3}, A. Endo^{2,4}, G. Coiffard⁵, E. Driessen⁵, A. Neto²
 1 SRON - Netherlands Institute for Space Research, Sorbonnelaan 2, 3584CA - Utrecht, The Netherlands
 2 Terahertz Sensing Group, Delft University of Technology, Melkweg 1, 2628CD - Delft, The Netherlands
 3 Kapteyn Astronomical Institute, University of Groningen, Landleven 12, 9747AD - Groningen, The Netherlands
 4 Kavli Institute of NanoScience, Delft University of Technology, Lorentzweg 1, 2628 CJ Delft, The Netherlands
 5 Institut de Radioastronomie Millimétrique IRAM, 300 rue de la Piscine, 38406 Saint Martin d'Hères, Grenoble, France

9914-138


Astronomical observations at infrared, sub-millimetre, and millimetre wavelengths are essential for addressing many of the key questions in astrophysics. Future ground- and space based observatories need large detector arrays with a sensitivity limited only by the noise of the radiation background. We demonstrate that antenna coupled Microwave Kinetic Inductance Detectors allow us to create kpixel large arrays with background limited sensitivity over the entire FIR/mm-wavelength range. We discuss in detail the readout system and experimental results of a 961 pixel array, optimised for 850 GHz radiation that is read out with a single readout chain.

The Microwave Kinetic Inductance Detector, MKID

A MKID is a superconducting resonance circuit that is constructed such that radiation is absorbed with high efficiency. This changes the complex surface impedance of the superconductor, modifying the resonance feature.


The devices we discuss are $\lambda/4$ CPW antenna coupled MKIDs¹

- The antenna properties determine the signal frequency.
- Each antenna is coupled to a lens. For large arrays we use flies eye lens arrays

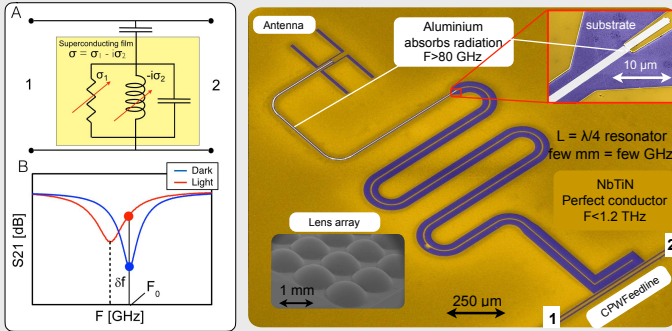

MKID arrays and readout


- Large arrays of MKIDs are made by changing the length (resonance/readout frequency) of the individual MKIDs while maintaining the same antenna geometry. Up to 2000 detector/GHz readout bandwidth are possible in principle
- The 'SpaceKIDS' readout system² can measure up to 4000 detectors simultaneously in a 2 GHz band centred around 5-7 GHz
- The devices are operated at 0.1K in a cryogenic test facility
- A single readout cable pair (2 coax cables) and a single cryogenic amplifier are needed to read out an array of up to 8000 pixels

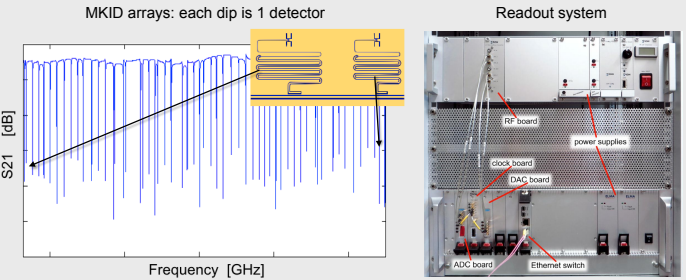

850 GHz demonstrator: a 961 pixel large imaging array read-out with 1 readout system

961 pixel array for 850 GHz radiation


- Sapphire C plane substrate: birefringent
- Metal layer thickness: 500 nm NbTiN, 40 nm Al
- 63 nm TiN mesh ($T_c \sim 0.8K$): stray light absorption
- Reducing cross talk³: $F_{KID} = F_{center} + \delta F_{res} \cdot M$
- $F_{center} = 4.5$ GHz, $\delta F_{res} = 1.67$ MHz

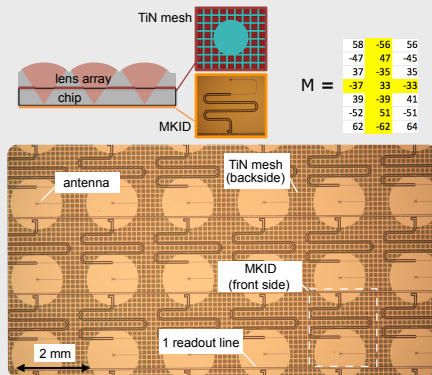

experimental system

- 100 mK test setup:
 - array in 100 mK cold box
 - central pixels coupled to 3-20 K thermal radiator
 - 3 filter stacks provide $\nu = 850 \pm 30$ GHz band
- Calculate power coupled to each detector: P_{calc}
 - radiator temperature
 - CST calculation of lens-antenna-aperture coupling: $\eta_{opt} = 0.304$
 - Filter frequency band
- We can calculate the source NEP(P_{calc})

$$NEP_{BLIP}^2 = 2P_{calc}h\nu(1 + \eta_{opt}B) + 2\Delta P_{calc}/\eta_{pb} \quad (1)$$

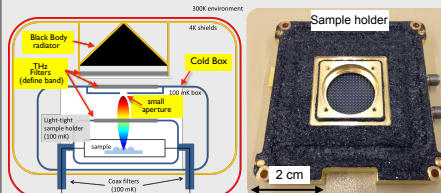


Sensitivity: $NEP \approx 2.5 \cdot 10^{-19} W/\sqrt{Hz}$

Measure the noise (S_n), response to radiator power ($d\theta/dP$) and lifetime τ_{ap} :

$$NEP = S_n \left(\frac{d\theta}{dP} \right) \sqrt{1 + (2\pi\tau_{ap})^2}$$


- Obtain $NEP \approx 2.5 \cdot 10^{-19} W/\sqrt{Hz}$
- independent of T_{BB} sweep direction
- Optical efficiency from eqn. (1)
- between 80-100% of calculated BLIP value

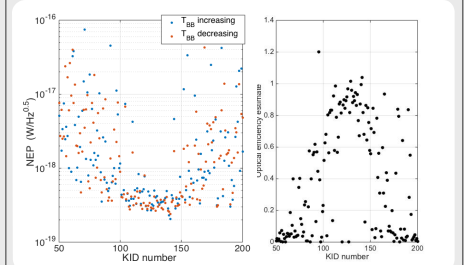

Dynamic range: $1.7 \cdot 10^5$

We read-out each MKID with a single tone, slightly detuned to lower frequency
 NO retuning


- max power: $P_{max} = 50$ fW
- dynamic range = $P_{max}/NEP = 1.7 \cdot 10^5$
- background limited 0.1 - 50 fW

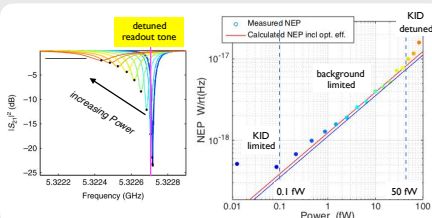

Array yield: 83%

Obtain the dark NEP for all pixels⁴


- From temperature response, noise, lifetime and T_c
 - Obtain the cross talk between pixels
 - from direct measurements and model analysis
- Yield:
 799 pixels: $NEP < 5 \cdot 10^{-19} W/\sqrt{Hz}$ and cross talk < -30dB
 • 83%

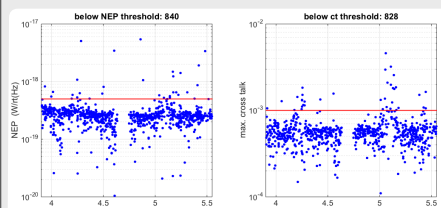

Cosmic Ray impact: 1.5% dataloss

Cosmic rays affect MKID timeline⁵

- Sampling at 1.2 kHz we flag all datapoints with a value $> 5 \sigma_{RMS}$
- time constant: 1.2 msec
 - so we resolve all cosmic ray glitches
- <Dead time/pixel> = 0.032% of timeline
- obtained event rate on the chip: 420 sec⁻¹m²
- @L2 operation event rate = $2 \cdot 10^4$ sec⁻¹m²
 - <dead time/pixel> = 1.5% of timeline

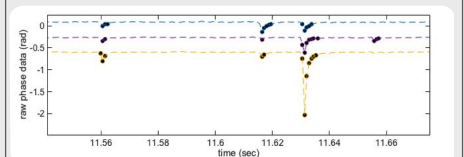

We have demonstrated a 961 pixel array + readout system multiplexing all pixels with a single readout chain with one 4K amplifier and 300K back-end. This system combines very high sensitivity, high dynamic range, low cross talk, low cosmic ray susceptibility and high yield and demonstrates the next step in technological readiness of MKID technology.

1: Yates et al. 2011, Appl. Phys. Lett. 99 073505 and Janssen et al. 2013, Appl. Phys. Lett. 103 203503
 2: Rantwijk J van et al. 2016, IEEE Trans. Microw. Theory Tech. 64-6 1876
 3: Yates et al. 2014, J. Low Temp. Phys. 176 761-6
 4: Janssen et al. 2014, Appl. Phys. Lett. 105 193504, DOI: 10.1109/TMTT.2016.2544303
 5: Janssen et al. 2015, Proc. of SPIE Vol. 9401 940115-10 (This conference) and Catalano et al. 2015 A&A DOI: 10.1051/0004-6361/201527715

This work was supported as part of SPACEKIDS, funded via grant 313320 provided by the European Commission under Theme SPA.2012.2.2-01 of Framework Programme 7.

SRON

Proc. of SPIE Vol. 9401 940115-10