

Structural Reuse by Design Reusing wind turbine blades for building applications

Joustra, J.J.; Popescu, M.A.; Bousseau, Adrien

Publication date

Document Version

Final published version

Citation (APA)
Joustra, J. J., Popescu, M. A., & Bousseau, A. (2024). Structural Reuse by Design: Reusing wind turbine
Citation (APA)

Joustra, J. J., Popescu, M. A., & Bousseau, A. (2024). Structural Reuse by Design: Reusing wind turbine
Citation (APA) Netherlands.

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

Structural Reuse by Design Reusing wind turbine blades for building applications

Challenge

Construction industry needs large volumes of materials and has a large carbon footprint. And although wind energy is renewable, the blades are hard to recycle leading to material waste. Our goal is to form a virtuous loop between these sectors by reusing wind turbine blades as construction elements. However, designing and building new structures from parts of existing ones raises novel design challenges in terms of geometry, structural properties and performance, processing and assembly.

The blades can reach lengths over 100m. and weigh up to 55 tons.

Properties after use

Local damages may affect usability But structural quality is often still good

High end materials with good environmental stability

The original cross-sectional properties of the blade can improve the structural performance in its new application

Geometry & material composition vary

Double-curved shape & changing thickness Made of composites, material composition tailored to use

Cutting strategy

Defined by the degrees of freedom of the cutting tool, materials, sizes and more.

Approach

Using a newly developed shape-matching algorithm, we determine the cutting pattern with which the material can best be reused. This will be developed through creating a demonstrator pavilion on campus.

Matching available material stock to a new design

Generating a design proposal based on structural properties and developing the processing and assembly system.

Iterative design process

A search for a design that considers what is available (the specifics of the actual blade) and what you wish to build (a pavilion).

Assembly system

Connections need to cope with varying thickness and curvature The structure will be self-supporting, leveraging material quality.

Findings

Defining the design space


The curvature of the blade largely restricts design possibilities: panels cannot intersect, but the predetermined curves make this difficult to avoid.

Finding applications

The material characteristics need to be determined to define valuable reuse applications. Next to geometry & mechanical characteristics, we investigate its acoustic performance.

Data and material availability

Design specifications are often guarded by IP but needed for reuse. A Digital Product Passport could bundle information and provide an opportunity for a systematic and standardized data collection system throughout the supply chain of the wind industry.

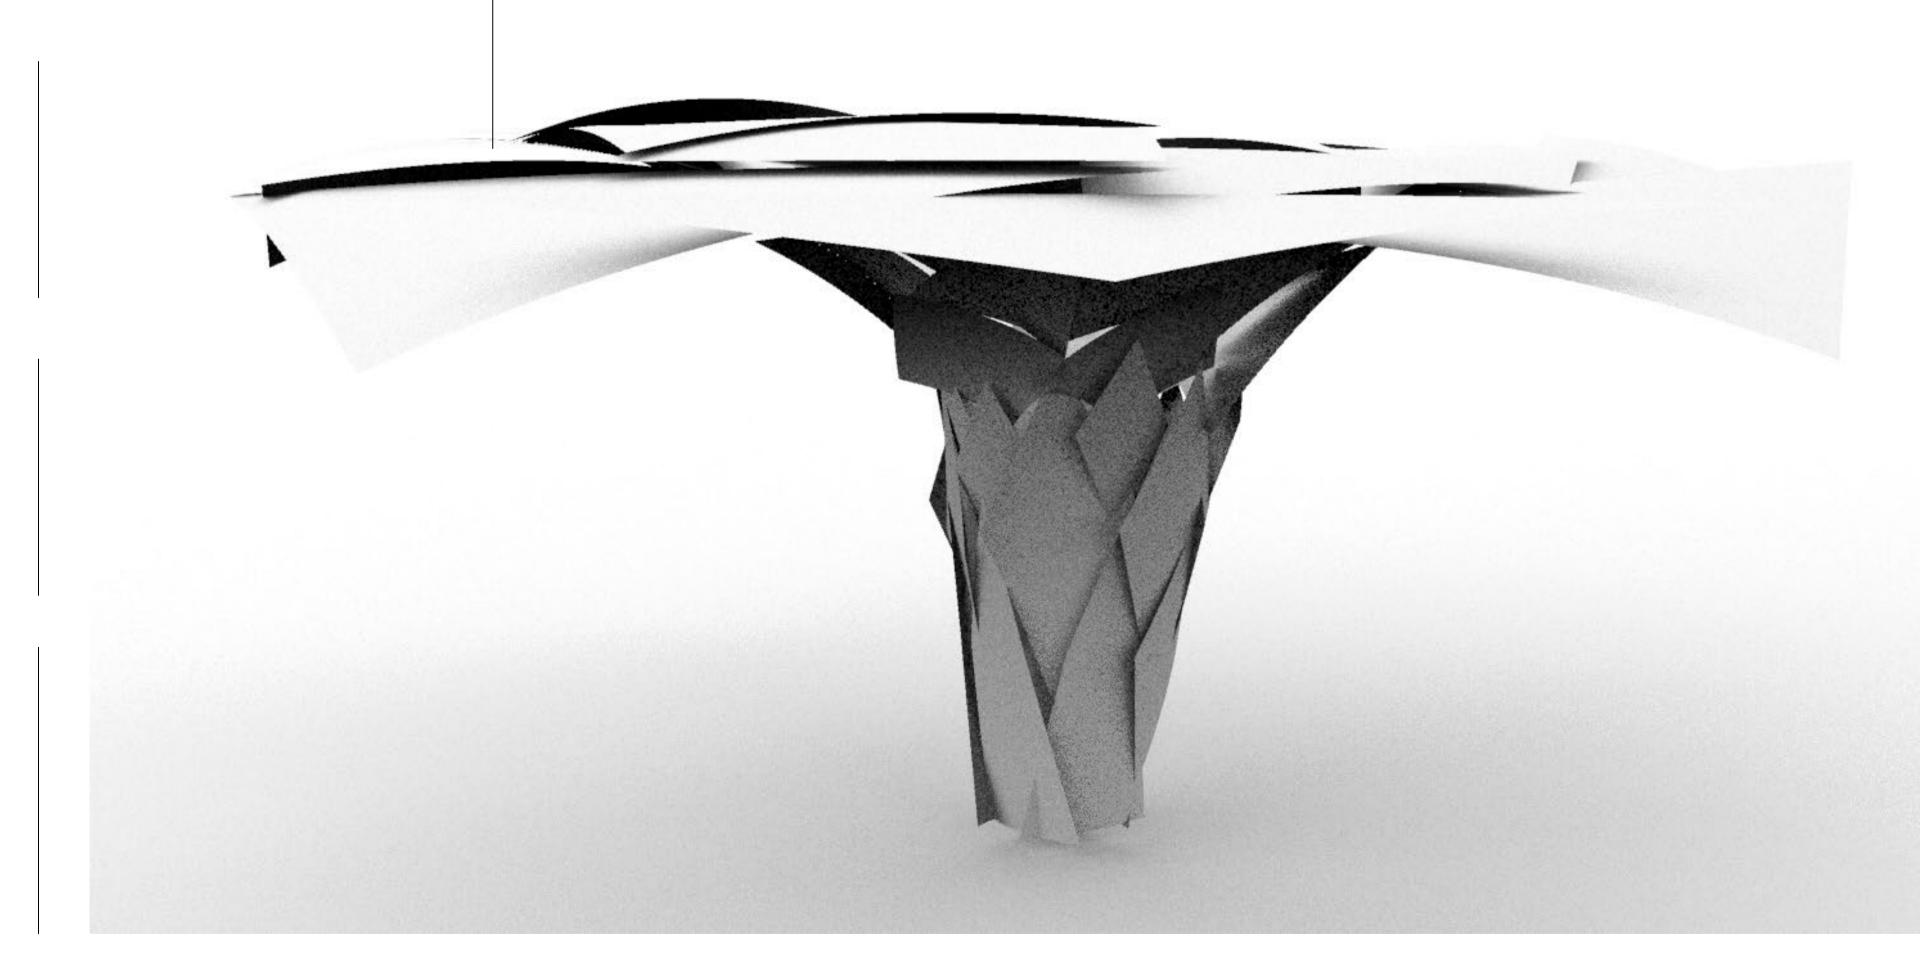

Researchers

Jelle Joustra*, IDE Mariana Popescu, CiTG Adrien Bousseau, INRIA (FR)

*) j.j.joustra@tudelft.nl

SRBD team

Robbert Kik
Berend Baas
Boris Kloeg
Sammie van der Vinne
Israel Carrete

Isabel Koopman
Ivo Neuman
Rushabh Mutha
Rishabh Pal
Hripsime Snkhchyan

