

Smart technology solutions for the NeTIRail-INFRA case study lines: Axle box acceleration and ultra-low cost smartphones

Nunez, Alfredo; Popa, Tudor; Anghel, Lucian Emmanuel; Hendriks, Jurjen; Moraal, Jan; Buretea, Laurentiu Dorin; Paragreen, Jon; Miron, Berbece; Gheorghe, Draghici; Campean, Mihail

Publication date

2018

Document Version

Accepted author manuscript

Citation (APA)

Nunez, A., Popa, T., Anghel, L. E., Hendriks, J., Moraal, J., Buretea, L. D., Paragreen, J., Miron, B., Gheorghe, D., Campean, M., Dollevoet, R., & Li, Z. (2018). *Smart technology solutions for the NeTIRail-INFRA case study lines: Axle box acceleration and ultra-low cost smartphones*. Poster session presented at Transport Research Arena 2018, Vienna, Austria.

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

SMART TECHNOLOGY SOLUTIONS FOR THE NETIRAIL-INFRA CASE STUDY LINES: AXLE BOX ACCELERATION AND ULTRA-LOW COST SMARTPHONES

10296

Alfredo Núñez¹, Tudor Popa², Lucian Emmanuel Anghel², Jurjen Hendriks¹, Jan Moraal¹, Laurentiu Dorin Buretea², Jon Paragreen³, Berbece Miron⁴, Draghici Gheorghe⁴, Mihail Campean⁴, Rolf Dollevoet¹, Zili Li¹

¹ Section of Railway Engineering, Delft University of Technology, Delft, The Netherlands.

² ADS Electronics, Bucharest, Romania.

³ MERail Railway Research Group, The University of Sheffield, United Kingdom.

⁴ RC-CF, Romania.

ABSTRACT

Results on the development of smart technology solutions for lower density railway lines are presented. The goal is to reach a cost effective inspection and asset management to minimize maintenance interventions time/cost without dedicated inspection vehicles.

The proposed methods in this paper include: 1) axle box acceleration measurements and 2) ultra-low cost smartphones.

The data is interpreted and converted from monitoring information into management information. Feasibility and preliminary studies were conducted in the railway lines of Romania. The results presented in this paper were obtained in the framework of the H2020 project NeTIRail-INFRA.

CONCLUSIONS

Methodologies based on accelerometers mounted either at the axle box or in the train vehicle are proposed for estimating track and ride quality.

The data collected from both systems contains useful information for railway infra-managers. With ABA, it is possible to rank the quality of the welds and rail defects. With the smartphone technology it is possible to map over the network the ride comfort, which is important for the users and for the safety.

With adaptive and intelligent signal processing methods, it is possible to extract the key information needed to anticipate the impact of degradation and determine the maintenance actions needed to correct the problems in the infrastructure.

AXLE BOX ACCELERATION MEASUREMENTS

For ABA measurements, a number of accelerometers are mounted on the axle boxes. Data is collected from accelerometers, a GPS receiver and either a tachometer or speed-sensor for positioning. The train SNCF Class X 4500, that operates on the line Bartholomeu-Zarnesti was employed during operation (with passengers on-board).



Figure 1. NetIRail-INFRA partners during the measurement campaign.

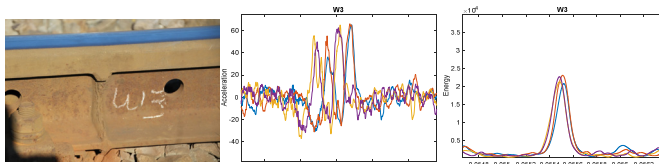


Figure 2. Example of measurements on a weld, a) photo of the weld, b) ABA in the time domain at the weld, c) energy due to weld-wheel impact.

This research was supported by
H2020 project NeTIRail-INFRA
No. 636237

NeTIRail

ULTRA-LOW COST SMARTPHONES

The smartphone's ability to monitor passenger comfort on a train was in accordance with the standard ISO-2631-1:1997. The test was performed in Romania on route Bartholomeu– Zarnesti on a passenger train that moved for one hour over a distance of approximately 27 km.

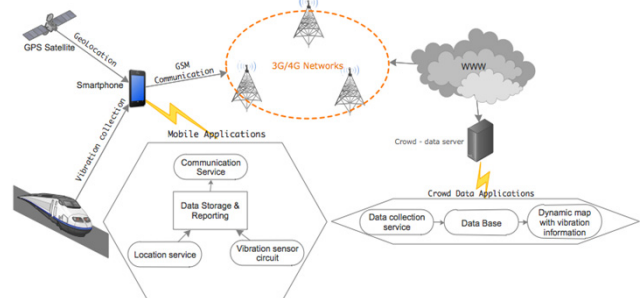


Figure 3. Architecture for system for track and ride quality monitoring.



Figure 4. a) Vibration diagram, b) Comfort and rotational acceleration diagram.

www.traconference.eu

Hosted and organised by:

Austrian Ministry
for Transport,
Innovation and Technology

AIT
Austrian Institute
of Technology
TOMORROW TODAY

austrlatech

Co-organised by:



Together with:

