

Band gap tuning based on adjustable stiffness of local resonators

Alimohammadi, H.; Vassilyeva, K.; Hosseinnia, H.; Petlenkov, E.

Publication date
2023

Document Version
Final published version

Published in
Proceedings of the The 13th International Conference on Metamaterials, Photonic Crystals and Plasmonics

Citation (APA)

Alimohammadi, H., Vassilyeva, K., Hosseinnia, H., & Petlenkov, E. (2023). Band gap tuning based on adjustable stiffness of local resonators. In *Proceedings of the The 13th International Conference on Metamaterials, Photonic Crystals and Plasmonics* (pp. 1743-1744). (International Conference on Metamaterials, Photonic Crystals and Plasmonics). META Conference.

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Green Open Access added to TU Delft Institutional Repository

'You share, we take care!' - Taverne project

<https://www.openaccess.nl/en/you-share-we-take-care>

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

META 2023 Paris - France

The 13th International Conference on Metamaterials, Photonic Crystals and Plasmonics

Edited by

Philippe Lalanne | Institut d'Optique d'Aquitaine - CNRS, France
Said Zouhdi | Paris-Saclay University, France

Band gap tuning based on adjustable stiffness of local resonators

H. Alimohammadi^{1*}, K. Vassilyeva¹, H. HosseinNia², and E. Petlenkov¹

¹Computer Systems Department, Tallinn University of Technology, 12618 Tallinn, Estonia

²Precision and Microsystems Engineering Department, Delft University of Technology, 2628 Delft, The Netherlands

*corresponding author: hossein.alimohammadi@taltech.ee

Abstract: This research explores the feasibility of using a cantilever-type resonator beam to achieve tunable and real-time control of vibration suppression. By varying the center of mass of the attached masses, the bandgap and transmittance response can be significantly impacted. The results suggest potential for improving resonator performance and optimizing metamaterial beams for vibration suppression applications.

Summary:

The method involves analyzing the propagation of acoustic waves through a phononic structure with one, two, and four beams connected to a non-uniform beam-type resonator. The frequency response of the tip of the Euler-Bernoulli beam is monitored to verify the outcomes found in the dispersion curves. The equation of motion is solved using a harmonic input force, with periodic boundary conditions and Floquet periodicity taken into account for accurate results. The study demonstrates the feasibility of using a cantilever-type resonator instead of a lumped mass spring for examining other modes of the resonator and tuning and controlling the bandgap characteristics of the beam in real-time experiments. A simulation is performed using finite element software.

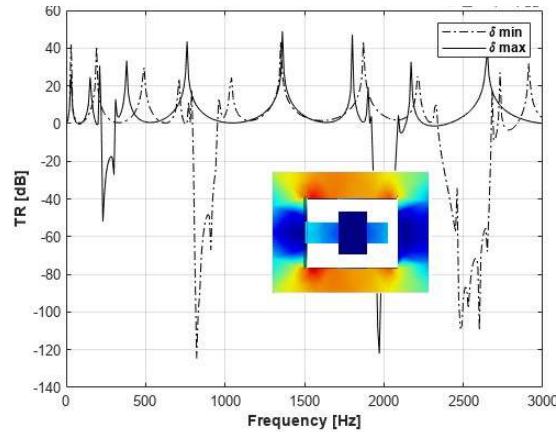


Fig.1. Transmittance responses of the first and second mode of resonator with $\mu=0.9$ for different δ .

By using a cantilever-type resonator instead of a lumped mass spring, it becomes feasible to examine other modes of the resonator. Fig.1 shows the transmittance responses of the first and second mode of the resonator with a high mass ratio of $\mu=0.9$ for different values of resonator center of mass (δ). The second mode is observed in the transverse vibration of the beam, and the attached mass on the resonator material is replaced from PLA to steel to decrease the natural frequency of the resonator to the desired frequency range. The result shows the same behaviour in the second mode as well, and the variation of δ changes the bandwidth and edge of bandgap similar to first mode.

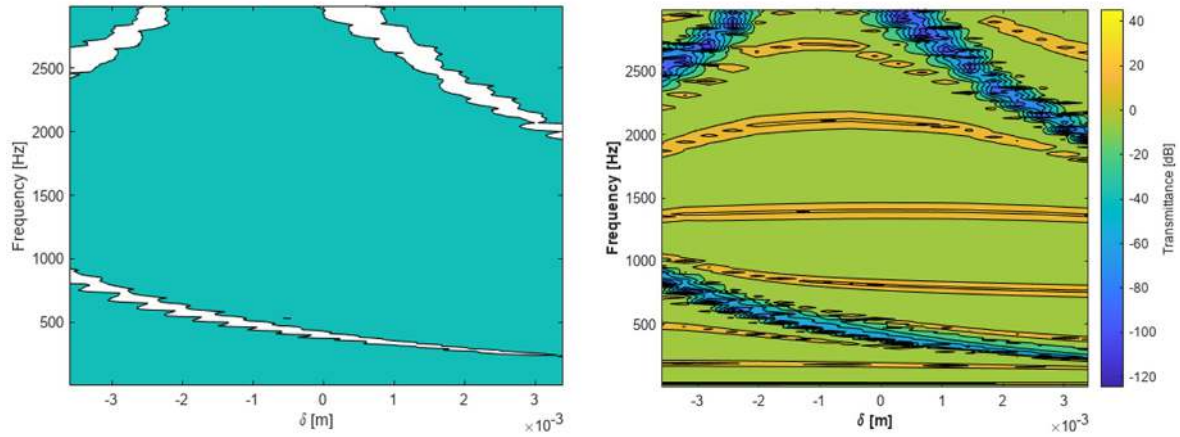


Fig.2. Contour and Image binarization of the transmittance using -40 dB as reference in response to the variation of δ , and $\mu=0.9$.

Fig.2 shows the binary representation of the transmittance contour pattern evolution with changes in δ for a high mass ratio of $\mu=0.9$. The image binary contour of the transmittance for $\mu=0.9$ and -40 dB as reference is shown in Fig.2. The second mode of resonator creates an additional gap in higher frequencies, as shown in the top part of Fig.2. This result suggests that using a cantilever-type resonator instead of a lumped mass spring allows the study of other modes of the resonator. Moreover, the change in attached mass and mass ratio allows for tuning and controlling the bandgap characteristics of the beam in real-time experiments.

In conclusion, this research has examined the possibility of tuning the band gap of beam-type resonators based on adjustable stiffness to achieve broadband vibration suppression. Through the analysis of dispersion relations and the binary representation of transmittance contour patterns, it has been demonstrated that the center of masses of attached masses does not significantly affect the vibration suppression performance of the metamaterial beam. However, by using a cantilever-type resonator instead of a lumped mass spring, it has become possible to examine other modes of the resonator and to tune and control the bandgap characteristics of the beam in real-time experiments. This study has provided valuable insights into the design and optimization of graded metamaterial beams for vibration suppression applications.

Acknowledgment: This work has been partially conducted in the project "ICT programme" which was supported by the European Union through the European Social Fund. It was also supported by the Estonian Research Council grant PRG658.

References

1. X. Wu, Y. Li, and S. Zuo, "The study of a locally resonant beam with aperiodic mass distribution," *Appl. Acoust.*, vol. 165, 2020.
2. Z. Tao et al., "A novel auxetic acoustic metamaterial plate with tunable bandgap," *Int. J. Mech. Sci.*, vol. 226, p. 107414, Jul. 2022.
3. Y. Jian, L. Tang, G. Hu, Z. Li, and K. C. Aw, "Design of graded piezoelectric metamaterial beam with spatial variation of electrodes," *Int. J. Mech. Sci.*, vol. 218, 2022.