

High-frequency rotary oscillations control of flow around cylinder at $Re = 1.4 \times 10^5$

Palkin, Egor; Hadžiabdić, M.; Hanjalić, K.

DOI

[10.1088/1742-6596/754/6/062006](https://doi.org/10.1088/1742-6596/754/6/062006)

Publication date

2016

Document Version

Final published version

Published in

Journal of Physics: Conference Series

Citation (APA)

Palkin, E., Hadžiabdić, M., & Hanjalić, K. (2016). High-frequency rotary oscillations control of flow around cylinder at $Re = 1.4 \times 10^5$. *Journal of Physics: Conference Series*, 754(6), 1-5. Article 062006. <https://doi.org/10.1088/1742-6596/754/6/062006>

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

PAPER • OPEN ACCESS

High-frequency rotary oscillations control of flow around cylinder at $Re = 1.4 \times 10^5$

To cite this article: E Palkin *et al* 2016 *J. Phys.: Conf. Ser.* **754** 062006

View the [article online](#) for updates and enhancements.

Related content

- [Control approaches for a cylinder wake by electromagnetic force](#)
Zhang Hui, Fan Bao-Chun and Chen Zhi-Hua
- [Coherent Control of Micro/Nanomechanical Oscillation Using Parametric Mode Mixing](#)
Hiroshi Yamaguchi, Hajime Okamoto and Imran Mahboob
- [Oscillation control of cantilevers via smart materials technology and optimal feedback control: actuator location and power consumption issues](#)
Sungsoo Na and Liviu Librescu



IOP | ebooks™

Bringing you innovative digital publishing with leading voices to create your essential collection of books in STEM research.

Start exploring the collection - download the first chapter of every title for free.

High-frequency rotary oscillations control of flow around cylinder at $Re = 1.4 \times 10^5$

E Palkin^{1,2}, **M Hadžiabdić**³, **K Hanjalić**^{2,4}

¹Institute of Thermophysics SB RAS, Novosibirsk, Russia

²Novosibirsk State University, Novosibirsk, Russia

³International University of Sarajevo, Sarajevo, Bosnia and Hercegovina

⁴Delft University of Technology, Delft, The Netherlands

E-mail: palkinev89@gmail.com

Abstract.

We perform a series of URANS simulations of the flow over a rotary oscillating cylinder at $Re = 1.4 \times 10^5$ to study the possible reduction of the drag and lift forces acting on the body when the rigid wall is rotary oscillating around the axis of symmetry. Two parameters of the external forcing are varied, i.e. the amplitude of rotation and the frequency. We find that the high-frequency and relatively high-amplitude forcing leads to the drag reduction of 78% compared to the non-rotating case. The oscillations (rms) of drag and lift coefficients are also significantly reduced.

1. Introduction

Most of the flow regimes over bluff bodies feature the unsteady quasi-periodic vortex shedding known as the Karman vortex street. These oscillations affect the drag and lift forces acting on the body. The control of the amplitude and the possible reduction of these forces, in general, is of utmost importance in a wide range of practical applications. In this work we investigate the effect of rotary oscillations of a cylinder of diameter D in a uniform fluid flow with velocity U_∞ . The relatively high Reynolds number of interest $Re = U_\infty D / \nu = 1.4 \times 10^5$, where ν is the kinematic viscosity, corresponds to a sub-critical regime with the laminar boundary layer separation but is close to the drag crisis phenomenon ($Re \approx 2.0 \times 10^5$) where the drag coefficient reduces naturally.

Tokumaru and Dimotakis [1] studied the same flow at moderate $Re = 1.5 \times 10^4$ and showed that the drag coefficient can be reduced by 80% if high-frequency rotary oscillating motion of the form

$$U_\theta|_{wall} = \frac{\Omega D}{2} \sin(2\pi ft)$$

is applied to the cylinder wall, where U_θ is the tangential velocity, Ω the oscillation amplitude, f the frequency and t the time. The physical reason behind the significant drag reduction is the transformation of the wake velocity profile which reorganizes and becomes more narrow (see Fig. 1). Shiels and Leonard [2] qualitatively confirmed the results of Tokumaru and Dimotakis with the two-dimensional simulations in the range of $150 \leq Re \leq 1.5 \times 10^4$ stressing that the effect of the drag reduction enhances with the Reynolds number increase. Relatively coarse three-dimensional large-eddy simulations (LES) performed by Du and Dalton [3] at $Re = 1.5 \times 10^4$



also confirmed the results of Tokumaru and Dimotakis although with the drag reduction of 57% instead of optimistic 80% obtained in experiments due to inaccurate method for drag coefficient calculation.

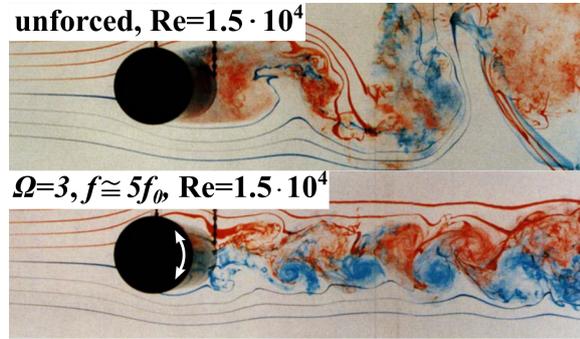


Figure 1. Visualization of the flow with and without the rotary oscillations from experiments [1]. The frequency f_0 corresponds to the natural (unforced) vortex shedding process.

In the present work we use a verified Unsteady Reynolds-averaged Navier-Stokes method with second moment closure Reynolds Stress Model of Jakirlić and Hanjalić [4] (URANS RSM JH) to investigate the effect of rotary oscillations on the drag and lift forces in a broad range of parameters. This model has been previously verified on LES of the same non-rotating case [5] and experimental data [6]. The relatively high Reynolds number $Re = 1.4 \times 10^5$ is of practical importance in contrast with most previous low Re studies. Our precursor work [7] in the low-frequency range ($f = f_0$, where f_0 corresponds to the natural/unforced vortex shedding process) did not reveal drag reduction in agreement with the work of previous investigators. Here we focus on higher-frequency oscillations with $f = 2.5f_0$ which are found optimal by Du and Dalton for $Re = 1.5 \times 10^4$.

2. Computational details

The simulations were performed using the TU Delft in-house unstructured finite-volume computational code T-FlowS, with the cell-centred collocated grid structure. The convective term in the transport equations was discretized by a second-order upwind-biased TVD differencing scheme. The diffusion term was discretized by the second-order central differences. The time-marching was performed using a fully-implicit three-level time scheme. The pressure-velocity coupling was handled by the SIMPLE algorithm. The mesh comprised 2.3×10^6 hexahedral cells. The computational domain was a box with $25D$ length in streamwise and $20D$ in crosswise directions while the spanwise length was $2D$ (see Fig. 2). The center of the cylinder was placed at $10D$ from the inflow boundary with uniform velocity U_∞ and zero free-stream turbulence. The slip conditions were set at the top and bottom boundaries, the convective outflow condition at the outlet and the no-slip condition on cylinder wall. Periodic conditions were imposed in the cylinder axis direction.

3. Results

The central parameter of the problem is the drag and lift coefficients:

$$C_D = 2F_x/(\rho U_\infty^2 S), \quad C_L = 2F_y/(\rho U_\infty^2 S),$$

where ρ is the density of the fluid and S is the area of the cylinder wall. The force components F_x and F_y acting on the body include the pressure and viscous contributions. We compare the time-averaged value $\overline{C}_D = 1.27^1$ previously obtained for the non-rotating case using URANS

¹ LES [6] provided $\overline{C}_D = 1.24$, the same as the experimental data of Cantwell and Coles [5]

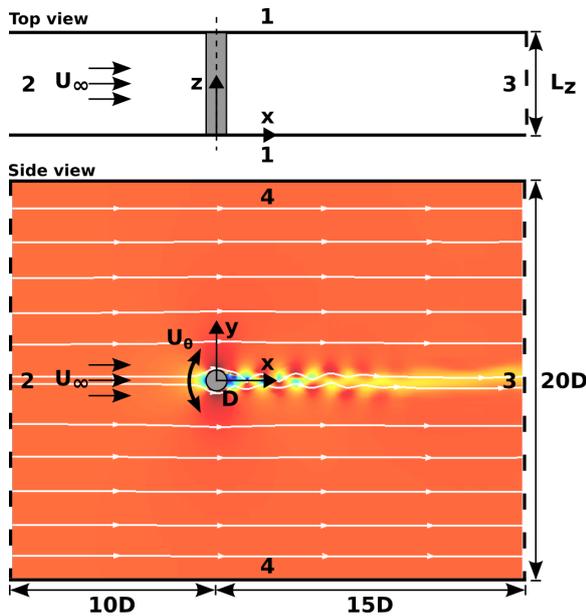


Figure 2. Computational domain. The numbers from 1 to 4 correspond to periodic, inflow, convective outflow and slip conditions.

RSM JH to low-frequency and high-frequency rotary forced regimes. The first one was forced at $f = f_0$ with $f_0 \approx 0.22$, investigated previously [7], did not show significant improvements of the drag characteristics. On the other hand, the second regime with $f = 2.5f_0$ showed substantial decrease of \bar{C}_D . All cases were forced with the non-dimensional amplitude $\Omega = 1, 2$ and 3 (value of $\Omega D/U_\infty$). Table 1 shows the value of \bar{C}_D for various Ω and f values. The optimal among considered control parameters are $\Omega = 2$ and $f = 2.5f_0$ where the drag coefficient value ($\bar{C}_D = 0.28$) is reduced by 78% compared to the non-rotating case ($\bar{C}_D = 1.27$).

Table 1. Time-averaged drag coefficient \bar{C}_D at $Re = 1.4 \times 10^5$ for various Ω and f .

	$\Omega = 1$	$\Omega = 2$	$\Omega = 3$
$f = 1.0f_0$	1.30	1.21	1.33
$f = 2.5f_0$	0.56	0.28	0.42

A sample of the time-history of the drag and lift coefficients for various Ω and $f = 2.5f_0$ is presented in Fig. 3. Note that at relatively low $\Omega = 1$ the signal of C_L resembles the one for unforced case with only modulations imposed by rotation. However, for higher Ω the signal is clearly $2.5f_0$ -periodic. In practice not only the time-averaged value of C_D is important but also the amplitude of oscillations of the forces. Note that the optimal regime also exhibits the lowest rms values of C_D and C_L . Figure 4 shows the streamlines and axial velocity field (left) and vorticity field (right) for various forcing parameters. As previously mentioned the high-frequency forcing reorganizes the vortical structure of the wake reducing the velocity defect leading to the smaller drag coefficient. Future work will be devoted to extending the parameter $\Omega - f$ map.

4. Conclusion

We performed a series of URANS simulations of the flow over a rotary oscillating cylinder at $Re = 1.4 \times 10^5$. Low- and high-frequency oscillations were studied with various amplitudes of

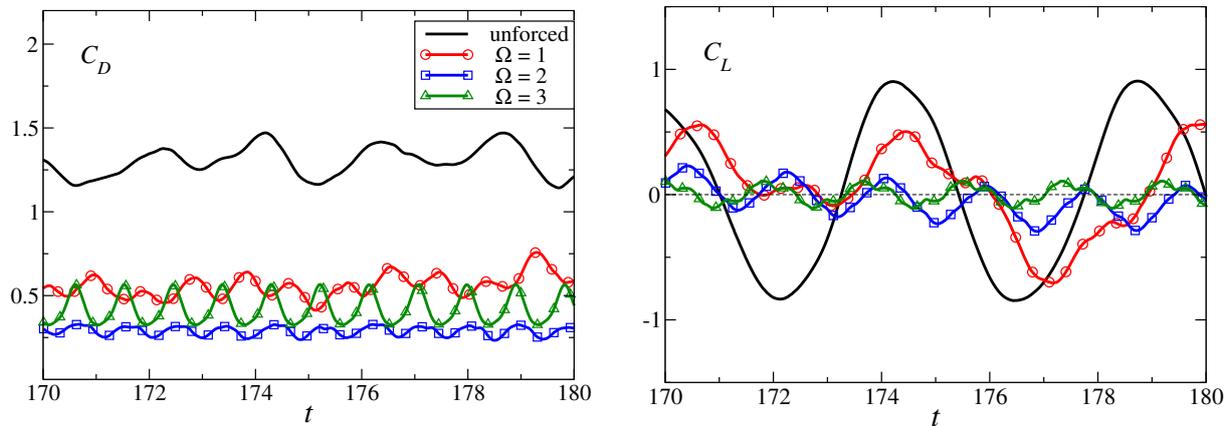


Figure 3. Drag (left) and lift (right) coefficients for simulations with various Ω and f .

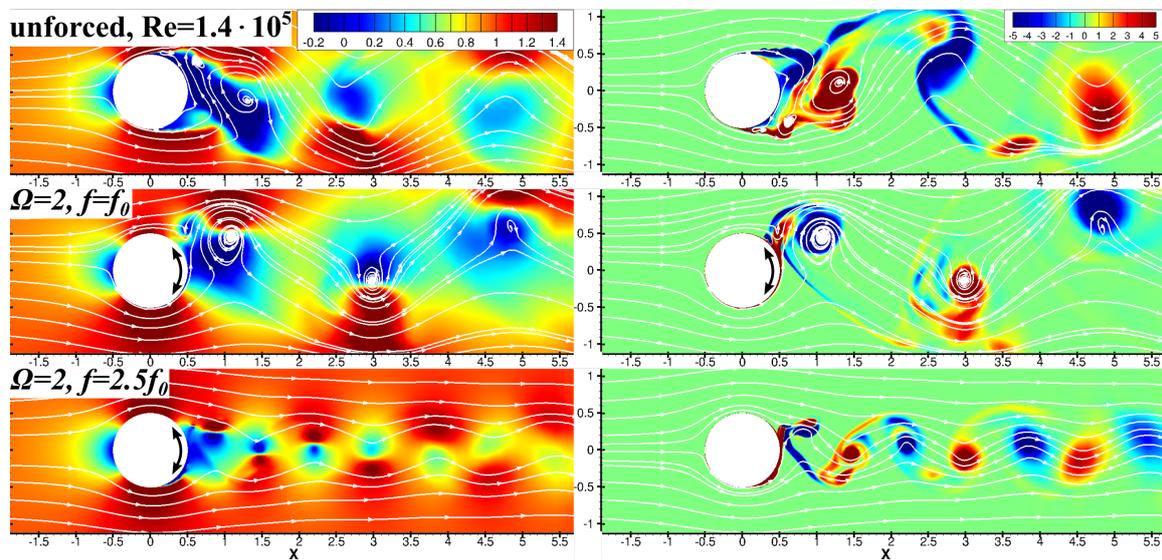


Figure 4. Axial velocity (left) and z -vorticity (right) for simulations with various Ω and f .

rotation in order to determine the optimal parameters when the drag and lift coefficients are significantly reduced. It was found that the high-frequency oscillations can lead to at least 78% $\overline{C_D}$ reduction in comparison with the non-rotating case. Future work will focus on a wide range $\Omega - f$ parameteric study for a complete optimization map.

Acknowledgments

This work is funded by Russian Science Foundation under the grant No. 14-29-00203. The computational resources are provided by Siberian Supercomputer Center SB RAS (Novosibirsk) and Joint Supercomputer Center RAS (Moscow).

References

[1] Tokumaru PT, Dimotakis PE 1991 Rotary oscillation control of a cylinder wake *J. Fluid Mech.* **224** 77–90
 [2] Shiels D, Leonard A 2001 Investigation of a drag reduction on a circular cylinder in rotary oscillation *J. Fluid Mech.* **431** 297–322

- [3] Du L, Dalton C 2013 LES calculation for uniform flow past a rotationally oscillating cylinder *J. Fluids Struct.* **42** 40–54
- [4] Jakirlić S, Hanjalić K 2002 A new approach to modelling near-wall turbulence energy and stress dissipation *J. Fluid Mech.* **459** 139–166
- [5] Cantwell B, Coles D 1983 An experimental study of entrainment and transport in the turbulent near wake of a circular cylinder *J. Fluid Mech.* **136** 321–374
- [6] Palkin E, Mullyadzhanov R, Hadžiabdić M, Hanjalić K 2016 Scrutinizing URANS models in shedding flows: the case of the cylinder in cross flow *Flow Turb. Comb.*
- [7] Palkin E, Mullyadzhanov R, Hadžiabdić M, Hanjalić K 2016 Rotary oscillations control of flow around cylinder at $Re = 1.4 \times 10^5$ *ICMAR Conf.*