

Document Version

Final published version

Licence

CC BY

Citation (APA)

Khodabandeh, A., Teunissen, P. J. G., & Psychas, D. (2023). A Multi-Epoch Processing Strategy for PPP-RTK Users. In J. T. Freymueller, & L. Sánchez (Eds.), *X Hotine-Marussi Symposium on Mathematical Geodesy - Proceedings of the Symposium, 2022: Proceedings of the Symposium in Milan, Italy, June 13-17, 2022* (pp. 159-167). Article 228 (International Association of Geodesy Symposia; Vol. 155). Springer. https://doi.org/10.1007/1345_2023_228

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

In case the licence states "Dutch Copyright Act (Article 25fa)", this publication was made available Green Open Access via the TU Delft Institutional Repository pursuant to Dutch Copyright Act (Article 25fa, the Taverne amendment). This provision does not affect copyright ownership.
Unless copyright is transferred by contract or statute, it remains with the copyright holder.

Sharing and reuse

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.



A Multi-Epoch Processing Strategy for PPP-RTK Users

A. Khodabandeh, P. J. G. Teunissen, and D. Psychas

Abstract

The present contribution aims to address why the stochastic model of the PPP-RTK user-filter is misspecified, and how one can limit the precision-loss associated with user parameter solutions. By developing tools for measuring the stated precision-loss under existing formulations of the user's Kalman filter, we propose an alternative formulation that recursively delivers close-to-minimum-variance filtered solutions when certain conditions hold. Such conditions are discussed, and their impact on the user ambiguity-resolved positioning performance is illustrated by supporting numerical results.

Keywords

Global Navigation Satellite System (GNSS) · Integer ambiguity resolution enabled precise point positioning (PPP-RTK) · Kalman filter · Time-correlated corrections

1 Introduction

In PPP-RTK, one employs state-space representation for positioning corrections so as to reduce their transmission rate, i.e. the frequency with which the corrections are to be provided to single-receiver GNSS users (Wubben et al 2005; Laurichesse and Mercier 2007; Collins et al 2010; Teunissen et al 2010). However, a reduction in the transmission rate comes at the cost of delivering time-delayed corrections. The user is therefore required to time-predict the

corrections so as to bridge the gap between the corrections' generation time and the user positioning time. Consequently, next to the intrinsic uncertainty brought by the randomness of GNSS measurements, 'multi-epoch' PPP-RTK corrections also inherit extra uncertainty that is associated with their time-prediction (Wang et al 2017).

As the user's Kalman filter relies on the provision of such random positioning corrections, his corrected observation equations become *correlated* in time. This violates the Kalman filter's key assumption, namely, that the input measurements must be time-uncorrelated. As a consequence, the user's Kalman filter loses its *minimum-variance* optimality property.

In this contribution we aim to identify the main factor that makes the stochastic model of the PPP-RTK user-filter misspecified, and thereby address how the user can limit the precision-loss associated with his parameter solutions. By developing tools for measuring the stated precision-loss under existing formulations of the user's Kalman filter, alternative multi-epoch formulations are developed that can recursively deliver close-to-minimum-variance filtered solutions of the user parameters. To bound the corresponding precision-loss experienced by the filtered solutions of such formulations, certain conditions must hold. These condi-

A. Khodabandeh (✉)
Department of Infrastructure Engineering, The University of Melbourne, Melbourne, VIC, Australia
e-mail: akhodabandeh@unimelb.edu.au

P. J. G. Teunissen
Department of Infrastructure Engineering, The University of Melbourne, Melbourne, VIC, Australia

Department of Geoscience and Remote Sensing, Delft University of Technology, Delft, The Netherlands

GNSS Research Centre, Curtin University, Perth, WA, Australia

D. Psychas
European Space Agency (ESA/ESTEC), Noordwijk, The Netherlands

tions are discussed, and their impact on the user ambiguity-resolved positioning performance is illustrated by supporting numerical results.

2 User Model Aided by External Corrections

Consider the (linearized) system of observation equations of a single-receiver PPP-RTK user

$$\underline{u} = B b + C c + \underline{n}, \quad (1)$$

where the user observation vector \underline{u} , together with the zero-mean random noise \underline{n} , are linked to the user's unknown parameter vector b and the unknown correction vector c through the full-rank design matrices B and C . The augmented design matrix $[B, C]$ is rank-defect though, meaning that the system is *not* solvable for both b and c . The observation vector \underline{u} may contain GNSS carrier-phase and pseudorange (code) measurements, with b containing the position coordinates, carrier-phase ambiguities, receiver clock parameters, and instrumental biases. On the other hand, the correction vector c may contain estimable forms of satellite orbit and clock parameters, atmospheric parameters, and phase/code biases (Leick et al 2015; Odijk et al 2015; Teunissen and Montenbruck 2017). The underscore symbol indicates the 'randomness' of quantities.

Due to the rank-deficiency of $[B, C]$ in (1), the user cannot *unbiasedly* determine the unknown parameters b with the *sole* use of his measurements. To obtain b unbiasedly, the user has to take recourse to an external provider, e.g., a network of permanent GNSS stations (Wubben et al 2005), to receive an unbiased solution of the correction vector c . Let \hat{c} denote such external correction solution. With the provision of \hat{c} , the user can extend his model (1) to

$$\begin{bmatrix} \underline{u} \\ \hat{c} \end{bmatrix} = \begin{bmatrix} B & C \\ 0 & I \end{bmatrix} \begin{bmatrix} b \\ c \end{bmatrix} + \begin{bmatrix} \underline{n} \\ \underline{\epsilon} \end{bmatrix}, \quad (2)$$

with $\underline{\epsilon}$ being the zero-mean random noise vector that characterises the 'randomness' of the correction solution \hat{c} . Since the user design-matrix B is of full-column rank, and that the correction vector c can now be determined by \hat{c} , the system (2) is solvable. As far as the estimation of the user parameters b is concerned, the system of equations (2) can be reduced for c . Such reduced model is formed by pre-multiplying the matrix $[I, -C]$ with (2). This gives

$$\underline{u} - C \hat{c} = B b + \tilde{\underline{n}}, \quad \text{with } \tilde{\underline{n}} := \underline{n} - C \underline{\epsilon} \quad (3)$$

The reduced model (3), with the user *corrected* observation vector $\underline{u} - C \hat{c}$, forms the basis of existing PPP-RTK models (Wubben et al 2005; Laurichesse and Mercier 2007; Collins et al 2010; Teunissen et al 2010). In contrast to the model (2) where both b and c are *jointly* estimated, (3) does not directly allow a further update on the correction solution \hat{c} . From the perspective of a single-receiver user who is merely interested in his parameters b , the reduced model (3) is more appealing in the sense that it involves fewer unknowns. In fact, the reduced model (3) can be shown to deliver user parameter solutions that are *identical* to those of (2) if the (co)variance propagation law to the corrected observation vector $\underline{u} - C \hat{c}$ is properly applied (Teunissen 2000). This means all the information required for the estimation of b is preserved when the user weights the corrected observation vector $\underline{u} - C \hat{c}$ in accordance with the inverse-variance matrix of the noise vector $\tilde{\underline{n}} = \underline{n} - C \underline{\epsilon}$. In practice however, the variance matrix of the correction solution \hat{c} , i.e. the dispersion of $\underline{\epsilon}$ in $\tilde{\underline{n}}$, may only be *partially* known to the user. As a consequence, the user takes recourse to the known part of such variance matrix to weight his corrected observation vector $\underline{u} - C \hat{c}$, missing part of the required information, thereby experiencing *precision-loss* in the estimation of b . The following theorem provides a general means for measuring such precision-loss.

Theorem (λ -Suboptimality) Let the zero-mean random vector \underline{p} , with the full-column rank matrix L , *perturb* the system of observation equations

$$\underline{y} = A x + \underline{e} + L \underline{p}, \quad (4)$$

in which the observation vector \underline{y} , with its zero-mean residual vector \underline{e} , is linked to the unknown parameter vector x by the full-column rank design matrix A . Also, let the variance matrix of \underline{e} be given by the positive-definite matrix Q_e . In the absence of the variance matrix of \underline{p} , say Q_p , the least-squares estimator

$$\hat{x} = A^+ \underline{y}, \quad \text{with } A^+ := (A^T Q_e^{-1} A)^{-1} A^T Q_e^{-1}, \quad (5)$$

is *not* minimum-variance, and therefore, suboptimal. Its precision-loss, in estimating every function $\theta = f^T x$, can be measured by the following variance-ratio bounds

$$1 + \lambda_{\min}(M_{L_A} M_{L_{A^\perp}}) \leq \frac{\text{Var}(f^T \hat{x})}{\text{Var}(f^T \hat{x}^*)} \leq 1 + \lambda_{\max}(M_{L_A} M_{L_{A^\perp}}) \quad (6)$$

with \hat{x}^* denoting the optimal (minimum-variance) least-squares estimator. Matrices M_{L_A} and $M_{L_{A^\perp}}$ are given

by $M_{L_A} = Q_p L_A^T (Q_e + L Q_p L^T)^{-1} L_A$ and $M_{L_{A^\perp}} = Q_p L_{A^\perp}^T (Q_e + L_{A^\perp} Q_p L_{A^\perp}^T)^{-1} L_{A^\perp}$, where $L_A = A A^+ L$ and $L_{A^\perp} = L - L_A$. The symbols $\lambda_{\min}(\cdot)$ and $\lambda_{\max}(\cdot)$ denote the minimum and maximum eigenvalues of a matrix, respectively. \square

Proof The proof is given in Appendix. \square

To better appreciate the bounds in (6), compare the suboptimal least-squares estimator (5) with its minimum-variance counterpart (Koch 1999; Teunissen 2000)

$$\hat{x}^* = (A^T Q_y^{-1} A)^{-1} A^T Q_y^{-1} \underline{y}, \quad \text{with } Q_y = Q_e + L Q_p L^T \quad (7)$$

The theorem states that if, instead of the full variance matrix Q_y , the weighting of the observation vector \underline{y} in (4) is conducted based on the known part Q_e , the increase in the variance of the solutions $f^T \hat{x}$ relative to that of their optimal counterparts $f^T \hat{x}^*$ can always be bounded by (6). Ideally, we wish to have the bounds $(1 + \lambda_{\min})$ and $(1 + \lambda_{\max})$ close to unity. Their deviation from unity is due to the presence of the nonnegative eigenvalues λ_{\min} and λ_{\max} . They indicate smallest and largest precision-loss that is experienced by the suboptimal estimator (5), respectively.

Such precision-loss is driven by the product of the two matrices M_{L_A} and $M_{L_{A^\perp}}$, each of which being a function of the orthogonal projections L_A and L_{A^\perp} of matrix L , respectively. Here, the orthogonality is defined with respect to the inner-product metric Q_e^{-1} . Thus $L_A^T Q_e^{-1} L_{A^\perp} = 0$ and $L = L_A + L_{A^\perp}$. This implies, for nonzero matrices L , that the two matrices M_{L_A} and $M_{L_{A^\perp}}$ cannot *simultaneously* be made zero. In fact, these two matrices ‘compete’ to limit the precision-loss experienced by the estimator \hat{x} . To see this, let us consider two extreme competing cases: (1) when L completely lies in the column-space of the design matrix A (i.e. when $L_{A^\perp} = 0$), and (2) when L is orthogonal to the column-space of A (i.e. when $L_A = 0$). The first case is when L can be expressed as $L = AP$ for some matrix P . For this case, the random vector \underline{p} is completely absorbed by the parameter vector x , thus simplifying the model (4) as $\underline{y} = A(x + P\underline{p}) + \underline{e}$. As a result, the model cannot distinguish between x and $\underline{x} = x + P\underline{p}$, meaning that the uncertainty due to \underline{p} cannot be adjusted by *any* weighted least-squares adjustment. Both the optimal and suboptimal estimators \hat{x}^* and \hat{x} would therefore experience the same amount of uncertainty. This is also corroborated by the bounds in (6) as the eigenvalues λ_{\min} and λ_{\max} become zero through the equality $L_{A^\perp} = 0$ (or $M_{L_{A^\perp}} = 0$).

The second case is when $A^T Q_e^{-1} L = 0$. For this case, both the optimal and suboptimal estimators \hat{x}^* and \hat{x} are *uncorrelated* with the random vector \underline{p} , i.e. $\text{Cov}(\hat{x}^*, \underline{p}) = \text{Cov}(\hat{x}, \underline{p}) = 0$. This follows by applying the covari-

ance propagation law, respectively, between (7) and \underline{p} , and between (5) and \underline{p} , together with the equalities $\text{Cov}(\underline{y}, \underline{p}) = L Q_p, A^T Q_e^{-1} L = 0$ and $Q_y^{-1} = Q_e^{-1} - Q_e^{-1} L (Q_p^{-1} + L^T Q_e^{-1} L)^{-1} L^T Q_e^{-1}$. Thus, both the estimators \hat{x}^* and \hat{x} remain intact irrespective of the uncertainty-level of \underline{p} . The bounds in (6) also support this as the eigenvalues λ_{\min} and λ_{\max} become zero through the equality $L_A = 0$ (or $M_{L_A} = 0$). Apart from the two extreme cases discussed above, the maximum eigenvalue λ_{\max} is *different* from zero, leading the estimator (5) to lose its minimum-variance property.

The result (6) can be used to quantify the suboptimality level of PPP-RTK user parameter solutions when the correctional uncertainty, i.e. the variance matrix of \underline{e} in the reduced model (3), is unknown to the user. To set the stage for measuring the largest possible precision-loss that the user estimator can experience, one needs to make the following settings $\underline{y} \mapsto (\underline{u} - C\hat{c}), A \mapsto B, \underline{e} \mapsto \underline{n}, \underline{p} \mapsto \underline{\epsilon}$, and $L \mapsto -C$. In the next section we employ the result (6) to assess the precision-performance of ‘multi-epoch’ formulations that are used to determine the user parameter vector b in a *recursive* manner.

3 Multi-epoch Formulations of the User Model

In the context of PPP-RTK, the user parameter solutions are to be computed in a near real-time manner, requiring the application of least-squares estimation in its ‘recursive’ Kalman filter forms (Kalman 1960; Simon 2006; Teunissen 2001). Accordingly, the user parameter vector b may be partitioned into a time-series of parameter vectors b_j ($j = i, i + 1, \dots$), where the subscripts i and j indicate the time-instance (epoch). Likewise, the time-uncorrelated observation vectors \underline{u}_j ($j = i, i + 1, \dots$) replace \underline{u} . This gives the ‘multi-epoch’ version of the user observation equations (1) as follows

$$\underline{u}_j = B_j b_j + C_j c_j + \underline{n}_j, \quad j = i, i + 1, \dots \quad (8)$$

Given the system of equations (8), the user needs to receive solutions of the correction vectors c_j from an external provider at every epoch j . In practice however, the provider disseminates state-space correction solutions at τ -second intervals to minimize the amount of information required to be transmitted to the user (Wubbena et al 2005). The longer the sampling period τ , the less the bandwidth required for data-transmission. While each individual correction type (e.g. satellite orbits versus clocks) can have its own sampling period τ , such distinction is not made here just for the sake of presentation. We instead only show one common sampling period τ for all correction types. Let $\hat{c}_{k\tau|k\tau}$ denote the solution of the correction vector $c_{k\tau}$ that is obtained based on all the provider observations collected up to and including the

epoch $k\tau$, where k is a positive integer indicating the number of the τ -second intervals. The user would need a correction solution at epoch $i \geq k\tau$ though. To this end, such solution can be *time-predicted* using the delayed solution $\hat{c}_{k\tau|k\tau}$ if information about the time-behavior of the corrections would be known to the user. Such information can be expressed in terms of the corrections' dynamic models (Teunissen 2001)

$$\underline{o}_t^c = c_t - \Phi^c c_{t-1} + \underline{w}_t^c, \quad t = 2, 3, \dots \quad (9)$$

where the randomness of the zero-sampled pseudo-observation \underline{o}_t^c is characterized by the time-uncorrelated process noises \underline{w}_t^c . The transition matrix Φ^c links the correction parameters between two successive epochs. Thus, $\Phi_{(j-i)}^c = \prod_{h=1}^{j-i} \Phi^c$ ($j > i$) links the corrections from epoch i to epoch j . Accordingly, the sought-for correction solution can be time-predicted as $\hat{c}_{i|k\tau} = \Phi_{(i-k\tau)}^c \hat{c}_{k\tau|k\tau}$.

As with the corrections, the time-behavior of the user parameter vectors b_j can also be incorporated into the estimation process to improve the corresponding parameter solutions. They are expressed by the following dynamic models

$$\underline{o}_j^b = b_j - \Phi^b b_{j-1} + \underline{w}_j^b, \quad j = i + 1, i + 2, \dots \quad (10)$$

where the transition matrix Φ^b links the user parameters over time, with the zero-sampled pseudo-observation \underline{o}_j^b and time-uncorrelated process noises \underline{w}_j^b ($j = i, i + 1, \dots$).

$$\begin{bmatrix} \underline{u}_i \\ \hat{c}_{i|k\tau} \\ \underline{o}_{i+1}^b \\ \underline{o}_{i+1}^c \\ \underline{u}_{i+1} \\ \underline{o}_{i+2}^b \\ \underline{o}_{i+2}^c \\ \vdots \\ \underline{u}_{(k+1)\tau} \\ \hat{c}_{(k+1)\tau|(k+1)\tau} \end{bmatrix} = \begin{bmatrix} B_i & C_i \\ 0 & I \\ \Phi^b & 0 \\ 0 & \Phi^c \end{bmatrix} \begin{bmatrix} I \\ I \end{bmatrix} \begin{bmatrix} b_i \\ c_i \\ b_{i+1} \\ c_{i+1} \\ b_{i+2} \\ c_{i+2} \\ \vdots \\ b_{(k+1)\tau} \\ c_{(k+1)\tau} \end{bmatrix} + \underline{\varepsilon} \quad (11)$$

On the left-hand side of (11), the user observation vectors \underline{u}_j ($j = i, i + 1, \dots, (k + 1)\tau$) are accompanied by the correction solutions of the two successive time-intervals $\hat{c}_{i|k\tau}$ and $\hat{c}_{(k+1)\tau|(k+1)\tau}$, together with the zero-sampled pseudo-observations \underline{o}_j^b and \underline{o}_j^c . On the right-hand side of the equa-

3.1 Representation in Batch Forms

The user can feed the time-predicted correction solution $\hat{c}_{i|k\tau}$ into his measurement and dynamic models (8) and (10) so as to run his recursive Kalman-filter. As the below will show, different formulations for the user-filter can be established, and the user ideally wishes to adopt the formulation that can deliver parameter solutions with *smallest* precision-loss. To measure the precision-loss under different formulations, one can employ the result of the theorem given in (6). To do so, one first needs to form the *multi-epoch* version of (2), and consequently, identify the corresponding reduced model (3).

Consider the epochs within a τ -second time-interval $j = i, \dots, (k + 1)\tau - 1$, where it is assumed that the user initial epoch i is larger than or equal to the correction transmission-time $k\tau$, i.e. $i \geq k\tau$. During this time-interval, the user-filter relies on the provider filtered correction $\hat{c}_{k\tau|k\tau}$. In the next time-interval, i.e. at epoch $j = (k + 1)\tau$, the user-filter can replace the out-dated correction $\hat{c}_{k\tau|k\tau}$ by its newer counterpart $\hat{c}_{(k+1)\tau|(k+1)\tau}$. With this in mind, the multi-epoch version of (2) follows by augmenting the user measurement and dynamic models (8) and (10), with the dynamic models of the corrections (9). This reads (Teunissen 2001)

tion, all the involved unknowns (both the user and correction parameters b_j and c_j) are linked to the measurements via the 'batch' structure of the design matrices B_j and C_j , together with the transition matrices Φ^b and Φ^c . As with any system of observation equations, the batch-form (11) is also

accompanied by a zero-mean random vector $\underline{\varepsilon}$. This vector can be expressed as a summation of four uncorrelated terms as follows

$$\underline{\varepsilon} = \underbrace{\begin{bmatrix} \begin{bmatrix} \underline{n}_i \\ 0 \end{bmatrix} \\ \begin{bmatrix} \underline{w}_{i+1}^b \\ 0 \end{bmatrix} \\ \begin{bmatrix} \underline{n}_{i+1} \\ \underline{w}_{i+2}^b \\ 0 \end{bmatrix} \\ \vdots \\ \begin{bmatrix} \underline{n}_{(k+1)\tau} \\ 0 \end{bmatrix} \end{bmatrix}}_{\text{I}} + \underbrace{\begin{bmatrix} 0 \\ \sum_{j=k\tau+1}^i \Phi_{(i-j)}^c \underline{w}_j^c \\ \begin{bmatrix} 0 \\ 0 \end{bmatrix} \\ 0 \\ \begin{bmatrix} 0 \\ 0 \end{bmatrix} \\ \vdots \\ \begin{bmatrix} 0 \\ 0 \end{bmatrix} \end{bmatrix}}_{\text{II}} + \underbrace{\begin{bmatrix} \begin{bmatrix} 0 \\ 0 \end{bmatrix} \\ \begin{bmatrix} 0 \\ \underline{w}_{i+1}^c \end{bmatrix} \\ 0 \\ \begin{bmatrix} 0 \\ \underline{w}_{i+2}^c \end{bmatrix} \\ \vdots \\ \begin{bmatrix} 0 \\ 0 \end{bmatrix} \end{bmatrix}}_{\text{III}} + \underbrace{\begin{bmatrix} 0 \\ \Phi_{(i-k\tau)}^c \hat{\underline{\varepsilon}}_{k\tau|k\tau} \\ \begin{bmatrix} 0 \\ 0 \end{bmatrix} \\ 0 \\ \begin{bmatrix} 0 \\ 0 \end{bmatrix} \\ \vdots \\ 0 \\ \hat{\underline{\varepsilon}}_{(k+1)\tau|(k+1)\tau} \end{bmatrix}}_{\text{IV}} \quad (12)$$

The first term I contains the user-specific measurement and process noises that are time-uncorrelated. The second term II contains the accumulative process noise due to the correction latency $i - k\tau$, i.e., the delay in time after the corrections are filtered by the provider and the time they are provided to the user. The third term III contains the correction process noises that are also time-uncorrelated. In contrast to the first three terms however, the fourth (last) term IV contains the correction estimation-errors $\hat{\underline{\varepsilon}}_{k\tau|k\tau} = \hat{\underline{c}}_{k\tau|k\tau} - c_{k\tau}$ and $\hat{\underline{\varepsilon}}_{(k+1)\tau|(k+1)\tau} = \hat{\underline{c}}_{(k+1)\tau|(k+1)\tau} - c_{(k+1)\tau}$ which are *correlated*, see e.g. Teunissen and Khodabandeh (2013). This implies that the variance matrix of $\underline{\varepsilon}$ is *not* ‘block-diagonal’, preventing the recursive computation of minimum-variance parameter solutions (Teunissen 2001). This shows that the stochastic model of the PPP-RTK user-filter is always misspecified, and therefore, *suboptimal* in the minimum-variance sense, no matter which formulation is adopted. However, the user can still recursively compute suboptimal parameter solutions by approximating the stated variance matrix using a block-diagonal positive-definite matrix. Each approximation adopted leads to a different formulation of the user-filter. In the following we discuss three different formulations and assess their corresponding precision-loss in estimating the user parameters b_j .

3.2 Case 1: Correctional Uncertainty Ignored

A straightforward choice of the block-diagonal matrix that can approximate the variance matrix of $\underline{\varepsilon}$ is made by ignoring the uncertainty of the corrections. In other words, the external

corrections $\hat{\underline{c}}_{j|k\tau}$ ($j = i, i + 1, \dots, (k + 1)\tau$) are assumed precise enough to be treated as *non-random*, the scenario that is commonly exercised in practice (Khodabandeh 2021). According to this choice, the presence of the last three terms II, III and IV in (12) is discarded. Therefore, only the variance matrix of the first term I is used to weight the underlying observation vectors. At every epoch j , the user would then work with the following measurement model

$$\begin{bmatrix} \underline{u}_j \\ \hat{\underline{c}}_{j|k\tau} \end{bmatrix} \approx \begin{bmatrix} B_j & C_j \\ 0 & I \end{bmatrix} \begin{bmatrix} b_j \\ c_j \end{bmatrix} + \begin{bmatrix} \underline{n}_j \\ 0 \end{bmatrix} \quad (13)$$

The reduced form of the above system, together the user dynamic model (10), is used to setup the underlying user-filter, that is

$$\text{Case 1 : } \begin{cases} \text{measurement-model : } \underline{u}_j - C_j \hat{\underline{c}}_{j|k\tau} \approx B_j b_j + \underline{n}_j \\ \text{dynamic-model : } \underline{o}_j^b = b_j - \Phi^b b_{j-1} + \underline{w}_j^b \end{cases} \quad (14)$$

Since the measurement noises \underline{n}_j are time-uncorrelated, the user can run his Kalman-filter in its recursive form (Teunissen 2001).

3.3 Case 2: Correction Process Noise Ignored

The second choice for approximating the variance matrix of $\underline{\varepsilon}$ can be made by ignoring the uncertainty of the correction process noises \underline{w}_j^c over the epochs $j = i + 1, \dots, (k + 1)\tau - 1$. According to this choice, the presence of the last

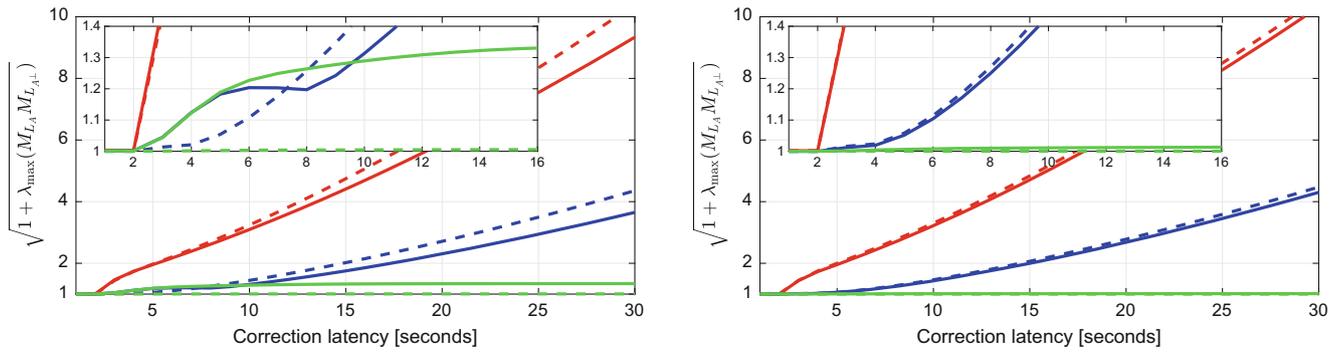


Fig. 1 The maximum increase in the standard-deviation ratio of the suboptimal-to-optimal estimation of the user parameters using network-derived corrections of a single station (thick lines) and twenty stations (dashed lines). The duration of the provider-filter initialization is set to 5 min (left) and 1 h (right). The results of Cases 1, 2 and 3 are indicated in red, blue and green, respectively

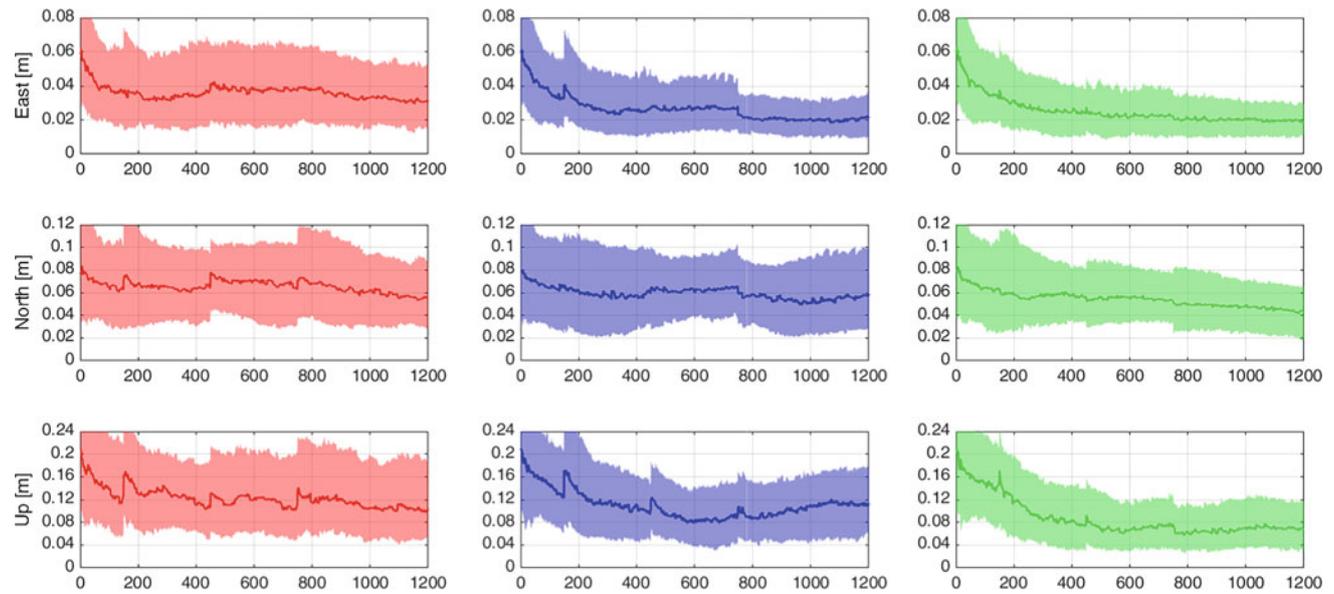


Fig. 2 Ambiguity-float results: The medians (50% percentiles) of the absolute positioning errors corresponding to 300 user-filter realizations within the area of their 25% and 75% percentiles. The horizontal axes indicate the time lapsed (in seconds) since the user-filter has started. The results of Cases 1, 2 and 3 are indicated in red, blue and green, respectively

rate on 21 January 2022 by two GNSS permanent stations: CUT0 and UWA0, both located in Western Australia. The precise orbital corrections are a-priori applied to the data. To emphasize the performance of the proposed filter formulations (i.e. Cases 2 and 3) in handling time-delayed corrections, we consider rather high correction latencies than the typical latency of 5–10 s of current IGS real-time PPP corrections (<https://igs.org/rtls/>), see, e.g., Leandro et al (2011). The clock corrections are made available to the user every 10 s, ionospheric corrections every 30 s, and phase-bias corrections every 10 min. The corrections are generated via a single-station PPP-RTK setup (Khodabandeh 2021), where the duration of the provider-filter initialization is set to 1 h. Station CUT0 serves as correction-provider, whereas station UWA0 serves as user that is about 8km away from the provider.

In order to infer the overall performance of the user-filter under the formulations offered by Cases 1, 2 and 3, we generate 300 different realizations of the filtered positioning solutions by shifting the user-filter starting epoch i every 15 s. The time-series of the medians (i.e. 50% percentiles) of these realizations within the area of their 25% and 75% percentiles are presented in Figs. 2 and 3 for the both the user ambiguity-float and-fixed options, respectively. The medians of the positioning errors corresponding to Cases 2 and 3 are shown to be considerably smaller than those of Case 1. The results also indicate that Case 3 outperforms Case 2 as it, on average, delivers smaller medians of the positioning errors. In particular, the difference in their performance becomes considerable when the user fixes his float ambiguities. Note also the presence of periodic jumps of the medians for all the three cases. This behaviour is due to the periodic nature

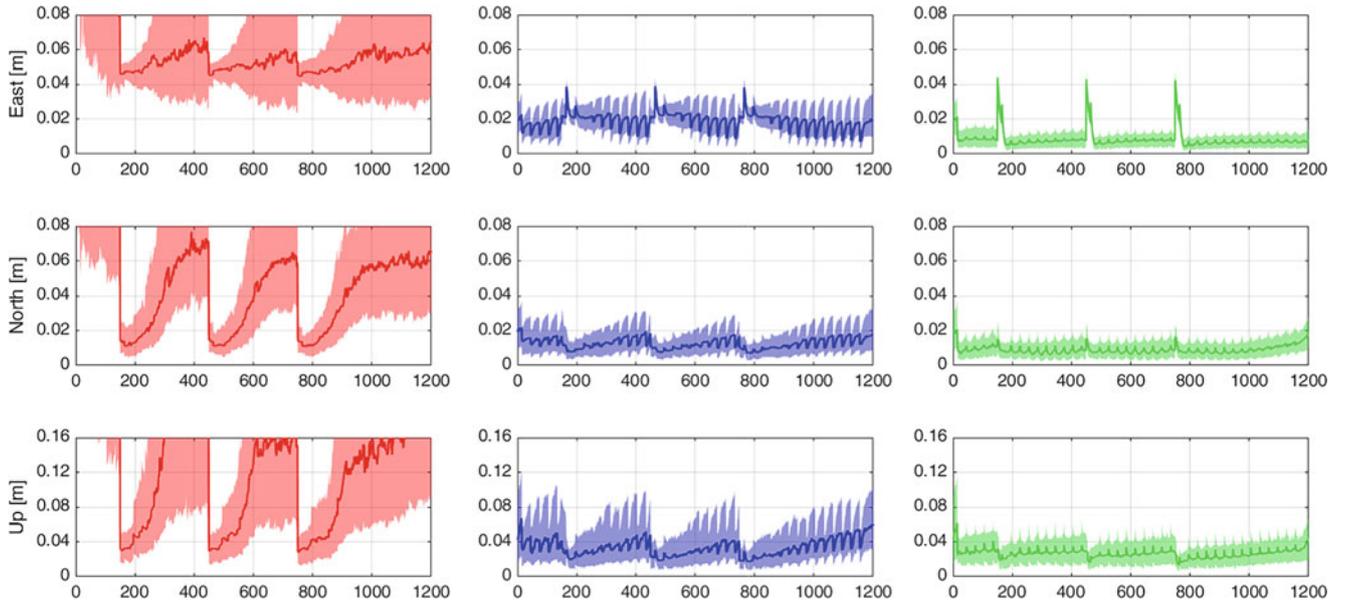


Fig. 3 Ambiguity-fixed results: The medians (50% percentiles) of the absolute positioning errors corresponding to 300 user-filter realizations within the areas of their 25% and 75% percentiles. The horizontal axes

indicate the time lapsed (in seconds) since the user-filter has started. The results of Cases 1, 2 and 3 are indicated in red, blue and green, respectively

of the correction latencies that vary from zero to $\tau - 1$ s for each data-transmission interval. The corresponding periodic peaks become more pronounced in the solutions of the east component when the float ambiguities are wrongly fixed.

Munich, with Professor Christoph Günther and Dr. Gabriele Giorgi as his hosts. This support is gratefully acknowledged.

4 Concluding Remarks

In this contribution we presented a general means for measuring the precision-loss that is experienced by the misspecified PPP-RTK user-filter. It was addressed why the stochastic model of the user-filter is always misspecified, irrespective of the multi-epoch formulation adopted, cf. term IV in (12).

By discussing three different formulations for the user-filter, it was demonstrated that the user can potentially limit the suboptimality level of his filter, i.e. when the correction latency is not high and when the duration of the provider-filter initialization is sufficiently long. In contrast to the commonly-used multi-epoch formulation (Case 1), our proposed formulations (Cases 2 and 3) were shown to deliver user parameter solutions that are almost as precise as those of the minimum-variance estimation.

Acknowledgements This work was conducted as part of the first author's Alexander von Humboldt Fellowship at the Institute for Communication and Navigation, the German Aerospace Center (DLR),

Appendix

Proof of the Theorem Let $Q_{\hat{x}}$ and $Q_{\hat{x}^*}$ be the variance matrices of the estimators \hat{x} and \hat{x}^* , respectively. To prove (6), we employ the following *Rayleigh quotient*-bounds of the matrix-pair $(Q_{\hat{x}}, Q_{\hat{x}^*})$ (Magnus and Neudecker 2017)

$$\lambda_{\min}(Q_{\hat{x}} Q_{\hat{x}^*}^{-1}) \leq \frac{f^T Q_{\hat{x}} f}{f^T Q_{\hat{x}^*} f} \leq \lambda_{\max}(Q_{\hat{x}} Q_{\hat{x}^*}^{-1}). \quad (18)$$

Defining matrix $M = (Q_{\hat{x}} - Q_{\hat{x}^*}) Q_{\hat{x}^*}^{-1}$, (18) can be expressed as

$$1 + \lambda_{\min}(M) \leq \frac{f^T Q_{\hat{x}} f}{f^T Q_{\hat{x}^*} f} \leq 1 + \lambda_{\max}(M), \quad (19)$$

as $Q_{\hat{x}} Q_{\hat{x}^*}^{-1} = I + M$. What remains to show is $\lambda(M) = \lambda(M_{L_A} M_{L_{A^\perp}})$. Application of the variance propagation law to (5) and (7) gives the variance matrices of the estimators \hat{x} and \hat{x}^* as $Q_{\hat{x}} = A^+ Q_y A^{+T}$ and $Q_{\hat{x}^*} = (A^T Q_y^{-1} A)^{-1}$, respectively. Therefore, the matrix difference $(Q_{\hat{x}} - Q_{\hat{x}^*})$

can be expressed as

$$\begin{aligned}
 Q_{\hat{x}} - Q_{\hat{x}^*} &= A^+ \underbrace{(Q_y - A Q_{\hat{x}^*} A^T)}_{Q_{\hat{x}^*}} A^{+T} \\
 &= A^+ \underbrace{Q_y A^\perp (A^{\perp T} Q_y A^\perp)^{-1} A^{\perp T} Q_y}_{Q_{\hat{x}^*}} A^{+T} \\
 &= A^+ L Q_p A^\perp (A^{\perp T} Q_y A^\perp)^{-1} A^{\perp T} Q_p L^T A^{+T} \tag{20}
 \end{aligned}$$

The first equality follows from the identity $A^+ A = I$ and the least-squares residuals' variance matrix $Q_{\hat{x}^*} = Q_y - A Q_{\hat{x}^*} A^T$, while the second equality follows by expressing $Q_{\hat{x}^*}$ in its conditional adjustment form (Teunissen 2000), with A^\perp being an orthogonal-complement basis matrix of A . Thus $A^T A^\perp = 0$, and $[A, A^\perp]$ is a square, invertible matrix. The last (third) equality follows from $Q_y = Q_e + L Q_p L^T$ and $A^+ Q_e A^\perp = 0$. Substitution of the last expression, with $Q_{\hat{x}^*}^{-1} = (A^T Q_y^{-1} A)$, into $M = (Q_{\hat{x}} - Q_{\hat{x}^*}) Q_{\hat{x}^*}^{-1}$ gives

$$M = \underbrace{A^+ L Q_p A^\perp (A^{\perp T} Q_y A^\perp)^{-1} A^{\perp T}}_U \underbrace{Q_p [A A^+ L]^T Q_y^{-1} A}_{V} \tag{21}$$

As the nonzero eigenvalues of the matrix-product UV remain *invariant* for switching the order of the involved matrices as VU (Magnus and Neudecker 2017, p. 16), the following matrix

$$\begin{aligned}
 VU &= \underbrace{Q_p [A A^+ L]^T Q_y^{-1} [A A^+ L]}_{M_{L_A}} \\
 &\times \underbrace{Q_p A^\perp (A^{\perp T} Q_y A^\perp)^{-1} A^{\perp T}}_{M_{L_{A^\perp}}} \tag{22}
 \end{aligned}$$

inherits the same nonzero eigenvalues as those of (21). \square

References

Collins P, Bisnath S, Lahaye F, Heroux P (2010) Undifferenced GPS ambiguity resolution using the decoupled clock model and ambiguity datum fixing. *Navigation* 57(2):123–135

Kalman RE (1960) A new approach to linear filtering and prediction problems. *J Basic Eng* 82(1):35–45

Khodabandeh A (2021) Single-station PPP-RTK: correction latency and ambiguity resolution performance. *J Geod* 95(4):1–24

Koch KR (1999) Parameter estimation and hypothesis testing in linear models. Springer, Berlin

Laurichesse D, Mercier F (2007) Proceedings of the 20th International Technical Meeting of the Satellite Division of The Institute of Navigation (ION GNSS 2007), pp 839–848

Leandro RF, Santos MC, Langley RB (2011) Analyzing GNSS data in precise point positioning software. *GPS Solut* 15(1):1–13

Leick A, Rapoport L, Tatarnikov D (2015) GPS satellite surveying, 4th edn. Wiley, New York

Magnus JR, Neudecker H (2017) Matrix differential calculus with applications in statistics and econometrics, 3rd edn. Wiley, New York

Odijk D, Zhang B, Khodabandeh A, Odolinski R, Teunissen PJG (2015) On the estimability of parameters in undifferenced, uncombined GNSS network and PPP-RTK user models by means of S-system theory. *J Geod* 90(1):15–44

Psychas D, Khodabandeh A, Teunissen PJG (2022) Impact and mitigation of neglecting PPP-RTK correctional uncertainty. *GPS Solut* 26(1):1–15

Simon D (2006) Optimal state estimation: Kalman, H [infinity] and nonlinear approaches. Wiley, New York

Teunissen PJG (2000) Adjustment theory: an introduction. Delft University Press, Delft. Series on mathematical geodesy and positioning

Teunissen PJG (2001) Dynamic data processing. Delft University Press, Delft. Series on mathematical geodesy and positioning

Teunissen PJG, Khodabandeh A (2013) BLUE, BLUP and the Kalman filter: some new results. *J Geod* 87(5):1–13

Teunissen PJG, Montenbruck O (eds) (2017) Springer handbook of global navigation satellite systems. Springer, Berlin

Teunissen PJG, Odijk D, Zhang B (2010) PPP-RTK: results of CORS network-based PPP with integer ambiguity resolution. *J Aeronaut Astronaut Aviat* 42(4):223–229

Wang K, Khodabandeh A, Teunissen PJG (2017) A study on predicting network corrections in PPP-RTK processing. *Adv Space Res* 60(7):1463–1477

Wubben G, Schmitz M, Bagg A (2005) Proceedings of ION GNSS, pp 13–16

Open Access This chapter is licensed under the terms of the Creative Commons Attribution 4.0 International License (<http://creativecommons.org/licenses/by/4.0/>), which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license and indicate if changes were made.

The images or other third party material in this chapter are included in the chapter's Creative Commons license, unless indicated otherwise in a credit line to the material. If material is not included in the chapter's Creative Commons license and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder.

