

## Preconditioners for Multi-Screen Scattering

Cools, Kristof ; Urzúa-Torres, Carolina

**DOI**

[10.1109/ICEAA49419.2022.9899877](https://doi.org/10.1109/ICEAA49419.2022.9899877)

**Publication date**

2022

**Document Version**

Accepted author manuscript

**Published in**

Proceedings of the 2022 International Conference on Electromagnetics in Advanced Applications (ICEAA)

**Citation (APA)**

Cools, K., & Urzúa-Torres, C. (2022). Preconditioners for Multi-Screen Scattering. In *Proceedings of the 2022 International Conference on Electromagnetics in Advanced Applications (ICEAA)* (pp. 172-173). IEEE. <https://doi.org/10.1109/ICEAA49419.2022.9899877>

**Important note**

To cite this publication, please use the final published version (if applicable).  
Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights.  
We will remove access to the work immediately and investigate your claim.

# Preconditioners for Multi-Screen Scattering

Kristof Cools

Dept. of Information Technology  
Ghent University, BE  
kristof.cools@ugent.be

Carolina Urzúa-Torres

Delft Institute for Applied Mathematics  
TU Delft, NL  
C.A.UrzuaTorres@tudelft.nl

**Abstract**—In this contribution, a well-conditioned method for the modelling of scattering by so-called multi-screens or PEC sheets including junctions is introduced. The method starts from the *inflated screen* approach by Claeys and Hiptmair. We introduce a Calderón preconditioner and a suitable discretisation scheme. The resulting scheme contains many more DoFs than strictly required. We will show how almost all redundancy can be removed without significant loss of effectiveness of the method.

## I. INTRODUCTION

In [3], a variational formulation for the scattering by multi-screens has been introduced and analysed. The problem is posed on the jump space: the quotient-space of the multi-trace space with all single-trace (non-radiating) currents. In [2] a discretisation for this quotient-space is presented, and a strategy to reduce the number of degrees of freedoms (DoFs) is proposed. In this contribution, we construct a Calderón preconditioner that works for the quotient-space discretisation. We explore ways to reduce the representation of the quotient-space such that preconditioners can be constructed efficiently. It turns out that the choice that seems most straightforward does not result in the desired efficiency, and extra care is required in choosing these spaces.

## II. EQUATIONS AND DISCRETISATION

We define simple screens as open surfaces in  $\mathbb{R}^3$  without junctions. For orientable simple screens  $\Gamma_p$  and  $\Gamma_q$ , with their chosen normals  $n_p$  and  $n_q$ , the single layer operator is

$$T_{pq}j = -n_p \times i\kappa \int_{\Gamma_q} \frac{e^{-i\kappa|x-y|}}{4\pi|x-y|} j(y) dy + n_p \times \frac{1}{i\kappa} \text{grad} \int_{\Gamma_q} \frac{e^{-i\kappa|x-y|}}{4\pi|x-y|} \text{div} j(y) dy, \quad (1)$$

with  $x \in \Gamma_p$ . Consider a multi-screen  $\Gamma$  containing a single junction  $\gamma$ . Three simple screens  $\Gamma_i, i = 1, 2, 3$  meet at the junction. We decompose  $\Gamma$  as

$$\Gamma = \cup_{i=1}^3 \Gamma_{i,i+1} \quad (2)$$

with  $\Gamma_{i,j} = \Gamma_i \cup \Gamma_j$ . The normal on  $\Gamma_{i,i+1}$  is chosen 'outward', i.e. such that near the junction it points away from other screens. Each simple screen  $\Gamma_i$  appears once as the 'front' and once as the 'back' of the multi-screen (Fig. 1). The simple

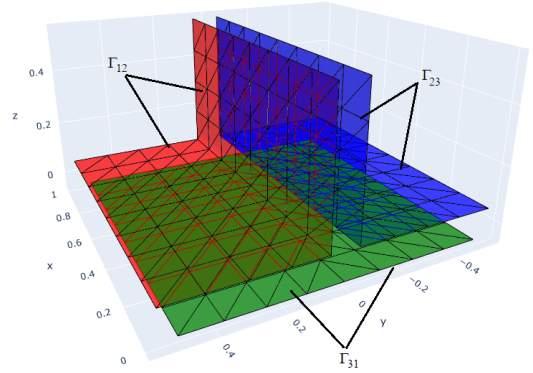


Fig. 1. Inflated screen. The discrete multi-trace contains two DoFs per edge not on the junction, and three DoFs per edge on the junction.

screens  $\Gamma_i$  are meshed with target element size  $h$ , with the meshes matching up along  $\gamma$ . The simple screens  $\Gamma_{i,j}$  inherit this mesh.

Let  $U_{i,i+1}$  be the Raviart-Thomas spaces on  $\Gamma_{i,i+1}$  subject to the condition  $m \cdot f = 0$  on  $\partial\Gamma_{i,i+1}$ , with  $m$  the bi-normal on  $\partial\Gamma_{i,i+1}$  (the tangent to  $\Gamma_{i,i+1}$  at  $\partial\Gamma_{i,i+1}$ , normal to  $\partial\Gamma_{i,i+1}$ ). The discrete multi-trace space is built as the direct product of these spaces, i.e.  $U = \prod_{i=1}^3 U_{i,i+1}$ . A variational description of the scattering problem reads: Find  $j \in U$  such that, for all  $k \in U$ :

$$\ll n \times k, Tj \gg_{\Gamma} = -\frac{1}{\eta} \ll n \times k, n \times e^{inc} \gg_{\Gamma}. \quad (3)$$

The double parentheses denote the multi-screen duality pairing

$$\ll u, v \gg_{\Gamma} = \sum_{i=1}^3 \langle u, v \rangle_{\Gamma_{i,i+1}}. \quad (4)$$

Note that (3) does not yield a unique solution. Fortunately, for regular incident fields, Fredholm compatibility is ensured. Moreover, all solutions of (3) radiate the same field, so the representation converged to by the iterative solver does not affect physical quantities.

The matrix for (3) is severely ill-conditioned, leading us to look for an efficient preconditioner. Inspired by the success of Calderón preconditioning, the space  $V = \prod_{i=1}^3 V_{i,i+1}$  is defined as the space of Buffa-Christiansen functions [1], dual to  $U$  and with basis  $(g_n)_{n=1}^N$ . Denote the standard basis of  $U$  by  $(f_n)_{n=1}^N$ . The following preconditioned system is proposed:

$$\mathbf{N}^{fg} \mathbf{T}_{gg} \mathbf{N}^{gf} \mathbf{T}_{ff} \mathbf{x}^f = \mathbf{N}^{fg} \mathbf{T}_{gg} \mathbf{N}^{gf} \mathbf{e}_f \quad (5)$$

This project has received funding from the ERC under the European Union's Horizon 2020 research and innovation programme (Grant agreement No. 101001847)

with  $(\mathbf{T}_{ff})_{m,n} = \ll n \times f_m, T f_n \gg_\Gamma$ ,  $\mathbf{N}^{gf} = (\mathbf{N}_{fg})^{-1}$ ,  $(\mathbf{N}_{fg})_{m,n} = \ll n \times f_m, g_n \gg_\Gamma$ , etc. Note that  $\mathbf{N}_{fg}$  is block-diagonal, subordinate to the partitioning (2) of  $\Gamma$ .

Unfortunately, this strategy is flawed. In fact, for simple screens, the range of  $\mathbf{N}^{gf}\mathbf{T}_{ff}$  coincides with the non-radiating subspace of  $V$ , which in turn coincides with the nullspace of  $\mathbf{N}^{fg}\mathbf{T}_{gg}$ . This implies the preconditioned system matrix is zero. To fix this, a block-diagonal bilinear form is introduced:

$$\tilde{t}(k, j) = \sum_{i=1}^3 \langle n \times k_{i,i+1}, T j_{i,i+1} \rangle_{\Gamma_{i,i+1}} \quad (6)$$

with  $j = (j_{i,i+1})_{i=1}^3$  and  $k = (k_{i,i+1})_{i=1}^3$ . As opposed to the *full* single layer bilinear form, this block-diagonal form gives rise to invertible matrices. The nullspace of the system does not grow upon application of the preconditioner. The preconditioned system becomes

$$\mathbf{N}^{fg}\tilde{\mathbf{T}}_{gg}\mathbf{N}^{gf}\mathbf{T}_{ff}\mathbf{x}^f = \mathbf{N}^{fg}\tilde{\mathbf{T}}_{gg}\mathbf{N}^{gf}\mathbf{e}_f \quad (7)$$

where the full single layer operator  $\mathbf{T}_{gg}$  has been replaced by the block-diagonal single layer operator  $\tilde{\mathbf{T}}_{gg}$ .

### III. REDUCTION OF DEGREES OF FREEDOM

Numerical examples demonstrate that this preconditioner is highly effective in reducing the number of iterations required for the approximate solution of the scattering problem. However, the space on which the problem is posed contains a very large subspace of non-radiating currents. As explained above, this redundancy does not lead to incorrect solutions, but it does lead to unnecessary computations, which is not desirable. In the following, it is investigated how the multi-trace space can be reduced whilst retaining the efficiency of the preconditioner.

It is tempting to try to reduce the DoFs to the absolute minimum, and choose them so that its span only intersects the single-trace subspace at 0. The saw-tooth reduction (Fig. 2) is such a reduction. Unfortunately, this results in a residual branch of eigenvalues piling up at zero, and a number of iterations that increases as the mesh parameter tends to zero.

The most economic discretisation that leads to Calderón preconditioning with the expected iteration count is one where the full finite element space on  $\Gamma_{12}$  is retained, together with the finite elements on  $\hat{\Gamma}_{23}$ , where  $\hat{\Gamma}_{23}$  is the union of all triangles in  $\Gamma_{23}$  that either are not on  $\Gamma_2$  or have a vertex in common with the junction. Roughly speaking, this amounts to extending  $\Gamma_3$  with a single strip of elements from  $\Gamma_2$  beyond the junction. Fig. 2 shows the two reduced discretisations. The primal space for the strip reduction is  $\hat{U} = U_{12} \times \hat{U}_{23}$ , with  $U_{12}$  and  $\hat{U}_{23}$  the finite element spaces spanned by standard bases of RWG functions attached to *internal* edges of the meshes on  $\Gamma_{12}$  and  $\hat{\Gamma}_{23}$ , respectively.

### IV. NUMERICAL EXAMPLE

Consider a plane wave  $e^{inc}(x) = (1, 0, 0)^T \exp(-i\frac{2\pi}{\lambda}x_3)$  with  $\lambda = 2\pi$  meter. This field illuminates the structure in Fig. 1. The problem is solved with the strip and saw-tooth reduced quotient-space boundary element method. The

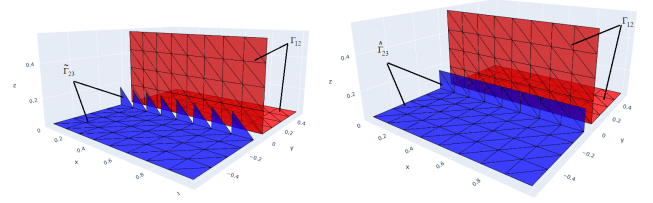


Fig. 2. Two strategies to reduce the degrees of freedom in the multi-trace space. Left (**saw-tooth mesh**): the RWG space on this mesh is a complement of minimal dimension of the non-radiating subspace. Right (**strip mesh**): DoFs at edges in the overlapping strip are redundant for description of the jump space but required in building an efficient preconditioner.

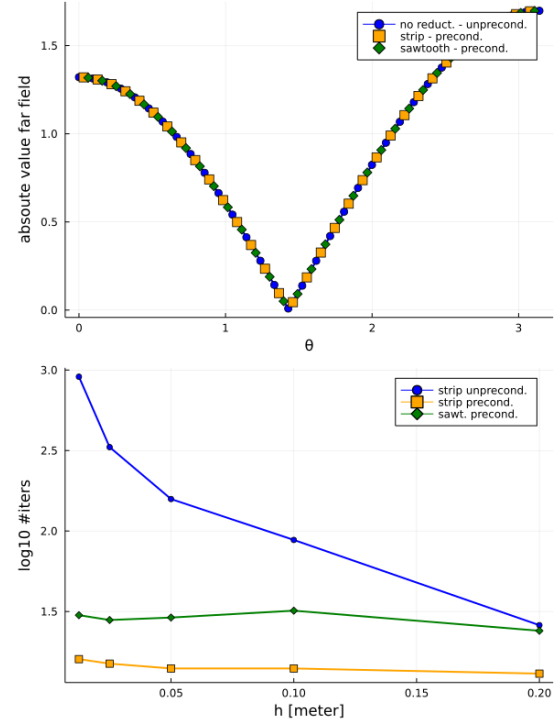


Fig. 3. Top: far fields for the unpreconditioned, unreduced inflated screen method and the precondition strip and sawtooth-reductions agree exactly. Bottom: number of iterations required for GMRES convergence. At  $h = 0.0125$  the strip reduction outperforms the sawtooth reduction by a factor of 2.

far fields for these solutions agree (Fig. 3). The number of iterations for a tolerance of  $2e - 5$  for the preconditioned saw-tooth reduced method is much smaller than that for the unpreconditioned unreduced solver and depends only mildly on  $h$ . It is reduced by another factor of 2 by the preconditioned strip reduced method (Fig 3).

### REFERENCES

- [1] F. P. Andriulli, K. Cools, H. Bagci, F. Olyslager, A. Buffa, S. Christiansen, and E. Michielssen. A multiplicative Calderón preconditioner for the electric field integral equation. In *Antennas and Propagation Society International Symposium*, July 2008.
- [2] X. Claeys, L. Giacomel, R. Hiptmair, and C. Urzúa-Torres. Quotient-space boundary element methods for scattering at complex screens. *BIT Numerical Mathematics*, 61(4):1193–1221, December 2021.
- [3] X. Claeys and R. Hiptmair. Integral Equations for Electromagnetic Scattering at Multi-Screens. *Integral Equations and Operator Theory*, 84(1):33–68, January 2016.