

Physical Modelling Tests With Flexible Woody Vegetation Mimics

Kalloe, Su A.; Hofland, Bas; van Wesenbeeck, Bregje K.

DOI

[10.59490/coastlab.2024.721](https://doi.org/10.59490/coastlab.2024.721)

Publication date

2024

Document Version

Final published version

Citation (APA)

Kalloe, S. A., Hofland, B., & van Wesenbeeck, B. K. (2024). *Physical Modelling Tests With Flexible Woody Vegetation Mimics*. Abstract from 9th Conference on Physical Modelling in Coastal Engineering and Science, CoastLab 2024, Delft, Netherlands. <https://doi.org/10.59490/coastlab.2024.721>

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

PHYSICAL MODELLING TESTS WITH FLEXIBLE WOODY VEGETATION MIMICS

SU A. KALLOE¹, BAS HOFLAND², BREGJE K. VAN WESENBEECK³

¹ Delft University of Technology, the Netherlands, S.A.Kalloe@tudelft.nl

² Delft University of Technology, the Netherlands, B.Hofland@tudelft.nl

³ Deltares, the Netherlands, Bregje.vanWesenbeeck@deltares.nl

KEYWORDS: Willow trees, Wave damping, 3D-printed tree mimics, Branch motion, Flexible vegetation.

ABSTRACT

Riparian forests in front of dikes can dampen incoming waves and thereby contribute to flood safety. In real-scale flume experiments with live pollard willow trees (forming a 40-m-long forest), it was observed that during storm conditions, a maximum reduction of 20 % in incoming wave height could be achieved (van Wesenbeeck, et al., 2022). Notably, this amount of wave damping occurred at a water depth of 3 meters, aligning with the section of the trees with the maximum frontal-surface area. For a larger water depth, measured wave damping however declined. This is potentially partly caused by the natural tapering form of the trees. Typically, trees are characterized by smaller branch diameters and more flexible branches higher up in the canopy (McMahon & Kronauer, 1976); and flexible vegetation mimics are known to dampen less than rigid mimics due to motion (Van Veelen, T, Reeve, & Karunarathna, 2020). Hence, both the frontal-surface area and branch rigidity decrease along the height of the willow trees, potentially leading to less wave damping by the forest when subject to large waves at higher water levels.

Until now, most flume studies did not incorporate both of these elements into their vegetation models. Many of these studies used rigid cylinders as vegetation mimics (e.g., (Sonnenwald, Stovin, & Guymer, 2019)) or assumed inherently rigid tree components such as mangrove roots (e.g., (Maza, Lara, & Losada, 2019)). It is important to note that most studies that did incorporate effects of flexibility, focus on aquatic or salt marsh vegetation (e.g., (Luhar & Nepf, 2016); (Hong, et al., 2022)), which typically are more flexible than trees. Hence, effects of flexibility of woody vegetation, such as willows and mangroves, have largely been neglected. To improve existing analytical models for wave damping through the canopy of woody vegetation, we conducted flume experiments using conical shapes with differing degrees of flexibility. By doing so, we test the effects of (1) decreasing frontal-surface area, and (2) increasing flexibility along the height of the object.

Experiments with simplified branch mimics were conducted in a ($1 \times 0.8 \times 40 \text{ m}^3$) flume at 1:10 scale (Figure 1A). The mimics were based on the live pollard willow trees in (van Wesenbeeck, et al., 2022); and therefore, consisted of a stiff cylinder (height= 10 cm, base diameter= 3.45 cm) to represent the trunk and a cone (length= 42.5 cm) to represent the canopy/branch. Two sizes of cones were tested with the following base diameters: 3.45 cm ('Thick' Cone), and 1.37 cm ('Medium' Cone), as shown in Figure 1A, and 1B, respectively. These two distinct thicknesses were tested to observe the effect of flexibility for different Reynolds regimes. Both cone sizes were 3D-printed using four different materials with varying E-moduli, namely: 5MPa, 7.5 MPa, 56 MPa and 3200 MPa (Stiff). The tested hydrodynamic conditions are shown in Table 1.

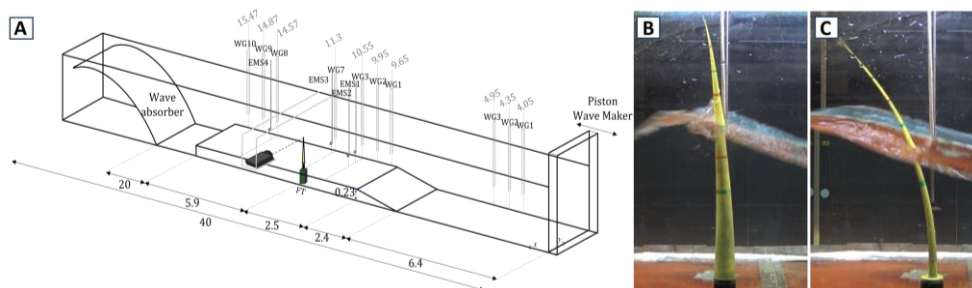


Figure 1. A: Overview test set-up and equipment along the flume; B: Thick Cone 5 MPa; and C: Medium Cone 5 MPa.

Table 1: Tested regular wave conditions, h_f the water depth at the tree location, H is the wave height; T the wave period and s the wave steepness, where $s = H/(gT^2/2\pi)$

<i>Emerged conditions</i>					<i>Nearly submerged conditions</i>				
Test	h_f (m)	H (m)	T (s)	s (-)	Test	h_f (m)	H (m)	T (s)	s (-)
1	0.3	0.05	1	0.03	11	0.45	0.05	1	0.03
2	0.3	0.1	1	0.06	12	0.45	0.1	1	0.06
3	0.3	0.14	1	0.09	13	0.45	0.14	1	0.09
4	0.3	0.1	1.23	0.04	14	0.45	0.1	1.23	0.04
5	0.3	0.14	1.23	0.06	15	0.45	0.14	1.23	0.06
6	0.3	0.18	1.23	0.08	16	0.45	0.18	1.23	0.08
7	0.3	0.05	1.77	0.01	17	0.45	0.05	2.1	0.01
8	0.3	0.1	1.77	0.02	18	0.45	0.1	1.77	0.02
9	0.3	0.14	1.77	0.03	19	0.45	0.14	1.77	0.03
10	0.3	0.18	1.77	0.04	20	0.45	0.18	1.77	0.04

The extent to which flexibility influences the forces on woody vegetation mimics will be analysed by mainly using the force and video data collected from these experiments. The tests with the rigid cones will serve as a bench mark. Dimensionless parameters (such as Cauchy) will be defined and quantified to verify whether these are reliable indicators for predicting behaviour of flexible cones when subject to regular waves. These indicators are useful when quick assessments for the wave damping performance of woody vegetation are needed.

ACKNOWLEDGEMENTS

This study is part of the research program WOODY, financed by the Dutch Research Council (NWO) visa the Open Technology Program, number 17194.

REFERENCES

- Hong, L., Cheng, S., Houseago, R., Parsons, D., Best, J., & Chamorro, P. (2022). On the submerged low-Cauchy-number canopy dynamics under unidirectional flows. *Journal of Fluids and Structures*.
- Luhar, M., & Nepf, H. (2016). Wave-induced dynamics of flexible blades. *Journal of fluids and structures*.
- Maza, M., Lara, J., & Losada, I. (2019). Experimental analysis of Wave Attenuation and Drag Forces in a Realistic Fringe Rhizophora Mangrove Forest. *Advances in Water Resources*.
- McMahon, T., & Kronauer, R. (1976). Tree Structures: Deducing the principle of mechanical design . *Journal of Theoretical Biology*,.
- Sonnenwald, F., Stovin, V., & Guymer, I. (2019). Estimating Drag Coefficient for Arrays of Rigid Cylinders representing Emergent Vegetation. *Journal of Hydraulic Research*.
- Van Veelen, T., T, F., Reeve, D., & Karunarathna, H. (2020). Experimental study on vegetation flexibility as control parameter for wave damping and velocity structure. *Coastal Engineering*.
- van Wesenbeeck, B., Wolters, G., Antolinez, J., Kalloe, S., Hofland, B., de Boer, W., . . . Bouma, T. (2022). Wave Attenuation through Forests under Extreme Conditions. *Scientific Reports*, .