

Investigation into the instantaneous centre of rotation for enhanced design of floating offshore wind turbines

Patryniak, Katarzyna; Collu, Maurizio; Jonkman, Jason; Hall, Matthew ; Barter, Garrett ; Zalkind, Daniel ; Coraddu, A.

DOI

[10.5194/wes-10-2051-2025](https://doi.org/10.5194/wes-10-2051-2025)

Publication date

2025

Document Version

Final published version

Published in

Wind Energy Science

Citation (APA)

Patryniak, K., Collu, M., Jonkman, J., Hall, M., Barter, G., Zalkind, D., & Coraddu, A. (2025). Investigation into the instantaneous centre of rotation for enhanced design of floating offshore wind turbines. *Wind Energy Science*, 10(9), 2051-2077. Article 2051-2077. <https://doi.org/10.5194/wes-10-2051-2025>

Important note

To cite this publication, please use the final published version (if applicable).

Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.



Investigation into the instantaneous centre of rotation for enhanced design of floating offshore wind turbines

Katarzyna Patryniak¹, Maurizio Collu¹, Jason Jonkman², Matthew Hall², Garrett Barter²,
Daniel Zalkind², and Andrea Coraddu³

¹Department of Naval Architecture, Ocean and Marine Engineering, University of Strathclyde, Glasgow, UK

²National Renewable Energy Laboratory, Golden, CO, USA

³Faculty of Mechanical Engineering, Delft University of Technology, Delft, the Netherlands

Correspondence: Katarzyna Patryniak (katarzyna.patryniak@strath.ac.uk)

Received: 27 November 2024 – Discussion started: 14 January 2025

Revised: 29 June 2025 – Accepted: 3 July 2025 – Published: 17 September 2025

Abstract. The dynamic behaviour of floating offshore wind turbines (FOWTs) involves complex interactions of multivariate loads from wind, waves, and currents, which result in complex motion characteristics. Although methods for analysing global motion responses are well-established, the time- and location-dependent kinematics remain underexplored. This paper investigates the instantaneous centre of rotation (ICR), a point of zero velocity at a time instance of general plane motion. Understanding and strategically positioning the ICR can reduce the dynamic motion in critical structural locations, enhancing the performance and structural robustness of FOWTs. The paper presents a method for computing the ICR using time-domain simulation results and proposes a statistical analysis approach suitable for design studies. Building on prior research, it examines the sensitivity of the ICR to external loading and design features, providing insights into how these factors influence motion response and how the motion response influences the statistics of the ICR, structural loads, and other performance metrics of interest. The study explores two FOWT configurations, a spar and a semisubmersible, identifying design variables that most effectively control the ICR statistics and identifying the ICR statistics most correlated with the responses of interest. Finally, through two case studies, we demonstrate how to apply these new insights in a practical design scenario. By adjusting the design variables most correlated with the ICR (fairlead vertical position and centre of mass for the spar and mooring line length and offset column diameter for the semisubmersible), we successfully modified the designs of the floating support structures to reduce the loads in the mooring lines, tower base, and blade roots, improving the ultimate strength and fatigue characteristics compared to the original designs.

1 Introduction

The dynamic behaviour of floating offshore wind turbines (FOWTs) presents significant complexity due to the diverse range of multivariate loads they encounter in an offshore environment. The distinctly distributed inertial, hydrostatic, mooring, and aero- and hydrodynamic loads are influenced by varying combined wind, wave, and current impacts. This results in response characteristics unique to FOWTs and not observed in other offshore structures. Although the methods for analysing the global motion responses of FOWTs are

well-established, the intricate, time- and location-dependent kinematics and motion patterns remain underexplored.

As highlighted by Patryniak et al. (2023), when a FOWT undergoes general plane motion, one can identify a point, known as the instantaneous centre of rotation (ICR), where the velocity is zero at a given moment. This point is not necessarily located within the physical boundaries of the FOWT and is highly dynamic, shifting in response to changing environmental loads and the resulting platform motions. Accurate identification of the ICR and its statistics can offer valuable insights for optimising motion reduction strategies

and enhancing the FOWT's performance and structural robustness. By strategically modifying design elements to influence the position of the ICR, it is possible to minimise dynamic motions at critical locations. For example, aligning the fairleads with the ICR could limit the dynamic part of the motion that does not contribute to useful restoring but does contribute to fatigue damage of the mooring lines. Similarly, positioning the ICR near the rotor–nacelle assembly (RNA) could decrease rotor and nacelle motion, reducing aerodynamic load fluctuations and mitigating fatigue across the system.

Early studies on the centre of rotation of floating structures were conducted by Stewart and Ewers (1979) and Standing (1991), focusing on barge vessels. Both authors noted significant oscillations in the centre of rotation, with Standing observing that the point “tends to wander wildly” in irregular waves. This work challenged the assumption that the centre of rotation is aligned with the centre of gravity and highlighted the importance of hydrodynamic loads. Haslum and Faltinsen (2000) further examined the centre of rotation in a spar platform undergoing surge–pitch motion, revealing its sensitivity to oscillation frequency and fairlead location. Souza (2012) introduced an experimental method to determine the ICR using velocity vectors from two probes on the floating body. Fernandes et al. (2016) and Costa et al. (2018) built on the previous work by analysing a floating production storage and offloading (FPSO) vessel in regular waves, showing that the ICR locus (a curve formed by all ICR points) is a straight line that does not align with the vessel's symmetry and varies with wave frequency. At very low frequencies, the ICR exhibited a behaviour akin to pure translation, approaching an infinite distance above the body. Costa et al. (2020a) found that the ICR coordinates of a moored vessel in regular head waves, free to move in surge, heave, and pitch, closely follow a Cauchy distribution. In subsequent work (Costa et al., 2020b), the authors expanded their investigation to oblique seas and six degrees of freedom, further reaffirming the ICR's dependence on external loading frequency.

Despite its relevance, the ICR has not been a focal point of FOWT studies. A few examples include the work by Eliassen (2015), which was the first attempt to investigate the centre of rotation of a FOWT without presupposing its location, and the study by Kaptan et al. (2022), which examined the influence of wave frequency on the centre of rotation for two different floating concepts. Lemmer et al. (2020) considered the centre of rotation to be the point where the surge and pitch response amplitude operators combine to produce near-zero motion. The authors modified the semisubmersible floating platform designs to ensure that the system rotates about the hub, thereby achieving preferable dynamic response characteristics, improved power quality, and reduced tower base loads. While the location of the centre of rotation was determined through frequency domain analysis, its instantaneous nature was not taken into account.

The concept of ICR in the context of FOWTs was most recently explored by Patryniak et al. (2023). The study provided a comprehensive explanation of the ICR concept, developed a method to calculate the ICR of FOWTs through eigen-analysis and in the time domain, and analysed its time history and statistical behaviour for a specific case involving the OC3 Hywind spar (Jonkman, 2010) with the NREL 5 MW reference rotor (Jonkman et al., 2009) that was subjected to regular and irregular waves of varying frequencies and amplitudes¹. The findings indicated that the ICR of a FOWT is influenced by the frequency of the incident waves and, at low frequencies, is also affected by wave height. Although significant insight into the ICR behaviour was provided, only one floating structure was investigated, and realistic environmental conditions (combined wind, wave, and current load) were not considered, limiting the applicability of the study.

In this work, we build on the previously developed method and further explore the ICR for FOWT design variations under the complex loading conditions typical of operational FOWTs to incorporate this knowledge into the design process. We begin by examining the influence of more complex environmental loading conditions (Sect. 3) to enhance understanding of ICR behaviour in realistic operational scenarios. For ICR insights to be useful in the design process, two conditions must be met. First, the ICR must be correlated with FOWT responses that are critical for design improvement. Second, a set of design variables that can be adjusted to “control” the ICR statistics must be identified to enable these improvements. Accordingly, in Sect. 4, we explore how specific design decisions affect ICR behaviour, followed by an investigation of the relationship between the ICR and key FOWT responses (Sect. 5). This sensitivity analysis helps identify key design features that can be prioritised during the FOWT optimisation process. The methods proposed in this paper can be applied to a practical design scenario, as will be demonstrated in Sect. 6.

2 Methodology

The objectives of this study are (i) to understand the behaviour of the ICR in a complex, realistic environment and (ii) to demonstrate how knowledge of ICR behaviour can be leveraged to improve FOWT designs. The ICR can serve as a useful metric in the FOWT design process provided that

1. the FOWT design can be modified in ways that influence the ICR statistics and
2. the ICR statistics significantly affect the responses of interest (i.e. the performance of the FOWT).

Therefore, to enable a practical application of the new knowledge about the ICR of FOWTs, this study examines the re-

¹OC3: offshore code comparison collaboration

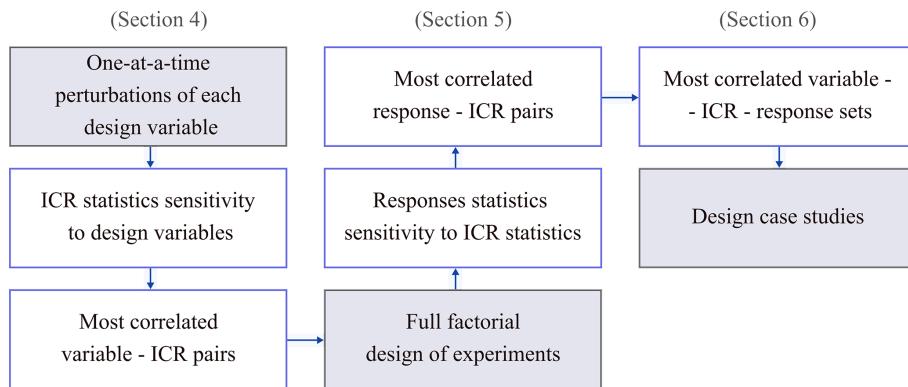


Figure 1. The procedure for investigating the relationships between the design variables, ICR, and response statistics.

relationships among design variables, ICR statistics, and response statistics. In particular, we investigate the design variables that are significantly correlated with the ICR statistics and the ICR statistics that are significantly correlated with the responses of interest. The procedure followed is illustrated in Fig. 1 and detailed in the subsequent sections.

The study begins with one-at-a-time perturbations of multiple design variables, which are features of the floating platform and mooring system. This approach allows for the examination of correlations with ICR statistics (mean and standard deviation of horizontal and vertical ICR components). Although more comprehensive experimental designs, such as full factorial or Latin hypercube, offer deeper insights into design space behaviour, perturbing one variable at a time while keeping all other variables at their original design values significantly reduces the design space size, keeps the computational cost tractable, and allows for a clear presentation and interpretation of the results.

Once the relationships between the design variables and ICR are established, the most impactful parameters are identified for down selection. These parameters are then subjected to a more thorough sensitivity analysis using a full-factorial approach. This analysis explores the relationships between all combinations of the selected parameters and the responses of interest (i.e. design performance metrics).

At this stage, highly correlated pairs of design variables and ICR statistics are further refined to include only those that also show strong correlations with the responses of interest. This systematic procedure helps identify design directions that may lead to significant improvements in the performance of the FOWTs through changes to ICR statistics.

The methods for computing the ICR and its statistics are outlined below.

2.1 Instantaneous centre of rotation derivation

When exposed to colinear unidirectional wind, wave, and current loads, FOWTs undergo general plane motion, with translational and rotational characteristics dependent on the

external load and design of the structure (Patryniak et al., 2023). In particular, the centre of the pitch rotation depends on the amplitudes, frequencies, phases, and distributions of the external dynamic forces, and therefore its determination is nontrivial.

A point (not necessarily within the body) of zero velocity at a particular instant in time (i.e. ICR) can be found by analysing the velocity vectors at two arbitrarily chosen points on the body. While, by definition, the ICR appears to be instantaneously at rest, all other points in the body present pure rotation about this point; i.e. they follow circular paths around the ICR (Meriam and Kraige, 1993). Therefore, the ICR can be found at the intersection of the lines perpendicular to the velocity vectors at the two points (A and B in Fig. 2), assuming a rigid body. In the special case when the velocity vectors are parallel and do not cross and the line joining points A and B is perpendicular to the velocities, the ICR can be obtained through a direct proportion² (Meriam and Kraige, 1993), as illustrated in the middle subfigure of Fig. 2. In the special case of pure translation (right subfigure of Fig. 2), the ICR tends to infinity. The vectors required for this calculation can be found by measuring the velocities in A and B, which are obtained from the time-domain numerical simulations (detailed in Sect. 2.3).

Note that the location of the ICR changes as the body moves or loading conditions change, in terms of both the body-fixed and global inertial coordinate systems, and therefore, it only exists at a particular instant in time (hence, “instantaneous”). As shown previously by Patryniak et al. (2023) and reiterated here in Fig. 3, in regular waves (a purely theoretical condition), the ICR coordinates exhibit a distinctive time history pattern. When the pitch displacement reaches its minimum or maximum, the pitch velocity is zero (pure translation), and the ICR tends toward infinity. At other times, it concentrates around finite locations. The phases before and after each pitch extremum result in the ICR cluster-

²Direct proportion is a relation between two quantities where the ratio of the two is equal to a constant value.

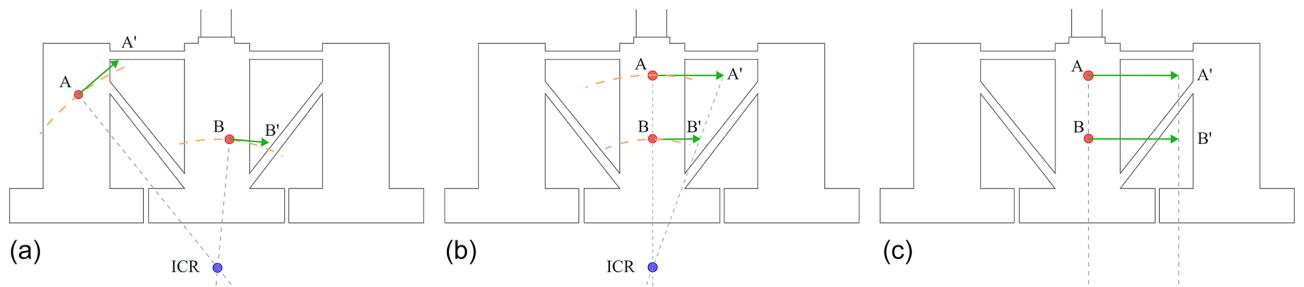


Figure 2. Construction of the ICR using velocity vectors at two points on the floating body. (a) General case, misaligned nodes; (b) special case, aligned nodes; and (c) special case, pure translation.

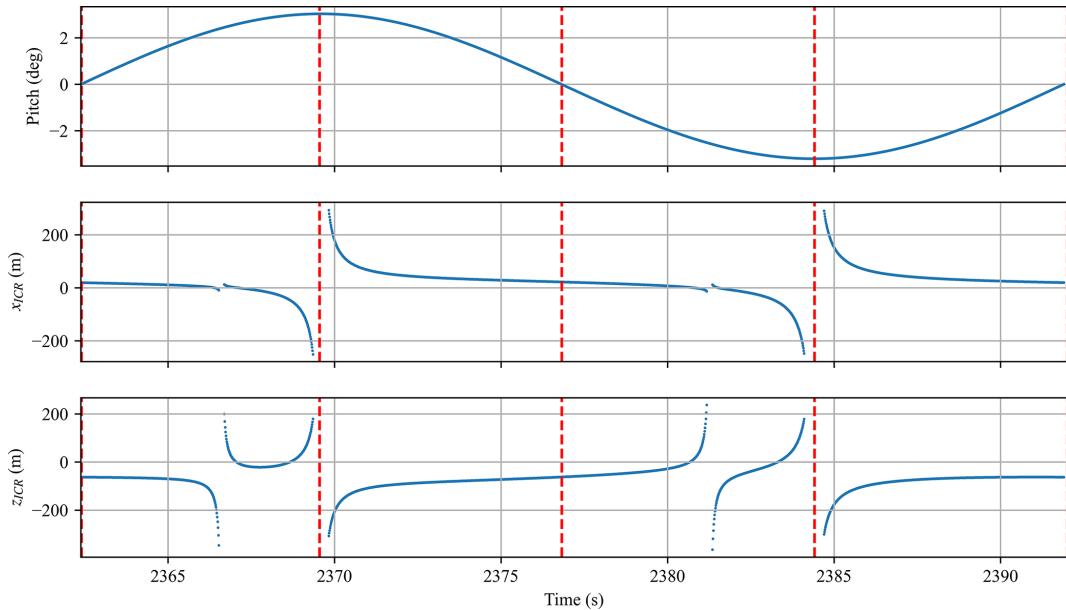


Figure 3. ICR time history during one period of pitch motion. Reproduced from Patryniak et al. (2023).

ing around unique points, as also illustrated in the histograms of Fig. 4. In a more complex, stochastic environment, such a regular pattern cannot be observed (Fig. 5). However, ICR coordinates still follow a well-defined distribution, as illustrated in Fig. 6.

2.2 Instantaneous centre of rotation statistics

Given that the ICR can exhibit asymptotic behaviour and is very irregular under stochastic environmental loading conditions, analysing time-domain signals directly can be difficult and not readily applicable to the design context. Therefore, a statistical analysis approach is followed instead. In particular, the distribution characteristics of the in-plane coordinates of the ICR (type, mean, standard deviation, skewness, and kurtosis) are investigated.

The one-sample Kolmogorov–Smirnov (K–S) test with hypothesis testing (Hodges, 1958) is performed to establish whether the ICR follows a normal distribution. This test com-

ares data sampled from a fitted normal distribution with the samples from the original data and outputs two metrics: the K–S statistic, which measures the maximum discrepancy between the empirical cumulative distribution functions of the two samples, and the *p* value, which indicates the probability of observing the test results under the null hypothesis. The null hypothesis is that the two samples come from the same distribution. A high *p* value above the significance level of 0.05 suggests insufficient evidence to state that the two samples come from different distributions. Therefore, a low K–S value and a *p* value above 0.05 are needed to confirm that the data closely follow a normal distribution.

To analyse the relationships between design variables, the ICR, and FOWT responses, we compute the Spearman rank correlation coefficient³, which quantifies the statistical dependence between two variables. As illustrated in Table A1 in Appendix A, for each pair of variables (for example, the

³The rank of a value is its position within a sorted list of data points ordered from smallest to largest.

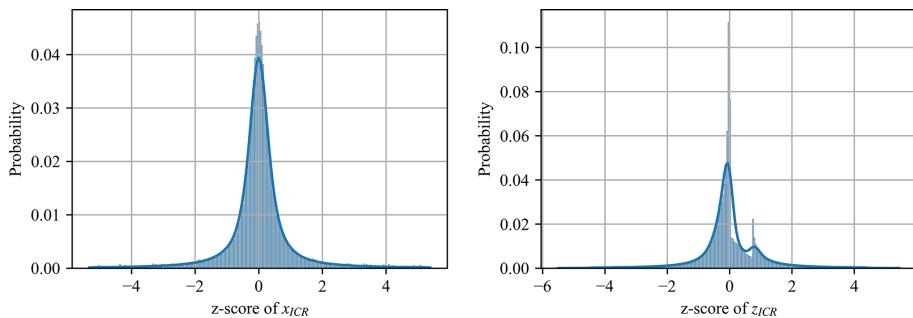


Figure 4. Histogram of ICR coordinates for a FOWT in regular waves.

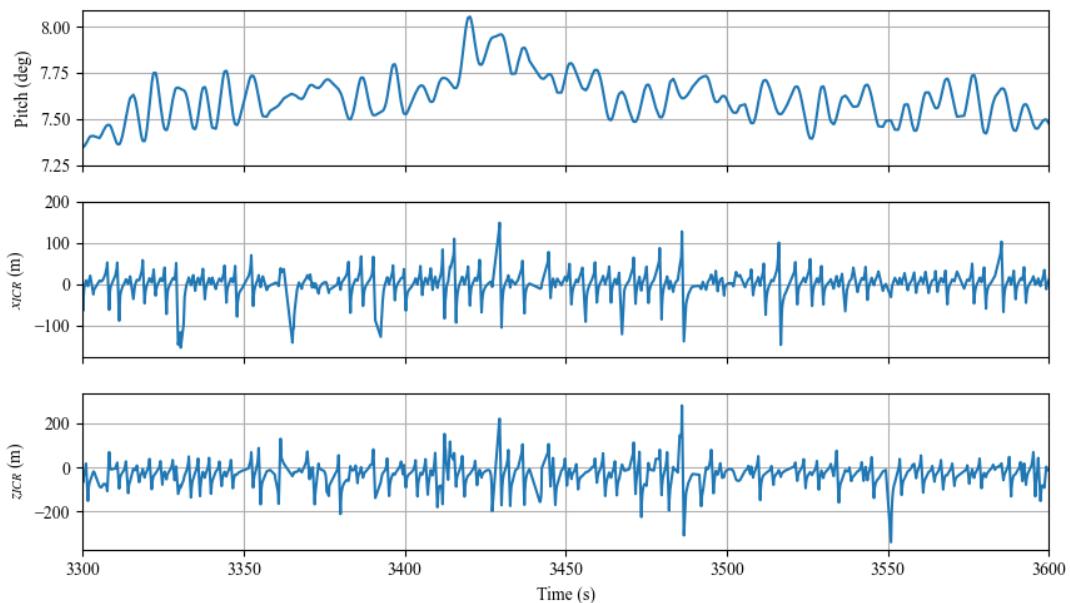


Figure 5. ICR time history during platform motion in a realistic environmental condition.

standard deviation of the tower base bending moment and the standard deviation of z_{ICR}), we list their values from different simulations then rank each list from smallest to largest (the smallest value in a list gets rank 1, the second-smallest value gets rank 2, etc.). The Spearman correlation coefficient ρ is computed based on the sum of the differences between the ranks of the paired values:

$$\rho = 1 - \frac{6 \sum_{i=1}^n d_i^2}{n(n^2 - 1)}. \quad (1)$$

d_i is the difference between the ranks for sample (simulation) i , and n is the number of observations (simulations). Spearman's correlation assesses the strength of a monotonic relationship, making no assumptions about the underlying data distribution. A correlation close to +1 or -1 indicates a strong monotonic relationship.

- $\rho \approx -1$: as one variable increases, the other tends to decrease.
- $\rho \approx 0$: there is little to no monotonic relationship between the variables.

Since Spearman's correlation is based on ranks rather than raw values, it is robust to nonlinearity and less sensitive to outliers than Pearson's correlation. However, it does not imply causation, meaning that a strong correlation does not indicate that changes in one variable directly cause changes in another.

- $\rho \approx 1$: as one variable increases, the other tends to increase.

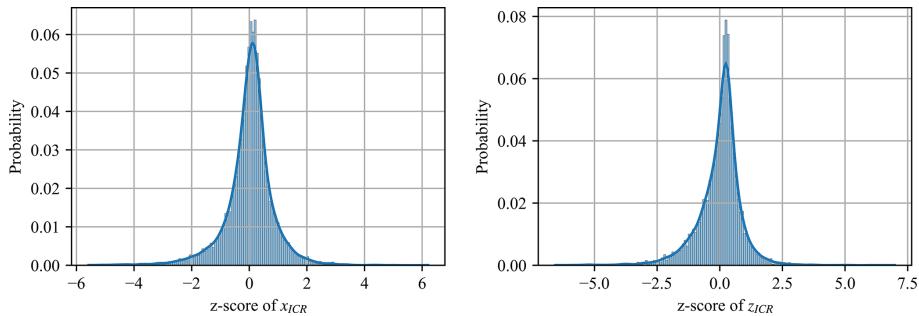


Figure 6. Histogram of ICR coordinates for a FOWT in a realistic environmental condition.

2.3 Dynamic simulations

All simulations in this study are performed with OpenFAST, a state-of-the-art, extensively validated nonlinear aero–hydro–servo–elastic coupled time-domain model of dynamics (NREL, 2024a). Equations of motion of OpenFAST are nonlinear and are expressed in a modular generalised state-space form with module-level states and module-to-module coupling handled through input–output constraints (Jonkman, 2013).

The degrees of freedom include six rigid-body motion modes; although possible in OpenFAST, the elastic dynamics are not modelled in this study, as the analysis relies on a rigid-body assumption. The NREL 5 MW baseline variable-pitch, variable-speed controller allows for blade pitch and rotor speed variations depending on the mean wind speed and slight rotor speed variations due to the system motion and turbulent inflow. The aerodynamic solution relies on the blade-element momentum theory with Beddoes–Leishman unsteady blade airfoil aerodynamics model, tip and hub loss corrections, and tower influence based on the potential flow. The first-order potential hydrodynamics of the spar platform are modelled through frequency-to-time-domain transforms based on the potential coefficients obtained from the boundary element method (BEM) code WAMIT (Lee and Newman, 2006). Viscous loads are computed from Morison’s theory. The semisubmersible platform’s offset columns, heave plates, and main column are modelled using a hybrid approach (potential and Morison). The potential coefficients are obtained with the pyHAMS BEM solver (NREL, 2024b), as was implemented in RAFT (Hall et al., 2022; NREL, 2024c). The slender pontoons and cross-braces (diameter of 1.6 m) are treated with a Morison-only approach, with the hydrodynamic coefficients listed in Table 1. Second-order hydrodynamics are not considered.

The nonlinear mooring loads are computed using a lumped-mass mooring line model, MoorDyn (Hall and Goupee, 2015). The model includes the effects of axial stiffness and damping, weight and buoyancy, hydrodynamic viscous forces, and vertical spring-damper forces from contact with the seabed.

Section 3 explores the ICR under various synthetic environmental conditions. Instead of relying on the predefined design load cases (e.g. DLC 1.6, which involves an operational turbine in severe sea state, and DLC 6.1, which considers a parked turbine experiencing severe wind and sea conditions, as outlined in the IEC (International Electrotechnical Commission) 61400-3-2 standard (IEC, 2019)), this study selectively applies different loading components. This approach aims to provide deeper insights into the ICR behaviour related to specific sources of loading. The wind conditions are characterised by the mean hub-height wind speed, profile (shear), and turbulence intensity, and the wave conditions (sea state) are characterised by the (significant) wave height and (peak) period. Wind and wave directions are aligned with the positive x axis (no misalignment is considered in this paper). The wave peak-shape parameter is set based on the peak period and significant wave height, as recommended in the IEC 61400-3 Annex B (IEC, 2009).

Sections 4–6, on the other hand, investigate ICR over a range of realistic environmental conditions. Each design variant is simulated in 10 environmental conditions that are listed in Table 2, representing binned metocean data obtained for the Scottish sectoral marine plan for the NE8 site (Scottish Government, 2020) (these bins account for 98.4 % of cumulative probability). The responses presented in this paper refer to the average responses weighed by the probability of each of the 10 conditions. Each simulation is run for 1 h (excluding the initial transient phase) with a single random seed (the same seed in all simulations).

2.4 Coordinate systems

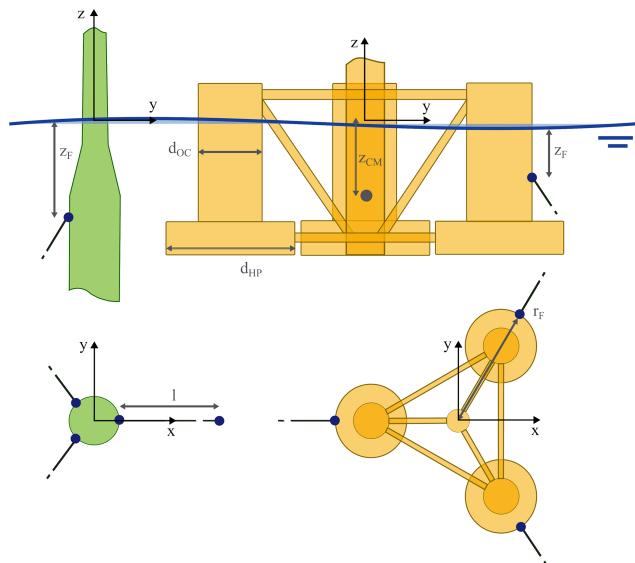
This study employs two distinct coordinate systems. The global inertial coordinate system, illustrated in Fig. 7, offers a reference frame for examining how the ICR responds to varying environmental loading conditions and design parameters. By remaining unaffected by the structural displacements, it provides a clear view of how external forces influence the ICR. It is centred at the intersection of the mean waterline and the undisplaced tower axis (centroid of the undisplaced initial waterplane area). Conversely, the body-fixed coordi-

Table 1. Hydrodynamic model parameters.

| Parameter | Unit | OC3 spar | OC4 semisubmersible |
|-------------------------------------|------|----------|--------------------------------------------------------------------------------------------------|
| Maximum Morison element size | m | 0.5 | 1 |
| Maximum BEM panel size | m | 1 | 1.5 |
| Added mass coefficient | – | – | Pontoons and cross-braces: 0.63 |
| Transverse viscous-drag coefficient | – | 0.6 | Main column: 0.56 Offset column: 0.61 Heave plate: 0.68 Pontoons and cross-braces: 0.63 |

Table 2. Binning of environmental conditions. Wind shear fixed at 0.2 and turbulence intensity at 14 %.

| Condition | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| V_s (m s ⁻¹) | 4.1 | 6.3 | 8.5 | 10.7 | 12.9 | 15.1 | 17.3 | 19.5 | 21.7 | 23.9 |
| H_s (m) | 1.09 | 1.23 | 1.44 | 1.75 | 2.17 | 2.68 | 3.27 | 3.95 | 4.71 | 5.42 |
| T_p (s) | 8.68 | 8.54 | 8.14 | 7.65 | 7.51 | 7.63 | 8.04 | 8.58 | 9.16 | 9.58 |
| Probability (–) | 0.087 | 0.213 | 0.266 | 0.230 | 0.134 | 0.052 | 0.013 | 0.002 | 0.001 | 0.001 |

**Figure 7.** FOWT design variables. OC3 spar (left) and OC4 semisubmersible (right).

nate system is used for design-focused evaluations, where the goal is to position the ICR relative to specific locations on the floating structure. This system initially coincides with the global inertial coordinate system but moves (both translates and rotates) with the floating body. Across the paper, the results are primarily presented in the global inertial frame. The local frame supports the interpretation of the observed design trends (the distinction will be made where appropriate).

2.5 Floating platform and turbine characteristics

The analysis is performed for two FOWT concepts: the OC3 Hywind spar (Jonkman, 2010) and OC4 semisubmersible (Robertson et al., 2014), both with the 5 MW reference rotor (Jonkman et al., 2009). The details of the reference designs are given in Tables 3–4 and Fig. 7.

3 Effect of environmental conditions

In a previous study (Patryniak et al., 2023), the ICR of FOWTs was only studied in regular waves, which provided a limited understanding of the behaviour in real operational scenarios. Therefore, this test aims to establish the dependence of the ICR on more complex environmental loading conditions, to understand the factors driving the ICR, and to establish the applicability of the ICR as a design metric.

3.1 Study setup

The sensitivity of the ICR to environmental loading conditions is studied through a series of simulations of gradually increasing complexity, as outlined in Table 5. All simulations are run for the case of the original design of the OC3 Hywind spar (Jonkman, 2010) with the 5 MW reference rotor (Jonkman et al., 2009) as the example system.

First, a simple test in regular waves is performed for a wide range of wave periods (or frequencies), keeping the wave height fixed (group A in Table 5). Subsequently, the response in irregular waves is simulated, keeping the peak period and significant wave height at the previously set values (group B). The irregular sea state includes the component waves at various frequencies, with the highest energy content around the peak frequency and contributions from

Table 3. OC3 Hywind Spar and OC4 semisubmersible FOWT original designs characteristics. CG – centre of gravity; CB – centre of buoyancy.

| Property | Unit | OC3 spar | OC4 semisubmersible |
|------------------------------------|-------------------------------|----------------------|---------------------|
| Platform, including ballast | | | |
| Draft | m | 120 | 20 |
| Diameter | m | 6.5–9.7 (tapered) | – |
| Offset column diameter | m | – | 12 |
| Base column diameter | m | – | 24 |
| Mass | kg | 7.47×10^6 | 1.35×10^7 |
| Vertical CG | m | –89.92 | –13.46 |
| Pitch inertia about CG | $\text{kg} \times \text{m}^2$ | 4.23×10^9 | 6.83×10^9 |
| Hydrostatics | | | |
| Vertical CB | m | –61.17 | –13.17 |
| Metacentric height | m | 28.7 | 10.7 |
| Stiffness coefficient: | | | |
| Heave | N m^{-1} | 3.33×10^5 | 3.84×10^6 |
| Pitch | Nm rad^{-1} | $–4.99 \times 10^9$ | $–3.78 \times 10^8$ |
| Infinite-frequency added mass | | | |
| Surge–surge | kg | 7.569×10^6 | 6.49×10^6 |
| Heave–heave | kg | 2.35×10^5 | 14.70×10^6 |
| Pitch–pitch | $\text{kg} \times \text{m}^2$ | 3.7×10^{10} | 7.21×10^9 |
| Surge–pitch | kg m | $–4.71 \times 10^8$ | $–8.51 \times 10^7$ |
| Mooring system | | | |
| Fairlead height | m | –70 | –14 |
| Fairlead radius | m | 5.2 | 40.87 |
| Water depth (anchor position) | m | –320 | –200 |
| Anchor radius | m | 853.87 | 837.6 |
| Unstretched line length | m | 902.20 | 835.5 |
| Chain diameter (volume-equivalent) | m | 0.09 | 0.077 |
| Pretension | kN | 910 | 1100 |
| Natural frequency | | | |
| Surge | Hz | 0.008 | 0.009 |
| Heave | Hz | 0.032 | 0.058 |
| Pitch | Hz | 0.034 | 0.037 |

Table 4. NREL 5 MW reference rotor characteristics.

| Property | Unit | Value |
|-----------------------------------|-------------------|-------------|
| RNA mass | kg | 350 000 |
| Hub height | m | 90.0 |
| Cut-in, rated, cut-out wind speed | m s^{-1} | 3, 11.4, 25 |
| Rated wind speed thrust | kN | 805.11 |

lower- and higher-frequency waves. The complexity is then increased by including the effect of steady wind (from cut-in to cut-out), which puts the FOWT into a new equilibrium position (group C), as well as the effect of the wind shear, which affects the vertical distribution of the wind load

(group D). Group E simulations are run in the rated wind speed condition, this time with turbulent wind inflow of varying turbulence intensities. The turbulent wind is expected to increase the dynamic responses at very low frequencies that are not excited otherwise (the second-order wave loads are not modelled). Group F adds the effect of the subsurface current speed (the power law exponent is kept at a value of 1/7). Finally, group G represents the conditions likely encountered by an operational FOWT, including the combined effects of the stochastic wind, wave, and current loads.

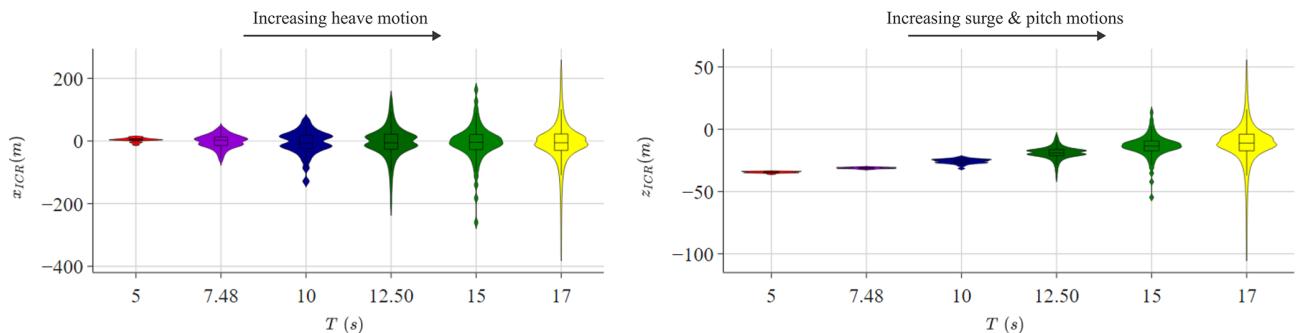
The results obtained for each group will be presented in turn; all results are given in the global inertial coordinate system.

Table 5. Impact of varied environmental loading on the ICR conditions considered. γ – peak-shape factor.

| Group (-) | Type (-) | Wind | | | Type (-) | Waves | | | Current (m s^{-1}) |
|--------------|-------------|--------------------------------|-----------|--------------|-------------|--------------|--------------|-----------------|----------------------------------|
| | | V_s (m s^{-1}) | TI (-) | Shear (-) | | H_s (m) | T_p (s) | γ (-) | |
| A | – | – | – | – | Reg | 1.87 | 5–17.0 | – | – |
| B | – | – | – | – | JONSWAP | 1.87 | 7.47 | 1.0 | – |
| C | Steady | 3–25 | – | 0.2 | Reg | 1.87 | 7.47 | 1.0 | – |
| D | Steady | 11.4 | – | 0.1–0.4 | Reg | 1.87 | 7.47 | 1.0 | – |
| E | Turbulent | 11.4 | 0.1–0.3 | 0.2 | Reg | 1.87 | 7.47 | 1.0 | – |
| F | – | – | – | – | Reg | 1.87 | 7.47 | 1.0 | 0.5–1.2 |
| G | Turbulent | 11.4 | 0.17 | 0.2 | JONSWAP | 1.87 | 7.47 | 1.0 | 0.85 |

Table 6. The ICR of a FOWT in regular waves (group A).

| T (s) | Surge | | Heave | | x_{ICR} | | z_{ICR} | |
|------------|-------------|-----------|-------------|-----------|------------------|-----------|------------------|-----------|
| | Mean (m) | SD (m) | Mean (m) | SD (m) | Mean (m) | SD (m) | Mean (m) | SD (m) |
| 5.00 | –0.09 | 0.07 | 0.02 | 0.00 | 3.55 | 6.28 | –34.52 | 0.63 |
| 7.47 | –0.10 | 0.21 | 0.02 | 0.02 | –1.70 | 21.49 | –31.12 | 0.61 |
| 10.00 | –0.09 | 0.38 | 0.02 | 0.05 | –6.38 | 39.50 | –25.79 | 1.94 |
| 12.50 | –0.09 | 0.51 | 0.02 | 0.09 | –4.77 | 51.61 | –19.08 | 5.15 |
| 15.00 | –0.09 | 0.62 | 0.03 | 0.14 | –6.69 | 62.63 | –13.90 | 10.08 |
| 17.50 | –0.09 | 0.76 | 0.02 | 0.16 | –6.85 | 70.59 | –11.43 | 17.74 |

**Figure 8.** Effect of the regular wave period on the distribution of ICR coordinates (group A).

3.2 Results

The simulations conducted under group-A environmental conditions (regular waves) are analysed to understand how the external load period (or frequency) influences the motion behaviour and the ICR of the floating system. As presented in Fig. 8 and Table 6, the mean of the x coordinate of ICR remains around zero regardless of the wave period, and the mean of the z coordinate approaches zero as the wave period increases. As the wave period increases, the distribution of z_{ICR} becomes wider (higher standard deviation).

Two mechanisms are important: (i) the difference in the horizontal velocity's increase at two points on the structure due to the increase in pitch motion as the wave period in-

creases towards 31 s and (ii) the higher horizontal velocity at both points due to the increased surge motion as the wave period approaches 125 s.

More specifically, the ICR is computed based on the intersection of the lines perpendicular to the velocity vectors at two points on the structure located at $z_A = -120$ m and $z_B = -12$ m. When the wave period approaches the pitch natural period (31 s), the pitch motion increases. Higher pitch motion about a point not coinciding with the midpoint between A and B induces a higher contribution to the horizontal velocity at the point further away from the centre of rotation. With higher pitch motion, the imbalance between the two points becomes more pronounced, and the ICR shifts ei-

ther higher or lower depending on the direction of the pitch rotation. This leads to the ICR fluctuating over a wider range.

The second effect becomes more prominent when the wave period is closer to the surge natural period (125 s). In this case, higher surge motion imposes the same increase in the horizontal velocity at both points. Figure 9 illustrates that for a given rotational velocity, if a significant horizontal translational velocity is superimposed, the ICR, defined as the point where the normals to the velocity vectors intersect, shifts either higher or lower depending on the direction of the translation and the instant of the periodic motion (i.e. the phase difference between the translation and rotation)⁴. This results in both lower and higher values of the ICR, thereby widening the distributions, as was observed.

Additional figures supporting this discussion are provided in Figs. B1–B2 in Appendix B.

The simulations of the group C environmental conditions (steady wind) are analysed to understand how the magnitude of the non-fluctuating load applied at the rotor height influences the motion behaviour and the ICR of the floating system. The results presented in Table 7 and Fig. 10 show that the mean of x_{ICR} increases with wind speed, while the mean of z_{ICR} follows a nonmonotonic trend. As seen previously for the regular wave cases, the distribution of the vertical coordinate gets wider as the wind speed increases.

The next group of simulations (group D) was conducted with a fixed mean hub-height wind speed of 11.4 m s^{-1} , varying the power exponent of the power law wind profile (shear). As demonstrated in Fig. 11, the distribution of x_{ICR} remains mostly unaffected by the wind profile, as explained by negligible changes to the vertical motion (refer to Table 8). However, z_{ICR} exhibits a strong dependence on the vertical distribution of wind. Notably, as the power exponent increases, the centre of application of the aerodynamic load (centre of effort) also shifts upward, resulting in a higher mean pitch angle. This change leads to two observable effects: (i) an increase in pitch angle reduces the thrust coefficient and (ii) an alteration in the rotor-averaged wind speed. Depending on the trade-off between these two factors, the total aerodynamic thrust may be either lower or higher. This variation results in changes in the mean offset of the system, which subsequently affects the mooring loads and the horizontal velocities of the FOWT, which influence the behaviour of z_{ICR} .

Figures 12–13 and Tables 9–10 demonstrate that the ICR distribution does not significantly change in response to changing turbulence intensity (group E) or subsurface current velocity (group F).⁵ The distributions at all turbulence levels remain normal, with a slightly increasing standard deviation due to increased horizontal load (higher turbulence intensity leads to a higher aerodynamic fluctuating load for any mean wind speed given). The current load on the slender

⁴Similarly, larger vertical velocity shifts the ICR horizontally away from the platform.

⁵Notice the small range of the y axis.

cylinder of the spar floating structure is insignificant compared to other loads on the system.

Finally, Fig. 14 compares the distributions of the ICR coordinates of a FOWT placed in increasingly complex environmental conditions.

While x_{ICR} appears consistent across all cases, the complexity of the loading significantly influences z_{ICR} , particularly in terms of its standard deviation. In the presence of regular waves, the vertical coordinate of ICR is confined to a narrow range. However, as irregular waves, wind, and current are gradually introduced, this range expands considerably.

Figure 15 provides a more detailed view of the effect of the environment complexity on z_{ICR} range. For each loading condition case, the confidence interval bounds were calculated using the mean and standard deviation of z_{ICR} for various confidence levels. The ranges displayed in the figure represent the differences between the upper and lower bounds, indicating the intervals within which the true mean z_{ICR} is expected to lie, given the specified confidence level. For any confidence level, more complex environmental loading leads to a broader range. This suggests that the complexity of the loading significantly impacts the variability in z_{ICR} and the potential for extreme values. Importantly, broader ranges are also related to increased uncertainty in predicting the true mean of ICR, which may affect the usefulness of the ICR as a metric in the FOWT design process, as it is less likely to remain near a target location.

As reported in Table 11, the cases with no stochastic loads (i.e. regular wind and/or steady wind) show a relatively low K–S statistic and a high p value (these metrics are introduced in Sect. 2.2), meaning that the ICR closely follows a normal distribution in these scenarios. In contrast, the low p value observed for the stochastic loading cases (irregular waves and/or turbulent wind) suggests that we cannot reach the same conclusion regarding the normality of the ICR distribution in those instances.

In those cases, the observed distribution of z_{ICR} has significantly increased skewness (more asymmetric) and excess kurtosis (heavier tails and sharper peaks), as illustrated in Fig. 16.

4 Sensitivity of design variables

For any environmental loading condition, the motion response of different FOWT designs differs due to unique hydrostatic, hydrodynamic, mooring, and inertial characteristics.⁶ Therefore, this test investigates the design features (or variables) that can be adjusted to achieve the desired ICR “location”.

Two floating systems are considered in turn: a spar and a semisubmersible. The study includes four design variables common to both concepts: mooring line length, fairlead ver-

⁶The impact of design parameters on the system dynamics was studied in Jonkman et al. (2022).

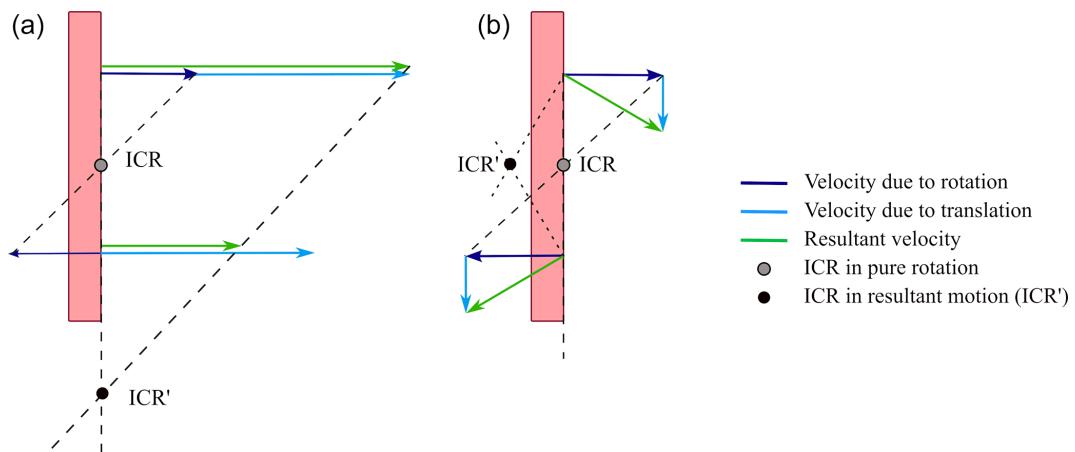


Figure 9. The effect of superimposing rotational velocity with (a) horizontal and (b) vertical translational velocities on the position of the ICR.

Table 7. The ICR of a FOWT in steady wind (group C).

| V_s (m s^{-1}) | Surge | | Heave | | x_{ICR} | | z_{ICR} | |
|--------------------------------|-------------|-----------|-------------|-----------|------------------|-----------|------------------|-----------|
| | Mean (m) | SD (m) | Mean (m) | SD (m) | Mean (m) | SD (m) | Mean (m) | SD (m) |
| 0.0 | -0.08 | 0.20 | 0.02 | 0.03 | -2.59 | 29.80 | -20.25 | 1.07 |
| 3.0 | 2.46 | 0.20 | -0.01 | 0.02 | -1.27 | 19.78 | -31.71 | 2.65 |
| 4.9 | 6.60 | 0.20 | -0.06 | 0.02 | -1.19 | 19.83 | -31.76 | 6.18 |
| 6.7 | 12.90 | 0.20 | -0.18 | 0.02 | -0.29 | 19.70 | -31.11 | 11.31 |
| 8.6 | 21.34 | 0.20 | -0.42 | 0.03 | 1.17 | 19.39 | -29.59 | 18.24 |
| 11.4 | 36.15 | 0.20 | -1.13 | 0.03 | 4.16 | 20.05 | -25.11 | 28.31 |

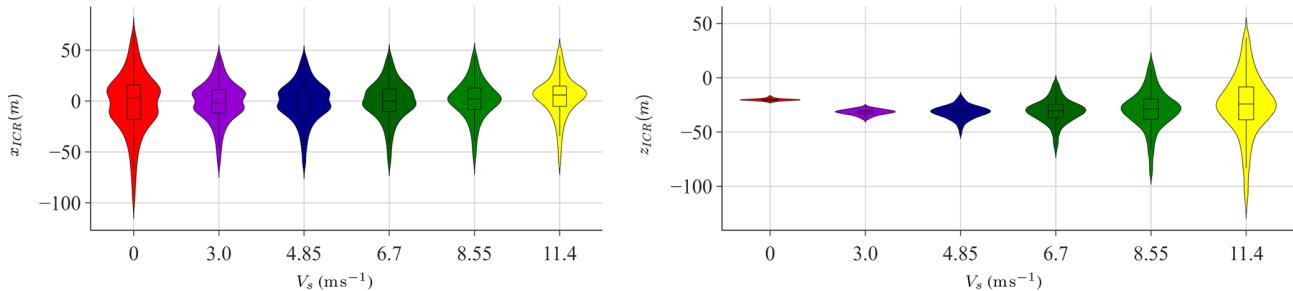


Figure 10. Effect of the steady wind speed on the distribution of ICR coordinates (group C).

tical position and radius, and platform centre of mass vertical position. Additionally, two variables are specific to the semisubmersible platform (offset column and heave plate diameters). These are illustrated in Fig. 7 and listed in Table 12. The anchor vertical position (water depth) is adjusted together with the fairlead vertical position variable to keep constant anchor–fairlead distance and only vary the point of application of the mooring load on the platform.


Note that this set of design variables is not exhaustive, and each parameter is varied independently. In particular, the fairlead position is adjusted without consideration of the float-

ing platform dimensions, which keeps the effects isolated but neglects the proper physical interface between the fairleads and the platform. The catenary mooring line length is modified without altering the fairlead and anchor positions, resulting in changes to the line angle at the fairlead, to the suspended line profile, and to the portion of the line resting on the seabed. Likewise, the ratio between the offset column and heave plate diameters is not maintained when either variable is adjusted.

The broad range of design variables ensures that the study covers the entire design space, including some unconven-

Table 8. The ICR of a FOWT in steady wind with shear (group D).

| Shear (-) | Surge | | Heave | | x_{ICR} | | z_{ICR} | |
|--------------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|
| | Mean (m) | SD (m) | Mean (m) | SD (m) | Mean (m) | SD (m) | Mean (m) | SD (m) |
| 0.10 | 2.46 | 0.20 | -0.01 | 0.02 | -1.27 | 19.78 | -31.71 | 2.65 |
| 0.15 | 12.90 | 0.20 | -0.18 | 0.02 | -0.29 | 19.70 | -31.11 | 11.31 |
| 0.20 | 36.15 | 0.20 | -1.13 | 0.03 | 4.16 | 20.05 | -25.11 | 28.31 |
| 0.25 | 6.60 | 0.20 | -0.06 | 0.02 | -1.19 | 19.83 | -31.76 | 6.18 |
| 0.30 | 21.34 | 0.20 | -0.42 | 0.03 | 1.17 | 19.39 | -29.59 | 18.24 |
| 0.35 | 35.93 | 0.20 | -1.11 | 0.03 | 4.27 | 20.01 | -25.59 | 28.96 |
| 0.40 | 35.95 | 0.20 | -1.11 | 0.03 | 4.07 | 20.16 | -25.49 | 28.88 |

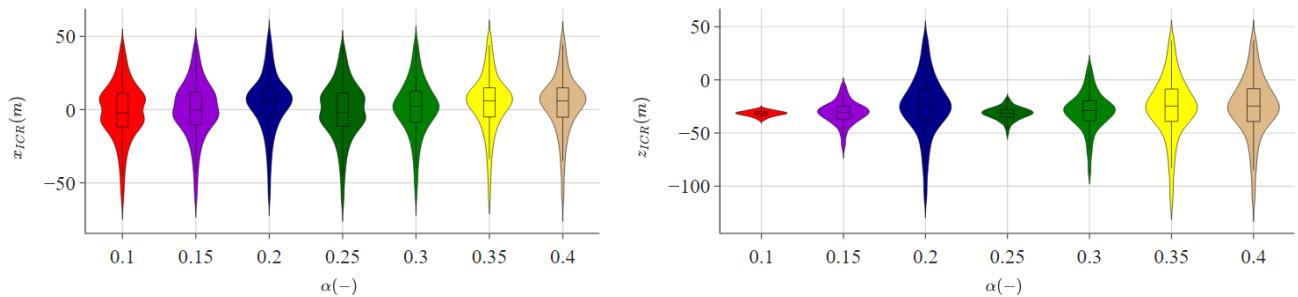**Figure 11.** Effect of the wind shear on the distribution of ICR coordinates (group D).

tional but realistic designs demonstrating a wide range of motion responses. Special attention was given to the mooring line length parameter, with the range chosen based on mooring pretension. Specifically, the study examined mooring line lengths that resulted in a $\pm 40\%$ variation in pretension compared to the original design to cover a plausible range of designs.

Note that these design variable perturbations may alter the mean heave (draft) of the floating platform due to changes in displacement volume (buoyancy) and/or the weight of the structure. This effect could significantly impact the response of the FOWT and may be undesirable, as the draft is a critical design parameter established early in the design process. It is often constrained by factors such as port depth and manufacturing or assembly capabilities. Therefore, an additional step was implemented whenever the underwater geometry was modified: the floating platform was re-ballasted to maintain the original draft. This not only affected the total weight of the system but also influenced the weight distribution and centre of mass.

For each concept, the design variables were perturbed one at a time, and the change in the ICR statistics (in the global inertial coordinate system) was studied, as illustrated in Fig. 17. As introduced in Sect. 2.3, the results for each design variant were averaged over 10 environmental condition bins, with weights based on bin probability.

The design variables presented in the figure were normalised to 0–1 for clarity and for unbiased comparison be-


tween the variables of different magnitudes. The absolute ranges of the variables are given in Table 12 for reference.

Based on the analysis of the spar platform in Fig. 17, it is clear that variations in certain design variables significantly impact the position of the ICR. In particular, the results highlighted the significant influence of the location of the centre of mass on the ICR statistics. This effect was most evident for the z coordinate (lower two plots), where the mean and standard deviation of the ICR showed strong negative and positive trends with the vertical position of the centre of mass, respectively. The vertical position of the fairlead was also found to be an important feature affecting the mean of x_{ICR} . The effects of other variables on the ICR metrics were relatively minor. Notably, no clear trends were observed for the standard deviation of x_{ICR} , suggesting that the variables examined do not significantly influence this metric independently.

For the semisubmersible-type FOWT, Fig. 18 demonstrates that the design variables have a more limited impact on the mean of ICR than was the case for the spar platform. Specifically, the mean position of the ICR remained within approximately 4 m across all design variations, indicating a smaller impact of design changes. Higher variability was observed in the standard deviation of the ICR. Notably, the offset column and heave plate diameters emerged as significant parameters, affecting both the mean and the fluctuations in the ICR position. The influence of other design variables on the ICR was relatively minor.

Table 9. The ICR of a FOWT in turbulent wind (group E).

| TI (%) | Surge | | Heave | | x_{ICR} | | z_{ICR} | |
|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|
| | Mean (m) | SD (m) | Mean (m) | SD (m) | Mean (m) | SD (m) | Mean (m) | SD (m) |
| 0 | 36.15 | 0.20 | -1.13 | 0.03 | 4.16 | 20.05 | -25.11 | 28.31 |
| 10 | 36.15 | 0.25 | -1.13 | 0.04 | 4.11 | 20.26 | -25.15 | 29.67 |
| 15 | 36.15 | 0.30 | -1.13 | 0.04 | 3.77 | 20.33 | -24.81 | 31.26 |
| 20 | 36.24 | 0.35 | -1.14 | 0.05 | 3.84 | 20.92 | -25.09 | 33.20 |
| 25 | 36.38 | 0.39 | -1.15 | 0.05 | 3.93 | 21.37 | -25.40 | 34.73 |
| 30 | 36.57 | 0.43 | -1.16 | 0.06 | 3.63 | 22.13 | -26.39 | 37.58 |

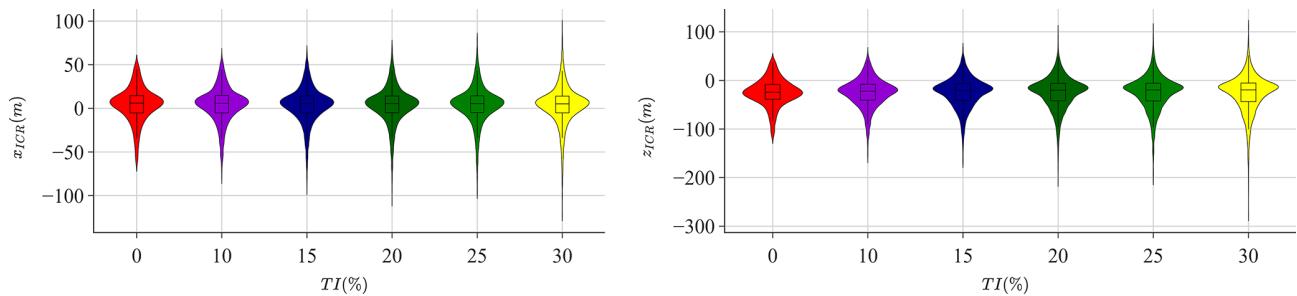**Figure 12.** Effect of the turbulence intensity on the distribution of ICR coordinates (group E).

To provide more quantitative insights, a sensitivity analysis was conducted using the data from Figs. 17 and 18 to compute the Spearman correlation coefficient for each pair of design variables and ICR statistics (details in Sect. 2.2). As demonstrated in Figs. 19 and 20, the sensitivity analysis confirmed the earlier observations. Additionally, for the case of the semisubmersible platform, it showed a non-negligible relationship between the mean x coordinate of the ICR and the mooring line design parameters: length, fairlead height, and fairlead radius (correlation coefficient of about ± 0.3).

These quantitative results allow us to rank the design variables according to their impact on the ICR statistics, helping to identify the variables that offer the greatest potential for ICR-driven design optimisation. This will be further explored in Sect. 6.

5 Sensitivity of responses

To determine the responses of the spar FOWT that can be improved by incorporating ICR into the design process, a sensitivity analysis was performed based on the full-factorial design of experiments of the two most impactful design variables identified in Sect. 4 (vertical fairlead position and platform centre of mass), resulting in 64 variations of the floating systems.


Each design variation was simulated under 10 environmental conditions based on the binned metocean data obtained for the Scottish NE8 site, and the results plotted refer to the average results weighted by the probability of occurrence of a given environmental condition, as explained in Sect. 2.3. The metrics considered included the nacelle fore-aft acceleration (referred to as NcIMUTAx in tables and figures), blade root out-of-plane and tower base fore-aft bending moments (RootMyc1, TwrBsMyt), and the most loaded mooring line tension at the fairlead (FAIRTEN2), as well as the computed x and z coordinates of ICR (in the global inertial coordinate system). For each pair of responses, distribution statistics and the Spearman rank correlation coefficients were computed, as detailed in Sect. 4.

As illustrated in the correlation matrix in Fig. 21, a significant negative correlation (-0.73 to -0.59) was observed between the standard deviation of the ICR horizontal coordinate and several responses, including nacelle acceleration and both the mean and standard deviation of the tower base and blade root bending moments. A strong negative correlation was also observed between the mooring tension and the mean of x_{ICR} (-0.61 to -0.59). A weaker yet significant correlation (0.43 to 0.46) exists between the mean of x_{ICR} and the mean of the tower base and blade root loads. The standard deviation of z_{ICR} also exhibits a moderate correlation with these loads (0.41 to 0.45). Other statistics, such as skewness and kurtosis, were computed and analysed; however, they did not yield significant correlations and are therefore omitted for clarity. Similarly, the expected value is not included, as it was found to be very close to the mean of the distributions.

The same procedure was followed for the semisubmersible type of FOWT, investigating the responses of 150 designs of

Table 10. The ICR of a FOWT simulated in varying current velocities (group F).

| V_c (m s^{-1}) | Surge | | Heave | | x_{ICR} | | z_{ICR} | |
|--------------------------------|-------------|-----------|-------------|-----------|------------------|-----------|------------------|-----------|
| | Mean (m) | SD (m) | Mean (m) | SD (m) | Mean (m) | SD (m) | Mean (m) | SD (m) |
| 0.00 | -0.10 | 0.21 | 0.02 | 0.02 | -1.55 | 21.39 | -31.10 | 0.62 |
| 0.25 | 0.39 | 0.17 | 0.02 | 0.02 | -1.36 | 19.34 | -31.09 | 0.60 |
| 0.50 | 2.01 | 0.20 | 0.02 | 0.02 | 0.01 | 20.93 | -31.17 | 0.66 |
| 0.70 | 3.94 | 0.20 | 0.01 | 0.02 | -0.19 | 21.35 | -31.18 | 0.82 |
| 0.80 | 5.27 | 0.20 | 0.01 | 0.02 | -0.26 | 20.60 | -31.23 | 0.91 |
| 1.00 | 8.41 | 0.21 | -0.02 | 0.02 | -0.35 | 23.20 | -31.09 | 1.23 |
| 1.20 | 12.39 | 0.21 | -0.07 | 0.02 | -0.01 | 23.24 | -31.16 | 1.60 |

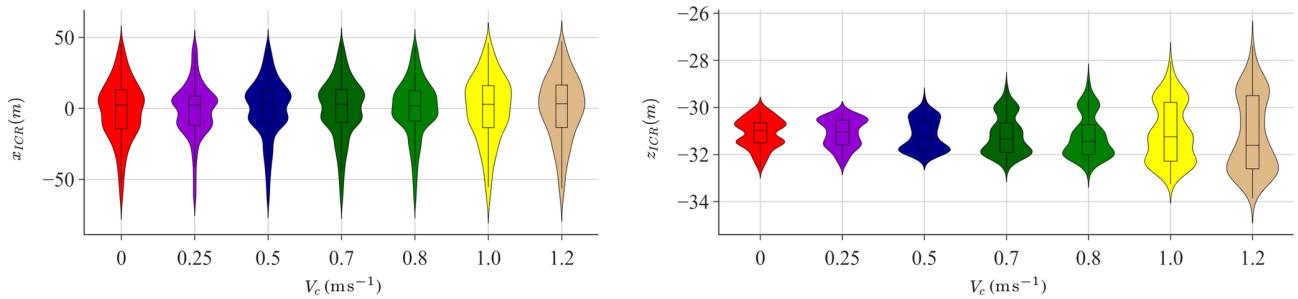**Figure 13.** Effect of the current speed on the distribution of ICR coordinates (group F).

varying offset column diameters, heave plate diameters, and line lengths according to the full-factorial sampling strategy. As seen in Fig. 22, the strongest correlation was found between the mean of z_{ICR} and all the responses considered (up to -0.83). A weaker correlation around $\rho = -0.3$ was found between all statistics of ICR and two responses: nacelle acceleration and the standard deviation of the tower base bending moment.

The correlation analysis presented here provides information about the strength and direction of a monotonic relationship. However, it does not give specific information about the magnitude of the change in one parameter in response to a shift in another. Therefore, to assess the potential impact of the ICR on the responses of interest, the correlation results should be interpreted together with the information about the ranges of the responses' statistics, as provided in Table 13. By analysing the minimum, median, and maximum values, it can be concluded that the ranges of the responses highly correlated with ICR are sufficiently broad to be regarded as useful design metrics, offering adequate design flexibility. For example, the strong correlation between the mean of z_{ICR} and the standard deviation of the tower base bending moment, shown in Fig. 22, is significant because both variables span meaningful ranges: the range of the z_{ICR} mean from -35.47 to -18.86 m corresponds to a tower base bending moment standard deviation range from 3.33 to 6.48 MNm.

6 Design case studies

The insights gained in the previous sections can be applied to design scenarios. The case studies presented here are defined based on the identification of the responses that are most sensitive to the ICR (i.e. those that can be improved by adjusting the ICR) (Sect. 5) and the design variables that have a significant impact on ICR and enable these improvements (Sect. 4). The first case study is done for the case of the spar-supported FOWT, and the second case focuses on the semisubmersible-type FOWT. The correlations used in the case studies are summarised in Fig. 23 and detailed in the subsequent sections.

6.1 Spar sizing design case study

Given the observations made in Sect. 5 based on Fig. 21, one major area would be particularly worth investigating in the context of design improvements through appropriate ICR "location". Namely, by maximising the standard deviation of the horizontal coordinate of ICR (i.e. by shifting it towards the positive x direction), one could reduce the nacelle acceleration and the tower base and blade root bending moments.⁷ Lower nacelle acceleration is desired from the point of view of the wind turbine's efficient and safe operation; reducing

⁷Note that the nacelle acceleration is one of the factors contributing to the tower base bending moment; therefore these responses are not independent.

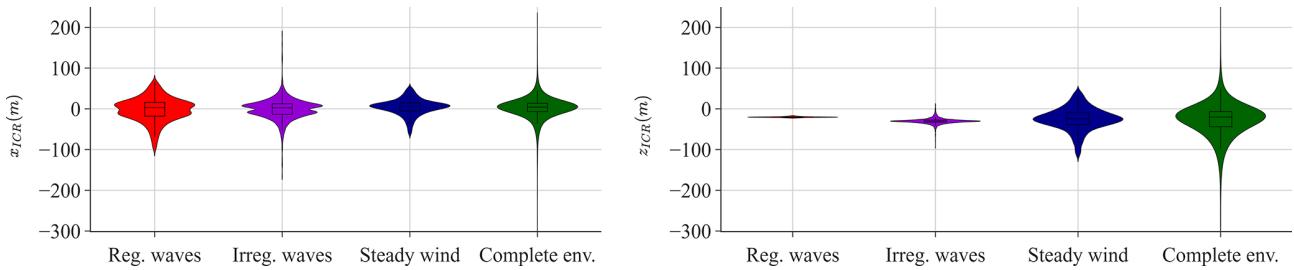


Figure 14. Effect of the increased environmental loading complexity on the distribution of ICR coordinates. The regular/irregular wave cases only include regular/irregular wave loads; the steady wind case includes steady wind in addition to irregular waves; and the complete environment includes irregular waves, turbulent wind, and current loads.

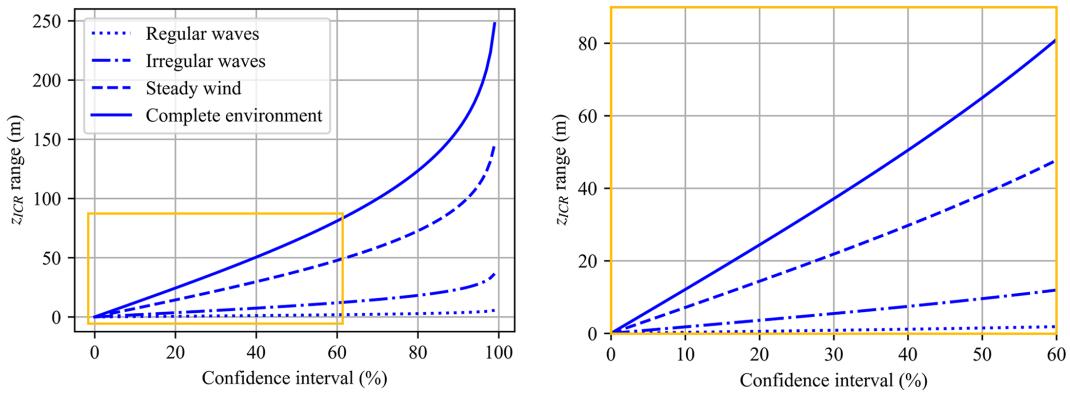


Figure 15. z_{ICR} range for different confidence intervals.

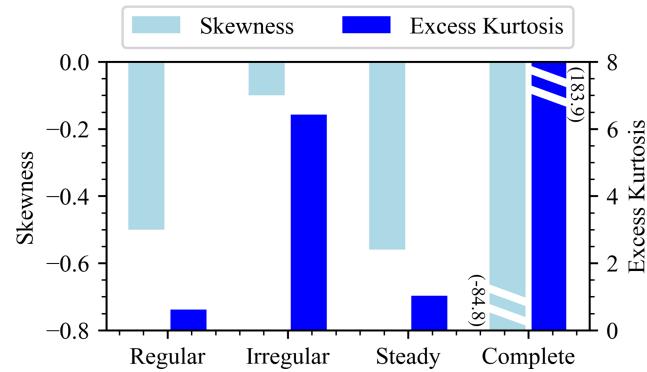


Figure 16. Skewness and kurtosis of the z_{ICR} distribution for different environmental loading conditions.

the standard deviation of the tower and blade loads is important for fatigue damage reduction. However, for these improvements to be possible, it would be necessary to find a set of design variables correlated with the standard deviation of the horizontal coordinate of the ICR and the mean of the ICR coordinates. As can be seen in the correlation matrix in Fig. 19 in Sect. 4, none of the variables considered gives any control over the standard deviation of x_{ICR} . Therefore, this metric cannot be modified in a design scenario.

Instead, the mean of x_{ICR} was seen to be strongly negatively correlated with the mean and standard deviation of the mooring loads and, at the same time, negatively correlated with the fairlead position. Therefore, it seems desirable to lower the fairlead position to increase the mean of x_{ICR} to, in turn, decrease the mean and dynamic tension. However, the mean of x_{ICR} is also positively correlated with the mean of the tower and blade loads; shifting the ICR towards a position that improves the tension characteristics might increase the tower and blade loads. This effect can be compensated for by lowering the platform centre of mass to effectively reduce the tower and blade loads. Hence, this case study will attempt to improve the mooring loads by varying two design variables: the vertical position of the fairlead and the platform centre of mass, keeping the tower base and blade roots mostly unaffected.

Figure 24 illustrates the design space in the form of 2D trends for the mean and standard deviation of the ICR coordinates and the responses identified as correlated for all combinations of the two selected design variables (full-factorial design). While the sensitivity of the mean x_{ICR} to each variable is largely independent of the other variable (top-left subplot), more interdependence is seen in the case of the standard deviation of z_{ICR} , where the rate of the ICR increase with the centre of mass depends on the fairlead position and vice versa. Regarding the loads, the mooring line tension at the fairlead

Table 11. The ICR of a FOWT under environmental loading conditions of varying complexity. Each row represents one case of a group listed in Table 5.

| Condition | Surge | | Heave | | x_{ICR} | | | | z_{ICR} | | | |
|-------------------|-------------|-----------|-------------|-----------|-------------|-----------|------------|----------|-------------|-----------|------------|----------|
| | Mean (m) | SD (m) | Mean (m) | SD (m) | Mean (m) | SD (m) | K-S (-) | p (-) | Mean (m) | SD (m) | K-S (-) | p (-) |
| Reg. waves (A) | -0.08 | 0.20 | 0.02 | 0.03 | -2.59 | 29.80 | 0.11 | 0.58 | -20.25 | 1.07 | 0.14 | 0.28 |
| Irreg. waves (B) | -0.08 | 0.13 | 0.02 | 0.02 | -1.04 | 25.52 | 0.10 | 0.72 | -30.10 | 7.09 | 0.16 | 0.16 |
| Steady wind (C) | 36.15 | 0.20 | -1.13 | 0.03 | 4.16 | 20.05 | 0.07 | 0.98 | -25.11 | 28.31 | 0.12 | 0.46 |
| Complete env. (G) | 40.48 | 0.24 | -1.38 | 0.03 | 2.28 | 29.23 | 0.13 | 0.34 | -26.87 | 47.36 | 0.15 | 0.17 |

Table 12. Original values and ranges of design variables. All values are in m.

| | OC3 spar | | | OC4 semi | | |
|-------------------------------------|----------|-------------|-------------|----------|-------------|-------------|
| | Original | Lower bound | Upper bound | Original | Lower bound | Upper bound |
| Line length (l) | 902.2 | 891.6 | 924.1 | 835.5 | 828.5 | 850.0 |
| Fairlead radius (r_F) | 5.2 | 4.0 | 8.0 | 40.87 | 20.0 | 50.0 |
| Fairlead z (z_F) | -70.0 | -120 | 3.5 | -14.0 | -20.0 | 1.0 |
| Platform CM (z_{CM}) | -89.92 | -110 | -84.29 | -8.66 | -10.0 | -7.0 |
| Offset column diameter (d_{OC}) | - | - | - | 12.0 | 10.80 | 13.20 |
| Heave plate diameter (d_{HP}) | - | - | - | 24.0 | 21.60 | 26.40 |

is significantly more sensitive to variations in fairlead position than it is to the centre of mass. The impact of the two design variables on the tower base and blade root bending moments is more balanced, with both variables affecting the loads significantly.

As previously outlined in the diagram of Fig. 23 and additionally illustrated in Fig. 24, the following design modifications were made: (i) lower the fairlead position to increase the mean x_{ICR} (top-left plot, red arrow). (ii) This leads to a reduction in the mean and dynamic mooring tension (top-middle and top-right plots, red arrows) and to an unfavourable increase in the tower base and blade root bending moments (bottom-middle and bottom-right plots, red arrows). (iii) Next, lower the platform centre of mass to lower the standard deviation of z_{ICR} (bottom-left plot, green arrow). (iv) This brings the tower base and blade root loads close to the original values while retaining the reduced mooring tension.

The extent of the variable adjustments is limited by practical considerations: it may not be practical to construct the fairlead at the very bottom of the spar structure, and the centre of mass of the platform is limited by the ballast placement.⁸

OpenFAST results of the original and the modified designs are compared in Table 14 and Fig. 25. As expected, the most

⁸Implementing such adjustments may necessitate additional design modifications – for example, lowering the centre of mass could require a deeper draft structure. While some consideration has been given to the practicality of these design variations, their overall feasibility is not guaranteed.

significant change was seen in the mooring loads, with 26 % and 69 % reductions in the mean and dynamic tension, respectively, improving both the ultimate strength and fatigue characteristics of the design. These changes were accompanied by shifting the mean of the body-fixed coordinate system ICR closer to the fairleads position. The softer mooring system resulted in vastly increased mean surge offset of 21.73 m. Although this was a 50 % increase over the original design, the value is still reasonable (7 % of the water depth assumed in this study). Importantly, the reduction in mooring loads was achieved without significantly compromising the other structural loads: the only response negatively affected was the tower base bending moment, which increased by less than 5 %.

6.2 Semisubmersible sizing design case study

The second case study follows the procedure presented for the spar-type FOWT case, but this time, it is performed for the semisubmersible-supported floating system.

Based on the observations made in Sect. 5, the most promising design task would be to adjust the structure's features to increase the mean of z_{ICR} in order to decrease all loads simultaneously. Defining a single design metric (the mean of z_{ICR}) that accounts for multiple metrics (nacelle acceleration and mooring, tower, and blade root loads) might be beneficial in design optimisation scenarios, as it reduces the size of the optimisation problem, potentially leading to a less time-consuming and more robust optimisation process.

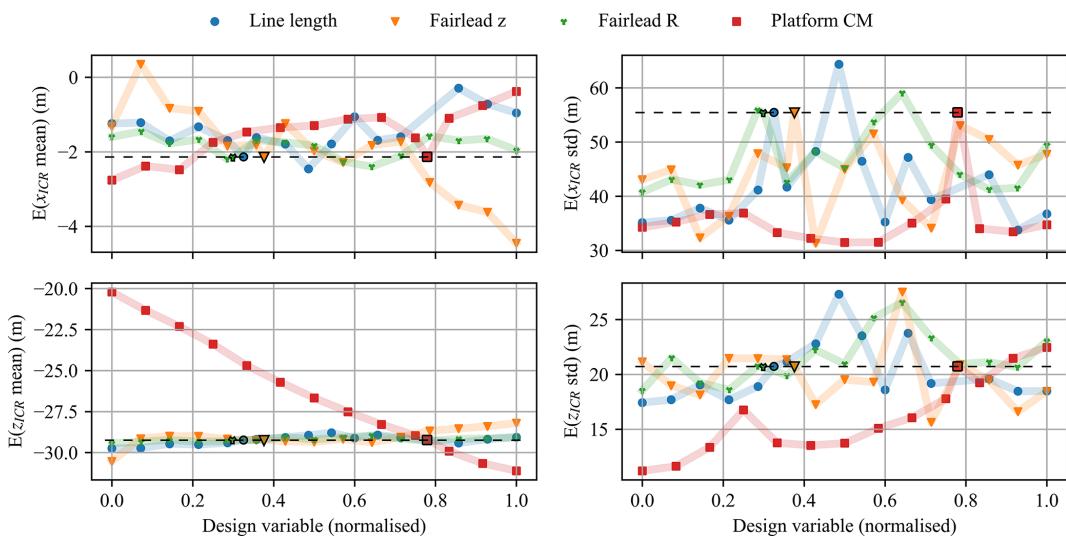


Figure 17. ICR statistics for different one-at-a-time design variable perturbations for a spar FOWT. Original design values are marked with black outlines. Results are averaged over 10 environmental conditions.

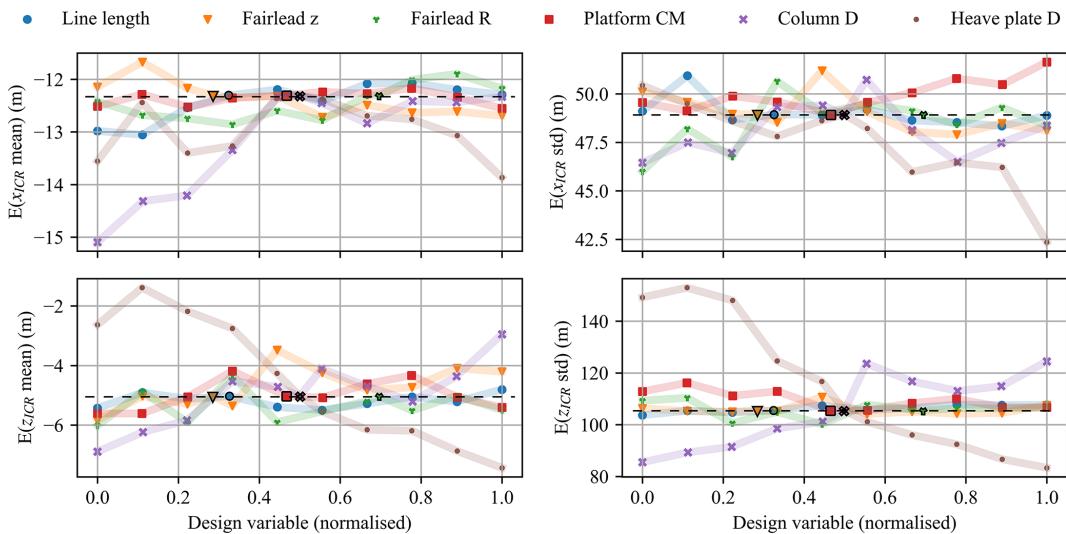


Figure 18. ICR statistics for different one-at-a-time design variable perturbations for a semisubmersible FOWT. Original design values are marked with black outlines. Results are averaged over 10 environmental conditions.

By examining the correlation matrix in Fig. 20, it can be seen that the mean of z_{ICR} is strongly correlated with the heave plate diameter ($\rho = -0.59$) and weakly correlated with the fairlead height ($\rho = 0.31$) and offset column diameter ($\rho = 0.29$). However, a change in one variable can lead to undesirable changes in multiple ICR statistics. Here, reducing the heave plate diameter to increase the mean of z_{ICR} would also lead to an increase in the standard deviation of z_{ICR} , which would lead to an increase in the dynamic mooring loads. Fairlead height is also negatively correlated with the mean of x_{ICR} , which is positively correlated with all responses. Therefore, the fairlead height changes that lead to load reduction through increasing the x_{ICR} would, at the

same time, increase the loads due to decreasing the z_{ICR} . Based solely on the correlation coefficients, it is not possible to determine the relative magnitudes of the two effects and the net effect.

Therefore, an additional step is introduced to select the variables to adjust. Rather than comparing the correlation coefficients, we follow the procedure described below.

1. For each pair of design variables and ICR statistics, we fit a linear function using the ordinary least-squares linear regression method. The slope represents the strength of the relationship between the metrics. The coefficient of determination of the prediction represents how closely the data follow the linear trend.

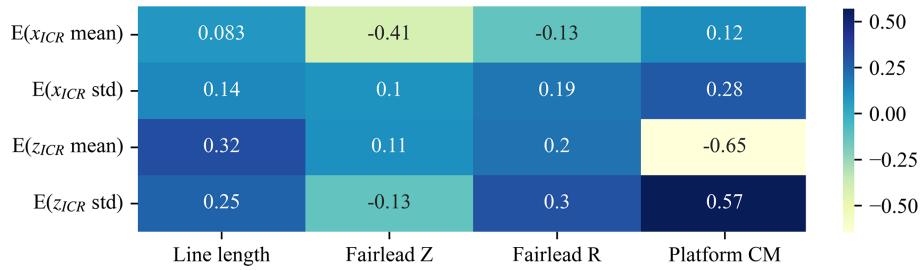


Figure 19. Correlation between the statistics of ICR and the design variables for the spar-type FOWT. See Fig. C1 in Appendix C for correlations of all responses.

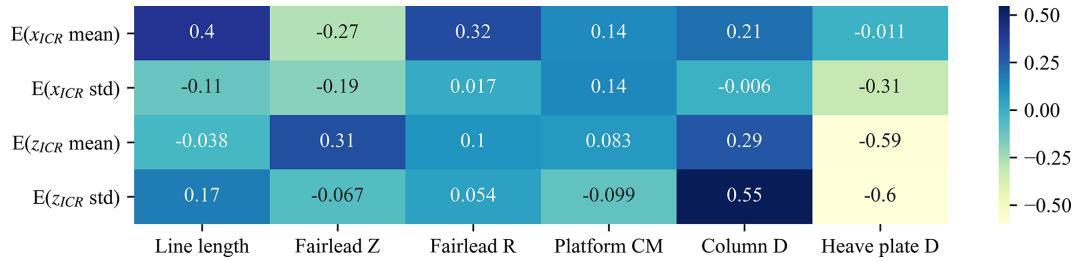


Figure 20. Spearman correlations between the statistics of ICR and the design variables for the semisubmersible-type FOWT. See Fig. C2 in Appendix C for correlations of all responses.

2. We multiply the slope ($\alpha_{i,j}$) by the coefficient of determination (R^2) to obtain a score that represents the strength of the relationship considering the confidence in the coefficient ($x_{i,j}$ in Eq. 2).

$$x_{i,j} = \alpha_{i,j} R_{i,j}^2 \quad (2)$$

3. For each pair of the ICR statistics and response statistics, we fit a linear function to obtain the slope, coefficient of determination, and their product ($s_{i,j}$ in Eq. 3).

$$s_{i,k} = \alpha_{i,k} R_{i,k}^2 \quad (3)$$

4. For each design variable, we multiply this product by the corresponding product for the design variable and ICR statistics pair. The resulting score (f_j in Eq. 4) represents the potential of the design variable to improve the overall performance of the design.

$$f_j = \sum_{i=1}^{N_i} \sum_{k=1}^{N_k} x_{i,j} s_{i,k} \quad (4)$$

The subscripts i , j , and k correspond to the i th ICR statistic ($N_i = 4$), j th design variable, and k th response statistic ($N_k = 8$). The variables/ICR statistics/response values are normalised by the absolute value of the original design's variable/ICR statistics/responses to allow the comparison between different responses while also preserving their signs.

The above procedure yields a list of influence scores, allowing the selection of a set of design variables with the most significant overall positive impact on the responses of interest. As reported in Table 16, two design variables have the most impact: the column diameter and the mooring line length.

Therefore, by consulting Figs. 20 and 22, the design task will be to increase the offset column diameter and mooring line length to increase the mean of both ICR coordinates. This should lead to a reduction in all loads. Adjusting the variables leads to an undesirable increase in the standard deviation of z_{ICR} , as it might increase the dynamic mooring tension, and to a desirable increase in the mean of x_{ICR} , which tends to improve the dynamic tension. The influence score analysis gives confidence that the net effect should be a lower load.

The design space and the above steps are visualised in Figs. 23 and 26.

The comparison of the original and modified designs in Table 17 and Fig. 27 shows a significant reduction in all loads due to the increase in mooring line length and offset column diameter (note that this case study only attempts a “manual” design sizing for simplicity and clear demonstration, and it is not an optimisation).

While the correlation coefficients and influence scores were useful in determining the general directions that potentially improve the designs, they gave no insight into the magnitudes of the changes in the ICR and responses. This insight can be gained by examining Fig. 26. In particular, it shows that the significant positive correlation between the mooring

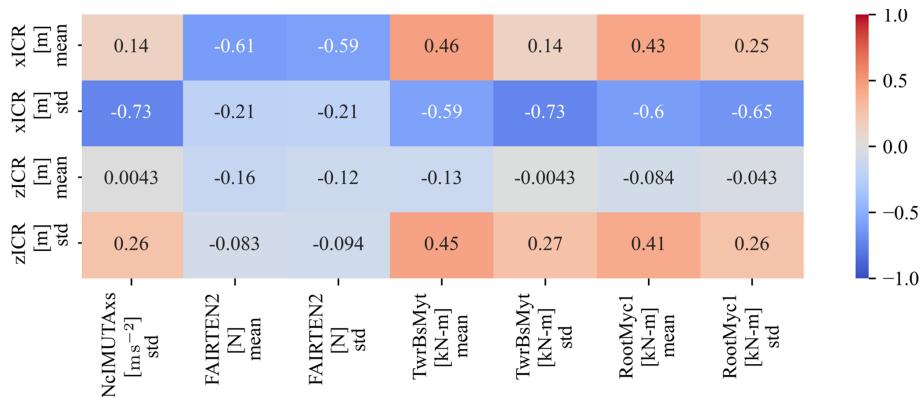


Figure 21. Spearman correlations between the statistics of ICR and the loads obtained by varying the spar design features.

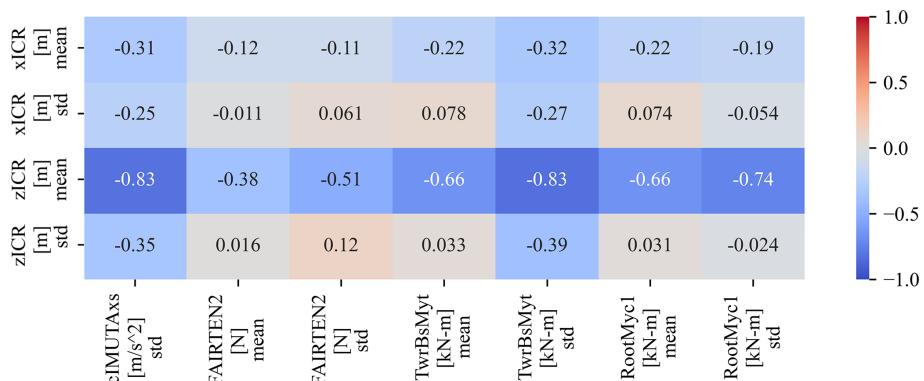


Figure 22. Spearman correlations between the statistics of ICR and the loads obtained by varying the semisubmersible design features.

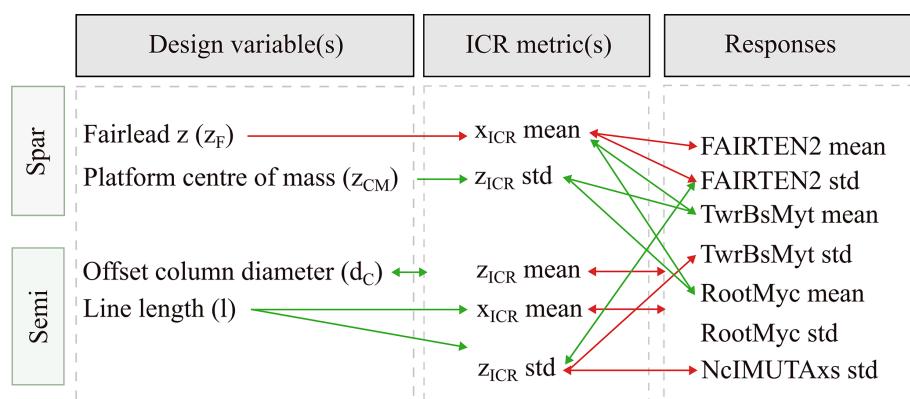



Figure 23. Case studies: design variables considered and their correlation with the ICR and responses statistics. Green/red arrows indicate a positive/negative correlation.

line length and the mean of x_{ICR} did not significantly contribute to changes in the mean x_{ICR} : although the two values change in the same direction, the gradient of ICR by the line length is relatively small in comparison to the gradient of ICR with the column diameter (see the pattern in the top-left subplot). However, the small increase in the line length still led to a significant reduction in the dynamic mooring tension

through a mechanism different than the ICR position (longer catenary lines provide less stiffness). This highlights an important point: while the ICR position can be a useful design metric, it is only one of many metrics. In this case, line length was a parameter that allowed the reduction in mooring tension without negatively affecting the ICR position.

Table 13. Summary statistics of responses for spar and semisubmersible structures based on the data used for the correlation analysis.

| Unit | Spar | | | Semisubmersible | | | |
|--------------------------|-------------------|--------|---------|-----------------|--------|---------|---------|
| | Min | Median | Max | Min | Median | Max | |
| NcIMUTAx _s SD | m s^{-2} | 0.06 | 0.08 | 0.12 | 0.05 | 0.08 | 0.14 |
| FAIRTEN2 mean | kN | 637.04 | 1276.43 | 2977.12 | 865.86 | 1409.13 | 2190.55 |
| FAIRTEN2 SD | kN | 0.59 | 7.80 | 29.98 | 5.83 | 17.94 | 61.21 |
| TwrBsMyt mean | MNm | -5.58 | 24.14 | 100.74 | -0.37 | 23.61 | 73.89 |
| TwrBsMyt SD | MNm | 3.33 | 4.35 | 6.48 | 1.85 | 2.99 | 5.16 |
| RootMyc1 mean | MNm | 0.80 | 3.31 | 9.50 | 0.86 | 3.91 | 9.47 |
| RootMyc1 SD | MNm | 0.08 | 0.19 | 0.76 | 0.07 | 0.22 | 0.68 |
| x_{ICR} mean | m | -8.43 | -1.88 | 4.72 | -19.22 | -13.00 | -5.98 |
| x_{ICR} SD | m | 20.40 | 32.44 | 110.56 | 38.28 | 47.71 | 102.22 |
| z_{ICR} mean | m | -35.47 | -26.60 | -18.86 | -18.26 | -5.14 | 9.61 |
| z_{ICR} SD | m | 5.97 | 13.84 | 46.28 | 68.15 | 106.96 | 337.67 |

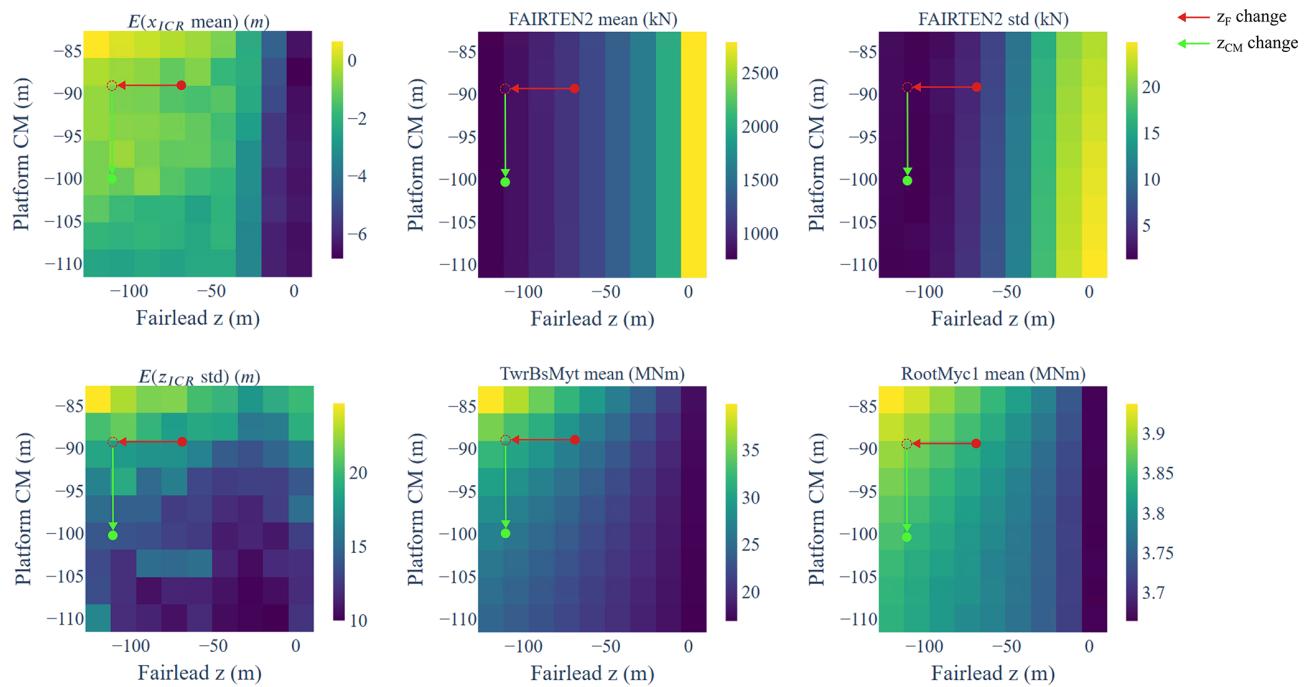**Figure 24.** Design space visualisation: ICR and response statistics as functions of two selected design variables for the spar-type FOWT.

This statement is also supported by an examination of a similar plot but this time based on variations in the parameters that do not directly affect the mooring design or loads. Figure 28 presents the column diameter and heave plate diameter design space. In the absence of mooring parameter changes, the effect of varying the ICR position in relation to the tower top and fairlead positions is more pronounced. Namely, as the distance between the z_{ICR} and fairlead position ($z = -14$ m) decreases, the dynamic tension decreases. At the same time, the distance between the z_{ICR} and the tower top increases, increasing the tower top acceleration and thus the bending moment experienced at the base of the tower.

7 Conclusions

This study investigated the instantaneous centre of rotation (ICR) of spar and semisubmersible floating offshore wind turbines (FOWTs) through time-domain analysis. It examined the dependence of ICR on complex environmental loading conditions and design features of the support structure, as well as the relationships between the ICR statistics and key FOWT responses.

The statistics of ICR coordinates under increasingly complex external loading conditions were analysed, isolating the impacts of mean wind speed, shear, turbulence intensity, regular wave frequency, irregular waves, and current speed. The

Table 14. Comparison of the original and the ICR-informed adjusted spar FOWT design responses. Body-fixed frame ICR values are in brackets.

| Metric | Unit | Mean | | SD | |
|-----------|-------------------|--------------------|--------------------|--------------------|--------------------|
| | | Original | Adjusted | Original | Adjusted |
| x_{ICR} | m | −2.13 (21.60) | −0.79 (12.63) | 54.79 (33.35) | 33.40 (54.80) |
| z_{ICR} | m | −28.69 (−23.27) | −24.31 (−28.86) | 19.83 (15.36) | 15.30 (19.58) |
| FAIRTEN2 | N | 1.09×10^6 | 8.06×10^5 | 4.24×10^3 | 1.31×10^3 |
| TwrBsMty | kNm | 2.68×10^4 | 2.64×10^4 | 4.04×10^3 | 4.21×10^3 |
| RootMyc1 | kNm | 3.83×10^3 | 3.85×10^3 | 2.37×10^2 | 2.32×10^2 |
| Surge | m | 13.93 | 21.73 | 0.12 | 0.13 |
| Heave | m | −0.16 | 1.04 | 0.02 | 0.02 |
| Pitch | ° | 1.62 | 1.53 | 0.06 | 0.06 |
| NcIMUTAxs | m s^{-2} | | | 0.11 | 0.11 |

Table 15. The original and the ICR-informed adjusted spar FOWT design features.

| Feature | Unit | Original | Adjusted |
|-------------------|------|----------|----------|
| Fairlead z | m | −70.00 | −110.00 |
| Platform z_{CM} | m | −89.92 | −100.00 |

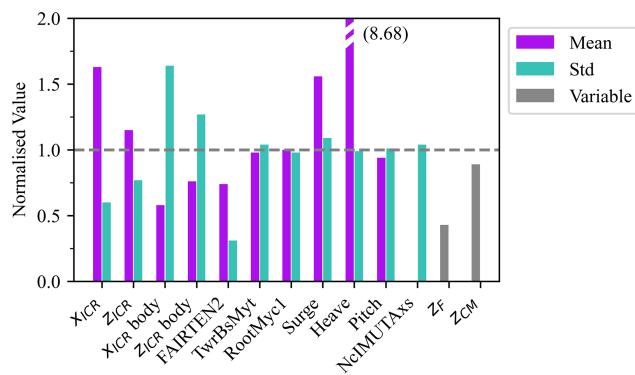


Figure 25. The responses of the modified spar FOWT design. Values normalised with the values of the original design as $1 + (x_{\text{adjusted}} - x_{\text{original}}) / |x_{\text{original}}|$.



results indicated that the ICR coordinates of FOWTs operating in realistic environmental conditions exhibit significant variability, following a heavy-tailed, sharp-peaked distribution with a high likelihood of extreme values. Notably, at a moderate confidence level of 60 %, the range of the vertical ICR coordinate of the spar-type FOWT was approximately 80 m, indicating that precise placement of the ICR is challenging in complex environments.

To inform practical design applications, we explored the design variables that could be adjusted to influence ICR statistics and how these statistics affected key responses for each substructure type separately. We identified the design variables most correlated with ICR: the platform's centre of

mass and the vertical position of the fairlead for the spar, as well as the mooring line length, offset column diameter, and heave plate diameter for semisubmersible FOWTs. A full-factorial design of experiments revealed significant correlations between ICR and the responses of interest: nacelle acceleration, tower base fore–aft bending moment, blade root out-of-plane moment, and mooring line tension. For the spar system, these were most significantly correlated with the horizontal ICR coordinate, and for the semisubmersible, the highest correlation was found with the mean of the z coordinate of the ICR.

Sets of highly correlated design variables, ICR statistics, and responses were selected and used to formulate case studies, where 2D design trends were visualised and analysed to identify preferred design directions. In the spar FOWT case, the fairlead position was adjusted to shift the mean of x_{ICR} closer to the fairleads. Although it was impossible to align the mean ICR with the fairleads using the design modifications considered, moving the ICR in that direction significantly reduced the mean and dynamic mooring loads. This adjustment had a negative impact on the tower and blade loads, which was mitigated by shifting the platform's centre of mass, thereby shifting the standard deviation of z_{ICR} and restoring these loads to their original levels. Even though the ICR is dynamic and exhibits significant variability, the case study showed that shifting the mean ICR towards specific locations can significantly reduce structural loads.

The semisubmersible case study demonstrated that analysing the correlations between the variables, ICR, and responses is not always sufficient to define a good design direction. To address more complex dependencies, we introduced an additional metric: the influence factor, which, based on the slope and coefficient of determination of a linear fit, quantifies the overall impact of a design variable on all responses of interest. By adjusting the two variables with the highest influence factors, we were able to achieve a design in which all responses of interest were improved.

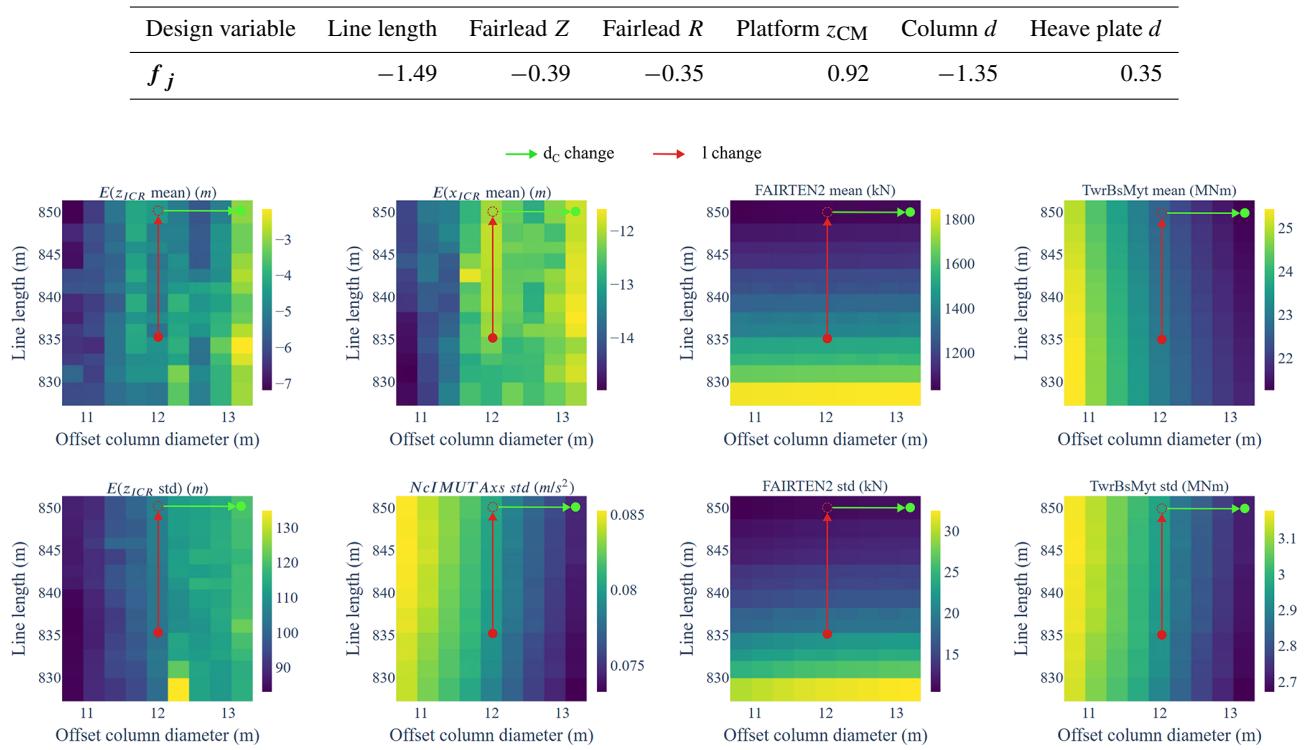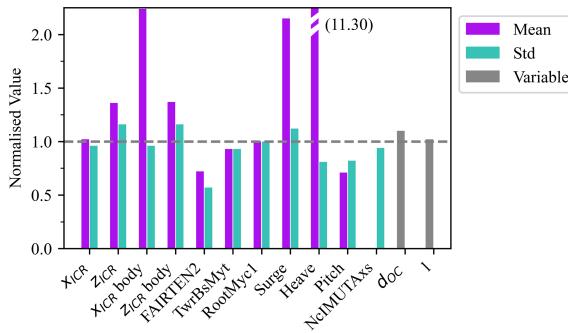Table 16. Influence scores for the semisubmersible design variables.**Figure 26.** Design space visualisation: ICR and response statistics as functions of two selected design variables for the semisubmersible-type FOWT.**Figure 27.** The responses of the modified semisubmersible FOWT design. Values normalised with the values of the original design as $1 + (x_{\text{adjusted}} - x_{\text{original}})/|x_{\text{original}}|$.

The results demonstrated the effect of the ICR on the trade-off between dynamic loads at different locations on the structure. Shifting the ICR closer to the tower top reduced nacelle acceleration and tower base loads (which are driven by acceleration). In contrast, shifting the ICR closer to the fairleads reduced mooring line loads. Importantly, the study showed that the ICR should not be treated as an independent design variable. It can only be adjusted by modifying other design variables that also impact the loads through mecha-

nisms different from the ICR itself and, in some cases, may even counteract its effects. Because of these complexities, relying solely on the ICR to guide the design is insufficient. Instead, the ICR is useful for understanding one of the mechanisms that affect the global response and loads experienced by FOWTs.

8 Future work

To generalise the conclusions to any floating system, further research should investigate how the characteristics of externally applied loads – such as amplitude, point of application, distribution, and frequency – along with the system’s inertial and restoring properties affect the motion response, ICR, and structural loads. This research should abstract from platform geometry and environmental conditions, focusing instead on the fundamental load–response interactions. Additionally, the parametrisation of the FOWT support structure should be refined to allow more control over the designs and the ICR. In particular, the separation of the semisubmersible columns is an important design feature overlooked in this study. Conducting the analysis under the design load cases commonly considered at the concept design/feasibility study stage would be insightful. Lastly, a more efficient frequency-

Table 17. Comparison of the original and the ICR-informed adjusted semisubmersible FOWT design responses. Body-fixed frame ICR values are in brackets.

| Metric | Unit | Mean | | SD | |
|-----------|-------------------|--------------------|--------------------|--------------------|--------------------|
| | | Original | Adjusted | Original | Adjusted |
| x_{ICR} | m | -12.13 (-5.85) | -11.86 (1.43) | 48.01 (47.85) | 45.93 (45.79) |
| z_{ICR} | m | -4.76 (-4.98) | -3.06 (-3.12) | 103.28 (103.35) | 119.65 (119.71) |
| FAIRTEN2 | N | 1.45×10^6 | 1.05×10^6 | 1.98×10^4 | 1.12×10^4 |
| TwrBsMyt | kNm | 2.30×10^4 | 2.12×10^4 | 2.93×10^3 | 2.71×10^3 |
| RootMyc1 | kNm | 3.81×10^3 | 3.80×10^3 | 2.23×10^2 | 2.23×10^2 |
| Surge | m | 6.16 | 13.22 | 0.10 | 0.11 |
| Heave | m | -0.01 | 0.09 | 0.03 | 0.02 |
| Pitch | ° | 0.98 | 0.69 | 0.07 | 0.06 |
| NcIMUTAxs | m s^{-2} | - | - | 0.08 | 0.07 |

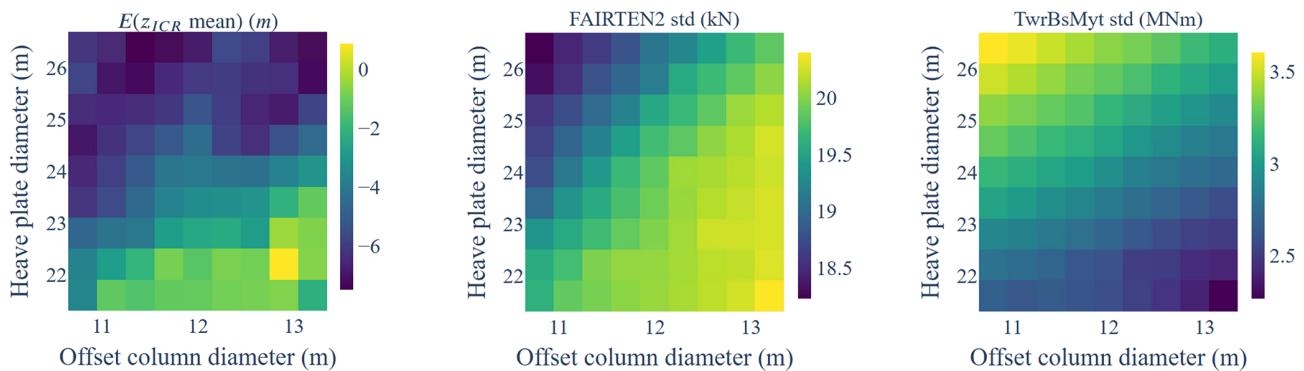


Figure 28. Additional design space visualisation: ICR and response statistics as functions of the offset column and heave plate diameter of the semisubmersible-type FOWT.

Table 18. The original and the ICR-informed adjusted semisubmersible FOWT design features.

| Feature | Unit | Original | Adjusted |
|------------------------|------|----------|----------|
| Offset column diameter | m | 12.0 | 13.20 |
| Line length | m | 835.5 | 850.0 |

domain approach to computing the ICR would benefit initial design space screening and optimisation tasks.

Appendix A

This appendix presents the Spearman correlation coefficient calculation for an example response (the standard deviation of the tower base bending moment) and an example ICR metric (the standard deviation of the z coordinate) using Eq. (1) on a subset of the data analysed in this paper. The differences in the ranks (d_i in Table A1) are summed to obtain the correlation coefficient for the response–ICR metric pair.

Table A1. Spearman rank correlation calculation example.

| Sample | My SD (kNm) | Rank | z_{ICR} SD (m) | Rank | d_i |
|--------|--------------------|------|------------------|------|-------|
| 1 | 2.65×10^3 | 5 | 120.55 | 4 | 1 |
| 2 | 2.66×10^3 | 4 | 119.29 | 5 | -1 |
| 3 | 2.87×10^3 | 3 | 126.24 | 2 | 1 |
| 4 | 3.21×10^3 | 2 | 122.14 | 3 | -1 |
| 5 | 3.72×10^3 | 1 | 149.58 | 1 | 0 |

Appendix B

This appendix presents the figures supporting the discussion in Sect. 3. Figure B1 shows the ICR coordinate distributions for two additional wave periods: 31 and 125 s (pitch and surge natural frequencies). Figure B2 shows the distributions of the horizontal velocity at points A and B for all wave periods.

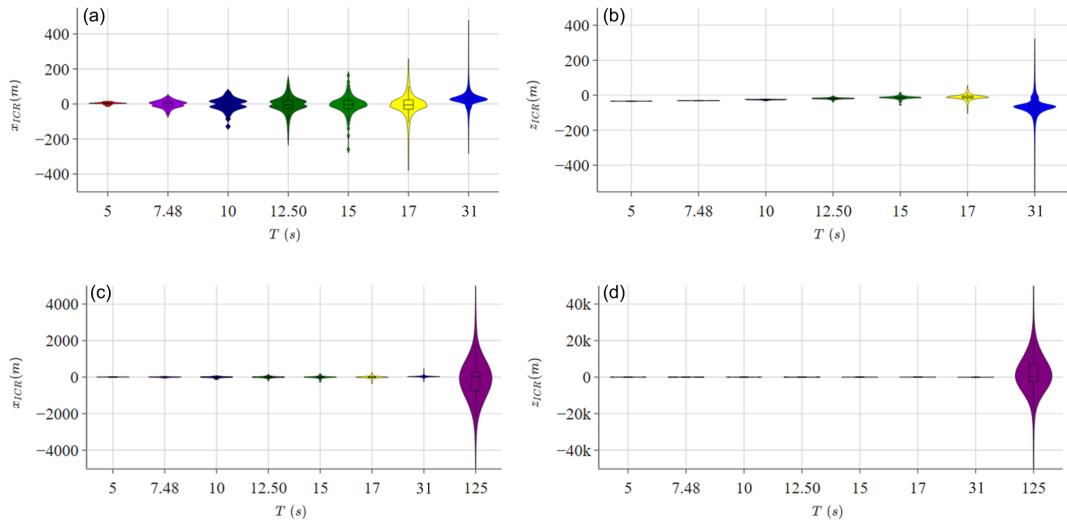


Figure B1. Distribution of ICR coordinates in regular waves of periods 5–31 s (a, b) and 5–125 s (c, d).

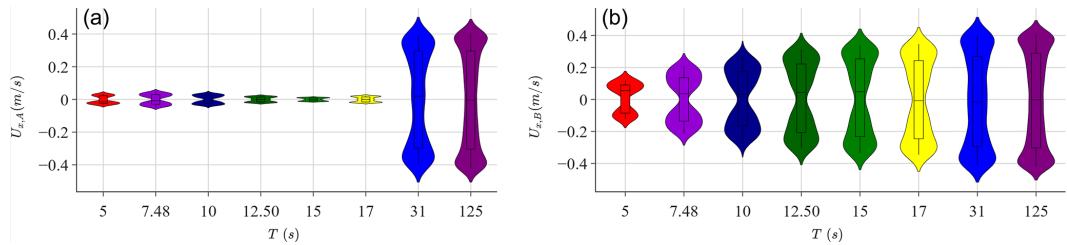


Figure B2. Distributions of the horizontal velocity at points A (a) and B (b).

Appendix C

This appendix presents the correlation matrices (Spearman correlation) between the design variables and the responses of interest for the spar (Fig. C1) and semisubmersible (Fig. C2) floating offshore wind turbines. For clarity, the correlation scores below the absolute value of 0.4 are not shown. Notice the primary impact of the mooring design on the mean response and the floating platform design on the dynamic response.

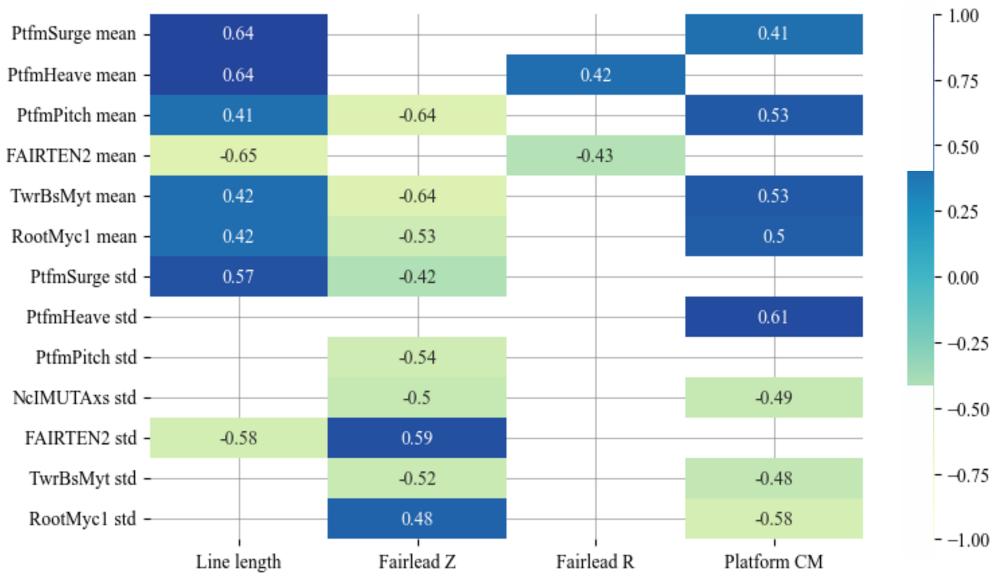


Figure C1. Correlation matrix between the design variables and the responses of interest for the spar design.

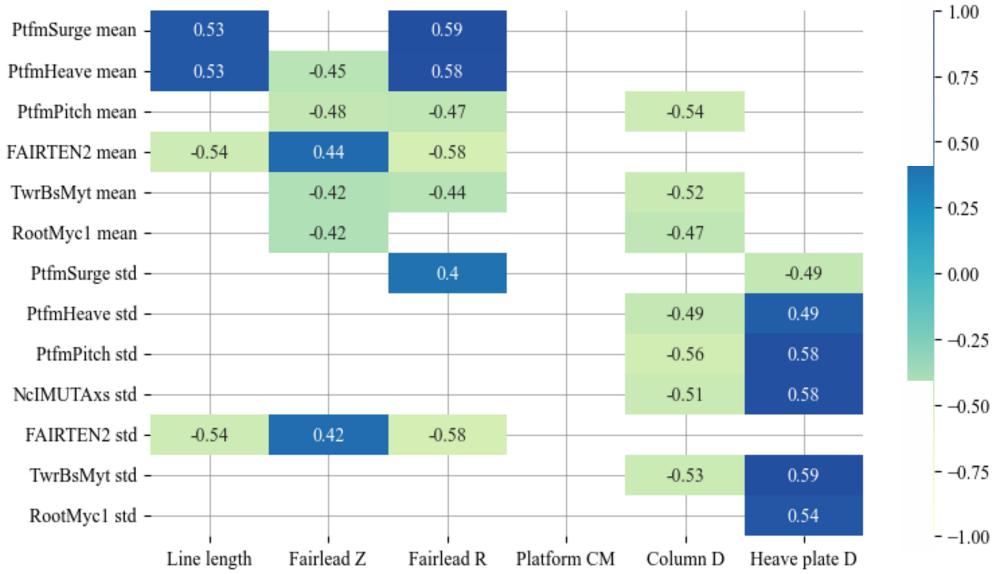


Figure C2. Correlation matrix between the design variables and the responses of interest for the semisubmersible design.

Code availability. The software code developed for this study is not publicly available due to intellectual property restrictions and institutional policies at the University of Strathclyde, which holds rights to the code. As such, external access cannot be granted at this time.

Data availability. The research data associated with this study are not publicly available due to intellectual property (IP) restrictions and institutional policies at the University of Strathclyde. Interested parties may contact the corresponding author to inquire about access under specific conditions, subject to institutional approval.

Author contributions. KP, MC, JJ, GB, MH, and DZ conceptualised the study. KP developed the methodology and performed formal analysis, investigation, visualisation, and original-draft preparation. MC, JJ, GB, MH, DZ, and AC provided supervision. All authors contributed to the draft review and editing.

Competing interests. At least one of the (co-)authors is a member of the editorial board of *Wind Energy Science*. The peer-review process was guided by an independent editor, and the authors also have no other competing interests to declare.

Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. While Copernicus Publications makes every effort to include appropriate place names, the final responsibility lies with the authors.

Financial support. This research has been supported by the University of Strathclyde Research Excellence Award Studentship (REA 2024).

Review statement. This paper was edited by Amir R. Nejad and reviewed by two anonymous referees.

References

Costa, D., Fernandes, A. C., Sales Junior, J. S., and Asgari, P.: Instantaneous Center of Rotation in Pitch Response of a FPSO Submitted to Head Waves: Ocean Engineering of International Conference on Offshore Mechanics and Arctic Engineering, ASME 2018 37th International Conference on Ocean, Offshore and Arctic Engineering, Madrid, Spain, 17–22 June 2018, 7A, ISBN 978-0-7918-5126-5, <https://doi.org/10.1115/OMAE2018-78098>, 2018.

Costa, D., Fernandes, A. C., and Sales Junior, J. S.: Further study on the Instantaneous Rotation Center in Pitch and its distribution in space for a moored vessel sub-

mitted to head regular waves, *Ocean Eng.*, 218, 108161 <https://doi.org/10.1016/j.oceaneng.2020.108161>, 2020a.

Costa, D., Sales Junior, J. S., and Fernandes, A. C.: Instantaneous Center of Rotation of a Vessel Submitted to Oblique Waves, Ocean Engineering of International Conference on Offshore Mechanics and Arctic Engineering, ASME 2020 39th International Conference on Ocean, Offshore and Arctic Engineering, Virtual, Online, 3–7 August 2020, 6B, ISBN 978-0-7918-8438-6, <https://doi.org/10.1115/OMAE2020-18860>, 2020b.

Eliassen, L.: Aerodynamic Loads on a Wind Turbine Rotor in Axial Motion, Ph.D. thesis, University of Stavanger, Stavanger, Norway, 2015.

Fernandes, A. C., Asgari, P., and Soares, A. R.: Asymmetric roll center of symmetric body in beam waves, *Ocean Eng.*, 112, 66–75, 2016.

Hall, M. and Goupee, A.: Validation of a lumped-mass mooring line model with DeepCwind semisubmersible model test data, *Ocean Eng.*, 104, 590–603, <https://doi.org/10.1016/j.oceaneng.2015.05.035>, 2015.

Hall, M., Housner, S., Zalkind, D., Bortolotti, P., Ogden, D., and Barter, G.: An Open-Source Frequency-Domain Model for Floating Wind Turbine Design Optimization, *J. Phys. Conf. Ser.*, 2265, 042020, <https://doi.org/10.1088/1742-6596/2265/4/042020>, 2022.

Haslum, H. A. and Faltinsen, O. M.: Simplified methods applied to nonlinear motion of spar platforms, thesis submitted in partial fulfilment of the requirements for the degree of Doktor Ingenipr., Trondheim, 2000.

Hodges, J. L. J.: The Significance Probability of the Smirnov Two-Sample Test, *Arkiv för Matematik*, 3, 469–486, 1958.

IEC: Technical Specification IEC 61400-3-1:2019, Wind energy generation systems –Part 3-1: Design requirements for fixed offshore wind turbines, International Standard, IEC, Geneva, Switzerland, ISBN 978-2-8322-76099, <https://webstore.iec.ch/en/publication/29360> (last access: 26 February 2025), 2019.

IEC: Technical Specification IEC TS 61400-3-2:2019, Wind energy generation systems–Part 3-2: Design requirements for floating offshore wind turbines, Technical Specification, IEC, Geneva, Switzerland; ISBN 978-2-8322-5986-3, <https://webstore.iec.ch/en/publication/29244> (last access: 26 February 2025), 2019.

Jonkman, J.: Definition of the Floating System for Phase IV of OC3, Tech. rep., National Renewable Energy Laboratory (NREL), 2010.

Jonkman, J., Butterfield, S., Musial, W., and Scott, G.: Definition of a 5-MW Reference Wind Turbine for Offshore System Development, <https://doi.org/10.2172/947422>, 2009.

Jonkman, J. M.: The New Modularization Framework for the FAST Wind Turbine CAE Tool, in: 51st AIAA Aerospace Sciences Meeting including the New Horizons Forum and Aerospace Exposition, 7–10, American Institute of Aeronautics and Astronautics, Grapevine (Dallas/Ft. Worth Region), TX, AIAA-2013-0202, NREL/CP-5000-57228, Golden, CO: National Renewable Energy Laboratory, <https://doi.org/10.2514/6.2013-202>, 2013.

Jonkman, J. M., Branlard, E. S. P., and Jasa, J. P.: Influence of wind turbine design parameters on linearized physics-based models in OpenFAST, *Wind Energ. Sci.*, 7, 559–571, <https://doi.org/10.5194/wes-7-559-2022>, 2022.

Kaptan, M., Skaare, B., Jiang, Z., and Ong, M. C.: Analysis of spar and semi-submersible floating wind concepts with respect to

human exposure to motion during maintenance operations, *Mar. Struct.*, 83, <https://doi.org/10.1016/j.marstruc.2021.103145>, 2022.

Lee, C. H. and Newman, J. N.: WAMIT User Manual, Versions 6.4, Tech. rep., Massachusetts Institute of Technology, 2006.

Lemmer, F., Yu, W., Müller, K., and Cheng, P. W.: Semi-submersible wind turbine hull shape design for a favorable system response behavior, *Mar. Struct.*, 71, <https://doi.org/10.1016/j.marstruc.2020.102725>, 2020.

Meriam, J. L. and Kraige, L. G.: *Engineering Mechanics, Volume 2, Dynamics*, John Wiley & Sons, Inc., 7th edn., 1993.

NREL: OpenFAST, v3.5, GitHub [code], <https://github.com/OpenFAST/openfast/> (last access: 31 December 2024), 2024a.

NREL: pyHAMS: Python-based Hydrodynamic Analysis of Marine Structures, GitHub [code], <https://github.com/WISDEM/pyHAMS> (last access: 26 February 2025), 2024b.

NREL: RAFT, GitHub [code], <https://github.com/WISDEM/pyHAMS> (last access: 26 February 2025), 2024c.

Patryniak, K., Collu, M., and Coraddu, A.: Rigid body dynamic response of a floating offshore wind turbine to waves: Identification of the instantaneous centre of rotation through analytical and numerical analyses, *Renewable Energy*, 218, 119378, <https://doi.org/10.1016/j.renene.2023.119378>, 2023.

Robertson, A., Jonkman, J., Masciola, M., Song, H., Goupee, A., Coulling, A., and Luan, C.: Definition of the Semisubmersible Floating System for Phase II of OC4, National Renewable Energy Laboratory, 2014.

Scottish Government: Sectoral Marine Plan for Offshore Wind Energy, Tech. rep., <https://www.gov.scot/publications/sectoral-marine-plan-offshore-wind-energy/> (last access: 26 February 2024), 2020.

Souza, F. R. S.: Influência do Centro de Rotação através de ensaios de decaimento no movimento de balanço transversal de cascos típicos de FPSO, Undergraduate Research Project, Escola de Engenharia, Universidade Federal do Rio de Janeiro (UFRJ), Rio de Janeiro, Brazil, 2012.

Standing, R.: Prediction Of Viscous Roll Damping And Response Of Transportation Barges In Waves, International Ocean and Polar Engineering Conference, ISOPE 91, 1st Int'l Offshore & Polar Engng Conference, Edinburgh, U.K., 11-16 August 1991, III, 409, ISBN 0-9626104-61, 1991.

Stewart, W. P. and Ewers, W. A.: Wave Induced Motions of Marine Deck Cargo Barges, in: Second International Conference on Behaviour of Off-Shore Structures, BOSS'79, Imperial College, London, Imperial College, London, England 28–31 August 1979, 1979.