

An Empirical Analysis to Assess the Operational Design Domain of Lane Keeping System Equipped Vehicles Combining Objective and Subjective Risk Measures

Farah, Haneen; Bhusari, Shubham ; van Gent, Paul; Mullakkal-Babu, Freddy; Morsink, Peter; Happee, Riender; van Arem, Bart

DOI

[10.1109/TITS.2020.2969928](https://doi.org/10.1109/TITS.2020.2969928)

Publication date

2020

Document Version

Final published version

Published in

IEEE Transactions on Intelligent Transportation Systems

Citation (APA)

Farah, H., Bhusari, S., van Gent, P., Mullakkal-Babu, F., Morsink, P., Happee, R., & van Arem, B. (2020). An Empirical Analysis to Assess the Operational Design Domain of Lane Keeping System Equipped Vehicles Combining Objective and Subjective Risk Measures. *IEEE Transactions on Intelligent Transportation Systems*, 22 (2021)(5), 2589-2598. Article 8979188. <https://doi.org/10.1109/TITS.2020.2969928>

Important note

To cite this publication, please use the final published version (if applicable). Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

Green Open Access added to TU Delft Institutional Repository

'You share, we take care!' - Taverne project

<https://www.openaccess.nl/en/you-share-we-take-care>

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

An Empirical Analysis to Assess the Operational Design Domain of Lane Keeping System Equipped Vehicles Combining Objective and Subjective Risk Measures

Haneen Farah¹, Shubham Bhusari², Paul van Gent, Freddy Antony Mullakkal Babu³,
Peter Morsink, Riender Happee⁴, and Bart van Arem⁵

Abstract—Lower levels of automation are designed to work in specific conditions referred to as the Operational Design Domain (ODD). Beyond these conditions, the human driver is expected to take control. A mismatch between a driver’s understanding and expectations of the automated vehicle capabilities and its actual capabilities as prescribed in the Original Equipment Manufacturers (OEMs) manual, could affect their safety and trust in automation. The main aim of this study is to develop a method for assessing the ODD of lane keeping system equipped vehicles. The analysis method is composed of an objective driving risk measure based on the Probabilistic Driving Risk Field (PDRF), and a subjective risk measure based on driver behavior, trust and situation awareness. We demonstrate the method applicability using the Automated Lane Keeping system of the Tesla Model S. A field test was conducted with 19 participants on public roads in the Netherlands including situations within and outside the defined ODD by the OEM. Across all test situations, a mismatch was observed between the ODD specified by the OEM and by the driver. Situations outside the ODD (i.e. no-lane markings and on/off-ramp) were often regarded as within the ODD by the participants. Situations inside the ODD (i.e. tunnel and curve) were mostly correctly classified by the participants. This analysis method has the potential to aid OEMs and road operators in defining more clearly the ODD while taking into account the driver’s safety and awareness of the system capabilities.

Index Terms—Automated vehicles, field test, lane keeping assistance systems, operational design domain, risk analysis.

I. INTRODUCTION

THE Society of Automotive Engineers (SAE) categorizes vehicle automation into six levels ranging from no-automation (level 0), where the human driver has full control of the vehicle, to full automation (level 5) where the vehicle controls all the driving tasks [1]. Each level of automation is designed to work in specific conditions referred to as the Operational Design Domain (ODD). The ODD is defined as ‘the specific conditions under which a given driving automation system or feature thereof is designed to function, including, but not limited to, driving modes. An ODD may include geographic, roadway, environmental, traffic, speed, and/or temporal limitations’ [1]. The ODD for all levels of automation, except for full automation, is limited. Currently, SAE level 2 of vehicle automation (i.e. partial automation) is available in several commercial vehicles. Partial automation, refers to ‘sustained and ODD specific execution by a driving automation system of both the lateral and longitudinal vehicle motion control subtasks of the Dynamic Driving Task (DDT) with the expectation that the driver completes the Object and Event Detection and Ranging (OEDR) subtask and supervises the driving automation system’. This means that with partial automation, the driver may be requested to take over control of the vehicle in certain conditions that are not part of the ODD. As each Original Equipment Manufacturer (OEM) specifies their own specific ODD, this could result in uncertainties about the capabilities of different vehicles within the same level of automation, and to mode confusion. A mismatch between a driver’s understanding and expectations of the capabilities of the automated vehicle and its actual capabilities as prescribed in the OEM’s manual, could affect drivers’ trust in automation and their perceived risks.

There is ample research, at level 2 automation, on the impact of the longitudinal automation function (such as Adaptive Cruise Control (ACC) and Cooperative ACC) on driver behavior, traffic safety and traffic flow [2]–[4], but limited research on the impacts of Lane Keeping Assistance System (LKAS) on driver behavior and traffic flow [5].

Manuscript received July 30, 2019; revised October 4, 2019 and November 28, 2019; accepted January 24, 2020. Date of publication February 3, 2020; date of current version May 3, 2021. The Associate Editor for this article was K. Yi. (Corresponding author: Haneen Farah.)

Haneen Farah is with the Department of Transport and Planning, Delft University of Technology, 2600 Delft, The Netherlands (e-mail: h.farah@tudelft.nl).

Shubham Bhusari and Peter Morsink are with Royal HaskoningDHV, 3818 Amersfoort, The Netherlands (e-mail: shubham.bhusari@rhdhv.com; peter.morsink@rhdhv.com).

Paul van Gent is with the Department of Transport and Planning, Delft University of Technology, 2600 Delft, The Netherlands (e-mail: p.vangent@tudelft.nl).

Freddy Antony Mullakkal Babu is with Siemens PLM Software, 2600 Delft, The Netherlands (e-mail: freddy.mullakkal_babu.ext@siemens.com).

Riender Happee is with the Faculty of Mechanical, Maritime, and Materials Engineering, Delft University of Technology, 2628 Delft, The Netherlands (e-mail: r.happee@tudelft.nl).

Bart van Arem is with the Department of Transport and Planning, Delft University of Technology, 2600 Delft, The Netherlands (e-mail: b.vanarem@tudelft.nl).

Digital Object Identifier 10.1109/TITS.2020.2969928

A. Lane Keeping Assistance System (LKAS)

There are three, commonly known, types of LKAS [6]: Warning, Intervention and Control based systems. Warning based systems, do not directly alter the vehicle trajectory and require that the driver acts on the warning to have any effect. Drivers are warned by the system if they are swaying away from their current lane and the lane change indicator is not turned on by the driver. The principle of an Intervention based system is to provide a steering wheel torque to avoid unintended lane departures. This torque is related to the vehicle's lateral position and speed. The system has limited authority and is meant to only augment driver commands but not to replace them continuously. Finally, the Control based system, which keeps track of potential unintended lane departures, and continuously steers the vehicle to ensure that it is ideally positioned at the center of the lane (with a small allowable buffer). These systems, not requiring active human steering inputs, are the focus of this paper, combined with ACC and a collision avoidance function to provide SAE level 2 automation.

B. Factors Influencing the LKAS

There are several factors that can affect the performance of the LKAS as described in different vehicle owners' manuals and can be classified into the following categories [7]:

Road Infrastructure and Traffic: This includes the type of road (i.e. highway, city road or rural road), and whether the road section includes discontinuities such as weaving sections, on-ramps and off-ramps. The road surface quality, in terms of smoothness, wetness or dust/slush are also important factors. The LKAS performance is also affected by the presence of lane-markings and their clarity, consistency and quality [8]. Finally, the traffic state of surrounding vehicles on the road has impact on the vehicle dynamics in both the longitudinal and lateral direction. In high traffic intensities vehicle cut-in situations are more probable, which could impact the LKAS performance.

Road Sensing: The first step for an automated vehicle is to sense, process and interpret its surroundings. This step may employ several different types of sensors (such as camera or LIDAR based), either individually or in combination (i.e. sensor fusion). Irrespective of the method there are a few common factors determining their functioning, and as a result the LKAS performance. These factors include: (1) nearby vehicles creating severe occlusions; (2) shadows from nearby trees, noise barriers and buildings creating misleading edges and texture on the road; and (3) abrupt changes in the illumination level, such as when exiting a tunnel, which impact the clarity of images gathered by the sensors and thereby affecting the accuracy and precision. In addition to this, for vision based systems, glare, bright sunlight, oncoming headlights and improper illumination hampers the detection capabilities of the cameras (such as detection of lane-marking).

Vehicle and LKAS: LKAS are designed to function only under certain speed ranges and this varies between different OEMs and depends on the type of LKAS. For all speeds outside the specified ranges, the LKAS either stops functioning or its performance reduces.

Driver: The driver's behavior and interaction with the vehicle also affects the LKAS performance. Factors like, whether the driver has his/her hands on the steering wheel and the driving style could affect decisions such as taking back control and disconnecting the system.

C. Assessment of the LKAS Performance

Research regarding lateral driving performance dates back to 1982, when most studies in this domain focused on the effect of pharmaceutical drugs on driving performance by real-road driving tests [9]. Since then primary parameters were used to assess the lateral driving performance including the Mean Lane Position (MLP), the Standard Deviation of Lateral Position (SDLP), and the Steering Reversal Rates (SRR). For example, recently Das *et al.* [10] examined the effect of fog conditions on the lane keeping performance of manual driving, using 'lane offset' as an indicator. Chu, *et al.* [11] applied this measure as an indicator to evaluate the lane keeping performance of the designed controller responsible for the lateral movement of the vehicle. The SDLP was as well applied in several research studies for evaluating manual driving behavior [12], [13]. It is important to indicate that the SDLP, even though used in several studies frequently, by itself cannot adequately describe the lane keeping performance. This is because a low SDLP could also mean that the vehicle is travelling to the left or right of the lane center without much variations. The SRR is generally defined as 'the number, per minute, of steering wheel reversals larger than a certain minimum angular value, referred to here as the gap size', [14]. Other measures used to assess the risk of lane-keeping performance include the Time to Lane Departure (TLD)/ Time to Lane Crossing (TLC), see for example Tarko [15] and Li *et al.* [12]. Another recently newly developed and applied risk measure is the Probabilistic Driving Risk Field (PDRF), [16], [17]. This is based on the concept that safety, or rather, 'unsafety' can be regarded as a combination of risk and its consequence. The PDRF aims to model the objective risk on the road, identifying the 'potential risk' from static objects such as lane markings and curb edge, and the 'kinetic risk' from moving objects, mainly other vehicles.

In the literature, there are limited studies on the interaction of drivers with LKAS. Most studies focused on drivers' interaction with the longitudinal assistance system such as Adaptive Cruise Control (ACC) [2], [18], [19]. Nevertheless, there are few studies like Navarro *et al.* [20], Rudin-Brown and Ian Noy [21], Pohl and Ekmark [22] investigating the influence of LKAS on driver's behavior, behavioral adaptation, and the interaction between the driver and the system. However, these studies, only consider the 'warning' type LKAS and not the more sophisticated 'control' type LKAS. Therefore, there is a knowledge gap regarding the factors determining drivers' interaction with more sophisticated 'control' type LKAS. Furthermore, most studies are either questionnaire-based or simulator-based. In other words, the participant does not experience real direct risk in case of automation failure. In questionnaire-based studies, the participants may say that they would trust an automated system, yet act in a way that demonstrates that they do not trust it [23]. From a design

standpoint, it is important to design systems that individuals will trust [24]. The assessment of driving behavior in automation includes understanding the factors that affect drivers' trust and awareness of the capabilities and functionality (ODD) of the system. Therefore, this raises the need for a method that combines a real-road test with a questionnaire-based approach. Developing such a method could be useful for vehicle manufacturers to assess the ODD of their vehicles equipped with LKAS and for road operators to assess the needed changes in the infrastructure.

D. Research Objective, Research Questions, and Main Contributions

The main objective of this study is to develop an analysis method that combines objective and subjective risk measures for the assessment of the ODD of vehicles equipped with LKAS. To do that the following research questions were defined:

- How does the LKAS perform when it is within and when it is exceeding its pre-defined ODD?
- To what extent can the proposed risk measurement metric be used to determine the objective driving risk across different test situations?
- Is there a mismatch between the ODD specified by the OEM and the one specified by the drivers? and which factors contribute to this mismatch?

The main contributions of this paper are as following:

- Development of a method for assessing the ODD of LKAS equipped vehicles considering objective and subjective risk measures;
- Data collection in real driving environment overcoming the limitations of previous studies based on data from a simulated environment or surveys;
- Focusing on 'control' type LKAS while most previous studies focused on studying drivers' interactions with the 'warning' type LKAS.

II. RESEARCH APPROACH & EXPERIMENTAL SETUP

To answer the research questions in this study, a research approach composed of a field test (including a pilot test) and a set of questionnaires was developed. As illustrated in Figure 1, we first conducted a literature review on LKAS, the factors that influence their performance, methods to assess their performance and as well the defined ODD in the vehicle owner's manual. This was followed by the experiment setup which consisted of the selection of test situations of interest, vehicle instrumentation and the preparation of the questionnaires. The test situations were selected so that some are classified within the ODD, some out of the ODD, and the remaining as ODD not in or out. Based on that the test route was selected. After the research plan was approved by the human research ethical committee of the TU Delft, we started with the participants recruitment procedure and test scheduling. This was followed by the pilot test, field test, and data processing. The final step included the data analysis which consisted of the lane keeping performance assessment and the objective and subjective risk assessment. These components of the approach are further detailed in the following sub-sections.

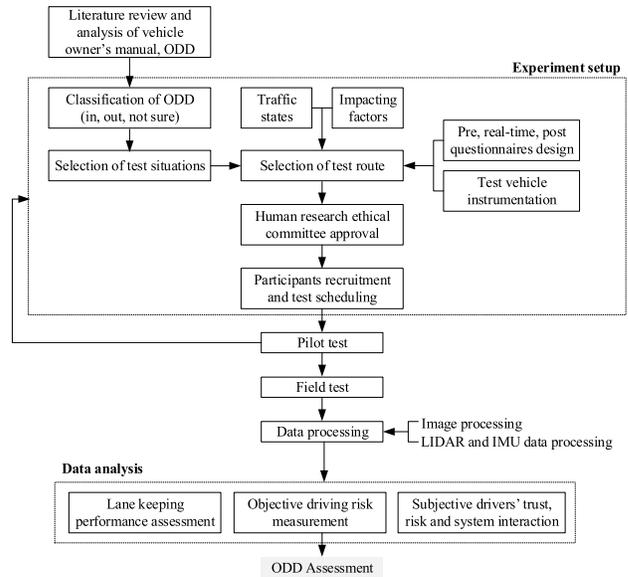


Fig. 1. Procedure of the research.

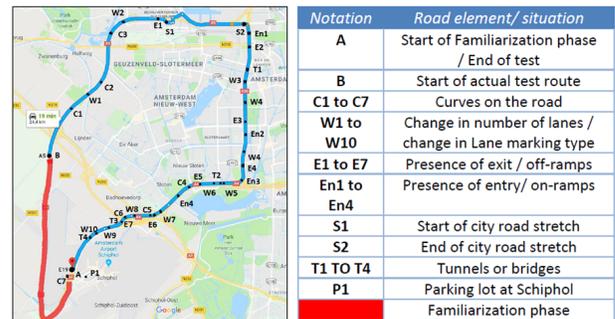


Fig. 2. Map of the selected testing route with notation of specific road elements/ situations.

A. Field Test Including a Pilot Test

For the field test several routes were considered taking into consideration several factors for determining the final test route. These factors included: the variation in road curvature, road width, presence and quality of lane marking, number of lanes, presence of on-ramps, off-ramps, tunnels, and bridges, and non-highway route sections. Based on these considered factors the final chosen test route consisted of the A5, Zwanenburg to A4 (E19) Schiphol as illustrated in Figure 2.

A pilot test was conducted prior to the main experiment to examine the appropriateness of the proposed test route with respect to the different ODD classified situations. A test map indicating possible locations that fall within and outside the ODD was made prior to the pilot test. During the pilot test the vehicle instrumentation, such as the sensors and cameras, were tested to make sure they function appropriately. The pilot test was conducted on the 9th of May, 2018 with three participants who were part of the research team. Furthermore, a safety driver from the Tesla car rental organization was present during all the test drives to ensure the safety of the participants and the other road users. The safety driver also explained to the participants how to use the automated system of the car.



	Go Pro cameras	To determine the position of the vehicle in its lane (side facing), and to capture the conditions of the road environment (front facing).
	GPS + IMU	To measure vehicle dynamics (i.e. velocity, acceleration and position) and to synchronize the video cameras' images with the data collected from the LIDARs.
	HD Webcam	To record drivers' reactions while driving on the test route (facing the driver).
	LIDAR's	To measure the distances to adjacent vehicles (side facing) and to the leading vehicle (front facing).

Fig. 3. Illustration of the vehicle instrumentation and collected data.

B. Vehicle Instrumentation

A Tesla Model S was used as the test vehicle. The LKAS function of the Tesla referred to as the Autosteer function v8.1 (218.18.2.301aeec), was therefore the system whose performance across different test situations, was assessed. The vehicle was instrumented with a LIDAR (LIDAR Lite v3), Go Pro's video cameras, a combined Inertial Measurement Unit (IMU), and a GPS unit. The location of the different sensors and equipment installed on the vehicle are illustrated in Figure 3 together with an explanation of the type of data collected. The synchronization of the data was done using beep sounds coming from the IMU at a specific frequency for 5 s at the beginning of every drive.

C. Questionnaires

The participants completed two sets of questionnaires: pre-drive and during the field test.

Pre-Drive Questionnaire: included questions regarding the participants' personal demographics, their initial trust, confidence, attitudes, and prior experience (such as: usage frequency, satisfaction, perceived risk) with semi-automated vehicles and LKAS systems in general. The participants were also asked whether they are familiar with the term 'Operational Design Domain' and they were asked to explain it in their own words. Prior to this, explanations regarding what semi-automated vehicles are, and the different types of LKAS (warning versus control) were given.

During the Field Test: This part captures the real-time trust of the participants during their drive, and more specifically just after they drove through each of the selected testing situations on a scale ranging from 1 to 5 (with score 5 meaning a very high trust). Following this, they were asked to report if they thought the situation was inside, outside or maybe in/out of the ODD of the LKAS.

D. Participants

The participants for the test route were recruited through various channels depending on the targeted driver group.

TABLE I
SELECTED TEST SITUATIONS AND THEIR CATEGORIZATION

Test situation	Description	Relation to ODD
S1-No-LM	<ul style="list-style-type: none"> Road inside the city, two-lanes per direction, with no lane marking on its boundary; Speed limit of 50 km/h; 	ODD-Out
S2-tunnel	<ul style="list-style-type: none"> Single lane tunnel of 3.25m and concrete walls at 4.5m and 2m on the right and left sides, respectively; Well illuminated tunnel and well-marked lane markings; Speed limit of 50 km/h; 	ODD-In
S3-off-ramp	<ul style="list-style-type: none"> Driving close to an off-ramp on the highway; Speed limit 120 km/h; 	ODD-Not In Or Out
S4-curve	<ul style="list-style-type: none"> Right-turning curve on the highway (radius=295.5m); Speed limit 120 km/h; 	ODD-In

The Tesla experienced drivers were recruited via online advertisements on the Tesla Motors Club forum, while the non-Tesla drivers were recruited via social media and digital mailing lists. All participants were compensated for their time with either a gift voucher of €50 or a dinner invitation.

A total of 19 participants (16 males; 3 females) were recruited with age ranging from 24 to 59 years old (mean=41.32; Std.=12.24), and with a driving license ranging from 3 to 41 years (mean=21.05; Std.=12.77). On average, the vehicle kilometers driven by the participants in the past 6 months was between 1,000 and 60,000 kilometers (mean=15,657; Std.=13,268), and vehicle kilometers in a semi-automated vehicle between 100 and 100,000 kilometers (mean=24,74; Std.=30,74).

E. Selected Test Situations

To test the ODD of the Autosteer function the selected situations were classified into three main categories: (1) ODD-In: i.e. situations where the Autosteer is designed to work properly according to the manufacturer; (2) ODD-Out: i.e. situations where the Autosteer is not intended to work; (3) ODD-Not In Or Out: i.e. situations where the Autosteer may or may not function adequately. The selected situations and their categorization based on the OEM manual of the Autosteer are described in TABLE I:

F. Procedure

The test procedure involved the following steps:

(1) signing the informed consent form and completing the pre-drive online questionnaire: In order to conduct the field tests on public roads within the Netherlands, an approval from the Delft University of Technology ethical committee was obtained. In addition to this, all participants had to sign an informed consent form prior to their participation in the field test. The form provided the participants with information about the general purpose of the research, its procedure, and about the presence of the on-board safety driver during the field test. The participants were informed about all possible risks and discomforts that they could face during the field

test, and that the collected data is confidential, and also about their rights to refuse or withdraw from the field test at any time and with no positive or negative consequences.

(2) introduction by the Tesla safety driver about the Autosteer system and familiarization with the Tesla Model S vehicle: A participant instructions protocol was developed and used by the on-board safety driver to provide instructions to the participants before the commencement of the test drives. The protocol was developed based on the driver manual of the Tesla Model S and in consultation with the safety driver.

(3) participation in the field test and completion of the real-time questionnaire: drivers were asked about their trust levels just after they drove through each of the selected testing situations and also if they thought the situation was inside, outside or not in or out of the ODD of the LKAS.

III. ANALYSIS METHOD

The analysis method was composed of an objective and subjective driving risk assessment. The objective driving risk assessment was based on the Probabilistic Driving Risk Field (PDRF) method [16], [17], while the subjective risk assessment was based on driver behavior, trust and situation awareness when driving with the LKAS.

A. Objective Risk Assessment (Potential Risk Field)

In the PDRF method, risk is defined by the magnitude of the consequences of a collision and the chance of its occurrence. The Potential Risk Field (PRF) first proposed and defined by Wang, *et al.* [25] and later by Mullakkal-Babu *et al.* [17] is composed of the risks experienced due to the non-moving road entities such as lane marking, guard rails, road medians. Lane-marking, in this case is a virtual obstacle that does not involve in a collision but impose a behavioral constraints on driving. The crash severity is then based on the crash energy transferred during a possible collision between the subject vehicle and a road entity. Accordingly, the risk taken by vehicle s due to fixed road boundary object is formulated as:

$$R_{b,s} = 0.5kM (V_{s,b})^2 \cdot \max \left(e^{\left(\frac{-|r_{s,b}|}{D} \right)}, 0.001 \right) \quad (1)$$

where $R_{b,s}$ denotes the risk to subject vehicle s due to road boundary b , and $r_{s,b}$ is a vector that denotes the shortest distance between s and b . The first part of the equation $0.5kM (V_{s,b})^2$ describes the physical crash energy in case of an inelastic collision between s and b . M denotes the mass of s , and $V_{s,b}$ denotes the velocity of s along $r_{s,b}$. k is a parameter to scale the expected crash energy with respect to the type of road boundary object. This parameter has a range [0-1], representing the level of rigidity of the road boundary object. For further information on how to scale this parameter please refer to [17].

The second term in the formulation, $e^{\left(\frac{-|r_{s,b}|}{D} \right)}$, constitutes the probability of the crash, and receives values between [0-1]. This term equals 1 when $r_{s,b} = 0$. As the distance between s and b increases the probability of the crash decreases. Intuitively, a road object further away offers more possibility

for the driver to avoid the collision. D is the coefficient that determines the steepness of descent of the potential risk field. The risk due to a road boundary decreases as one moves away from the road boundary object. In this study we have chosen a value of $D = W/14$, where W is the lane width, indicating that the collision probability term attains a marginal value (0.00091) at the lane center. However, crashes are not always perfectly inelastic and roadside objects allow finite deformation thereby absorbing some amount of crash energy and decreasing the inflicted crash severity. This assumption is consistent with the empirical studies by Zou, *et al.* [26] where it was shown that the odds of injury due to collisions with a guard rail is lower than that with a concrete median barrier and a concrete wall.

Being based on artificial field theory, the PDRF method possess several benefits in comparison to other surrogate safety measures ([16]). First, the PDRF accounts for the combined risk in both the longitudinal and the lateral directions, while other risk measures, such as the Time to Collision and the Time to Lane Crossing account for the longitudinal or the lateral risk, respectively. Secondly, the PDRF method is applicable to a wider range of evaluation scenarios and driving conditions. This could result in a more informative and realistic representation of driving risk.

The objective risk measure could be very useful for OEMs and road authorities to assess the implications of different mismatches on safety and based on that prioritize their actions and interventions to reduce the mismatches that lead to the highest objective risks.

B. Subjective Risk Assessment

It is important to examine if the objective risk significantly affects drivers' perceived risk and trust in vehicles equipped with LKAS. This is important especially for the situations in which it is safe for the LKAS to function [27], [28].

Several questionnaire-based studies have identified various factors that affect driver's trust in automation. Jian *et al.* [23] identified factors such as predictability, reliability and dependability which impact trust in automation. Drivers' trust varies dynamically, changing over time [29]. Past experiences and knowledge about the system influence the initial trust while drivers' interaction with the system influences their dynamic trust. Therefore, in the underlying research, drivers' trust and awareness about system's capabilities were measured/reported before and during driving in the Tesla Model S on the test route. The trust questionnaire used in this study was designed based on the three layers of variability in human-automation trust (dispositional trust, situational trust, and learned trust) defined by Hoff and Bashir [30].

IV. RESULTS

We first present the characteristics of the recruited participants for this experiment, followed by the results of the LKAS performance, the objective and subjective risk measurements and finally the ODD assessment.

A. Participants

Out of the 19 participants, 17 participants had previously used a control/intervention type LKAS and all of them had

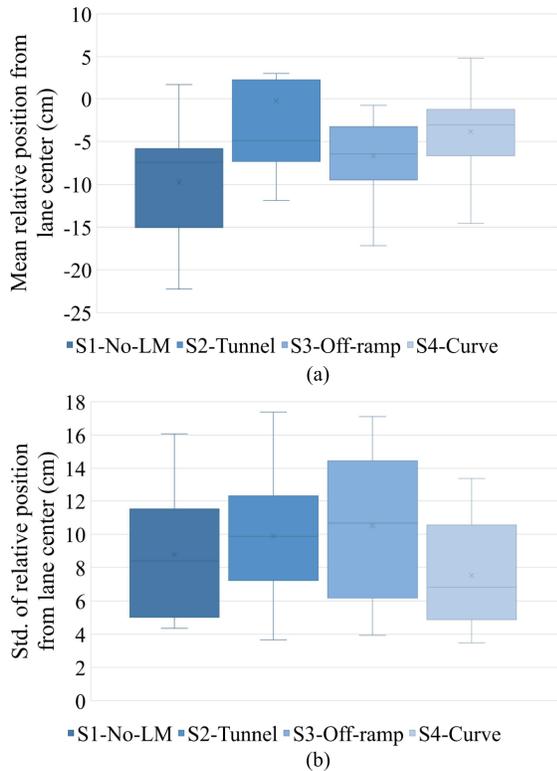


Fig. 4. (a) Mean relative position from lane center in each situation; (b) Standard deviation of relative position from lane center in each situation.

prior experience in the warning type of LKAS as this was a recruitment criterion. Furthermore, 9 participants reported that they always use the LKAS while they drive, 4 usually use it, 2 sometimes use it, and the remaining 4 reported that this question was not applicable to them. 5 participants took part in prior on-road test experiments, and 7 participants were aware of the term ‘Operational Design Domain’.

B. LKAS Performance

To assess the performance of the LKAS the lane position data, extracted from the processed images, were analyzed across the different selected situations (S1-No-LM (no lane-marking on road boundaries in the city), S2-tunnel, S3-off-ramp, and S4-curve). The objective was to understand how the system performs inside and/or outside the OEM specified ODD, and where the vehicle aligns itself (with respect to the lane center). Data corresponding to the first 15 seconds in each situation of each drive was selected for the assessment. The comparison of the LKAS performance between different test situations was first done using boxplots (see Figure 4). This was followed by pairwise comparisons.

C. Objective Risk Measurement

As expected, for the situations *ODD-In*, i.e. situations S2-Tunnel and S4-Curve, the vehicle was closer to the lane center as compared to the other situations (Figure 4(a)). Between these two situations, the relative positions from lane center were more skewed to the right in S2-Tunnel than in S4-Curve. This could be explained by the fact that in S2-Tunnel there were walls on both sides of the tunnel, with the wall on the left side being closer to the lane compared to

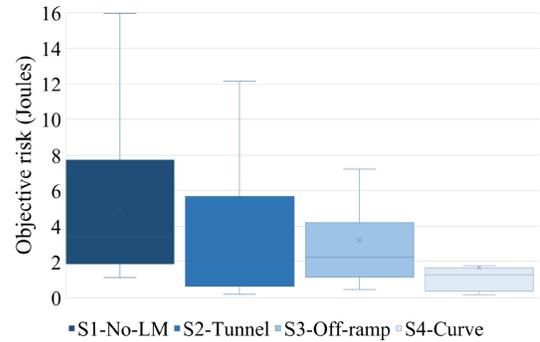


Fig. 5. Maximum objective risk derived with potential risk fields.

the wall on the right side. This could explain why the LKAS positioned the vehicle away from the wall on the left side. The slight left skew in the curve situation could be explained by the presence of the guard rail on the right side of the lane.

Driving close to the off-ramp (S3-Off-ramp, *ODD-Not In Or Out*) resulted in the highest variance of the relative positions from lane center compared to the other situations (Figure 4(b)). Furthermore, the relative positions are slightly skewed to the left which can be explained by the unrecognized changes in the lane marking type close to the off-ramp.

While driving inside the city with no lane marking on the road boundaries (S1-No-LM, *ODD-Out*), it was observed that the LKAS positioned the vehicle closer to the road center. This can be explained by the fact that when the LKAS recognises that there is no lane marking on the right side of the lane, it positions the vehicle closer to the road center.

The Probabilistic Driving Risk Field (PDRF) metric was used to determine the objective driving risks across all the different test situations. In this study we have only considered the Potential Risk Field (i.e. the risks due to non-moving fixed road entities) and a duration of 15 seconds of each test drive. The front left wheel of the subject vehicle was considered as the reference point to determine distances between the subject vehicle and the road entity. The features of the road boundary determine the level of risk it poses to road users [26]. The parameter, k in Equation 1 is used to differentiate the risk posed by each road entity. Four types of road boundaries (non-moving road entities) were considered in the calculation of the risk, with the following values of ‘ k ’: $k=0.1$ for a lane marking strip; $k=0.2$ for a curb stone in the city; $k=0.5$ for a concrete median on the highway; $k=0.7$ for a concrete wall inside the tunnel. Accordingly, lane marking strips pose the least and concrete walls pose the highest risk to driving.

The potential driving risk field for any time instance of a situation, is the sum of the risks due to all the boundary types surrounding the subject vehicle at that time instance. The maximum risk during the 15s in each situation was used as the representative value. The average risk values were not used because in general, for the test duration of 15s, these were equal to zero in most situations. The results are shown in Figure 5.

The objective risk is expressed in Joules and a higher value represents a higher risk. As shown in Figure 5 the mean objective risk is the highest in S1-No-LM and decreases in the

order S1-No-LM > S2-Tunnel > S3-Off-ramp > S4-Curve. The corresponding median values also show a similar trend but with lower magnitudes. This also means that there is deviation in the median and mean values in all the situations and thereby an asymmetry in the objective risk values within each situation. The asymmetry is also observed in the unequal whisker lengths in all situations except for S4-Curve. This means that the risk values are more asymmetric towards values larger than the median. The non-parametric Friedman’s test showed a statistically significant difference in the means of the Objective Risk values, $\chi^2(3)=17.925$, $p < 0.001$. Post-hoc analysis with Wilcoxon signed-rank test with a Bonferroni correction showed a statistically significant difference between S1-No-LM and S4-Curve ($Z = -3.206$, $p = 0.001$), between S2-Tunnel and S4-Curve ($Z = -2.534$, $p = 0.011$), and between S3-Off-ramp and S4-Curve ($Z = -2.482$, $p = 0.013$).

D. Subjective Safety Evaluation

The main aim of this analysis was to investigate if there is a mismatch between the awareness of drivers about the ODD of the LKAS (i.e., inside ODD, outside ODD, or not sure) and the ODD functionality as defined by the OEM.

1) *Pre-Drive Subjective Safety*: 10 of the 19 participants reported that they had prior negative experiences while driving with their LKAS ON. A moderate positive correlation was found between ‘Awareness of the conditions in which LKAS can function’ with ‘Having prior knowledge about ODD of LKAS equipped vehicles’, ($r_s(16)=0.59$, $p=0.016$); and with prior negative experiences, ($r_s(16)=0.60$, $p=0.014$). These correlations should be treated with caution because of the relatively small sample size.

2) *Real-Time Trust and ODD Awareness*: The average trust across all the four situations was found to be relatively high, 4 on a scale from 1 (very low trust) to 5 (very high trust), with a $std.=0.88$. A Friedman test showed that there is no significant influence of the time spent in the vehicle on the real-time trust of drivers across the different situations ($\chi^2(3)=3.418$, $p=0.332$). No statistically significant correlation was found between the real-time trust ratings of drivers and their ODD state awareness. Furthermore, no statistically significant correlation was found between the real-time trust across all test situations and the participant’s experience of driving in a Tesla.

The analysis of the mismatch between ODD state awareness of driver and ODD specified by OEM revealed that the highest percentage of mismatch was in S3-Off-ramp (81.2% mismatch), followed by S1-No-LM (68.7%), S2-Tunnel (12.5%), and S4-Curve (6.25%). Interestingly, none of the drivers had a correct ODD state awareness in all of the four situations. A Cochran’s Q test [31] with Bonferroni correction revealed that the ODD mismatch of drivers is significantly different between the four different test situations ($Q(3)=24.6$, $p<0.0001$). It is important to avoid such mismatches as this could lead to risky situations.

E. ODD Assessment

The ODD of the LKAS was assessed in the different selected situations based on the objective risk measurement

TABLE II
ODD ASSESSMENT OF THE SELECTED SITUATIONS

Test situation	Lane Keeping System performance	Objective Risk of driving	ODD mismatch
S1-No-LM (<i>ODD-Out</i>)	- High bias towards left of lane center; - Considerable variation.	Highest	Second highest (68.7%);
S2-Tunnel (<i>ODD-In</i>)	- Aligned close to lane center; - Bias away from left lane marking strip, avoiding left tunnel wall.	Second highest	Second lowest (12.5%).
S3-Off-ramp (<i>ODD-Not In Or Out</i>)	- Slight bias to left of lane center; - Highest variation.	Second lowest	Highest (81.2%);
S4-Curve (<i>ODD-In</i>)	- Closest to lane center; - Smallest variation.	Lowest	Lowest (6.25%).

(i.e. potential risk field), and based on the subjective risk measurement (i.e., drivers’ questionnaires). The results are summarized in TABLE II.

1) *Inside the ODD Situations*: The lane keeping performance was best in S4-Curve followed by S2-Tunnel. S4-Curve also had the smallest variation in the lateral position. The relative distances of the concrete tunnel walls from the lane boundaries affected the vehicle location within the lane. The vehicle drifts away from the closest wall, in our situation that was the left wall. Drivers’ real-time trust in the system in this situation was negatively correlated with their perceived risk of the situation. This might explain the relatively low ODD mismatches (12.5%).

2) *Neither Inside Nor Outside the ODD Situation*: The vehicle lane positions had the highest variation and deviations relative to the lane center with a slight bias to the left (away from the off-ramp). The lane keeping performance was therefore considered the poorest in this situation. The mismatch was also the highest (82.8%) and the majority of drivers (77%) believed that the vehicle was inside its ODD.

3) *Outside the ODD Situation*: This situation (S1-No-LM), as TABLE II shows, had the highest bias in the lane position towards the left of the lane center, and with considerable variation. Therefore, the lateral objective risk of driving in this situation was the highest. The majority of drivers believed that this situation was inside the ODD of the vehicle, and therefore, the second highest mismatch between drivers’ perception of ODD and OEM specified ODD (68.7%). One possible explanation for this result is the fact that the system could always be switched ON. Therefore, to ensure that drivers understand the capabilities of the system better, the OEMs must either not allow for the system to be activated in these situations, or have a better form of communication with drivers regarding the system possible decrease in performance. 62.5% of the drivers reported that they would have trusted and used the system more if timely information about its capabilities was provided to them.

V. CONCLUSION AND FUTURE RESEARCH

We first present a summary and main conclusions from this study followed by the limitations and future research directions.

A. Summary and Conclusions

In this research, an analysis method to assess the Operational Design Domain (ODD) of Lane Keeping Assistance System (LKAS) equipped vehicles was developed. The performance of the LKAS across different ODD-classification types (*ODD-In*, *ODD-Out*, *ODD-Not In Or Out*) was first assessed based on the mean and standard deviation of the vehicle position from the lane center, followed by the calculation of the lateral driving risk based on the Probabilistic Driver Risk Field (PDRF) metric. The results are based on data collected from a field test on a public road under real traffic conditions of which 19 drivers took part, each driving 55 km (about 75 minutes) covering different road types and situations. The main conclusions from this study are as following:

- For *ODD-In* situations the deviation from the lane center was the smallest, while for *ODD-Out*, it was the biggest among the three categories. For *ODD-Not In Or Out* (in this situation off-ramp), even though the mean deviation from the lane center was relatively small, the variation of the deviation was the highest. This can be attributed to the variation in lane marking types on the right side of the lane center.
- Based on the PDRF metric clear differences in the risk of driving between the different situations could be identified and possible explanations for these were given. For example, the maximum risk was measured to be the highest in the situation that was *ODD-Out* (driving in the city with no lane marking on the road boundaries). On the other hand, even though driving inside the tunnel was considered *ODD-In*, the lateral risk in this situation was the second highest. This can be attributed to the type of road barrier, i.e. the concrete tunnel wall. In comparison to guardrails, the consequence of a crash with the concrete wall is relatively higher. However, it should be noted that these differences in risk might change if the conflicts with adjacent vehicles are considered.
- Across all test situations, a mismatch was observed between the ODD specified by the OEM and by the drivers. This mismatch can negatively affect the establishment of a correct mental model which is crucial for effective and safe interaction of the drivers with automated systems, such as the LKAS [32]. A higher mismatch was observed in both situations *ODD-Out* (i.e. no-lane markings) and *ODD-Not In Or Out* (i.e. off-ramp). Drivers mostly reported these situations to be inside the ODD. This type of mismatch (false-positive ODD) is more dangerous intuitively and also as observed by the PDRF. Therefore OEMs may be recommended to minimize such mismatches by proactively informing/warning the driver. On the other hand, the mismatch in situations that were *ODD-In* (i.e. tunnel and curve) were found to be minimal. In such

situations, the OEMs may focus on improving the LKAS performance.

- Driving experience in a Tesla did not have significant impact on the mismatch. This indicates that regardless of having experience of driving in semi-automated vehicles, increasing drivers' awareness of the automated system capabilities is still very important. Therefore, training and increasing drivers' knowledge and understanding of the LKAS capabilities and in which conditions it works appropriately could support drivers in building correct mental models and well-calibrated trust [33], [34]. Using this assessment method, it was only possible to compare the test situations with each other, and not make decisions regarding the inclusion/exclusion of situations from the LKAS's ODD. This is because, acceptable threshold values for each assessment component (i.e. maximum acceptable risk) vary between vehicle manufacturers and is confidential information. Therefore, this method has the potential to aid OEMs in deciding if a situation should remain inside or moved outside the lane keeping system's ODD while keeping the drivers' safety and awareness of the system capabilities at the core of the decision-making process.

B. Limitations & Future Research Directions

This study has several limitations:

- The first limitation concerns the sample size, with 19 participating drivers of which only 3 were female. Therefore, we could not analyze differences in trust and ODD perceptions as a function of gender. Due to the relatively small sample size also the impact of age was not examined.
- A second limitation is the consideration of only static road entities in the determination of the risk, i.e. the potential risk field. The kinetic field risk due to other moving objects (such as adjacent moving vehicles) also plays a very important role in the determination of total lateral risk assessment. Especially for the case of driving close to off-ramps and on-ramps, adding the kinetic field risk could result in different ranking of the risk level for the different situations. It is recommended in future studies to account for the kinetic field risk to increase the realism of the risk measurement.
- A third limitation is the potential errors in lane position stemmed from image processing. Average errors of 3.5% (highway) and 4% (city) were identified in the values of the lane positions. This largely depends on the camera's image resolution, their calibrations and the applied algorithms. Future research could explore ways to reduce these errors.
- A fourth limitation relates to other factors that might affect the definition of the ODD such as weather and time of day which are important to be considered in future studies.

This assessment method could also be used to study variations among different vehicles' LKAS performance within the same SAE level 2. The results could accelerate harmonization

among different vehicles manufacturers with respect to a more detailed definition of the ODD of each automated system.

ACKNOWLEDGMENT

The authors would like to thank Mr. Tom Alkim, at that time senior advisor C-ITS & Automated Driving Rijkswaterstaat, and currently Policy Officer (SNE) Connected & Automated Driving at European Commission for financially supporting this study and partially funding the field test.

REFERENCES

[1] *Taxonomy and Definitions for Terms Related to Driving Automation Systems for On-Road Motor Vehicles*, SAE International Warrendale, Warrendale, PA, USA, 2018.

[2] D. M. Hoedemaeker, "Driving with intelligent vehicles: Driving behaviour with adaptive cruise control and the acceptance by individual drivers," Ph.D. dissertation, Dept. Work Organizational Psychol. Sect., Delft Univ. Technol., Delft, The Netherlands, 1999.

[3] G. F. Bianchi Piccinini, C. M. Rodrigues, M. Leitão, and A. Simões, "Driver's behavioral adaptation to Adaptive Cruise Control (ACC): The case of speed and time headway," *J. Saf. Res.*, vol. 49, pp. 77–84, Jun. 2014.

[4] S. F. Varotto, H. Farah, T. Toledo, B. Van Arem, and S. P. Hoogendoorn, "Modelling decisions of control transitions and target speed regulations in full-range adaptive cruise control based on risk Allostasis theory," *Transp. Res. B, Methodol.*, vol. 117, pp. 318–341, Nov. 2018.

[5] W. Wang and D. Zhao, "Evaluation of lane departure correction systems using a regenerative stochastic driver model," *IEEE Trans. Intell. Veh.*, vol. 2, no. 3, pp. 221–232, Sep. 2017.

[6] A. Mammeri, G. Lu, and A. Boukerche, "Design of lane keeping assist system for autonomous vehicles," in *Proc. 7th Int. Conf. New technol., Mobility Secur. (NTMS)*, Jul. 2015, pp. 1–5.

[7] A. Bar Hillel, R. Lerner, D. Levi, and G. Raz, "Recent progress in road and lane detection: A survey," *Mach. Vis. Appl.*, vol. 25, no. 3, pp. 727–745, Apr. 2014.

[8] R. Huggins *et al.*, "Assessment of key road operator actions to support automated vehicles," Austroads, Sydney, NSW, Australia, Tech. Rep. AP-R543-17, 2017. [Online]. Available: <https://www.onlinepublications.austroads.com.au/items/AP-R543-17>

[9] J. O'hanlon, "Driving performance under the influence of drugs: Rationale for, and application of, a new test," *Brit. J. Clin. Pharmacol.*, vol. 18, no. S1, pp. 121S–129S, Feb. 1984.

[10] A. Das, A. Ghasemzadeh, and M. M. Ahmed, "Analyzing the effect of fog weather conditions on driver lane-keeping performance using the SHRP2 naturalistic driving study data," *J. Saf. Res.*, vol. 68, pp. 71–80, Feb. 2019.

[11] Z. Chu, C. Wu, and N. Sepehri, "Automated steering controller design for vehicle lane keeping combining linear active disturbance rejection control and quantitative feedback theory," *Proc. Inst. Mech. Eng., Part I, J. Syst. Control Eng.*, vol. 232, no. 7, pp. 937–948, Aug. 2018.

[12] P. Li, N. Merat, Z. Zheng, G. Markkula, Y. Li, and Y. Wang, "Does cognitive distraction improve or degrade lane keeping performance? Analysis of time-to-line crossing safety margins," *Transp. Res. F, Traffic Psychol. Behav.*, vol. 57, pp. 48–58, Aug. 2018.

[13] P. Green, "Standard definitions for driving measures and statistics: Overview and status of recommended practice J2944," in *Proc. 5th Int. Conf. Automot. User Inter. Interact. Veh. Appl.-AutomotiveUI*, 2013, pp. 184–191.

[14] W. A. Macdonald and E. R. Hoffmann, "Review of relationships between steering wheel reversal rate and driving task demand," *Hum. Factors*, vol. 22, no. 6, pp. 733–739, Dec. 1980.

[15] A. P. Tarko, "Use of crash surrogates and exceedance statistics to estimate road safety," *Accident Anal. Prevention*, vol. 45, pp. 230–240, Mar. 2012.

[16] F. A. Mullakkal-Babu, M. Wang, H. Farah, B. Van Arem, and R. Happee, "Comparative assessment of safety indicators for vehicle trajectories on highways," *Transp. Res. Rec.*, vol. 2659, no. 1, pp. 127–136, Jan. 2017.

[17] F. Mullakkal-Babu, M. Wang, B. van Arem, and R. Happee, "Probabilistic field approach for motorway driving risk assessment," 2019, doi: [10.13140/RG.2.2.28157.31207/1](https://doi.org/10.13140/RG.2.2.28157.31207/1).

[18] B. Filzek and B. Breuer, "Distance behaviour on motorways with regard to active safety: A comparison between adaptive-cruise-control (ACC) and driver," in *Proc. Int. Tech. Conf. Enhanced Saf. Vehicles*, vol. 201, 2001, pp. 1–8.

[19] J. Pauwelussen and P. J. Feenstra, "Driver behavior analysis during ACC activation and deactivation in a real traffic environment," *IEEE Trans. Intell. Transp. Syst.*, vol. 11, no. 2, pp. 329–338, Jun. 2010.

[20] J. Navarro, J. Deniel, E. Yousfi, C. Jallais, M. Bueno, and A. Fort, "Influence of lane departure warnings onset and reliability on car drivers' behaviors," *Appl. Ergonom.*, vol. 59, pp. 123–131, Mar. 2017.

[21] C. M. Rudin-Brown and Y. I. Noy, "Investigation of behavioral adaptation to lane departure warnings," *Transp. Res. Rec.*, vol. 1803, no. 1, pp. 30–37, Jan. 2002.

[22] J. Pohl and J. Ekmark, "A lane keeping assist system for passenger cars—design aspects of the user interface," in *Proc., Int. Tech. Conf. Enhanced Saf. Vehicles, Nat. Highway Traffic Saf. Admin.*, 2003, p. 8.

[23] M. R. Lehto, T. House, and J. D. Papastavrou, "Foundations for an empirically determined scale of trust in automated systems," *Int. J. Cognit. Ergonom.*, vol. 4, no. 1, pp. 73–86, Mar. 2000.

[24] J. D. Lee and K. A. See, "Trust in automation: Designing for appropriate reliance," *Hum. Factors*, vol. 46, no. 1, pp. 50–80, 2004.

[25] J. Wang, J. Wu, and Y. Li, "The driving safety field based on driver-vehicle-road interactions," *IEEE Trans. Intell. Transp. Syst.*, vol. 16, no. 4, pp. 2203–2214, Aug. 2015.

[26] Y. Zou, A. P. Tarko, E. Chen, and M. A. Romero, "Effectiveness of cable barriers, guardrails, and concrete barrier walls in reducing the risk of injury," *Accident Anal. Prevention*, vol. 72, pp. 55–65, Nov. 2014.

[27] K. A. Brookhuis, D. De Waard, and W. H. Janssen, "Behavioural impacts of advanced driver assistance systems—an overview," *Eur. J. Transp. Infrastruct. Res.*, vol. 1, no. 3, pp. 245–253, 2001.

[28] N. Merat and J. D. Lee, "Preface to the special section on human factors and automation in vehicles: Designing highly automated vehicles with the driver in mind," *Hum. Factors*, vol. 54, no. 5, pp. 681–686, Oct. 2012.

[29] J. K. Rempel, J. G. Holmes, and M. P. Zanna, "Trust in close relationships," *J. Personality Social Psychol.*, vol. 49, no. 1, p. 95, 1985.

[30] K. A. Hoff and M. Bashir, "Trust in automation: Integrating empirical evidence on factors that influence trust," *Hum. Factors*, vol. 57, no. 3, pp. 407–434, May 2015.

[31] K. D. Patil, "Cochran's Q test: Exact distribution," *J. Amer. Stat. Assoc.*, vol. 70, no. 349, pp. 186–189, 1975.

[32] J. W. Jenness, N. D. Lerner, S. Mazor, J. S. Osberg, and B. C. Tefft, "Use of advanced in-vehicle technology by young and older early adopters," *Surv. Results Adapt. Cruise Control Syst.*, Washington, DC, USA, Report No. DOT HS 810 828, 2008, p. 917.

[33] W. Payre, J. Cestac, N.-T. Dang, F. Vienne, and P. Delhomme, "Impact of training and in-vehicle task performance on manual control recovery in an automated car," *Transp. Res. F, Traffic Psychol. Behav.*, vol. 46, pp. 216–227, Apr. 2017.

[34] M. Beggato, M. Pereira, T. Petzoldt, and J. Krems, "Learning and development of trust, acceptance and the mental model of ACC. A longitudinal on-road study," *Transp. Res. F, Traffic Psychol. Behav.*, vol. 35, pp. 75–84, Nov. 2015.



Haneen Farah received the Ph.D. degree in transportation engineering from the Technion-Israel Institute of Technology. She is currently an Assistant Professor with the Department of Transport and Planning and also the Co-Director of the Traffic and Transportation Safety Lab, Delft University of Technology. Before joining TU Delft, she worked as a Post-Doctoral Researcher at the KTH-Royal Institute of Technology, Stockholm, Sweden. Her research interests include studying the implications of road infrastructure design on road user behavior and traffic safety. In her research, she combines her expertise in transportation engineering, with her curiosity in the fields of human factors and econometrics to study these connections. She is currently examining the implications of the advances in vehicle technology and automation on the road infrastructure design and road user behavior in the framework of several national and international projects.



Shubham Bhusari received the M.Sc. degree in civil engineering with a specialization in transport & planning from the Delft University of Technology. He works as an Innovator and a Product Manager of the Department of Transport & Planning, Royal HaskoningDHV. Given his interests in the field, he works on projects for several provinces, municipalities in The Netherlands and Interregional projects such as the Interregional Automated Transport funded partially by the European Union. These projects, amongst others, involve the assessment of

road infrastructure and its surroundings and the behavior of drivers in the car for the efficient functioning of advanced driver assistance systems and their testing. In addition to this, he also works on the development of in-house products. These products include the collection of data from several sources such as in-car, satellites and image data, as well as using it for road inspections and driver behavior monitoring.



Paul van Gent is currently a Ph.D. Researcher with the Transport & Planning Department, Delft University of Technology. He is interested in how the position and role of the human component changes in an ever more automated world. Accommodating these changes, so that the increased automation actually benefits humans and is safe, brings its own sets of challenges that he loves working on. His recent work focuses on applying deep learning and machine learning methods to improve the interaction between drivers and smart in-car systems. He has worked

on driver persuasion, developing driver monitoring software, and driver state classification. Before joining TU Delft, he worked at the Dutch Road Safety Research Institute (SWOV), where he developed and implemented sensing equipment for use in naturalistic (instrumented) studies on both cars and bikes.



Freddy Antony Mullakkal Babu received the bachelor's degree in civil engineering from the National Institute of Technology, Calicut, in 2011, and the master's degree in transportation systems engineering from the Indian Institute of Technology, Mumbai, in 2014. He is currently pursuing the Ph.D. degree with the Department of Transport and Planning, Delft University of Technology. He is also an Application Engineer at Siemens PLM Software, since 2019. His main research interests include driver behavior modelling, traffic safety and

design, and assessment of driving automation systems.



Peter Morsink is currently the Project Manager and a leading professional in road safety and smart mobility with the Royal HaskoningDHV, since 2008. Before joining Royal HaskoningDHV, he worked at the Dutch research institute TNO Automotive for six years, and at the SWOV Institute for Road Safety Research for five years. He is a mechanical engineer, graduated in biomechanics and computational mechanics. Since 1998, he has developed into all-around road safety and smart mobility consultant through a wide range of assignments on different

types of traffic and transport-related research projects. He has gained a lot of international experience in executing and managing research and consultancy projects in the field of vehicle and infrastructure safety, (inter)national road safety policy, and intelligent transport systems (ITS). In these areas, he has been active as a lecturer in training programs and he has written many articles. He is currently involved in many projects on road safety and traffic management from different perspectives (infrastructure, technology, autonomous vehicles, education), on both a strategic and operational level, in The Netherlands and abroad.



Riender Happee received the M.Sc. degree in mechanical engineering and the Ph.D. degree from the Delft University of Technology, in 1986 and 1992, respectively. He investigates the human interaction with automated vehicles focusing on safety, comfort, and acceptance at the Delft University of Technology, The Netherlands, where he is currently an Associate Professor at the Faculties of Mechanical, Maritime and Materials Engineering, and Civil Engineering and Geosciences. His key projects include HFAuto (coordinator), MOTORIST, SHAPE-IT, and HADRIAN. He investigated road safety and introduced biomechanical human models for impact and comfort at TNO Automotive (1992–2007).



Bart van Arem received the M.S. and Ph.D. degrees in applied mathematics from the University of Twente, Enschede, The Netherlands, in 1986 and 1990, respectively. From 1992 and 2009, he was a Researcher and Program Manager at TNO, working on intelligent transport systems, in which he has been active in various national and international projects. Since 2009, he has been a Full Professor of intelligent transport modelling with the Department of Transport and Planning, Faculty of Civil Engineering and Geosciences, Delft University of

Technology, Delft, The Netherlands. His research focuses on modelling the impact of intelligent transport systems on mobility. He serves as the Editor-in-Chief of the IEEE OPEN JOURNAL OF INTELLIGENT TRANSPORTATION SYSTEMS.