

## Application of the PISA framework to the design of offshore wind turbine monopile foundations

Panagoulas, S.; Brinkgreve, R.B.J.; Minga, E.; Burd, H.J.; McAdam, R. A.

**DOI**

[10.13140/RG.2.2.31427.86564](https://doi.org/10.13140/RG.2.2.31427.86564)

**Publication date**

2018

**Document Version**

Final published version

**Citation (APA)**

Panagoulas, S., Brinkgreve, R. B. J., Minga, E., Burd, H. J., & McAdam, R. A. (2018). *Application of the PISA framework to the design of offshore wind turbine monopile foundations*. Poster session presented at WindEurope 2018 Conference, Hamburg, Germany. <https://doi.org/10.13140/RG.2.2.31427.86564>

**Important note**

To cite this publication, please use the final published version (if applicable). Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights. We will remove access to the work immediately and investigate your claim.

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/328342708>

# Application of the PISA framework to the design of offshore wind turbine monopile foundations

Poster · September 2018

DOI: 10.13140/RG.2.2.31427.86564

CITATIONS

3

READS

504

5 authors, including:



**Stavros Panagoulas**

Delft University of Technology

17 PUBLICATIONS 40 CITATIONS

[SEE PROFILE](#)



**R. B. J. Brinkgreve**

Delft University of Technology

61 PUBLICATIONS 1,720 CITATIONS

[SEE PROFILE](#)



**Eleni Minga**

11 PUBLICATIONS 114 CITATIONS

[SEE PROFILE](#)



**Harvey Burd**

University of Oxford

158 PUBLICATIONS 3,365 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



PLAXIS MoDeTo (Monopile Design Tool) [View project](#)



ALPACA: Axial-Lateral Pile Analysis for Chalk Applying multi-scale field and laboratory testing [View project](#)

# Application of the PISA framework to the design of offshore wind turbine monopile foundations

S. Panagoulas<sup>1</sup>, R.B.J. Brinkgreve<sup>1,2</sup>, E. Minga<sup>3</sup>, H.J. Burd<sup>3</sup>, R.A. McAdam<sup>3</sup>

<sup>1</sup>Plaxis bv, <sup>2</sup>Delft University of Technology, <sup>3</sup>University of Oxford



PO.142

## Abstract

The recently-completed **PISA (Pile Soil Analysis)** research project aimed to improve the design of monopile foundations for offshore wind turbines (OWT), focusing on laterally-loaded monopiles with length-to-diameter ( $L/D$ ) ratios between 2 and 6 [2,4]. The project resulted in a novel one-dimensional (1D) design model which overcomes certain limitations in current practice. The PISA 1D design model facilitates rapid design calculations, based on the use of Timoshenko beam theory to represent the monopile. The soil response is modelled via soil reactions, applied along the shaft and at the base of the monopile. The soil reaction curves are determined using a series of three-dimensional (3D) finite element (FE) calibration calculations, performed prior to the design process, spanning a representative design space.

A new software tool called **PLAXIS MoDeTo (Monopile Design Tool)** has been developed based on this design procedure. This design tool facilitates the automatic generation and calculation of the 3D FE calibration models, the optimisation of the soil reaction curves and the conduct of the 1D design calculations.

## Objectives

- Demonstrate the practical application of the PISA method to a design case for a clay soil profile that is typical of North Sea sites.
- Provide an indication of the efficiency and accuracy of the PISA approach.
- Demonstrate a new design framework which provides opportunities for more efficient procedures for the optimised design of monopile foundations.

## Methods

A calibration set consisting of pile geometries that span a representative design space is initially established (Tab. 1). For these, 3D FE calculations are conducted, using the software PLAXIS (Fig. 1), to determine the performance of each calibration pile. Soil reaction curve data extracted from the 3D models are optimized and parameterized; they are then used to calibrate the 1D model. The calibrated model is used to conduct (rapid) design calculations to determine an optimum monopile geometry, subject to the specified design constraints. Once a final design has been obtained, the validity of the 1D model is confirmed using an additional 3D FE calculation.

Clay behaviour is modelled in the 3D FE analysis using the NGI-ADP model [1]. The assumed ground conditions correspond to an idealized offshore clay till soil deposit based on the site at Cowden, UK [4]. Loads and turbine characteristics have been assumed according to the NREL 5 MW baseline OWT [3].

Tab. 1 Calibration pile set.

3D FE models	L (m)	D (m)	t (mm)	h (m)
FEM 1	18.0	6.0	60	20.0
FEM 2	24.0	6.0	60	20.0
FEM 3	18.0	6.0	60	110.0
FEM 4	24.0	6.0	60	110.0
FEM 5	24.0	8.0	80	20.0
FEM 6	32.0	8.0	80	20.0
FEM 7	24.0	8.0	80	110.0
FEM 8	32.0	8.0	80	110.0

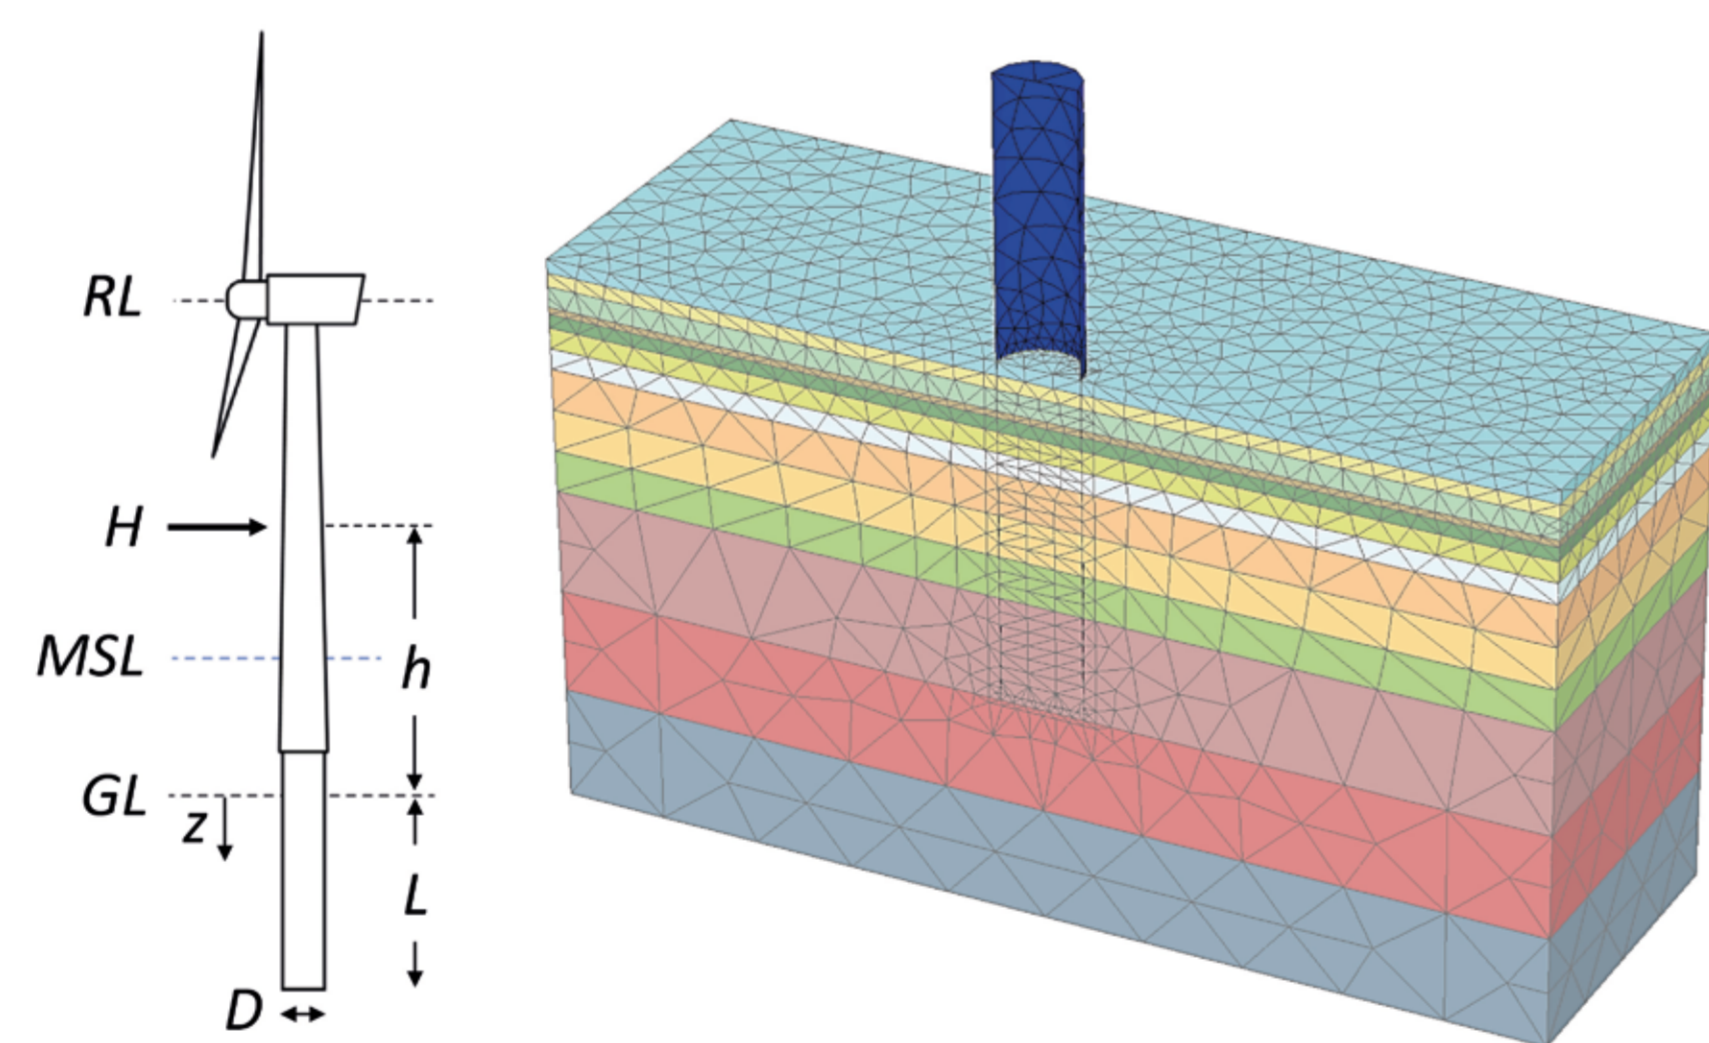


Fig. 1 Schematic representation of the NREL 5 MW OWT (left; RL: rotor level, MSL: mean sea level, GL: ground level, H: resultant horizontal load), and a 3D FE model (FEM 2) in PLAXIS (right).

The specified design criteria for the current example are (Fig. 1): monopile diameter,  $D$ , and loading eccentricity,  $h$ , are fixed at 7.5 m and 60 m respectively. The embedded length,  $L$ , and the wall thickness,  $t$ , are to be determined subject to the following constraints:

- A resultant horizontal design load,  $H$ , of 17 MN is applied at height  $h$ .
- The stress in the monopile must not exceed 325 MPa at any point when the design load is applied; the pile displacement at ground surface must be less than  $0.1 \times D$ .
- The wall thickness of the monopile is allowed to vary along its length to minimise weight. The minimum admissible thickness is 50 mm.

After several design iterations, the dimensions of the monopile are chosen as:  $L = 30.0$  m and a thickness profile divided in two sections,  $t = 0.075$  m from  $z = 0$  m to  $z = 15$  m and  $t = 0.060$  m from  $z = 15$  m to  $z = 30$  m.

## Results

The reliability of the 3D FE calibration is checked against published numerical data [2], indicating a good match for the response of a short ( $L/D = 2$ ) pile founded in the same ground conditions as in the current example (Fig. 2). The calibrated 1D model provides an efficient means of selecting monopile dimensions (embedded length and pile wall thickness). The depth variation of the maximum vertical normal stress in the pile ( $\sigma_z$ ) verifies that the stress design criterion is successfully met (Fig. 3). A convergence study indicates that the 1D model is highly robust; remarkably few elements are needed to represent the embedded pile to obtain accurate results (Fig. 4). A check calculation using the final monopile design parameters – conducted using 3D FE analysis – indicates a close match with the 1D model (Fig. 5); this confirms the robustness of the design approach.

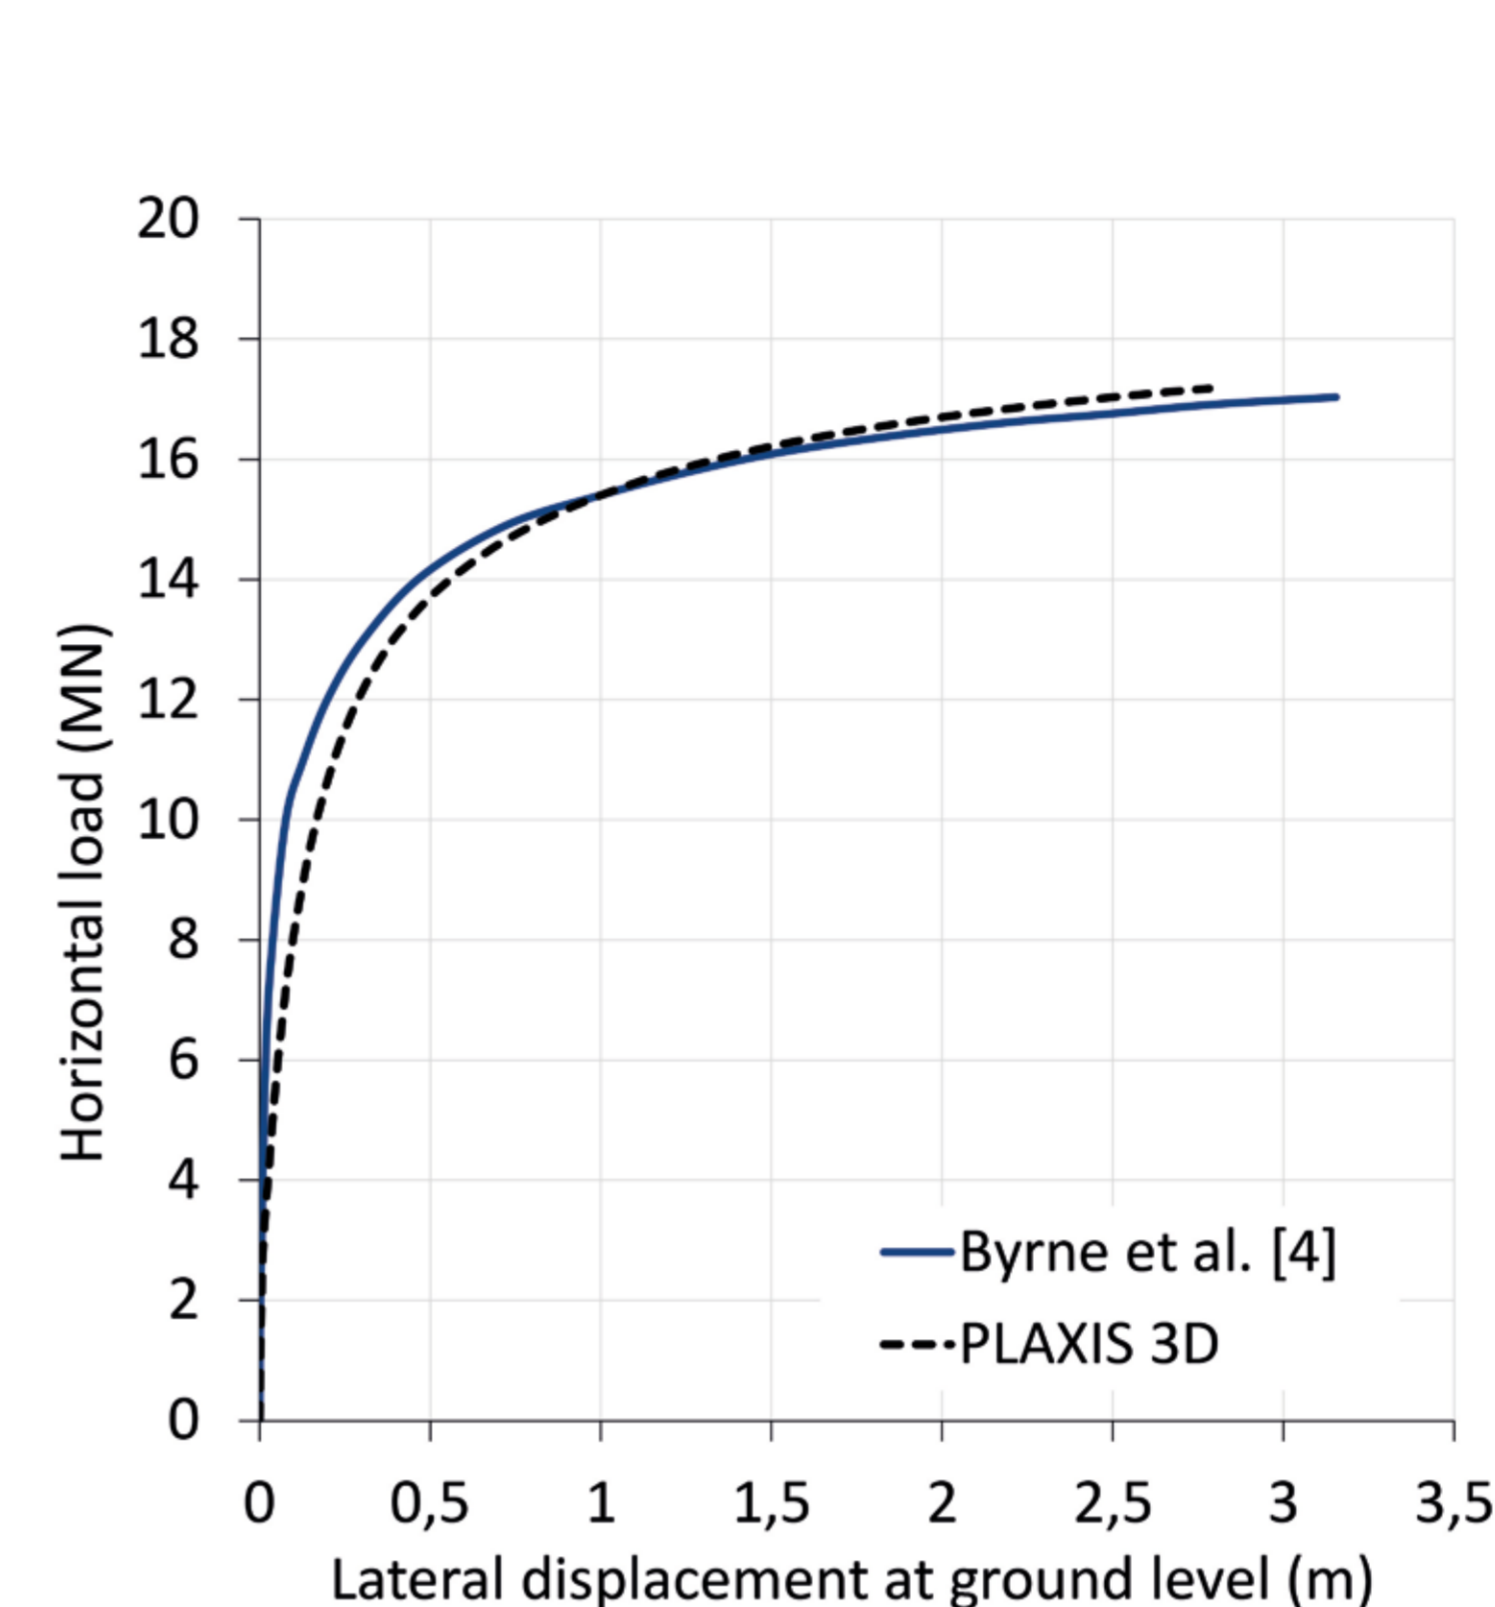


Fig. 2 Reliability check of the 3D FE calibration against published data [4].

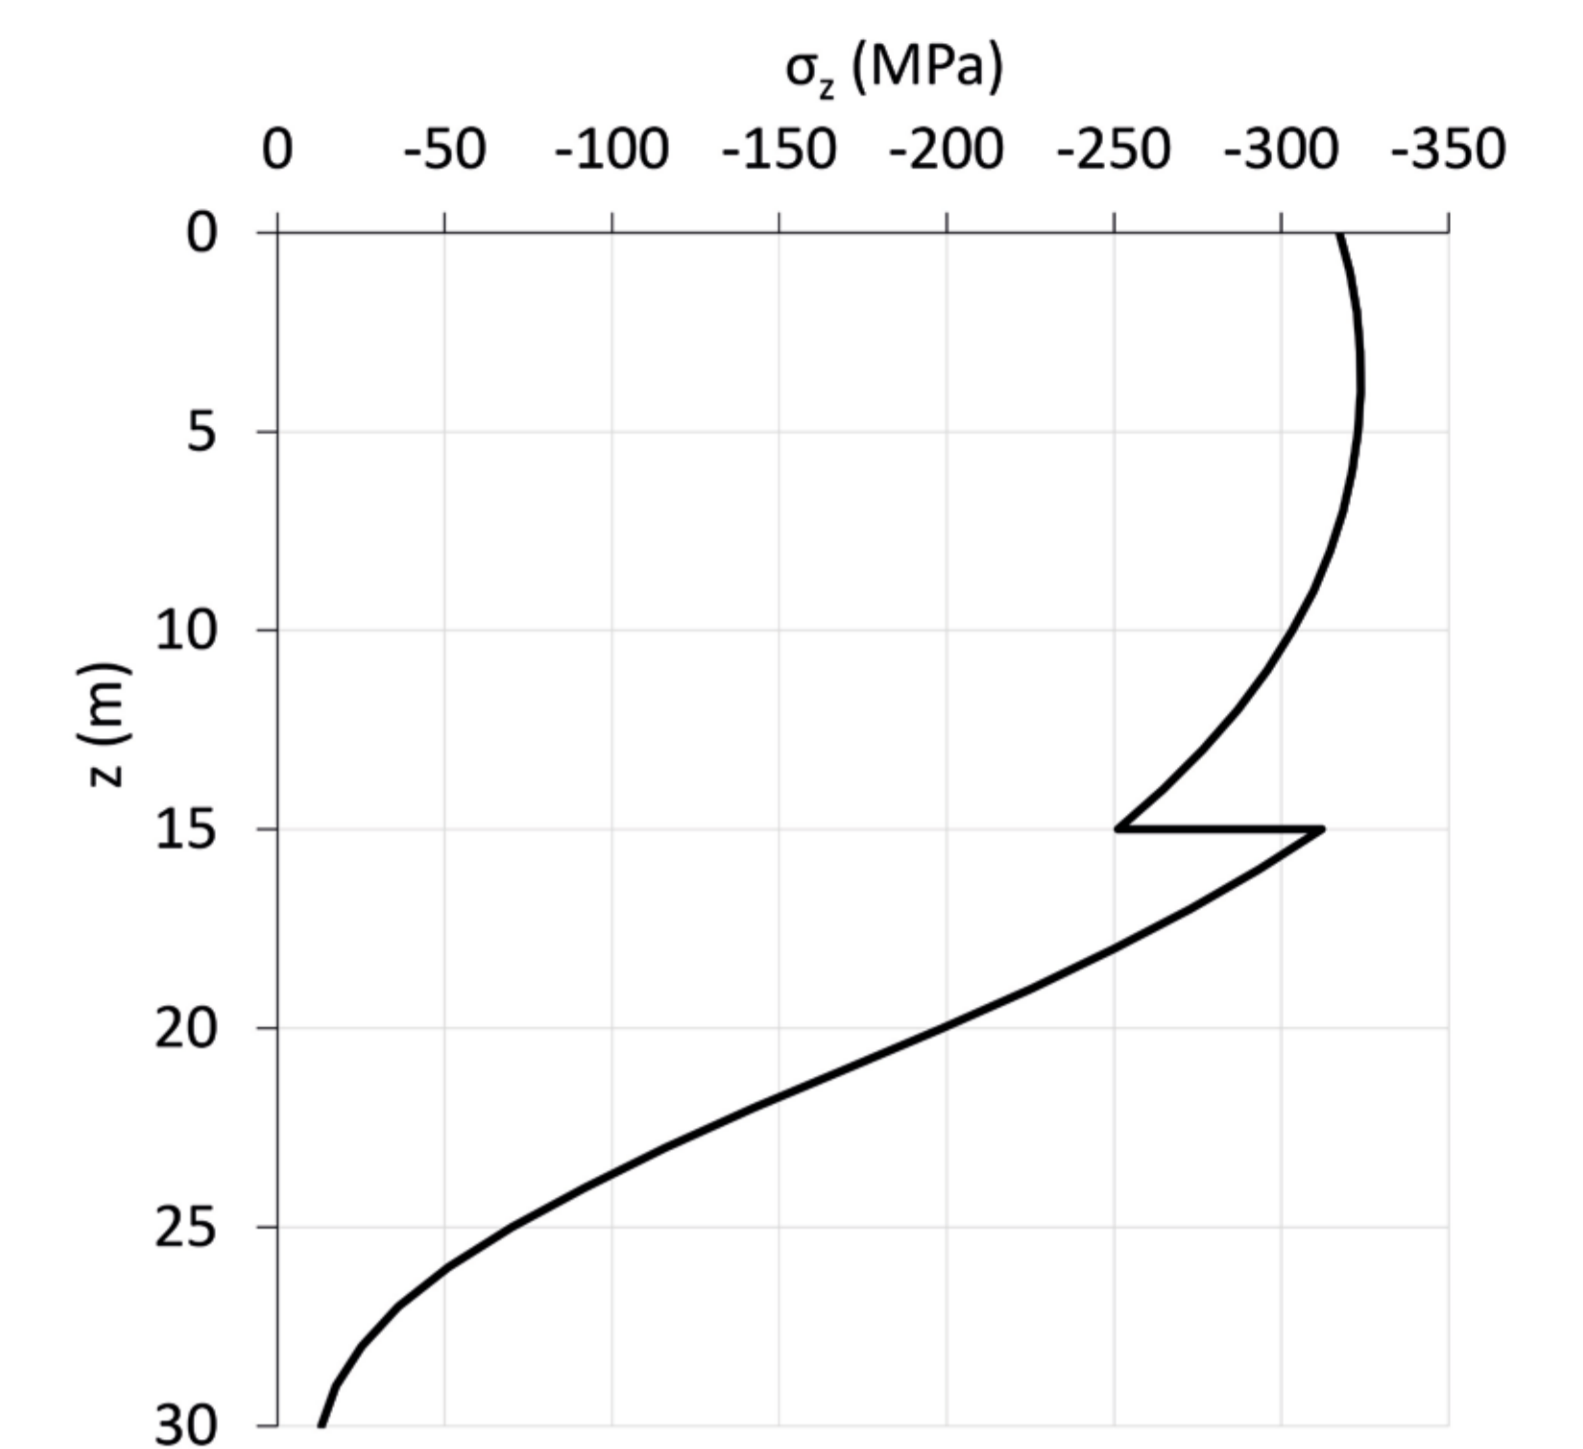


Fig. 3 Depth variation of the maximum vertical normal stress ( $\sigma_z$ ) in the pile.

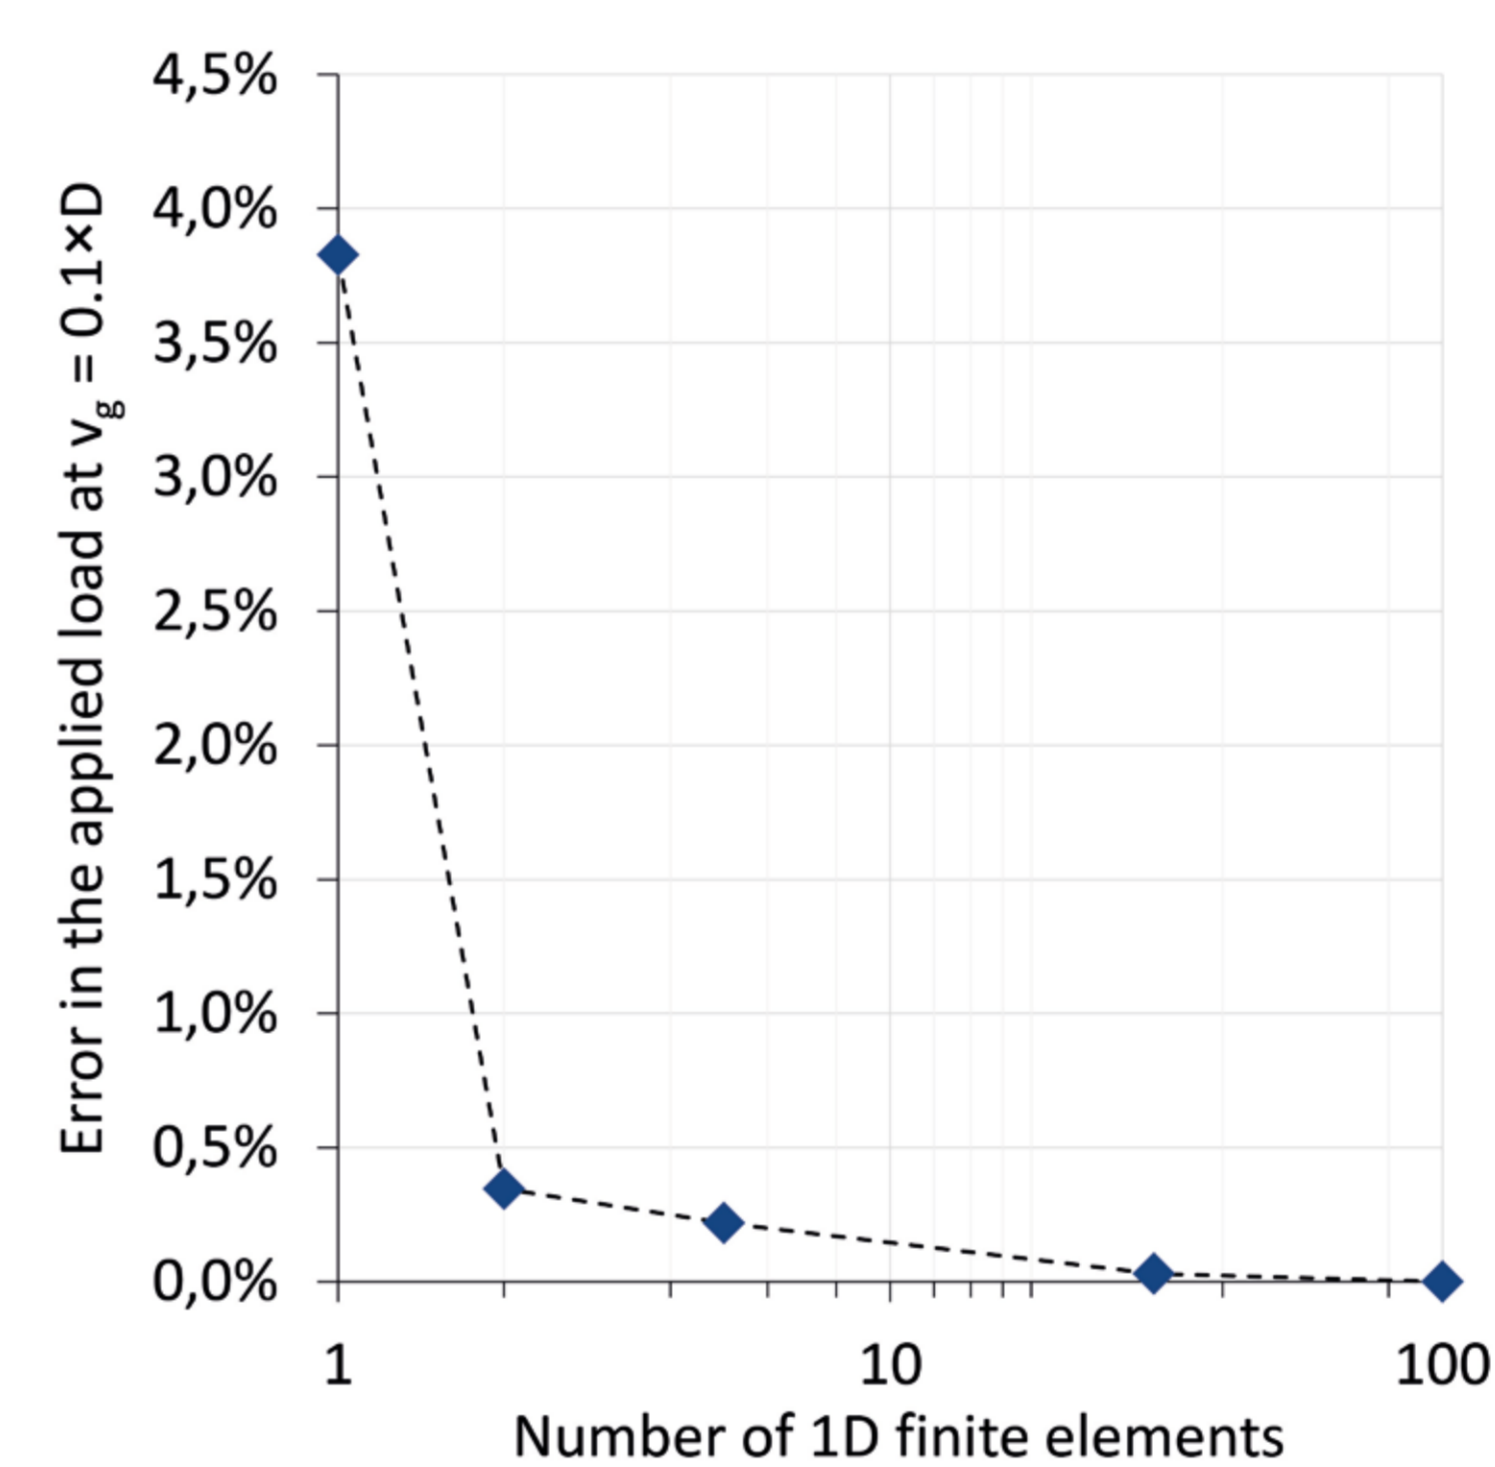


Fig. 4 1D FE model convergence study results ( $v_g$ : lateral displacement at ground level).

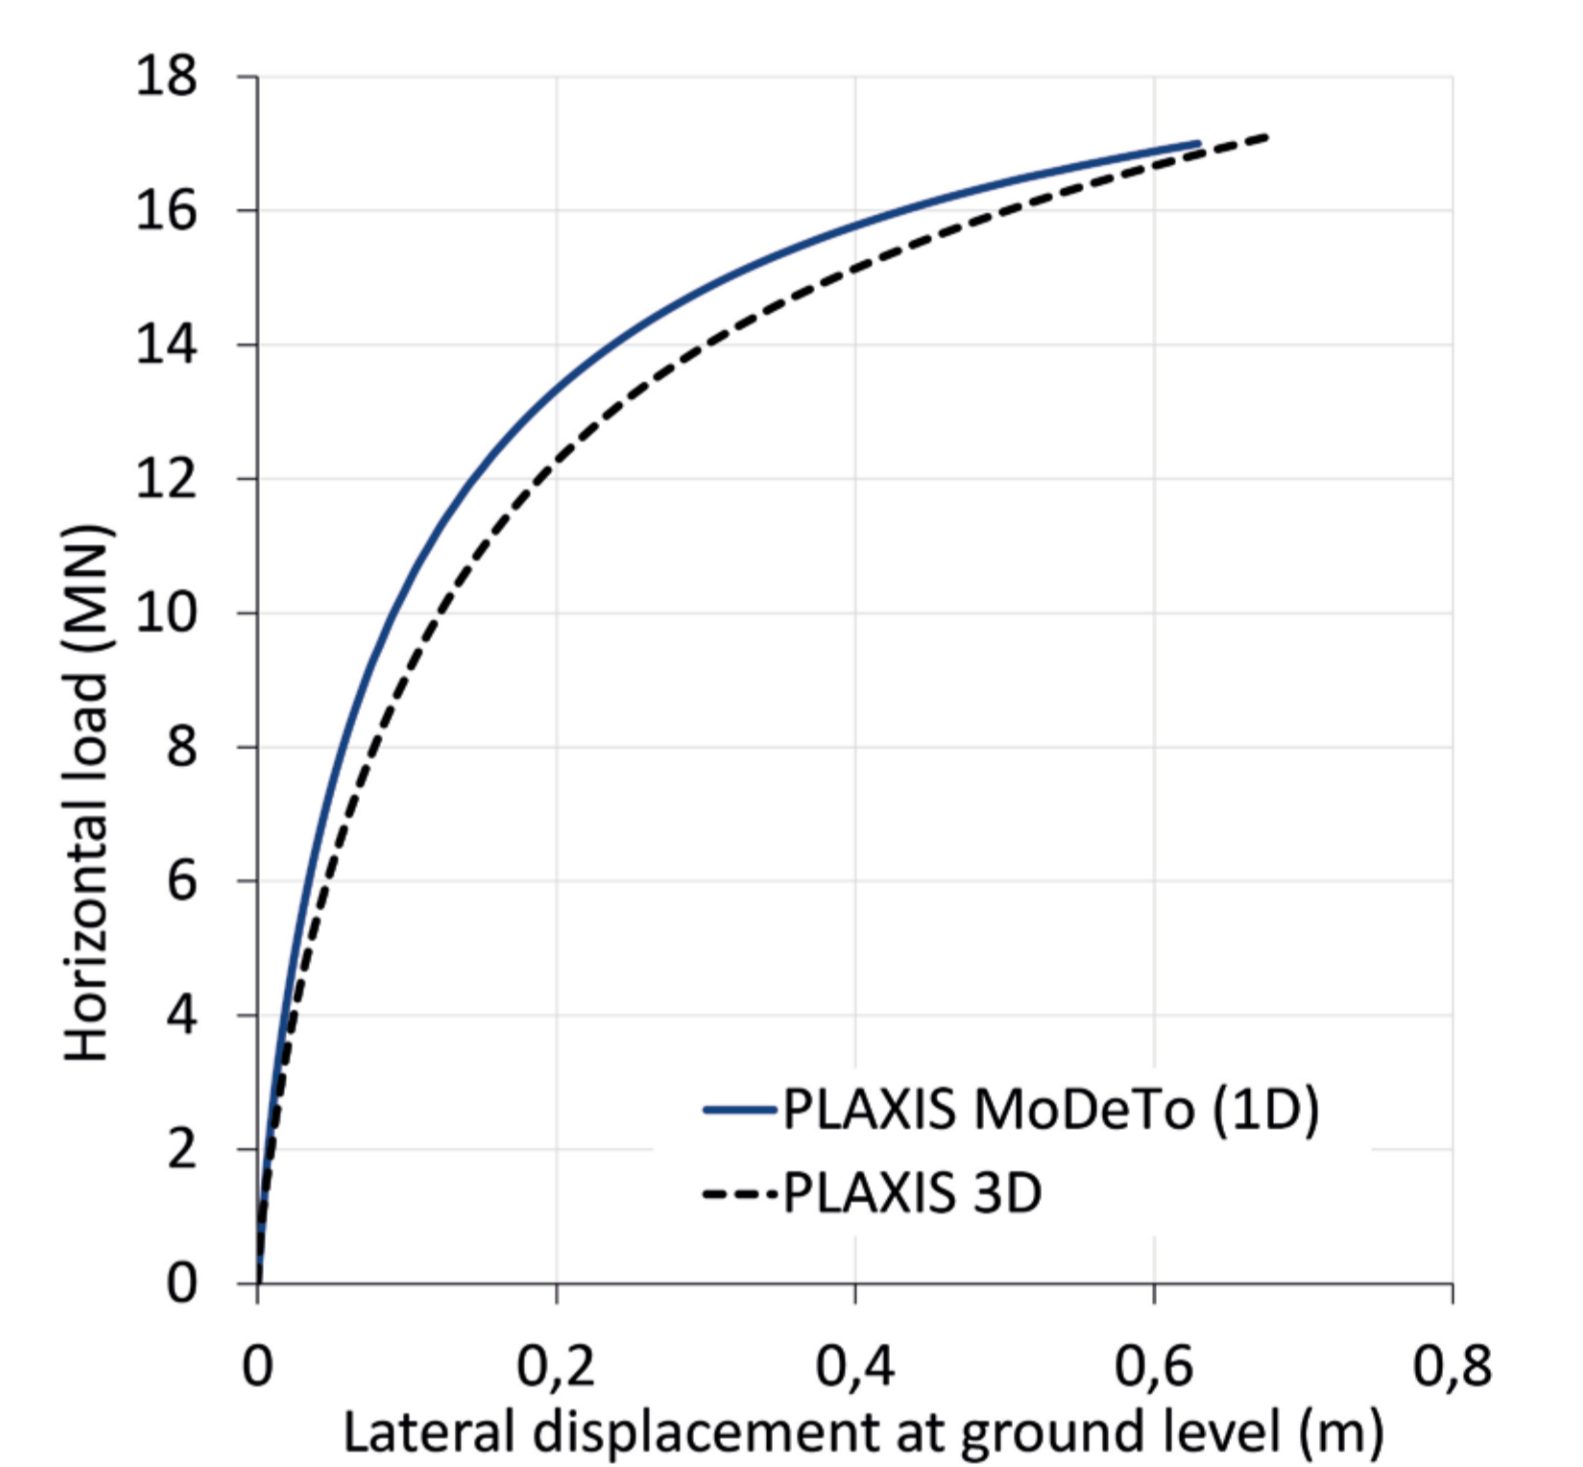


Fig. 5 Comparison between the 1D model and a 3D FE model for the final design.

## Conclusions

- A novel design methodology, developed during the PISA research project, has been incorporated into a new design tool, called PLAXIS MoDeTo.
- Typical soil conditions and monopile geometries are adopted in a design study to demonstrate the capabilities of the PISA design framework.
- A small number (eight in the current case) of 3D FE calculations is needed to calibrate the 1D model in the representative design space. The 3D FE models are validated against published numerical data.
- The calibrated 1D model provides an efficient means of conducting design calculations.

## References

1. Brinkgreve, R.B.J., Kumarswamy, S. and Swolfs, W.M., 2017. PLAXIS manual 2017. Plaxis bv, Delft, the Netherlands.
2. Byrne, B.W., McAdam, R., Burd, H.J., Housby, G., Martin, C., Zdravković, L., Taborda, D.M.G., Potts, D.M., Jardine, R.J., Sideri, M. and Schroeder, F.C., 2015. New design methods for large diameter piles under lateral loading for offshore wind applications. In *3rd International Symposium on Frontiers in Offshore Geotechnics (ISFOG 2015)*, Oslo, Norway.
3. Jonkman, J., Butterfield, S., Musial, W. and Scott, G., 2009. Definition of a 5-MW reference wind turbine for offshore system development. *National Renewable Energy Laboratory, Golden, CO, Technical Report No. NREL/TP-500-38060*.
4. Zdravković, L., Taborda, D.M.G., Potts, D.M., Jardine, R.J., Sideri, M., Schroeder, F.C., Byrne, B.W., McAdam, R., Burd, H.J., Housby, G.T. and Martin, C.M., 2015. Numerical modelling of large diameter piles under lateral loading for offshore wind applications. In *Proceeding 3rd International Symposium on Frontiers in Offshore Geotechnics (ISFOG 2015)*, Oslo, Norway.

Meet us at WindEnergyMatch 2018

