

Predicting the range of volume loss in shallow tunnelling

Vu, M.N.; Broere, Wout; Bosch, Johan

Publication date

2017

Document Version

Accepted author manuscript

Published in

Proceedings of the World Tunnel Congress 2017 – Surface challenges – Underground solutions

Citation (APA)

Vu, M. N., Broere, W., & Bosch, J. (2017). Predicting the range of volume loss in shallow tunnelling. In B. Nilsen (Ed.), *Proceedings of the World Tunnel Congress 2017 – Surface challenges – Underground solutions*

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Predicting the range of volume loss in shallow tunnelling

M. N. Vu

Delft University of Technology, Delft, the Netherlands.

Hanoi University of Mining and Geology, Hanoi, Vietnam.

W. Broere

Delft University of Technology, Delft, the Netherlands.

J. W. Bosch

Delft University of Technology, Delft, the Netherlands.

ABSTRACT: In estimating the effect of tunnelling on existing buildings, the value of volume loss, which is often determined by experience, is an important input parameter. This paper proposes a method to predict the volume loss for various cover-to-diameter C/D ratios in case of shallow tunnelling. By applying a number of (empirical) relation, such as the stability number of O'Reilly(1988) and an analysis of the bentonite and grout flows, volume loss at the tunnelling face, along the shield and at the tail is estimated. Long-term volume loss behind the shield is also derived by means of a consolidation analysis. A width band of achievable volume loss for future projects is derived in this way.

1 INTRODUCTION

Tunnelling often leads to settlements of the soil surface due to over-excavation, soil relaxation and inefficient tail void filling. The magnitude of volume loss is influenced by tunnelling management, characteristics of the tunnel boring machines (TBM), and the geotechnical conditions. In predictions of surface settlement (Peck, 1969) and subsurface settlement (Mair *et al.*, 1993), the volume loss is often determined by engineering experience and data from previous cases. This makes it difficult to correctly assess the volume loss for a future project under radically different conditions like a shallow depth of the tunnel and/or very different soil parameters. A ground movement analysis in Vu *et al.* (2015a) shows the important role of volume loss for settlement calculations and in predicting the effects on existing buildings induced by tunnelling. Especially for (very) shallow tunnels near building foundations, the impact of changes in volume loss is large. Most previous studies on volume loss start from a given volume loss and establish deformation patterns from that or correlate surface observations to volume loss at the tunnel for specific projects. Mair *et al.*

(1982), Macklin (1999) and Dimmock and Mair (2007) studied the volume loss with a summary of projects in overconsolidated clay relating to the volume loss at the tunnelling face. Verruijt (1997), and Strack (2002) applied analytical methods for predicting the ground loss around the tunnel. Loganathan (2011) proposed volume loss calculations but only approximated volume loss along the shield with the worst case, and does not take the consolidation into account. Meanwhile, Bezuijen and Talmon (2008) showed the effect of grouting pressure on the volume loss around the TBM but none of these includes a detailed method to estimate volume loss along the TBM. This paper aims to estimate the volume loss when tunnelling with limited C/D ratios (i.e. less than 1) in various soils with a focus on slurry shield tunnelling.

On the basis of the studies by Cording and Hansmire (1975) and Mair and Taylor (1999), the volume loss can be estimated by the sum of the following components:

- Volume loss at the tunnelling face $V_{L,f}$: soil movement towards the excavation chamber as a result of movement and relaxation ahead of the face, depending on the applied support pressures

- Volume loss along the shield $V_{L,s}$: the radial ground loss around the tunnel shield due to the moving soil into the gap between the shield and surrounding soil, which can be caused by overcutting and shield shape. The bentonite used in the tunnelling face flows into the gap, while the grout used in the shield tail also flows in the opposite direction. Due to the drop of bentonite and grout flow pressures in a constrained gap, soil can still move into the cavity when the soil pressure is larger than the bentonite pressure or grout pressure;

Table 1. Soil parameters used in design of Amsterdam North-South metro line project

Type	γ	ϕ	K	c	Cs	C _{swel}	ν	E _s
Sand	20	35	0.5	-	-	-	0.2	20000
Clayed sand	17.9	35	0.4	2	-	-	0.2	12000
Clay	16.5	33	0.5	7	100	1000	0.15	10000
Organic clay	15.5	20	0.65	5	80	800	0.15	5000
Peat	10.5	20	0.65	5	25	250	0.15	2000

- Volume loss at the tail $V_{L,t}$: when precast segments are placed, the advance of the shield results an annular cavity between the segments and surrounding soil. Grout is used in order to prevent surrounding soil moving into the gap. Volume loss at the tail depends on applied grouting pressure at the tail and proper volume control, where high grout volume and pressure may lead to local heave and low volume to increase settlements;

- Volume loss behind the shield tail due to consolidation $V_{L,c}$: in this void along the tunnel lining, grout consolidates and forms a grout cake, and the stress changes induced in the soil may lead to long-term consolidation settlements in soil volume above the tunnel. Other causes of volume loss are shrinkage of grout and long-term lining deformations. However, their contributions to the total volume loss are small comparing to the above factors.

The total volume loss V_L in tunnelling progress can be given as:

$$V_L = V_{L,f} + V_{L,s} + V_{L,t} + V_{L,c} \quad (1)$$

To illustrate the impact of the different contributions in different soil conditions, estimates are made for a number of ideal soil profiles which are derived from Amsterdam North-South metro line project, consisting of a single soil type with most important properties as defined in Table 1, where γ (kN/m³) is

volumetric weight, ϕ (°) is the friction angle, K is the initial coefficient of lateral earth pressure, c (kN/m²) is cohesion, C_s is compression constant, C_{swel} is swelling constant, m is Poisson's ratio and E_s (kN/m²) is the stiffness modulus of the ground.

2 VOLUME LOSS AT THE TUNNELLING FACE

When tunnelling, the soil ahead of the excavation chamber generally has the trend to move into the cavity which is created by the tunnelling machine. The soil volume moving towards the face depends on applied support pressures and can be controlled by adjusting the support pressures. In stability analysis for tunnelling, the stability number N proposed by Broms and Bennermark (1967) is widely used. By studying the relationship between this stability number and volume loss at tunnelling face, Mair *et al.* (1982) and Macklin (1999) presented a method to determine the expected volume loss based on observed data. The stability number N is given by:

$$N = [\lambda(C + D/2) - s] / c_u \quad (2)$$

where s is the support pressure and c_u is undrained shear strength of the soil.

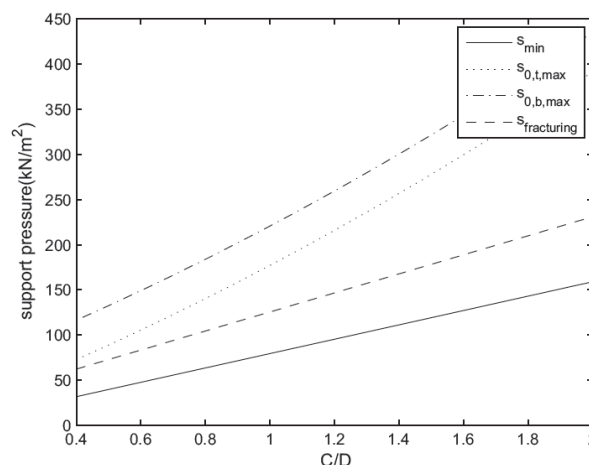


Figure 1. The range of support pressures at the tunnelling face of a tunnel with a diameter D=6 m in clay

In shallow tunnelling, the support pressure s should be high enough to avoid the collapse to the excavation chamber but also limited to prevent blow-out and fracturing. Firstly, the required support pressure must be higher than or at least equal to the total of water pressure and horizontal effective soil pressure taking into account three dimensional arching effects. The

wedge model, which was studied by Jancsecz and Steiner (1994) and Broere (2001), is commonly applied to determine the minimum support pressure $s_{\min}$. When shallow tunnelling, the minimum support pressure $s_{\min}$ can be derived from the wedge model, as follows:

$$s_{\min} = \gamma z K_{A3} + p \quad (3)$$

where p is pore pressure and K_{A3} is the three dimensional earth pressure coefficient.

Secondly, the maximum support pressures are often estimated as to avoid blow-out and fracturing. According to Vu *et al.* (2015b), the maximum support pressures are given by:

$$s_{0,t,\max} = \gamma(H - \pi D/8) + 2H(c + HK_y \gamma \tan \phi) / D - aD/4 \quad (4)$$

$$s_{0,b,\max} = \gamma(H - \pi D/8) + 2H(c + HK_y \gamma \tan \phi) / D + \gamma_T \pi d + aD/4 \quad (5)$$

where $s_{0,t,\max}$, $s_{0,b,\max}$ are the maximum support pressures at the top and bottom of the tunnel.

In normally consolidated soil, according to Mori *et al.* (1991), the maximum pressure in the case of fracturing is presented as:

$$s_f = \sigma_v K + p + c_u \quad (6)$$

However, field data show that the higher allowable support pressures are often applied in the tunnelling face, according to reports by BTL (Boren van Tunnels en Leidingen). Therefore, the support pressures boundaries are determined with the minimum support pressure and the maximum support pressure as indicated in Equations 4 and 5.

Figure 1 shows the relationship between the required support pressures and the C/D ratio with the tunnel diameter $D=6\text{m}$ in clay. We will elaborate the calculation method for these conditions and present overall results for different diameters and soil conditions later in Figure 6. According to Vu *et al.* (2015b), only C/D ratios larger than 0.4 are studied, as less cover would lead to unreasonable large volume loss, and the upper 3-4 m of soil in urban areas are often taken up by various utilities and therefore would not be available for tunnelling. The support pressures calculated here are the minimum support pressure from a wedge model and the maximum support pressures for fracturing and blow-out at the top and the bottom of the tunnel.

O'Reilly (1988) indicated that a relation exists between the volume loss at tunnelling face $V_{L,f}$ and the load factor LF, which is estimated by the ratio of working stability

number N and the stability number at collapse N_{TC} , as follows:

$$LF = N / N_{TC} \quad (7)$$

for $0 \leq C/D \leq 1$: $N_{TC} = 2 + 2\ln(2C/D + 1)$

for $1 \leq C/D \leq 1.8$: $N_{TC} = 4\ln(2C/D + 1)$

From the analysis of case history data, Macklin (1999) presented a formula to calculate the volume loss at the tunnelling face $V_{L,f}$ as:

$$V_{L,f} = 0.23e^{4.4LF} \quad (8)$$

Equation 8 can be used to convert the load factor LF to the volume loss $V_{L,f}$ estimates, which leads to Figure 2. This shows the range of volume loss $V_{L,f}$ with various C/D ratios for a tunnel with $D=6\text{m}$ in clay. In shallow tunnels with $0.4 \leq C/D \leq 1$ the range of possible volume loss $V_{L,f}$ is large, ranging from 0.12% to 3.1%. This means that if tunnelling uses the minimum pressure in the excavation chambers, the volume loss $V_{L,f}$ will increase significantly. Meanwhile, the volume loss $V_{L,f}$ with $1 \leq C/D \leq 2$ ranges from 0.27% to 1.05%. The difference in volume loss $V_{L,f}$ between the minimum pressure and maximum pressures due to blow-out and fracturing is clearly reduced. Therefore, in the case of very shallow tunnels $C/D \leq 1$ the support pressures applied at the tunnelling face should be kept near to the maximum pressure in order to avoid increasing the volume loss.

3 VOLUME LOSS ALONG THE SHIELD

The diameter of the cutting wheel in front of the TBM is often larger than the diameter of the shield. This leads to an overcut when tunnelling. Also, the TBM is often tapered, which creates a gap between the shield skin and the surrounding soil. Additional gapping can also occur when the TBM moves in curves as indicated in Festa *et al.* (2015). In this study, the effect of curves is not included. This gap is often filled by bentonite, which flows from the tunnelling face and/or grout which comes from the shield tail. In practice, the grout and bentonite pressures are often larger than the vertical soil pressure at the tunnelling face and tail. From the observation of Bezuijen (2007), there are three possible bentonite and grout flows that can occur along the shield. Firstly, the bentonite flows from the tunnelling face to the tail and pushes the grout at the joint between the tail and the TBM. Secondly, the grout flows from the tail to the tunnelling face and pushes the bentonite away. Thirdly, the grout flows from the tail to the

tunnelling face and the bentonite also flows in the opposite direction. The flows of bentonite and grout were also simulated in Nagel and Meschke (2011). In shallow tunnelling, due to the possibility of blow-out and fracturing, there is a limitation of applied grout and bentonite pressures at the tunnelling face and the tail.

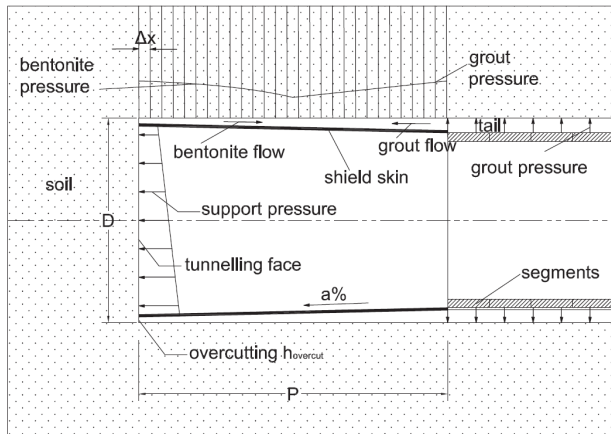
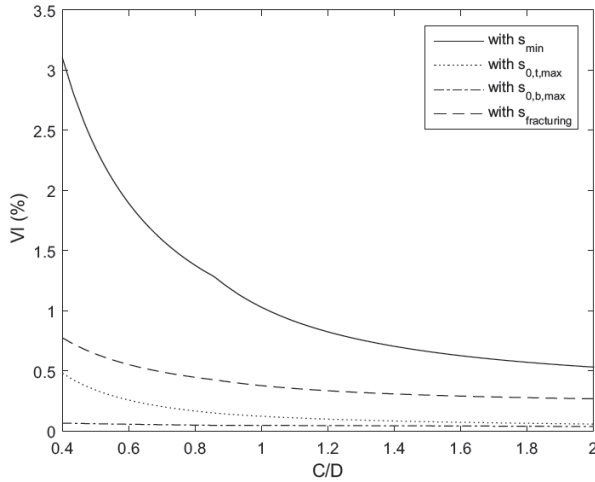


Figure 2. The range of volume loss at the tunnelling face when tunnelling with a diameter $D=6$ m in clay


Figure 3. Bentonite and grout flows along the shield

According to Bezuijen (2007), both liquids, the grout in the shield tail and the bentonite applied at the tunnelling face are assumed to behave as the Bingham liquids, such that the yield stress is governing in the flow behaviour. The flow pressures in grout and bentonite reduce along the shield as in Figure 3. The reduction of grout pressure along the shield is given by:

$$\Delta p = \Delta x \tau_y / w_j \quad (9)$$

where Δp is the change of the pressure due to flow, Δx is a length increment along the TBM, w_j is the joint width between the tunnel and the

surrounding soil and τ_y is a shear strength of the grout around the TBM. In this study, the volume loss along the shield is calculated with input

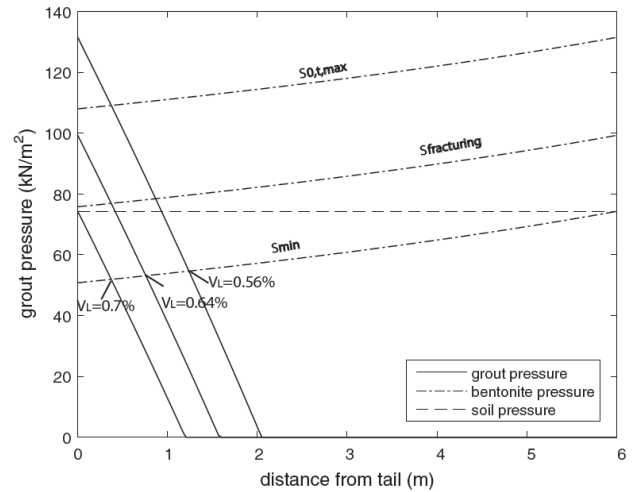

parameters as indicated in Table 2 with the following approach.

Figure 4. Grout pressures along a shield ($D=6$ m) in clay.

As an example, the calculation is carried out with a case of tunnel with $D=6$ m and $C/D=0.75$ in clay. Figure 4 shows the change of grout pressure and bentonite pressure along the shield. It is assumed that when the grout pressure and bentonite pressure are less than the vertical soil pressure, the soil is moving into the cavity. The volume loss is estimated as the void volume that is filled by soil. The volume loss will not occur if the grout pressure and the bentonite pressure are larger than the vertical soil pressure. In that case, the gap along the shield is assumed to be completely filled by grout and bentonite. From this figure, the volume loss along the shield depends on the bentonite pressure, which is applied at the tunnelling face and the grout pressure at the tail. When the bentonite and grout pressures are equal to the minimum required pressure as calculated in previous section, the volume loss will be maximal. On the other hand, when the maximum allowable pressures are applied, there is no volume loss along the shield.

Table 2. Input parameters of TBM

Diameters of shield D	6,8 and 10m
Length-to-diameter P/D ratio of the shield	1
Reduction of shield diameter a	0.2%
Overcutting h_{ou}	0.015m
Shear strength of grout	1.6kPa
Shear strength of bentonite	0.8kPa

In order to investigate the effect of grout pressure on the shield in different soils, we assume the bentonite pressure applied at the tunnelling face is the average of the minimum support pressure and the maximum support pressure for fracturing. Figure 5 shows the change of volume loss with different tunnel diameters in sand. When the C/D ratio increases, the range of the volume loss along the shield $V_{L,s}$ is larger. With a particular C/D ratio of the tunnel, the larger the tunnel diameter is, the smaller the volume loss $V_{L,s}$ is with the constant overcut parameter of the shield. The upper boundary of the volume loss $V_{L,s}$ increases nearly linearly with the C/D ratio from 0.4 to 1.2, then becomes almost constant when the C/D ratio increases whereas the lower boundary reduces linearly when the C/D ratio increases. At this point, basically, the entire annulus is filled by the surrounding soil, leading to a maximum attainable volume loss along the tail. It is noted that the maximum upper boundary volume loss along the shield $V_{L,s}$ is the same for a given tunnel diameter. Regardless of soil conditions, for a tunnel with $D=6m$, it follows that $V_{L,s,max}=0.7\%$, with $D=8m$, $V_{L,s,max} = 0.57\%$ and with $D=10m$, $V_{L,s,max}=0.5\%$.


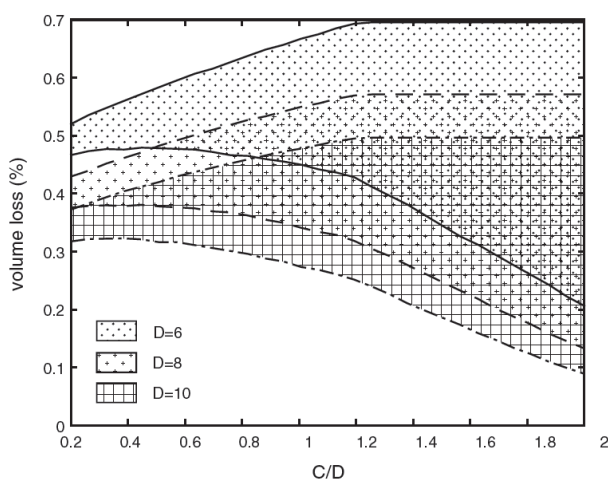


Figure 5. Volume loss along the shield in sand

Figure 6 shows the boundary of the volume loss along the shield $V_{L,s}$ in relationship with C/D ratios for a tunnel with $D=6m$ in different soils. The upper boundary for $0.4 \leq C/D \leq 0.6$ corresponds to the case of tunnelling in peat in all three tunnel diameters. When tunnelling with $0.6 \leq C/D \leq 1$, the upper boundary is given by tunnelling in organic clay and when tunnelling with the C/D ratio larger than 1, the upper boundary becomes constant and depends on the

tunnel diameter D . The maximum volume loss along the shield $V_{L,s}$ is about 0.7% for $D=6m$. For the lower boundary, there is a decreasing trend of the minimum volume loss along the shield $V_{L,s}$ when the C/D ratio increases. The

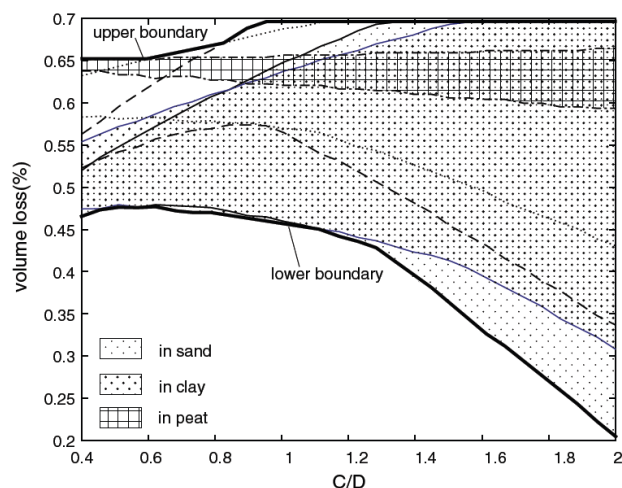

maximum $V_{L,s}$ of the lower boundary is about 0.47% when $C/D=0.5$ and when $C/D=2$, $V_{L,s,max}$ is about 0.2%.

Figure 6. Volume loss along the shield with $D=6m$

4 VOLUME LOSS BEHIND THE SHIELD

When precast segments are placed, the advance of the shield results in an annular cavity between the segments and the surrounding soil due to the shape of the TBM and the overcut as discussed above. Grout is injected rapidly in order to prevent the surrounding soil to move into the gap. It is assumed that the void is filled by the grout. The injected grout pressure induces the loading on the soil around the tunnel lining. This might lead to immediate displacements and long-term consolidation of the soil. These are two components of the volume loss behind the shield: the volume loss at the tail and the volume loss due to consolidation.

4.1 Volume loss at the tail

When the grout is injected with high pressures at the tail, the ground around the tunnel will be deformed. In order to estimate the surface settlement induced by tunnelling, there are some analytical solutions proposed by Verruijt (1997), and Strack (2002) based on cavity expansion and taking the influence of a free surface into account. However, the effect of the range of support pressures has not taken into

account in these methods and resulting solutions, for instance expressed as a Laurent series expansion in the case of Verruijt (1997), require an increasing number of terms for a stable numerical integration if the distance between free surface and tunnel reduces. On the other hand, the cavity expansion developed for the case of a cavity in infinite medium has been implemented in tunnelling studies by Taylor (1993) and Yu (2013) and results in far more elegant and practical solution for a first estimate of the effect of grout pressures on soil stresses and deformations around the TBM. To determine the effect of grouting at the tail on volume loss at the tail and consolidation, in this study, the cavity expansion method for tunnelling, which is proposed by Yu (2013), is therefore applied as a simplified method. In this cavity-expansion theory, it is assumed that the soil around the tunnel is a Tresca medium. The stresses in the soil and the settlement at the surface can be calculated by the cavity-expansion theory. According to Yu (2013), the plastic zone will deform around the tunnel wall, as can be seen in Figure 7, with the radius R_p of the plastic zone estimated from the following equation:

$$R_p = D/2e^{(p_0-s)Y-k/(k+1)} \quad (10)$$

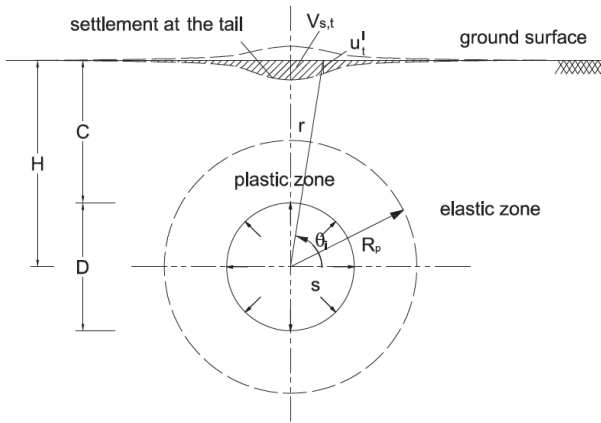


Figure 7. Deformations around a shallow tunnel at the tail

where p_0 is the pre-tunnelling pressure; $k=1$ or 2 corresponding to cylindrical or spherical cavity models; $Y=2c_u$ or $-2c_u$ corresponding to the case of contraction or expansion of the tunnel. Similar to Yu (2013) and Taylor (1993), the pre-tunnelling pressure p_0 can be estimated as:

$$p_0 = \gamma(C + D/2) \quad (11)$$

The soil displacement u_s in the elastic zone is given by:

$$u_s = -Yr(R_p/r)^{1+k}/[2(1+k)G] \quad (12)$$

where r is the distance from the calculated point to the tunnel centre and $G = E/2(1+\nu)$ is the shear modulus of soil.

The soil displacement u_s in the plastic zone is given by:

$$u_s = YD[D/(2r)]^k/[4(1+k)G]e^{(p_0-s)(1+k)/(kY)-1} \quad (13)$$

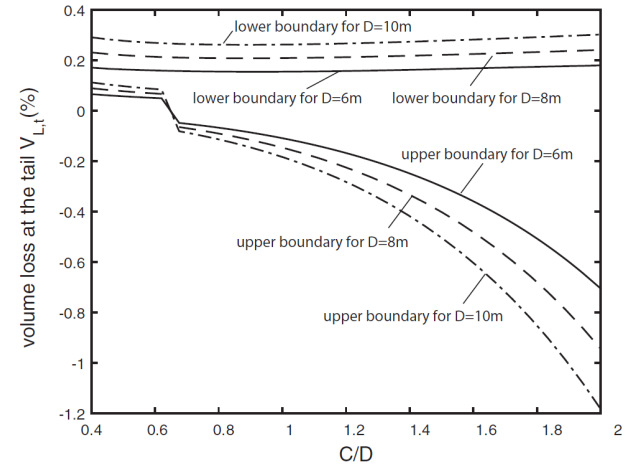


Figure 8. Volume loss at the tail when tunneling in sand

In this case, the effect of grouting pressures at the tail is analysed with a cylindrical cavity model and is calculated with the minimum and maximum support pressures. Thus, in Equation 10, k equals 1.

It can be assumed that the volume loss around the tunnel due to grouting at the tail equals the volume of ground settlement at the surface. In order to identify the contribution of soil deformation at the tail on the total volume loss, the displacement of the ground surface is estimated. According to assumptions in Yu (2013), the tunnel will collapse when the plastic zone expands to the ground surface. It means that when the tunnel is stable, the radial displacement of ground u_s at the surface is in the elastic zone and can be calculated with Equation 12.

The surface settlement at the tail can be estimated as:

$$u_t = u_s \sin \theta \quad (14)$$

where θ is the angle between the calculated point to the tunnel centre and the horizontal axis.

The volume loss $V_{L,t}$ can be estimated as:

$$V_{L,t} = V_{s,t}/[\pi(D/2)^2] \quad (15)$$

where $V_{s,t}$ is the volume of the surface settlement due to grouting pressures at the tail.

Figure 8 shows the boundaries of the volume loss at the tail $V_{L,t}$ in sand for tunnels with $D=6$; 8 and 10 m with the range of the support pressures from the vertical soil stress to the maximum support pressure at the top of the tunnel derived from Equation 4. The figure shows that the larger the tunnel diameter is, the larger the range of volume loss $V_{L,t}$ is. When the support pressure equals the vertical soil stress at the top of the tunnel lining, there is a contraction in the cavity and this leads to positive values of the lower boundary of volume loss at the tail. When a high support pressure is used, the cavity will expand. The negative volume loss $V_{L,t}$ values indicate that the soil above the tunnel lining is pushed upward and there might be heave at the ground surface. In practice, this heave might not be observed because the settlement due to volume loss at the tunnelling face and along the shield could be larger. When a high support pressure is applied at the tail, a heave can occur in order to compensate the volume loss at the tunnelling face and along the TBM. However, when very shallow tunnelling, there is no heave due to the small margin in the range of allowable support pressures as indicated in Vu *et al.* (2015b).

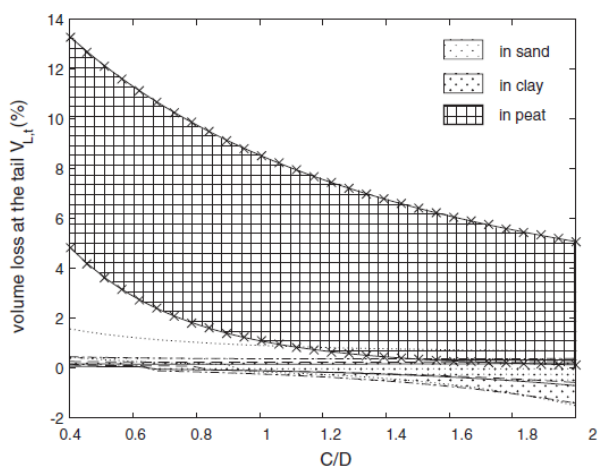


Figure 9. Volume loss at the tail in various soil when tunneling with $D=6$ m

Figure 9 shows the dependence of $V_{L,t}$ values on soils with tunnel diameter $D=6$ m. When tunnelling in peat, the range of $V_{L,t}$ values is significantly large compared to tunnelling in sand, clay and organic clay, especially when tunnelling with large diameters.

4.2 Volume loss due to consolidation

For the volume loss due to consolidation, in the cavity behind the tail, two consolidation

processes occur along the tunnel lining. Firstly, the newly injected grout is consolidating and forms a consolidated grout cake in the cavity along the tunnel lining (Talmon and Bezuijen, 2009). In the case of tunnelling in clay, the consolidation in grout might not occur (Bezuijen and Talmon, 2013) and the length of liquid grout on the lining is much longer. Although the grout pressure decreases along the lining, the injected grout may flow along 2-3 following segments and the appearance of the grout cake will prevent the movement of the soil above. It is often assumed that there is no volume loss in the grout consolidating. The other volume loss is due to the subsequent shrinkage of grout, which is estimated at about 0.06-0.1 percent of total tail gap. However, the contribution of this volume loss to the total volume loss is small comparing to the other volume losses. This volume loss, therefore, is not taken into account in this study.

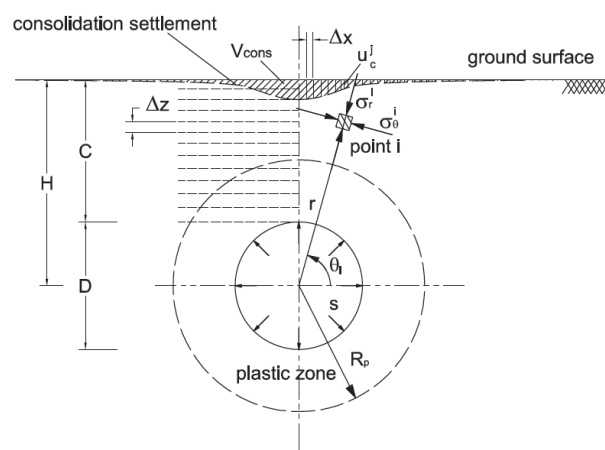


Figure 10. Soil stresses at the tail

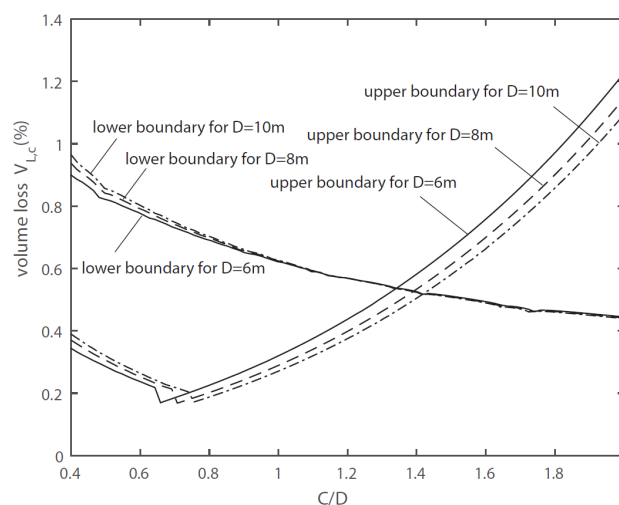


Figure 11. Volume loss due to consolidation $V_{L,c}$ with different tunnel diameters in clay

The second process is the consolidation of the soil volume above the tunnel behind the tail. When grout is applied at the tail, the soil stress in the above soil volume will change. This will induce consolidation in the long term behind the tail. The volume loss due to consolidation $V_{L,c}$ is derived from the consolidation settlement of the soil volume above tunnel lining. In the case of tunnelling in sand, consolidation of soil will probably not occur or be minimal. For tunnels in clay or peat, this may be a notable contribution. The consolidation settlement of the soil can be estimated from Terzaghi's formula, as follows:

$$u_c = -\ln(\sigma_{soil} / \sigma_0) / C_s \quad (16)$$

where C_s is the compression constant, σ_{soil} is the vertical stress in the soil and σ_0 is the initial vertical stress in the soil.

In case the vertical stress is lower than the initial vertical stress, unloading occurs and Equation 16 would be modified to:

$$u_c = -\ln(\sigma_{soil} / \sigma_0) / C_{swel} \quad (17)$$

where C_{swel} is the swelling constant.

The stress in the soil σ_{soil} is estimated from the radial and tangential stresses derived by the cavity expansion theory as can be seen in Figure 10. According to Yu (2013), the σ_r and σ_θ are the radial and tangential stresses in the elastic zone are given by:

$$\sigma_r = -p_0 + kY / (1 + k) (R_p / r)^{1+k} \quad (18)$$

$$\sigma_\theta = -p_0 - kY / (1 + k) (R_p / r)^{1+k} \quad (19)$$

In the plastic zone, the stresses are given by:

$$\sigma_r = -p_0 + kY / (1 + k) + kY \ln(R_p / r) \quad (20)$$

$$\sigma_\theta = -p_0 - kY / (1 + k) + kY \ln(R_p / r) \quad (21)$$

In order to estimate the consolidation settlement, the soil volume above the tunnel lining is divided into n layers. The final consolidation settlement is derived by summing deformations of these layers, which are calculated by Equations 16 and 17. The final consolidation settlement is given by:

$$u_j^i = \sum_{i=1}^n u_c^{j,i} \Delta z \quad (22)$$

where $u_c^{j,i}$ and Δz are the deformation due to consolidation and the depth of the i^{th} layer at the j^{th} location along the surface.

By integrating the final consolidation settlements over the surface, the volume of consolidation settlement at the surface V_{cons} can be estimated as:

$$V_{cons} = \sum_{j=1}^m u_c^j \Delta x \quad (23)$$

where Δx is a length increment along the surface consolidation settlement and m is the increment number.

The volume loss due to consolidation settlement is then estimated as:

$$V_{L,c} = V_{cons} / [\pi(D/2)^2] \quad (24)$$

Figure 11 shows the relationship between the consolidation volume loss $V_{L,c}$ and the C/D ratio for tunnels with different diameters in clay. With $0.4 \leq C/D \leq 1.3$ when tunnelling in clay, it can be seen that the maximum support pressure applied at the tail can lead to a heave on the surface. The volume loss due to consolidation $V_{L,c}$ when maximum support pressure is applied becomes smaller than when minimum support pressure is applied. When the tunnel is located at a deeper level, the volume loss $V_{L,c}$ when applying the maximum support pressure is higher than the volume loss $V_{L,c}$ when applying minimum support pressure. The dependence of the volume loss due to consolidation $V_{L,c}$ on soil type is shown in Figure 12 for a tunnel with $D=6m$. It can be seen that the volume loss $V_{L,c}$ in the case of tunnelling in peat is much higher compared to tunnelling in clay and organic clay.

5 TOTAL VOLUME LOSS

The total volume loss is derived by summing the volume loss of tunnelling face, along the shield, at the tail and due to consolidation. Figures. 13 and 14 show the total volume loss in the case of shallow tunnelling in sand and clay. It can be seen that the range of the total volume loss decreases with the increase of the C/D ratio and the tunnel diameter D .

When tunnelling in sand, with a C/D ratio from 0.4 to 1, a volume loss in shallow tunnelling of less than 0.5% can be achieved with the condition of careful monitoring. The highest expected volume loss in this range of the C/D ratio is about 3.7% for tunnelling in sand when less optimal but still stable support and grout pressures are applied. When the C/D ratio larger than 1, the maximum volume loss is less than 1.5% with the range of support pressures in this study. These figures also show that a result of no volume loss can be achieved when tunnelling with $C/D \geq 2$.

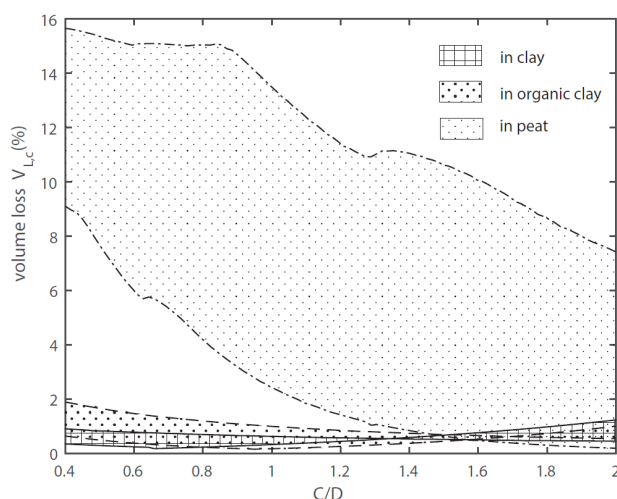


Figure 12. Volume loss due to consolidation V_{Lc} with a tunnel diameter $D=6m$ in various soils

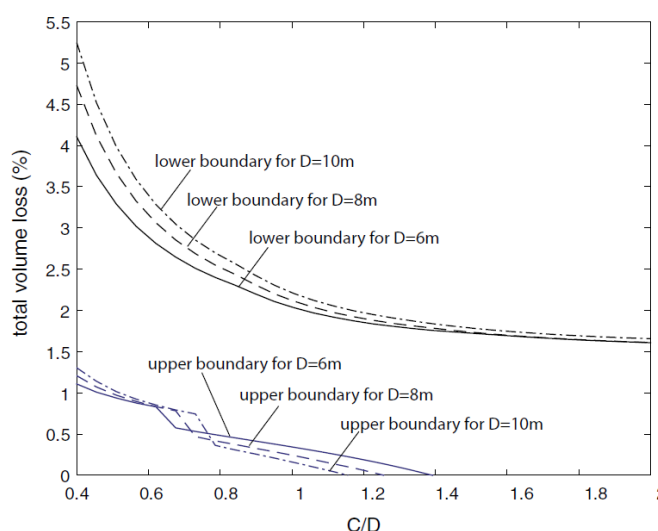


Figure 13. Total volume loss for tunnelling in sand

When tunnelling in clay, the total volume loss V_L when tunnelling has just finished (not taking into account the consolidation) is shown in Figure 14a. It can be seen that a total volume loss V_L less than 0.5% after tunnelling is feasible even with $C/D \leq 1$. This figure also shows that for very shallow tunnelling with $C/D \leq 0.6$, a tunnel with a large diameter has a larger range of expected volume loss. With deeper tunnelling when $1 \leq C/D \leq 2$, the maximum value of the total volume loss reduces and becomes less than 2%. Figure 14b shows the total volume loss V_L for tunnelling with various diameters $D=6$; 8 and 10m in clay including consolidation of soil layers above the tunnel. It also follows that the lower the C/D ratio is, the larger the range of volume loss is. The total volume loss of tunnelling in clay would be at maximum about 6% with $D=10m$, 5.5% with


$D=8m$ and 5% with $D=6m$ when $C/D=0.4$. The lower boundary corresponding with the minimum support pressure applied has a reducing trend when the C/D ratio increases. This means there might be a larger volume loss when the tunnel becomes shallower. At the upper boundary of the total volume loss, corresponding with the maximum support pressure applied, the final volume loss of tunnelling with $D=6m$ can reach just over 0% after consolidation has been taken into account.

6 CONCLUSION


Volume loss is a major parameter in the calculation of ground movement by tunnelling. The range of attainable volume loss can be estimated by combining stability analysis at tunnelling face, along and behind the shield. In this theoretical study, it is found that in the case of tunnelling with $C/D \leq 1$, the volume loss at the tunnelling face has a major impact in total volume loss. The volume loss along the shield can be optimized by selecting optimal bentonite and grout pressures applied at tunnelling face and tail. The proposed calculation method estimates attainable upper and lower boundaries of volume loss along the shield for a particular tunnel. This paper also presents methods to identify the volume loss behind the shield. The volume loss behind the tail was estimated by the volume loss due to shrinkage of grout and consolidation of above soil volume. The volume loss due to consolidation depends on the surrounding soil and the C/D ratio.

The total volume losses for tunnelling in sand and clay are derived. Overall, the range of volume loss increases when tunnelling with shallower overburden. By controlling the applied support pressure at the tunnelling face and tail, the volume loss can be minimized. Still, a direct volume loss around 1% is a reasonable minimum for very shallow tunnels ($C/D=0.4$) where for deeper tunnels no volume loss should be attainable. If pressure control is less optimal but still controlled, a direct volume loss up to 5.5% is not unreasonable to expect for very shallow tunnels. Analysis shows that consolidation after the TBM has passed can contribute considerably to the final surface settlements and can be of this same order as direct volume loss effects in clay and even larger in very soft soils like peat. This effect,

however, is more pronounced in deeper tunnels, where it could easily double the direct volume loss.

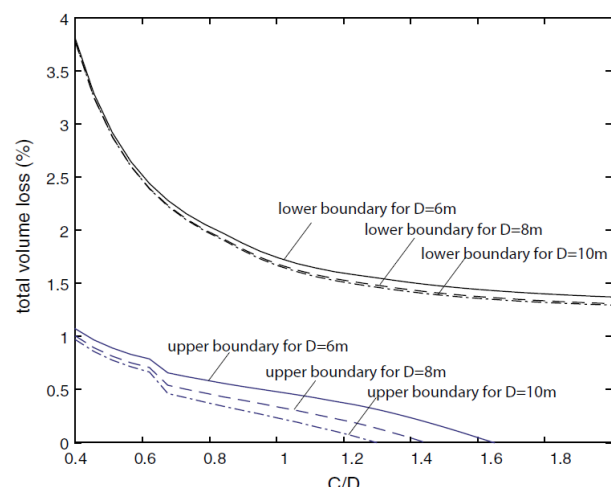

a) Not including consolidation

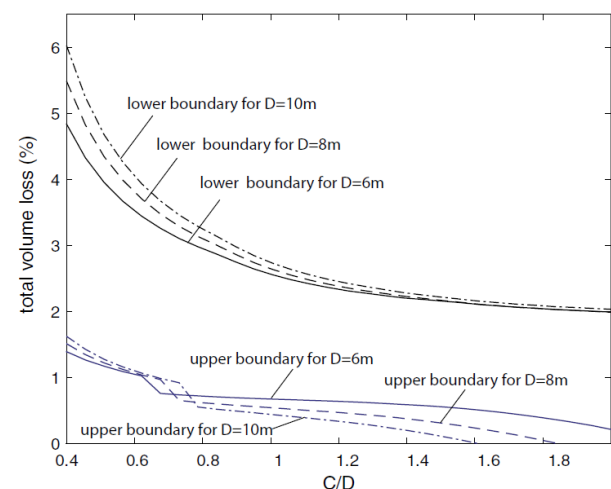

b) Including consolidation

Figure 14. Total volume loss for tunnelling in clay

REFERENCES

- Bezuijen, A., 2007. *Bentonite and grout flow around a TBM*. Proceedings of the World Tunnel Congress 2007 and 33rd ITA/AITES Annual General Assembly, Prague, May 2007. CRC Press, 2007, p. 383.
- Bezuijen, A., Talmon, A., 2008. *Processes around a TBM*. Proceedings of the 6th International Symposium on Geotechnical Aspects of Underground Construction in Soft Ground, pp. 10–12.
- Bezuijen, A., Talmon, A., 2013. *Grout properties and their influence on back fill grouting*. Proceedings of the 5th International Symposium on Geotechnical Aspects of Underground Construction in Soft Ground, p. 187.
- Broere, W., 2001. *Tunnel Face Stability & New CPT Applications*. Delft University of Technology.
- Broms, B.B., Bennermark, H., 1967. *Stability of clay at vertical openings*. J. Soil Mech. Found. Div.
- Cording, E.J., Hansmire, W., 1975. *Displacements around soft ground tunnels*. 5th Pan American Congress on Soil Mechanics and Foundation Engineering. Buenos Aires, vol. 4, pp. 571–633.
- Festa, D., Broere, W., Bosch, J., 2015. *Kinematic behaviour of a tunnel boring machine in soft soil: theory and observations*. Tunn. Undergr. Space Technol. 49, 208–217.
- Loganathan, N., 2011. *An Innovative Method for Assessing Tunnelling-Induced Risks to Adjacent Structures*. Parsons Brinckerhoff Inc., One Penn Plaza New York, New York, 2011.
- Macklin, S., 1999. The prediction of volume loss due to tunnelling in overconsolidated clay based on heading geometry and stability number. Ground Eng. 32(4), 30–33.
- Mair, R., Gunn, M., O'Reilly, M., 1982. *Ground movement around shallow tunnels in soft clay*. Tunnels Tunn. Int. 14 (5).
- Mair, R., Taylor, R., 1999. *Theme lecture: bored tunnelling in the urban environment*. In: of XIV ICSMFE [131], pp. 2353–2385.
- Mori, A., Tamura, M., Kurihara, K., Shibata, H., 1991. *A suitable slurry pressure in slurry-type shield tunneling*. Proc Tunnelling '91, London, pp. 361–369.
- Nagel, F., Meschke, G., 2011. *Grout and bentonite flow around a TBM: Computational modeling and simulation-based assessment of influence on surface settlements*. Tunn. Undergr. Space Tech. 26 (3), 445–452.
- O'Reilly, M., 1988. *Evaluating and predicting ground settlements caused by tunnelling in London clay*. Tunnelling, vol. 88, pp. 231–241.
- Peck, R.B., 1969. *Deep excavations and tunnelling in soft ground*. Proc. 7th Int. Conf. on SMFE, pp. 225–290.
- Strack, O.E., 2002. *Analytic Solutions of Elastic Tunneling Problems*. Delft University of Technology.
- Talmon, A., Bezuijen, A., 2009. *Simulating the consolidation of TBM grout at Noordplaspolder*. Tunn. Undergr. Space Technol. 24 (5), 493–499.
- Taylor, R.N., 1993. *Prediction of clay behaviour around tunnels using plasticity solutions*. Predictive Soil Mechanics: Proceedings of the Wroth Memorial Symposium Held at St. Catherine's College, Oxford, 27–29 July 1992. Thomas Telford, p. 449.
- Verruijt, A., 1997. *A complex variable solution for a deforming circular tunnel in an elastic half-plane*. Int. J. Numer. Anal. Meth. Geomech. 21 (2), 77–89.
- Vu, M.N., Broere, W., Bosch, J.W., 2015a. *Effects of cover depth on ground movements induced by shallow tunnelling*. Tunn. Undergr. Space Tech. 50, 499–506.
- Vu, M.N., Broere, W., Bosch, J.W., 2015b. *The impact of shallow cover on stability when tunnelling in soft soils*. Tunn. Undergr. Space Tech. 50, 507–515.
- Yu, H.-S., 2013. *Cavity Expansion Methods in Geomechanics*. Springer Science & Business Media.