

Statistical models for improving significant wave height predictions in offshore operations

Emmanouil, Stergios; Aguilar, Sandra Gaytan; Nane, Gabriela F.; Schouten, Jan Joost

DOI

[10.1016/j.oceaneng.2020.107249](https://doi.org/10.1016/j.oceaneng.2020.107249)

Publication date

2020

Document Version

Accepted author manuscript

Published in

Ocean Engineering

Citation (APA)

Emmanouil, S., Aguilar, S. G., Nane, G. F., & Schouten, J. J. (2020). Statistical models for improving significant wave height predictions in offshore operations. *Ocean Engineering*, 206, 1-10. Article 107249. <https://doi.org/10.1016/j.oceaneng.2020.107249>

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Statistical Models For Improving Significant Wave Height Predictions In Offshore Operations

By

Stergios Emmanouil^(1,2), Sandra Gaytan Aguilar⁽³⁾,
Jan-Joost Schouten⁽³⁾ and Gabriela F. Nane⁽⁴⁾

⁽¹⁾ Department of Civil Engineering and Geosciences
TU Delft
Delft, the Netherlands

⁽²⁾ Department of Civil and Environmental Engineering
University of Connecticut
Storrs, CT, U.S.A.

⁽³⁾ Deltares
Delft, the Netherlands

⁽⁴⁾ Department of Applied Mathematics
TU Delft
Delft, the Netherlands

Correspondence:

- Stergios Emmanouil, 261 Glenbrook Road, Unit 3037, Storrs, CT 06269, U.S.A., phone: +1(860)208-3868, e-mail: stergios.emmanouil@uconn.edu.

Abstract

Installation and maintenance strategies regarding offshore wind farm operations involve extensive logistics. The main focus is the right temporal and spatial placement of personnel and equipment, while taking into account forecasted meteorological and hydrodynamic conditions. For these operations to be successful, weather windows characterized by certain permissive wave, wind and current conditions are of enormous importance, whereas unforeseen events result in high cost and risk in terms of safety. Numerical modelling of waves, water levels and current related variables has been used extensively in engineering practice to forecast ocean conditions. To account for the inherited model uncertainty, several error modelling techniques, such as Artificial Neural Networks (ANN), Copulas, Stochastic Interpolation, and Linear Regression, can be implemented for the numerical model forecasts to be corrected. In this study, various Bayesian Network (BN) models are incorporated, in order to enhance the accuracy of the significant wave height (H_s) predictions and to be compared with the aforementioned techniques in conditions resembling the real-time nature of the application. The implemented BN models differ in terms of training and structure and provide overall the most satisfying performance in comparison to the rest of the techniques, when tested with data retrieved from stations deployed in the Irish Sea. It is shown that the BN models illustrate significant advantages as both quantitative and conceptual tools, since they produce estimates for the underlying uncertainty of the phenomena, in the form of 95% confidence intervals extracted by the significant wave height (H_s) conditional distribution, while providing information about the incorporated variables' dependence relationships through their structure.

Keywords: Bayesian Networks; offshore operations; real-time predictions; statistical techniques; model coupling

This research did not receive any specific grant from funding agencies in the public, commercial, or not-for-profit sectors.

1. Introduction

Marine structures like offshore wind turbines can ensure safety and serve their main function adequately, in both reliability and economy terms, when most – if not all – of the variables involved in their design are modelled as accurately as possible. The specification of the uncertainties related to the environmental variables describing the ocean conditions is continuously gaining importance and interest by the offshore, coastal, and the emerging renewable energy industries. Several studies have been conducted in order to describe, classify, or quantify the uncertainties and errors related to meteorological and ocean climate variables (see e.g. Bitner – Gregersen et al., 2014; Haver and Moan, 1983; Bitner – Gregersen and Hagen, 1990). Simplistically, the uncertainty can be classified as: (a) Phenomenon related uncertainty, which is a product of the natural randomness and stochastic nature of the variables incorporated and cannot be reduced, (b) data related uncertainty, which surfaces either from the measuring devices' accuracy, or the insufficient number or quality of the observations, and (c) model related uncertainty, which constitutes a product of inaccurate idealisations, crude assumptions, or even insufficient use of either the meteorological or the hydrodynamic model. It is obvious that the true nature of any phenomenon cannot be modelled exactly and that even if the probability distributions of some variables are known a priori, the extreme complexity of the met-ocean environment makes the distributions of the rest completely unknown. The estimation of the bias, or systematic error, and the random error evaluation are the first steps to quantify the uncertainty of any variable.

In the case of offshore wind farms, the installation and maintenance strategies involve extensive logistics. The main focus is the right placement, in time and space, of both the personnel and the equipment, while taking into account forecasted meteorological and hydrodynamic conditions. In order for the aforementioned procedures to be carried out successfully, weather windows, interwoven with certain permissive wave, wind and current

conditions, are of major importance, while unforeseen weather or sea climate events result in high cost and risk, primarily in terms of safety. Subsequently, successful operations require accurate and representative data for the wind farm sites, which unfortunately are inadequately - if at all - provided by surrounding stations.

In order to produce forecasts of the hydrodynamic conditions in a specific area, numerical models can be used. Wind speeds, as well as the air and water temperatures, resulting from a meteorological model serve as an input for numerical modelling of waves, water levels and current related variables. In that regard, SWAN (see Booij et al., 1999a; 1999b) is a third-generation wave model, developed at Delft University of Technology, which computes random, short-crested wind-generated waves in coastal regions and inland waters and provides output quantities in numerical files containing tables, maps and timeseries. Comparison of the wave model forecasts with observations is essential for characterizing the model deficiencies, identifying systematic and random model errors, thus providing areas for improvement.

Several techniques exist and can be implemented in order for the numerical model forecasts to be corrected. The Artificial Neural Networks (ANNs), which are information processing paradigms composed of a large number of highly interconnected processing elements (neurons) working together, have been used extensively in offshore and coastal applications (see e.g. Deo et al., 2001; Tsai et al., 2002; Makarynskyy, 2004; Malekmohamadi et al., 2008; Kumar et al., 2017; Deo and Sridhar Naidu, 1999; Makarynskyy et al., 2005; Londhe et al., 2016; Agrawal and Deo, 2002; Mandal et al., 2005; Londhe and Panchang, 2005; Zhang et al., 2006; Deshmukh et al., 2016; Makarynskyy, 2007; Londhe and Panchang, 2006; Makarynskyy, 2005). Supplementary, Copulas (see e.g. Genest and Favre, 2007; Embrechts et al., 2001; Nelsen, 2006; Schmidt, 2006) have been utilized in various occasions to model the dependency of ocean related variables and predict their behavior, as it has been done in the works of Leontaris et al. (2016) and Jane et al. (2016). Simpler but equally effective methods are the

linear regression and the stochastic interpolation. Both of these techniques have been used extensively in a variety of engineering applications, including offshore and coastal (see e.g. Asma et al., 2012; Scotto and Guedes Soares, 2007). They do not require substantial training and pose serious advantages in terms of computational time and load.

All of the aforementioned techniques constitute soft computing methods and ensure a reasonable computational load. A number of them require training using historical or present time data, while others can be incorporated forthwith. Some studies have tried to produce valid met-ocean climate forecasts using coupled (hybrid) method (e.g. Deshmukh et al., 2016), as the ones discussed in this paper, or incorporate solely one of the techniques discussed previously to predict the environmental conditions therewithal. By “coupled” or “hybrid” methods the use of more than one error modelling techniques, or a combination of a soft computing method and a numerical model, is implied. Certainly, the use of a single soft computing method for prediction reduces the computational time significantly, but often at the expense of accuracy.

In this study, special attention is given to the implementation of the Bayesian Networks (BNs), graphical models which allow the representation of a probability distribution over more than one variables and whose use has not been that widespread in offshore applications (an example can be found in Malekmohamadi et al., 2011), but has been tested effectively in other engineering problems, such as coastal morphology (see e.g. Poelhekke et al., 2016; Kroon et al., 2017; Wilson et al., 2015; Plant and Holland, 2011), environmental modelling (see Chen and Pollino, 2012; Aguilera et al., 2011), construction reliability (Morales-Napoles and Steenbergen, 2014), traffic prediction (Worm et al., 2011), or flood risk analysis (Sebastian et al., 2017). Supplementary, many applications of the BNs on dependability, risk analysis and maintenance can be found in Weber et al. (2012) and Medina Oliva et al. (2009). An overview of many BN applications is given in the work of Hanea et al. (2015). Many of the applications,

however, use networks consisting of nodes that represent discrete random variables. Those networks are characterized as discrete BNs and suffer from serious limitations, since the provided discrete representation of variables for many important problems is inadequate.

The perspective of this research deviates from providing a forecast, accompanied with a desired level of accuracy. The aim is to use automated tools to quantify the possible errors present in numerical model forecasts of the significant wave height (H_s), learn from these errors while understanding and quantifying the underlying relations induced by certain phenomena to eventually improve the predictions of the numerical model, which is solely based on empirically and theoretically derived formulas. The consideration of Bayesian Networks aims to the description and representation of the underlying uncertainty in nature's behavior, as accurately as possible. While most models, such as Copulas or ANNs, would just need past measurements, numerical model data and/or numerical model forecasts of the significant wave height, to produce a possible correction, the nature of Bayesian Networks imposes the use of more variables (e.g. wind velocity, wave period, etc.), whose dependency with the variable of interest can produce a forecast of enhanced accuracy.

In Section 2 of this paper some information on the data used for the analysis, as well as a description of the theoretical background and functionality of the BN models, are outlined. To grant the desired corrections, several models that differ in terms of their training, their structure, and the incorporated variables were created and tested. A comparison of the performance of all the implemented statistical and stochastic techniques took place, to ascertain which one performs better, employing widely used evaluation metrics and more specific indicators created for the purposes of the application under consideration. Additionally, the ability of the error correction techniques to perform in operational (real-time) conditions was investigated, to evaluate their performance even in possible absence of measurements. The results and comparison of the different techniques can be found in Section 3, along with a discussion on

the influence of different BN structures on the quality of the outcome. Finally, Section 4 contains the conclusions of this study, supplemented by future research paths.

2. Materials and Methods

The error correction models described here, are essentially forecasting tools, which attempt to predict the hydrodynamic conditions in open seas more accurately than a numerical model (in this case SWAN), while using the results provided by the latter as an input. Hence, they are referred to as “error correction” models, since their nature and behavior deviates slightly from a pure predictive tool (see e.g. Emmanouil, 2018).

In general, the models are able to perform both in non-operational (offline) and operational (online) situations. By operational situations, the continuous flow of the required data in real-time is implied, while in non-operational mode, the model interacts with data stored in the computer’s memory. Nevertheless, in both cases the nature of the data, and the number of variables included in each simulation, are the same. The error correction models require three types of data: (1) on-site measurements (observations), which are processed before used, (2) numerical model hindcast¹ data for a time interval prior to the one under consideration. Instead of using hindcast data for the analysis, one could alternatively use past forecast data of the numerical model, which of course will be less accurate, due to the input of wind data produced also by a numerical model (e.g. HIRLAM; see Cats and Wolters, 1996) incorporating and transferring uncertainties of its own, and (3) numerical model forecast data for the time interval under consideration (48 hours ahead of current time). In a real-time scenario, the numerical model forecasts is produced every 6 hours, so there would be 4 forecasts per day, each one for

¹ The numerical model hindcast data are produced by incorporation of observational wind data as input to the model and a reverse procedure to obtain the results (i.e. the opposite of a forecast procedure).

48 hours ahead. Depending on the error correction method some of the above data may or may not be used.

2.1. Bayesian Networks (BN) Model

2.1.1. Brief Theoretical Background

Bayesian Networks (BNs) are graphical models, which allow the representation of a probability distribution over a set of random variables (see Jensen and Nielsen, 2007; Morales-Napoles et al., 2013; Hanea et al., 2015; Weber et al., 2012). They consist of a directed acyclic graph (DAG) built on discrete (discrete networks), continuous (continuous networks), or both kinds (hybrid networks) of random variables ($X_1, X_2, \dots, X_n$), and a set of (conditional) distributions. A DAG is constituted by a set of nodes, that represent random variables, and a set of arcs, in a way that a directed cycle cannot be created. Within the graph, an ordering of the variables can be established, given the directionality, which provides information on the sampling order, i.e. the order which has to be followed so that a sample can be taken from this joint distribution. As a result, some of the nodes are characterized as “parents” and others as “children”, depending on whether they precede or success the node of interest. A marginal distribution is assigned to each node with no parent, and a conditional distribution is associated with each child node, providing quantitative information about the dependences between the variables, which can be either retrieved from data or from expert judgment (see e.g. Cooke, 1991).

Denoting the parent nodes of i as $Pa(i)$, the joint density of $X_1, X_2, \dots, X_n$ is given by:

$$f_{X_1, \dots, X_n}(x_1, \dots, x_n) = \prod_{i=1}^n f_{X_i|X_{Pa(i)}}(x_i|x_{Pa(i)}) \quad (2.1)$$

where $f_{X_i|X_j}$ denotes the conditional densities. The factorization of the joint distribution relies on the local Markov property of conditional independence.

BNs are quantitative tools, able to evaluate conditional probabilities between variables, and at the same time constitute valuable conceptual models, since they visually represent independent and dependent variables in causation relationships (see Chen and Pollino, 2012; Palmsten et al., 2014; Stewart-Koster et al., 2010). The principles of BNs as a modelling tool are described thoroughly in Pearl (1988) and Jensen (1996). The main property of the BNs is inference, which constitutes their ability to provide updated distributions, given observations, but also characterization of the relationship between the variables. Generally, the simple visualization of the complicated relationships between the random variables, as well as their polyvalence, i.e. the ability to deal with issues such as prediction, diagnosis, optimization, data analysis of feedback experience, and model updating, makes the use of BNs appealing.

2.1.2. Training Methodology

The Bayesian Networks, as most of the data driven techniques, need a sufficient amount of data in order to be trained sufficiently and be able to represent the desired relations. When the BN structure is acquired through the data, then a significant amount of data is needed. In every application the characterization of a training procedure as “sufficient” depends largely on the type and behavior of the data. A sensitivity analysis would be in place to determine what “sufficient amount” actually means for the application. The significant wave height, for instance, is a variable whose behavior is highly dynamic, i.e. it can change radically in short time intervals (e.g. hours). As a result, the more training the model has the better, since it can assimilate to, and later reflect a larger range of behaviors.

Here, the training techniques are divided into two major categories; (1) the long training, which involves past observational and numerical data, even from 3 years prior to the current date, and (2) the short training, which only involves measurements and numerical model data from 48 hours prior to the start of the forecast.

224 In order to obtain the structure of the Bayesian Network, the `bnlearn` package of R is used.

225 In general, there are two broad categories of algorithms to learn the structure of a BN, the score-
226 based and the constraint-based. The constraint-based case employs conditional independence
227 tests to identify a set of edge constraints for the graph and then finds the best DAG that satisfies
228 these constraints; see e.g. Scutari (2005). The score-based approach (see Russell and Norvig,
229 2009; Korb and Nicholson, 2010) first defines a criterion to evaluate how well the BN fits the
230 data, and then searches over the space of DAGs for a structure with maximal score.

231 For this study, a hill climbing (HC) score-based structure learning algorithm was used to train
232 the network, which made use of an AIC criterion. The package also assumes a multivariate
233 normal distribution for continuous variables (such as the hydrodynamic variables in hand). This
234 assumption can be considered restricting in many occasions, but as it will become obvious, the
235 results of such an analysis are quite reasonable. In case the assumption of multivariate
236 normality is violated, the non-parametric Bayesian Networks could produce a more accurate
237 conditional distribution and possibly more accurate forecasting results; see e.g Hanea et al.
238 (2015). Nevertheless, the assumption of multivariate normality was considered sufficient to
239 test the BN behavior and performance, and the open-source `bnlearn` package as the most
240 suitable one for this particular application.

241 For the case of long training, the training dataset is continuously enriched with new
242 measurements, as well as with past numerical model data for the variable of interest only.
243 Certainly, this requires a relatively large part of the computer's memory. This effect can be
244 impugned by incorporation of new variables and deletion of older, or with smaller training sets,
245 i.e. in the order of months instead of years.

246 In general, the user can impute his/her own structure, by whitelisting or blacklisting certain
247 relations, i.e. providing a custom fit. This, certainly, creates large differences in the results,

since in many occasions the whitelisted arc is not supported by the BN structure in representing the joint density. Thus, it is suggested by the writers that the procedure should be carried out using data-driven structure learning and fitting techniques, even if a given relation might not be supported intuitively.

2.1.3. Predictions and Uncertainty Bounds

The predictions provided by the BN models are retrieved from the conditional distribution of the variable of interest, given the information about certain other variables.

Since it is impossible to have future measurements for the incorporated variables, forecasted numerical model data for these variables are used to construct the conditional distribution for every point prediction. In other words, the network is trained and fitted with past observational data, as well as numerical model data for the variable of interest, subsequently providing a forecast based on forecasted numerical model data (essentially we are conditionalizing on forecast numerical model data). The point prediction is the expected value of the conditional distribution, which is assumed to be normal. Since the significant wave height (H_s) is not normally distributed (see e.g. Tayfun, 1980), the assumption is in certain occasions not appropriate. Consequently, this assumption prevents us from retrieving realistic uncertainty bounds for the significant wave height. Nevertheless, the symmetrical uncertainty intervals can provide a fairly good coverage of the observations (more information and examples can be found in the following sections).

The standard 95% are obtained from the 2.5th and 97.5th quantiles of the conditional distribution. Since the wave heights seemed to follow a log-normal distribution, a log-transformation of the significant wave height (H_s) has been applied. The network was thus trained with the transformed data. The obtained predictions were transformed back to their

original form, which yield the log-normal intervals. Again the 2.5th and the 97.5th quantiles were used.

2.2. The Data

The data were retrieved from stations deployed in the Irish Sea. The measurement stations, which are actually wave rider buoys and meteorological masts, are adjacent to the wind farms of Gwynt-y-Mor² and Rhyl Flats³, located within the Liverpool Bay. The received datasets consist of measurements of hydrodynamic and meteorological data, obtained between 01-09-2012 to 31-01-2018. It has to be stressed that the error correction techniques are suitable for any offshore environment, given the required training, and are not limited in the area of the Irish Sea. The case presented here serves as an example of the applicability of the models in real-life applications. The same procedures and techniques would have to be followed in any similar case, aiming to accurately predict the variables' behavior in mild offshore environments.

A fit test was carried out for the significant wave height (H_s) data by means of the FDB tool in Matlab®, which incorporates certain criteria (AIC, BIC, etc.) to define the best parametric distribution for the data in hand. As can be seen in Figure 1, the log-normal distribution provides a good fit for the significant wave height data (H_s), which will be proved really useful in the simulations to follow.

² Gwynt-y-Mor Offshore Wind Farm (53°27'N 03°35'W) is located off the coast of North Wales and is the 4th largest operating wind farm in the world (160 wind turbines).

³ Rhyl Flats Offshore Wind Farm (53°22'N 03°39'W) is a 25 turbine wind farm, located approximately 8 km north-east of Llandudno in North Wales.

2.2.1. Training and Fitting Datasets

Different error correction techniques require different sets for training, while some of them do not need substantial training at all. To be more exact, the simple linear regression and the Bernstein stochastic interpolation (see e.g. Kolibal and Howard, 2006; 2008; Seyfarth et al., 2006) utilized here, take as an input only numerical data and measurements corresponding to a time interval just 48 hours prior to the forecast. The three-layered, feed forward ANN (see e.g. Deo and Sridhar Naidu, 1999), which uses a back-propagation algorithm (see e.g. Tsai and Lee, 1999), as well as the bivariate Copula (chosen to be Gumbel based on a simple Cramér-Von Mises criterion test incorporating numerically modelled and observed data; see Anderson, 1962), were trained with 6 months of data corresponding to the period March – August 2015, and then used implementing the same input delineated for the aforementioned techniques. It has to be stressed that only H_s data were used by all these techniques.

The BN models incorporate three different types of training; (1) long-training with data from 01-01-2014 to 31-12-2016, i.e. 3 years of training, (2) short-training with hourly data corresponding to 48 hours prior to the forecast, i.e. 2 days of training, and (3) a fixed structure, produced by 3 years of training (2014 - 2016), and fitted with data tallying to 48 hours prior to the respective 48-hr forecast, i.e. 3 years for training and 48 hours for fitting and retrieving the required variable relations, necessary to produce a prediction. The term “fixed” was used to stress out that, while the power of the underlying relations between the variables constantly altered due to the dynamic behaviour of hydrodynamic and meteorological variables, the structure was not changing because of the significant amount of training.

2.2.2. BN Input Data

When producing a prediction with the BN model, there should be an input of the variables based on which the conditional distribution is being produced (this is often referred to as *conditionalization*). The variables were selected to represent nodes in the network based on

their relation to the significant wave height, their availability, and finally their quality. In order to simulate a realistic scenario, where measurements and numerical model data exist, the following variables were selected: (1) the zero-crossing wave period (T_z), (2) the wave direction (D_{irp}), (3) the wind velocity 10 m above the sea level (U_{10}), (4) the wind direction (U_{dir}), and (5) the numerical significant wave height ($H_{s,num}$). As stated before, the numerical model forecast data (48 hours ahead) for the rest of the selected variables are used as conditionalizing values to generate accurate predictions for the variable of interest, namely the significant wave height (H_s).

2.2.3. Model Testing and Validation Datasets

For testing and comparison between the different incorporated techniques, data retrieved for the year of 2017 were used (01-01-2017 to 31-12-2017). In order to simulate effectively the real-time nature of the application, a forecast was corrected every 6 hours of each day. Because SWAN produced 4 forecasts per day, one every 6 hours, each one of the error correction techniques, generated a potential corrected (potentially more accurate) prediction an equal number of times. It can be realized that the extremely large amount of information makes it impossible for all the results to be presented. Thus, a collective set, encapsulating different types of behaviours, is going to be displayed.

3. Results - Discussion

In this section, the summative results for simulations corresponding to the whole year of 2017 (from 01-01-2017 to 31-12-2017) are presented. As previously stated, the measurement stations were situated near the Gwynt-y-Mor (GyM) and Rhyl Flats (RF) offshore wind farms.

3.1. Method Comparison

In order to establish a basis for comparison between the methods, certain well-known evaluation metrics, namely the Root-Mean-Square-Error (RMSE), the Bias, and the Unbiased-RMSE (URMSE) were employed. For reasons of brevity, only the Gwynt-y-Mor results are presented here (Table 1).

Both the long-trained and custom-fixed BNs displayed satisfying performance in terms of their error distribution, which is reflected on their bias values, while introducing an enhancement in accuracy, larger than any other method, with the exception of linear regression. Yet, even if the metrics of Table 1 are indicative of the general behavior of the models, it has to be stressed out that evaluating the techniques' performance solely based on them is impossible. This issue, regarding the robust and consistent validation of the predictions, can be resolved with the use of case specific metrics, i.e. indicators displaying the models' accuracy within and around the significant wave height boundaries of this specific application, i.e. $0.5 \leq H_s \leq 1.5$ m. Particular interest is given around the upper boundary of 1.5 m, which is certainly the most crucial for offshore maintenance operations, since it ensures nautical safety (see Table 2).

Consequently, three extra indicators were taken into account: (1) the percentage of the critically accurate predictions, i.e. the forecasts for which the measurements were higher than 1.5 m and the respective model managed to predict, (2) the false positive forecast percentage, which provides information on the amount of predictions above 1.5 m when the measurement was below, and (3) the percentage of the critically inaccurate forecasts, i.e. the amount of predictions below the 1.5 m upper boundary, when the measurement was above that limit. Notice that the percentages were calculated over the whole time interval, i.e. in terms of the whole dataset, hence their values are small. In any case, they provide the needed means for comparison in this stage.

An example of a correction to the numerical model's 48-hr forecast, given at critical values for an operation, is shown in Figure 2. The BN model incorporating the so-called fixed structure managed to predict relatively accurate the offshore conditions while simultaneously prevented (hypothetically) any operation that might endanger the crews and the equipment.

3.2. Uncertainty Estimates

One major advantage of the BN methods, in comparison to the rest of the techniques is their ability to provide estimates of the uncertainty governing the variable of interest; in this case the significant wave height (H_s). The only one of the other techniques able to produce confidence intervals is the Gumbel Copula. Nevertheless, the assumption of a Gumbel Copula influences the confidence intervals' performance significantly.

Regarding the BN methods, the normality assumption for the conditional distribution of H_s governs the predictions. As a result of the aforementioned supposition, the uncertainty boundaries given by the BN models are symmetrical. Despite the restrictive nature of this assumption, the predictions acquired by the BN models in our study are quite satisfying, providing a correction of the SWAN forecast in most of the cases. That of course might not influence their performance or their usefulness.

Since the H_s data follow a log-normal distribution (see also Section 2.1.3), a log-transformation of the data has been considered for the BN methods. Note that the uncertainty bounds are no longer symmetric.. Table 3 provides the the results of uncertainty quantification from standard BN methods and BN methods applied to the log-transformation of the data, as well as from the Copula. The log-normal uncertainty bounds provide smaller coverage percentages (percentage of measurements in the test data within the confidence interval) with similar or larger average lengths of the confidence intervals or larger percentages accompanied with unrealistically large average lengths (approximately 1.18 m). As a result, the normal confidence intervals are more

efficient and accurate. The most useful uncertainty boundaries seem to be the ones provided by the BN model incorporating the fixed structure, which have a reasonably high coverage percentage (86.1%) accompanied by a satisfying average length, in comparison to the bounds given by the long-trained BN model, which are 10 cm larger but only 3% more accurate.

Considering the overall performance in terms of the given uncertainty, in combination with the point predictions provided previously, it seems that the BN method incorporating a fixed structure, alongside with the respective normal confidence intervals, is the most suitable one for the Gwynt-y-Mor case study. The long-trained BN normal boundaries have also a steady and robust performance, which makes the corresponding model an attractive and satisfying alternative.

Finally, it has to be noted that the extremely large coverage percentage given by the log-normal uncertainty boundaries, for the case of the long-trained BN model, is justified by the similarly large average length of the intervals, which makes the solution less suitable. The log-normal boundaries have a more realistic form (i.e. only positive values and a match with the parametric distribution fitting the H_s), but in case the performance is taken into account the normal confidence intervals pose many advantages.

3.3. BN Structures and Configurations

Up until now, the incorporated BN structures involved 6 nodes. Figure 3 displays the long-trained structure, which has also been used for the fixed BN model. The simulations were carried out using data driven structures, i.e. structures acquired by the nature of the data and not imposed a priori. In general, it was noted that trying to create a structure using general knowledge on the incorporated variables (i.e. knowledge on the underlying relations procured by the literature or by experts) only hindered the prediction/correction procedure instead of enhancing its accuracy (see also Emmanouil, 2018).

408 Some of the relations governing the structures are anticipated, when others oppose what would
409 be expected by the common knowledge on the variables at hand. The most distinctive examples
410 here are the relations between the observed significant wave height (H_s) and the wind velocity
411 (U_{10}), as well as the wind (U_{dir}) and wave (D_{irp}) directions. In a situation represented by the
412 dependencies described in the literature (see e.g. Hasselmann and Olbers, 1973), one would
413 expect the wind direction to influence the wave direction, i.e. the arc connecting those two
414 nodes to have a direction from U_{dir} to D_{irp} . Nevertheless, the data-driven analysis conducted in
415 this study implies that the wind direction depends on the wave direction, something which is
416 certainly not the case. But a reasonable explanation exists, justifying this kind of behaviour.
417 The wind and wave directions are measured at the same locations, a fact that insinuates that
418 the variables influence one another in one specific area. Still, waves are created by storms
419 occurred many kilometres (or miles in the nautical language) away from the location of the
420 measurement. As a result, the measured wind directions might indeed not have any influence
421 on the wave directions. Further, the wave direction is influenced by many effects, such as
422 diffraction due to islands or other obstacles, so it can be totally irrelevant to the values given
423 by the wind direction. That of course raises the question on whether the wind direction could
424 be omitted by the analysis, which will be addressed hereupon.

425 On the other hand, the significant wave height and wave direction relation is a different story.
426 For the case of the long training (3 years of data), presented in Figure 3, the relation is the one
427 expected by the descriptions available in the literature, corresponding to the experts' opinions;
428 see e.g. Pierson and Moskowitz (1964), Hasselmann and Olbers (1973), as well as Phillips
429 (2006). To be more exact, the wind velocity influences the significant wave height, a
430 dependence which is highlighted by the high correlation between the variables (correlation
431 coefficient equal to 0.795), shown in Table 4. In the same table other relations are also visible,
432 as for instance between the wind and wave direction, which justifies the structure's form. Also

visible is the extremely high dependency between the observed and numerically derived wave heights, which gives the character of correction instead of pure prediction, since the quality of the numerical model (SWAN) results influence highly the long-trained models' accuracy.

Contrarily, the short-trained BN model provides a variety of relations between the wind velocity and the observed significant wave height, due to the dynamic nature of the offshore events, which force the data to rapidly change behaviour. There is no clear relation between the two aforementioned variables, since the direction of the connection changes repeatedly, and in some occasions becomes even inexistent. That of course is again explained by the wave creation by distant storms, or secondary effects like diffraction or reflection, since also those two variables are measured in the same location.

It is interesting to examine how different configurations of the BN structures (see Figure 4), i.e. a different number of nodes with a selection of variables influence the predictions and the provided uncertainty. This comparison will shed some light on whether one or more of the incorporated variables influence the models' accuracy positively and will reveal if the erratic behaviour of the models incorporating short-term past data can be casted off.

The exclusion of the meteorological variables, i.e. the wind velocity and direction, only triggered a reduction of the fixed structure's accuracy, to a point where it became equal to the short-trained BN models' one; hence the presentation of these results was considered needless.

Regarding the percentage of coverage and the average length of the uncertainty bounds, again a reduction in performance was noticed in the case of the fixed structure, while a small and insignificant enhancement of accuracy is observed in the short – and long-trained BN models.

As a result, it can be concluded that for the Gwynt-y-Mor case the exclusion of the meteorological variables had an undesirable effect, and the 6-variable structure would be generally suggested. Further testing was conducted with a 5-variable BN structure,

incorporating supplementary the wind velocity (U_{10}). Examples of the arc directions for the case of Gwynt-y-Mor are shown in Figure 4, where the relations discussed previously between the meteorological and the hydrodynamic variables are again varying depending on the training of the BN model (long or short training). The explanation here is quite the same, since for the largest part of the year the wind velocity can in general influence the significant wave height, while in certain occasions this might not happen due to the origin of the waves. The performance of the models is only enhanced slightly (approximately 0.5%), while being more consistent for the BNs incorporating short-term past data. Even so, the RMSE values were in general smaller for all BN models, with the one provided by the fixed structure being the smallest in comparison to the rest of the error correction techniques (0.208). The accuracy in predictions close to the critical boundary also increased, particularly in terms of the false positive percentages (nearly 8%; a value of 1.95% for the case of the fixed structure).

Regarding the uncertainty estimates, the coverage percentages and the average lengths were similar to the 6-variable BN models' figures, without any improvement to the length of the long-trained log-normal confidence intervals. It is truly difficult to determine which boundary is the most suitable and it always depends on the applications needs. Nevertheless, for this case both kinds of confidence intervals display superiority when compared to the uncertainty estimates given by the Gumbel Copula. Of particular interest are the results produced for the case of Rhyl Flats. As shown in Table 5, there is a significant improvement in terms of all metrics. Table 6 illustrates that also in terms of critical performance, around the 1.5 m upper boundary, the fixed structure BN model's performance is enhanced. Moreover, the behaviour of the 5-variable structures regarding models which include short-term past data (i.e. 48 hours prior to the forecast), is quite consistent and robust in comparison to the structures incorporating 6 variables. Here, the point that the wind direction causes unsteadiness to the predictions is proved.

Because the uncertainty estimates display large improvement as well, it seemed fit to present them here in comparison to the results given by the 6-variable BN structure (see Table 7). The normal confidence intervals of the fixed-structured BN reach a coverage percentage of nearly 91% of the total observations, with an average length of just 49 cm. Certainly, the form of the boundaries is not ideal, since they are symmetrical, but still their performance provides a significant enhancement in accuracy, making the BN models a valuable correction tool for this application. The long-trained BN model is equally good in terms of accuracy, regardless the number of incorporated variables, making it also a robust and reliable tool, which with the inclusion of its uncertainty bounds introduces a significant improvement of the significant wave height (H_s) predictions. As such, it can be concluded that the 5-variable BN models would need to be used for the case of Rhyl Flats, due to its robust behaviour, in comparison to similar techniques incorporating 6 variables.

4. Conclusions

The results provided by the methods under consideration are largely dependent on the data quality and availability. Due to the topology (Irish Sea) which induces secondary events in terms of hydrodynamics (reflection, diffraction, etc.), some direct variable relations that would seem obvious are not so trivial after all. For instance, some dependencies between meteorological and hydrodynamic variables, as the wind (U_{dir}) and wave directions (D_{irp}), are not that obvious when the analysis is data-driven. Thus, data-driven approaches were used and are recommended when the morphology of the area, or the way the measurements were collected (e.g. with wave-rider buoys and met-masts), induce many uncertainties.

The BN method incorporating the so-called fixed structure (a long-trained structure in combination with short-term past data) seems to be the best overall, out-performing any other error correction technique. In Gwynt-y-Mor the BN models incorporating 6 variables, namely

506 the observed significant wave height (H_s), the numerically produced significant wave height
507 ($H_{s,num}$), the wave direction (D_{irp}), the zero-crossing wave period (T_z), the wind velocity (U_{10}),
508 and the wind direction (U_{dir}), serves the application equally good to the 5-variable structures,
509 where the wind direction is excluded. A general comment is that the 6-variable BN structures
510 behave erratically in certain occasions, when short-term past data (i.e. data retrieved 48 hours
511 prior to the forecast) are incorporated. On the other hand, for the Rhyl Flats dataset, the
512 exclusion of the wind direction is imperative in order for all the BN models to be able to
513 produce results of enhanced accuracy, due to the condition of the aforementioned variable's
514 dataset. Certainly, the long-trained BN model, regardless of the number of variables
515 incorporated, provides robust and consistent results for both stations, and with the inclusion of
516 the uncertainty estimates provided it becomes also an attractive and equally suitable technique.

517 In offline mode it is easy to establish and recognise which variable/s reduces the respective
518 models' accuracy, but when the models run operationally it is impossible to interfere. The final
519 goal is to manage to emulate the real-time nature of the application and draw conclusions for
520 the applicability of the methods under consideration in operational environments. In that
521 regard, the 5-variable fixed-structured BN model outperforms any other technique. Certainly,
522 this kind of model has one major disadvantage; the fact that it needs short-term past data (48-
523 hrs prior to the forecast) makes it unable to produce corrected forecasts in the absence of recent
524 observations. This effect is not an issue with the long-trained BN model, which displays equally
525 good metrics, but is underperforming in terms of the critical situations (close to the upper 1.5
526 m boundary), presenting a more conservative behaviour and failing to predict significant wave
527 height peaks in certain occasions. Consequently, it is really a matter of subject and data
528 availability to distinguish which model is better in terms of its operational performance. Surely,
529 the ability of the long-trained BN model to produce forecasts of enhanced accuracy constantly,
530 even in the absence of recent observations makes it attractive for real-time use. Yet, the

satisfying performance of the fixed-structured BN cannot be overlooked, especially when producing critical predictions (close the application's upper boundary), which constitutes probably its most important virtue while incorporated.

All in all, it can be concluded that the BN methods provide the most suitable solution in terms of error correction when compared to the rest of the techniques presented in the preceding sections. A major benefit is the information acquired by the structures and uncertainty estimates, which can be either provided in normal or log-normal form and cover nearly 90% of the total number of measurements in the validation set. The normal confidence intervals seem to be the most suitable for this application, since they demonstrate good performance, especially in terms of the higher and most crucial boundary. Moreover, they introduce an acceptable average length of 50-60 cm, in comparison to their log-normal counterparts. The log-normal uncertainty boundaries grant behaviours closer to reality, but their average length, especially the one given by the long-trained technique (≈ 1.18 m), exhibit high levels of uncertainty. Nevertheless, it can be generally concluded that the BN methods enhance the uncertainty estimates' performance in comparison to the Gumbel Copula model, enhancing the SWAN forecasts significantly and ensuring nautical and operational safety in most of the occasions.

The techniques described in this study provide a useful tool for the decision making process of installation and maintenance operations in offshore wind farms. Further, the applicability of the models in real-time scenarios could assure the right temporal and spatial placement of the personnel and the equipment in dynamic circumstances, hence leading to an optimal utilization of the available resources. Since the success of offshore operations is based on the accurate prediction of specific weather windows, the improved H_s forecasts provided by the BN models will lessen the risk of high cost, while ensuring the safety of the crews.

For the future, extensive real-time testing would provide a more concise and consistent validation of the models' performance. Supplementary, some variables (e.g., wind direction) could be discretized rather than used as an additional continuous variable, leading to a hybrid network. As such the models' accuracy could be evaluated based on the type of events (e.g. for wind coming from NW in comparison to SE). Finally, it could be stated that the differences between the models are in certain occasions small. An application-based impact assessment would highlight the importance and contribution of each model, expressed in monetary and risk terms, showing that these small differences could lead actually to large benefits.

Acknowledgements

This research was supported by the Joint Industry Projects (JIPs) taking place within the TKI Wind at Sea program. Data used in the project was kindly provided within the JIPs framework.

References

- A. Hanea, O. Morales-Napoles, D. Ababei (2015) Non-parametric Bayesian networks: Improving theory and reviewing applications, *Reliability Engineering and System Safety*, **144**, pp. 265–284, DOI: <http://dx.doi.org/10.1016/j.ress.2015.07.027>.
- A. Kroon, M. de Schipper, K. den Heijer, S. Aarninkhof, P. van Gelder (2017) Uncertainty assessment in coastal morphology prediction with a bayesian network, In T. Aagaard, R. Deigaard, & D. Fuhrman (Eds.), *Proceedings of Coastal Dynamics 2017: Helsingør, Denmark*, pp. 1909-1920, Paper No. 254, URL: <https://repository.tudelft.nl/islandora/object/uuid%3A424c4f19-4bd2-48cd-9221-b6e3e8426636>.
- A. Malekmohamadi, R. Ghiassi, M.J. Yazdanpanah (2008) Wave hindcasting by coupling numerical model and artificial neural networks, *Ocean Engineering*, **35**, pp. 417–425, DOI: 10.1016/j.oceaneng.2007.09.003.
- A.G. Sebastian, E.J.C. Dupuits, O. Morales-Napoles (2017) Applying a Bayesian network based on Gaussian copulas to model the hydraulic boundary conditions for hurricane flood risk analysis in a coastal watershed, *Coastal Engineering*, **125**, pp. 42-50, DOI: <https://doi.org/10.1016/j.coastaleng.2017.03.008>.
- A.N. Deshmukh, M.C. Deo, P.K. Bhaskaran, T.M. Balakrishnan Nair, and K.G. Sandhya (2016) Neural-Network-Based Data Assimilation to Improve Numerical Ocean Wave Forecast, *IEEE Journal of Oceanic Engineering*, **41** (4), DOI: 10.1109/JOE.2016.2521222.
- B. Stewart-Koster, S.E. Bunn, S.J. Mackay, N.L. Poff, R.J. Naiman, P.S. Lake (2010) The use of Bayesian networks to guide investments in flow and catchment restoration for impaired river ecosystems, *Freshwater Biology*, **55** (1), pp. 243-260, DOI: <https://doi.org/10.1111/j.1365-2427.2009.02219.x>.
- C. Genest, A.C. Favre (2007) Everything You Always Wanted to Know about Copula Modeling but Were Afraid to Ask, *Journal of Hydrologic Engineering*, **12** (4), 347-368, DOI: [https://doi.org/10.1061/\(ASCE\)1084-0699\(2007\)12:4\(347\)](https://doi.org/10.1061/(ASCE)1084-0699(2007)12:4(347)).

593 C.-P. Tsai, C. Lin, J.-N. Shen (2002) Neural network for wave forecasting among multi-
594 stations, *Ocean Engineering*, **29**, pp. 1683–1695, PII: S00 29 -8018(01)00112-3, DOI:
595 [https://doi.org/10.1016/S0029-8018\(01\)00112-3](https://doi.org/10.1016/S0029-8018(01)00112-3).

596 C.P. Tsai, T.L. Lee (1999) Back-propagation neural network in tidal-level forecasting,
597 *Journal of Waterway, Port, Coastal and Ocean Engineering*, **125**, pp. 195–202, DOI:
598 [https://doi.org/10.1061/\(ASCE\)0733-950X\(1999\)125:4\(195\)](https://doi.org/10.1061/(ASCE)0733-950X(1999)125:4(195)).

599 D. Worm, O. Morales-Nápoles, Wvd. Haak, T. Bakri (2011) Continuous dynamic non-
600 parametric Bayesian networks: application to traffic prediction, TNO-report, project number:
601 043.01000;2011.

602 E.M. Bitner-Gregersen, O. Hagen (1990) Uncertainties in Data for the Offshore
603 Environment, *Structural Safety*, **7**, (1990), 11-34, DOI: [https://doi.org/10.1016/0167-](https://doi.org/10.1016/0167-4730(90)90010-M)
604 [4730\(90\)90010-M](https://doi.org/10.1016/0167-4730(90)90010-M).

605 E.M. Bitner-Gregersen, S.K. Bhattacharya, I.K. Chatjigeorgiou, I. Eames, K. Ellermann, K.
606 Ewans, G. Hermanski, M.C. Johnson, N. Ma, C. Maisondieu, A. Nilva, I. Rychlik, T. Waseda
607 (2014) Recent developments of ocean environmental description with focus on uncertainties,
608 *Ocean Eng.*, **86**, pp. 26-46, DOI: <http://dx.doi.org/10.1016/j.oceaneng.2014.03.002>.

609 F.V. Jensen, T.D. Nielsen (2007) Bayesian Networks and Decision Graphs, Information
610 Science and Statistics , Springer Verlag, New York, 448 pages, ISBN: 978-0-387-68282-2,
611 DOI: 10.1007/978-0-387-68282-2.

612 G. Cats, L. Wolters (1996) The Hirlam Project, *IEEE Computational Science and*
613 *Engineering*, **3** (4), DOI: 10.1109/99.556505.

614 G. Leontaris, O. Morales-Napoles, A.R.M. (Rogier) Wolfert (2016) Probabilistic scheduling
615 of offshore operations using copula based environmental time series – An application for
616 cable installation management for offshore wind farms, *Ocean Engineering*, **125**, pp. 328–
617 341, DOI: <http://dx.doi.org/10.1016/j.oceaneng.2016.08.029>.

618 G. Medina Oliva, P. Weber, C. Simon, B. Iung (2009) Bayesian networks Applications on
619 Dependability, Risk Analysis and Maintenance, 2nd IFAC Workshop on Dependable Control
620 of Discrete Systems DCDS'09, Bari, Italy, June 10-12, 2009, DOI: 10.3182/20090610-3-IT-
621 4004.0040.

622

623 I. Malekmohamadi, M.R. Bazargan-Lari, R. Kerachian, M.R. Nikoo, M. Fallahnia (2011)
624 Evaluating the efficacy of SVMs, BNs, ANNs and ANFIS in wave height prediction, *Ocean*
625 *Engineering*, **38**, 487–497, DOI: 10.1016/j.oceaneng.2010.11.020.

626 J. Kolibal, D. Howard (2006) MALDI-TOF Baseline Drift Removal Using Stochastic
627 Bernstein Approximation, *EURASIP Journal on Applied Signal Processing*, **2006**, Article ID
628 63582, pp. 1–9, DOI: 10.1155/ASP/2006/63582.

629 J. Kolibal, D. Howard (2008) Alternative Parametric Boundary Reconstruction Method for
630 Biomedical Imaging, *Journal of Biomedicine and Biotechnology*, **2008**, Article ID: 623475,
631 7 pages, DOI:10.1155/2008/623475.

632 J. Pearl (1988) Probabilistic reasoning in intelligent systems: networks of plausible inference,
633 Morgan Kaufmann Series in Representation and Reasoning, Morgan Kaufmann Publishers,
634 1st edition, ISBN: 978-0-08-051489-5.

635 J.D. Agrawal, M.C. Deo (2002) On-line wave prediction, *Marine Structures*, **15**, pp. 57–74,
636 DOI: [https://doi.org/10.1016/S0951-8339\(01\)00014-4](https://doi.org/10.1016/S0951-8339(01)00014-4).

637 K. E. Wilson, P. N. Adams, C. J. Hapke, E. E. Lentz, O. Brenner (2015) Application of
638 Bayesian Networks to hindcast barrier island morphodynamics, *Coastal Engineering*, **102**,
639 pp. 30–43, DOI: <http://dx.doi.org/10.1016/j.coastaleng.2015.04.006>.

640 K. Hasselmann, D. Olbers (1973) Measurements of wind-wave growth and swell decay
641 during the Joint North Sea Wave Project (JONSWAP), *Ergänzungsheft zur Deutschen*
642 *Hydrographischen Zeitschrift Reihe A*, **8** (12), pp. 1-95, HDL:10013/epic.20654.

643 K. Korb, A.E. Nicholson (2010) Bayesian Artificial Intelligence, Chapman & Hall/CRC
644 Computer Science & Data Analysis (Book 2), Chapman & Hall/CRC, 2nd edition, 491 pages,
645 ISBN-10: 1439815917.

646 L. Poelhekke, W. S. Jäger, A. van Dongere, T. A. Plomaritis, R. McCall, Ó. Ferreira (2016)
647 Predicting coastal hazards for sandy coasts with a Bayesian Network, *Coastal Engineering*,
648 **118**, pp. 21–34, DOI: <http://dx.doi.org/10.1016/j.coastaleng.2016.08.011>.

649 M. Aziz Tayfun (1980) Narrow-band nonlinear sea waves, *Journal of Geophysical Research*,
650 **85** (C3), pp. 1543–1552, DOI: <https://doi.org/10.1029/JC085iC03p01548>.

651 M. Scutari (2015) Bayesian Network Constraint-Based Structure Learning Algorithms:
 652 Parallel and Optimised Implementations in the bnlearn R Package, *Journal of Statistical*
 653 *Software*, **10** (2), 20 pages, arXiv:1406.7648v2.

654 M.C. Deo, A. Jha, A.S. Chaphekar, K. Ravikant (2001) Neural networks for wave
 655 forecasting, *Ocean Engineering*, **28**, pp. 889–898, DOI: [https://doi.org/10.1016/S0029-](https://doi.org/10.1016/S0029-8018(00)00027-5)
 656 [8018\(00\)00027-5](https://doi.org/10.1016/S0029-8018(00)00027-5).

657 M.C. Deo, C. Sridhar Naidu (1999) Real time wave forecasting using neural networks, *Ocean*
 658 *Engineering*, **26**, pp. 191–203, DOI: [https://doi.org/10.1016/S0029-8018\(97\)10025-7](https://doi.org/10.1016/S0029-8018(97)10025-7).

659 M.C. Deo, C. Sridhar Naidu (1999) Real time wave forecasting using neural networks, *Ocean*
 660 *Engineering*, **26**, pp. 191–203, DOI: [https://doi.org/10.1016/S0029-8018\(97\)10025-7](https://doi.org/10.1016/S0029-8018(97)10025-7).

661 M.G. Scotto, C. Guedes Soares (2007) Bayesian inference for long-term prediction of
 662 significant wave height, *Coastal Engineering*, **54**, pp. 393-400, DOI:
 663 <https://doi.org/10.1016/j.coastaleng.2006.11.003>.

664 M.L. Palmsten, K.D. Splinter, N.G. Plant, H.F. Stockdon (2014) Probabilistic estimation of
 665 dune retreat on the Gold Coast, Australia, *Shore & Beach*, **82** (4), pp. 35-43, URL:
 666 <https://pubs.er.usgs.gov/publication/70159345>.

667 N. Booij, R.C. Ris and L.H. Holthuijsen (1999) A third-generation wave model for coastal
 668 regions, Part I, Model description and validation, *J. Geophys. Res.*, **104** (C4), p.p. 7649-7666,
 669 DOI: <https://doi.org/10.1029/98JC02622>.

670 N.G. Plant, K. T. Holland (2011) Prediction and assimilation of surf-zone processes using a
 671 Bayesian network Part II: Inverse models, *Coastal Engineering*, **58**, pp. 256–266, DOI:
 672 [10.1016/j.coastaleng.2010.11.002](https://doi.org/10.1016/j.coastaleng.2010.11.002).

673 N. Krishna Kumar, R. Savitha, A.A. Mamun (2017) Regional ocean wave height prediction
 674 using sequential learning neural networks, *Ocean Engineering*, **129**, pp. 605–612, DOI:
 675 [http://dx.doi.org/10.1016/j.oceaneng.2016.10.033](https://doi.org/10.1016/j.oceaneng.2016.10.033).

676

677 O.M. Phillips (2006) On the generation of waves by turbulent wind, *Journal of Fluid*
 678 *Mechanics*, **2** (5), pp. 417-445, DOI: <https://doi.org/10.1017/S0022112057000233>.

679 O. Makarynsky (2004) Improving wave predictions with artificial neural networks, *Ocean*
680 *Engineering*, **31**, pp. 709–724, DOI:10.1016/j.oceaneng.2003.05.003.

681 O. Makarynsky (2005) Neural pattern recognition and prediction for wind wave
682 data assimilation, *Pacific Oceanography*, **3** (2), URL:
683 <https://www.researchgate.net/publication/288867692>.

684 O. Makarynsky (2007) Artificial neural networks in merging wind wave forecasts with field
685 observations, *Indian Journal of Marine Sciences*, **36**(1), pp. 7-17, IPC Code: Int. CI. (2006)
686 G06F 7/20; G06Q 99/00.

687 O. Makarynsky, A.A. Pires-Silva, D. Makarynska, C. Ventura-Soares (2005) Artificial
688 neural networks in wave predictions at the west coast of Portugal, *Computers & Geosciences*,
689 **31**, pp. 415–424, DOI: 10.1016/j.cageo.2004.10.005.

690 O. Morales-Napoles, D. Worm, P. van den Haak, A. Hanea, W. Courage, S. Miraglia (2013)
691 Reader for course: Introduction to Bayesian Networks, TNO report, reference: TNO-060-
692 DTM-2013-01115.

693 O. Morales-Nápoles, R.D.J.M. Steenbergen (2014) Analysis of axle and vehicle load
694 properties through Bayesian Networks based on Weigh-in-Motion data, *Reliability*
695 *Engineering and System Safety*, **125**, pp. 153–164, DOI:
696 <http://dx.doi.org/10.1016/j.res.2014.01.018>.

697 P. Embrechts, F. Lindskog, A. McNeil (2001) Modelling Dependence with Copulas and
698 Applications to Risk Management, Department of Mathematics, ETHZ, CH-8092 Zurich,
699 Switzerland, URL: <https://people.math.ethz.ch/~embrecht/ftp/copchapter.pdf>.

700 P. Weber, G. Medina-Oliva, C. Simon, B. Iung (2012) Overview on Bayesian networks
701 applications for dependability, risk analysis and maintenance areas, *Engineering*
702 *Applications of Artificial Intelligence*, **25**, pp. 671–682, DOI:
703 10.1016/j.engappai.2010.06.002.

704 P.A. Aguilera, A. Fernández, R. Fernández, R. Rumí, A. Salmerón (2011) Bayesian networks
705 in environmental modelling, *Environmental Modelling & Software*, **26**, pp. 1376-1388, DOI:
706 10.1016/j.envsoft.2011.06.004.

707 R. B. Nelsen (2006) An Introduction to Copulas, 2nd Edition, *Springer Series in Statistics*,
708 Springer-Verlag New York, ISBN: 978-0-387-28678-5, DOI: 10.1007/0-387-28678-0.

709 R. Cooke (1991) Experts in uncertainty: opinion and subjective probability in science,
710 *Environmental ethics and science policy series*, Oxford University Press, 336 pages, ISBN:
711 0195362373.

712 R. Jane, L. Dalla Valle, D. Simmonds, A. Raby (2016) A copula-based approach for the
713 estimation of wave height records through spatial correlation, *Coastal Engineering*, **117**, pp.
714 1–18, DOI: <http://dx.doi.org/10.1016/j.coastaleng.2016.06.008>.

715 R. Seyfarth, J. Kolibal, D. Howard (2006) New Mathematical Method for Computer
716 Graphics, In: 2006 International Conference on Hybrid Information Technology, 9-11 Nov.
717 2006, Cheju Island, South Korea, ISBN: 0-7695-2674-8, DOI: 10.1109/ICHIT.2006.253457.

718 R.C. Ris, N. Booij and L.H. Holthuijsen (1999) A third-generation wave model for coastal
719 regions, Part II, Verification, *J. Geophys. Res.*, **104**(C4), p.p. 7667-7681, DOI:
720 <https://doi.org/10.1029/1998JC900123>.

721 S. Asma, A. Sezer, O. Ozdemir (2012) MLR and ANN models of significant wave height on
722 the west coast of India, *Computers & Geosciences*, **49**, pp. 231–237, DOI:
723 <http://dx.doi.org/10.1016/j.cageo.2012.05.032>.

724 S. Emmanouil (2018) Error Correction for Wave Modelling, M.Sc. Thesis, Delft University
725 of Technology, Department of Civil Engineering and Geosciences, 193 pages, URL:
726 <http://resolver.tudelft.nl/uuid:e712c0c1-3c85-4cff-8455-443a84ff7537>.

727 S.H. Chen, C. A. Pollino (2012) Good practice in Bayesian network modelling,
728 *Environmental Modelling & Software*, **37**, pp. 134-145, DOI: 10.1016/j.envsoft.2012.03.012.

729 S.H. Chen, C. A. Pollino (2012) Good practice in Bayesian network modelling,
730 *Environmental Modelling & Software*, **37**, pp. 134-145, DOI: 10.1016/j.envsoft.2012.03.012.

731 S. Haver, T. Moan (1983) On some uncertainties related to the short term stochastic
732 modelling of ocean waves, *Applied Ocean Research*, **5** (2), pp. 93-108, DOI:
733 [https://doi.org/10.1016/0141-1187\(83\)90021-4](https://doi.org/10.1016/0141-1187(83)90021-4).

734

- 735 S. Mandal, S. Rao, D.H. Raju (2005) Ocean wave parameters estimation using
736 backpropagation neural networks, *Marine Structures*, **18**, pp. 301–318, DOI:
737 10.1016/j.marstruc.2005.09.002.
- 738 S.N. Londhe, V. Panchang (2006) One-Day Wave Forecasts Based on Artificial Neural
739 Networks, *Journal of Atmospheric and Oceanic Technology*, **23**, pp. 1593-1603, DOI:
740 <https://doi.org/10.1175/JTECH1932.1>.
- 741 S.J. Russell, P. Norvig (2009) Artificial Intelligence: A Modern Approach, Prentice Hall, 3rd
742 edition, 1152 pages, ISBN-10: 0136042597
- 743 S.N. Lodhe, V. Panchang (2005) One-day wave forecasts using buoy data and artificial
744 neural networks, Conference Paper, February 2005, DOI: 10.1109/OCEANS.2005.1640074.
- 745 S.N. Londhe, Shalaka Shah, P.R. Dixit, T.M. Balakrishnan Nair, P. Sirisha, R. Jain (2016) A
746 Coupled Numerical and Artificial Neural Network Model for Improving Location Specific
747 Wave Forecast, *Applied Ocean Research*, **59**, pp. 483–491, DOI:
748 <http://dx.doi.org/10.1016/j.apor.2016.07.004>.
- 749 T. Schmidt (2006) Coping with copulas, In: Rank, J. (Ed.), *Copulas-From Theory to*
750 *Applications in Finance*, 1st Edition, 350 pages, Incisive Media Risk Books, London, UK,
751 pp. 3–34, ISBN: 190433945X.
- 752 T.W. Anderson (1962) On the distribution of the Two-Sample Cramer-von Mises Criterion,
753 *Ann. Math. Statist.*, **33**(3), p.p. 1148-1159, DOI: 10.1214/aoms/1177704477.
- 754 W.J. Pierson, L. Moskowitz (1964) A proposed spectral form for fully developed wind seas
755 based on the similarity theory of S. A. Kitaigorodskii, *Journal of Geophysical Research*, **69**
756 (24), pp. 5181–5190, DOI: <https://doi.org/10.1029/JZ069i024p05181>.
- 757 Z. Zhang, Chi-Wai Li, Y. Qi and Y.-S. Li (2006) Incorporation of artificial neural networks
758 and data assimilation techniques into a third-generation wind–wave model for wave
759 forecasting, *Journal of Hydroinformatics*, 08.1, DOI: 10.2166/jh.2006.005.

760 **Tables**

761 Table 1. Evaluation metrics for the year of 2017 (Gwynt-y-Mor).

Method	SWAN	BN Long Training	BN Short Training	BN Fixed Structure	REG	ANN	Copula	SI
RMSE (m)	0.231	0.218	0.253	0.209	0.206	0.225	0.246	0.325
BIAS (m)	-0.046	-0.011	-0.051	0.005	0.004	0.0365	-0.076	-0.016
URMSE (m)	0.226	0.218	0.248	0.209	0.206	0.222	0.234	0.324

762

763 Table 2. Application specific metrics for the year of 2017 (Gwynt-y-Mor).

Method	SWAN	BN Long Training	BN Short Training	BN Fixed Structure	REG	ANN	Copula	SI
Critically Accurate (%)	19.72	21.16	20.27	22.31	22.00	23.05	16.89	20.83
Critically Inaccurate (%)	2.55	2.82	3.79	2.10	2.34	1.90	4.72	1.96
False Positive (%)	2.26	1.93	1.50	2.10	1.97	3.01	0.82	3.01

764

765 Table 3. Uncertainty comparison for the Gwynt-y-Mor case study.

Method	BN Long Training	BN Fixed Structure	BN Short Training	Copula	BN Long Training (Log-N)	BN Short Training (Log-N)	BN Fixed Structure (Log-N)
Coverage (%)	89.2	86.1	75.3	68.5	95.4	73.1	76.5

Average Length (m)	0.630	0.531	0.356	0.375	1.185	0.550	0.594
---------------------------	-------	-------	-------	-------	-------	-------	-------

766

767 Table 4. Correlation matrix for the long-trained BN models for the Gwynt-y-Mor case.

Variable	D_{irp}	T_z	U_{10}	U_{dir}	$H_{s,num}$	H_s
D_{irp}	1.000	0.381	0.001	0.515	0.245	0.249
T_z	0.381	1.000	0.596	0.359	0.842	0.874
U_{10}	0.001	0.596	1.000	0.110	0.820	0.795
U_{dir}	0.515	0.359	0.110	1.000	0.319	0.329
$H_{s,num}$	0.245	0.842	0.820	0.319	1.000	0.964
H_s	0.249	0.874	0.795	0.329	0.964	1.000

768

769 Table 5. Evaluation metrics for the case of the 5-variable BN models (Rhyl Flats).

Method	SWAN	BN Long Training	BN Short Training	BN Fixed Structure	BN Long Training	BN Short Training	BN Fixed Structure
		6 Nodes			5 Nodes		
RMSE (m)	0.203	0.178	0.200	0.201	0.178	0.195	0.163
BIAS (m)	-0.004	-0.010	-0.037	0.003	-0.013	-0.038	0.003
URMSE (m)	0.203	0.178	0.196	0.201	0.177	0.191	0.163

770

771 Table 6. Application-specific evaluation metrics for the case of the 5-variable BN models
772 (Rhyl Flats).


Method	SWAN	BN Long Training	BN Short Training	BN Fixed Structure	BN Long Training	BN Short Training	BN Fixed Structure
		6 Nodes			5 Nodes		
Critically Accurate (%)	18.02	17.01	16.04	18.82	16.87	16.08	18.03
Critically Inaccurate (%)	1.05	2.28	2.50	1.34	2.30	2.45	1.47
False Positive (%)	2.55	1.16	1.03	1.58	1.14	0.84	1.14

773


774 Table 7. Uncertainty estimates' performance for the case of a 5-variable BN structure (Rhyl
775 Flats).

Method	BN Long Training	BN Fixed Structure	BN Short Training	Copula	BN Long Training (Log-N)	BN Short Training (Log-N)	BN Fixed Structure (Log-N)
5 Variables							
Coverage (%)	89.6	90.8	77.2	70.9	95.0	77.1	73.2
Average Length (m)	0.527	0.489	0.430	0.327	1.024	0.505	0.460
6 Variables							
Coverage (%)	89.7	64.7	69.8	70.9	94.7	68.9	61.0
Average Length (m)	0.527	0.491	0.427	0.327	0.948	0.466	0.425

776 Figures

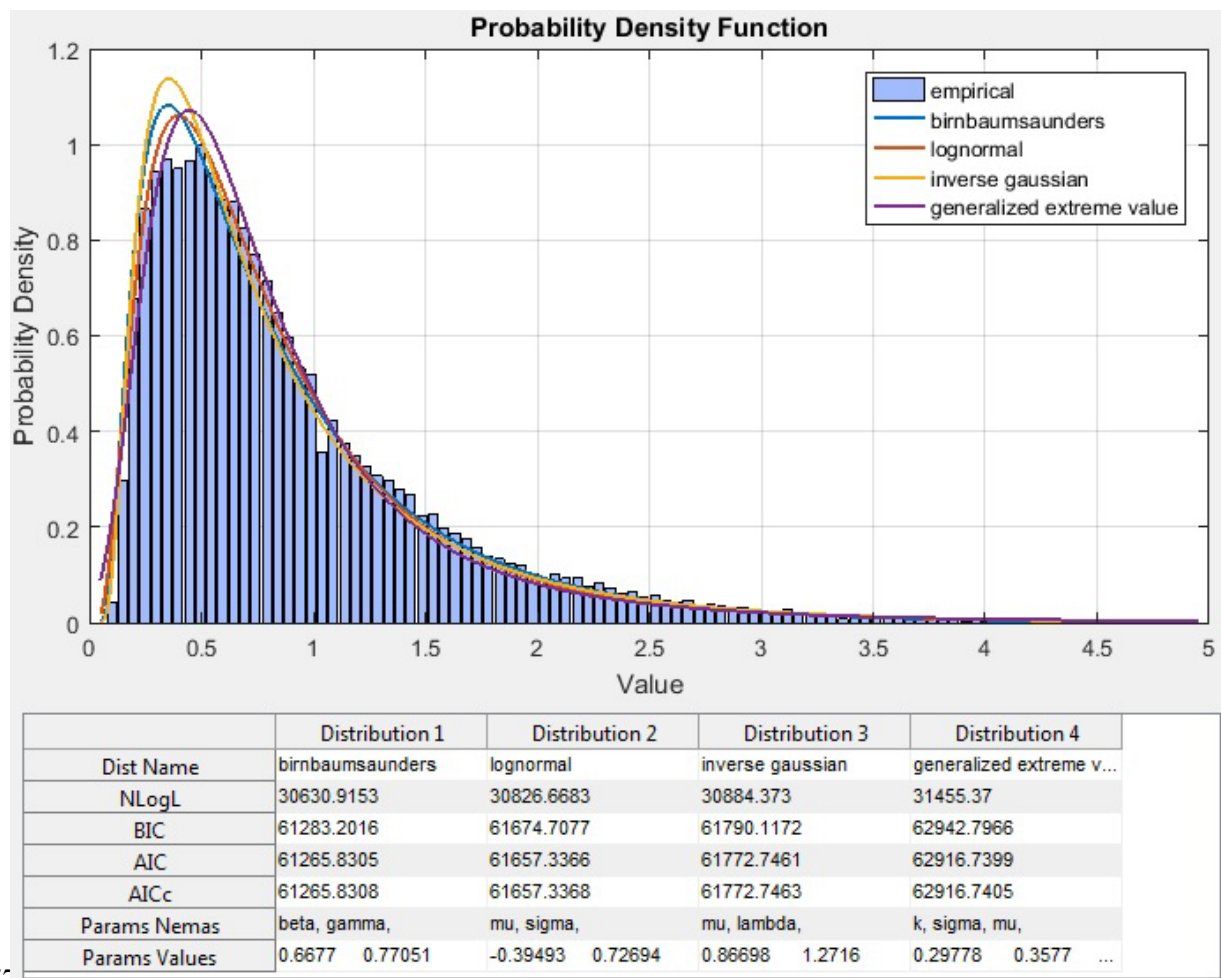


778 Figure 1. Results of the parametric distribution fitting procedure to the significant wave
 779 height (H_s) data of Gwynt-y-Mor. (*colored)

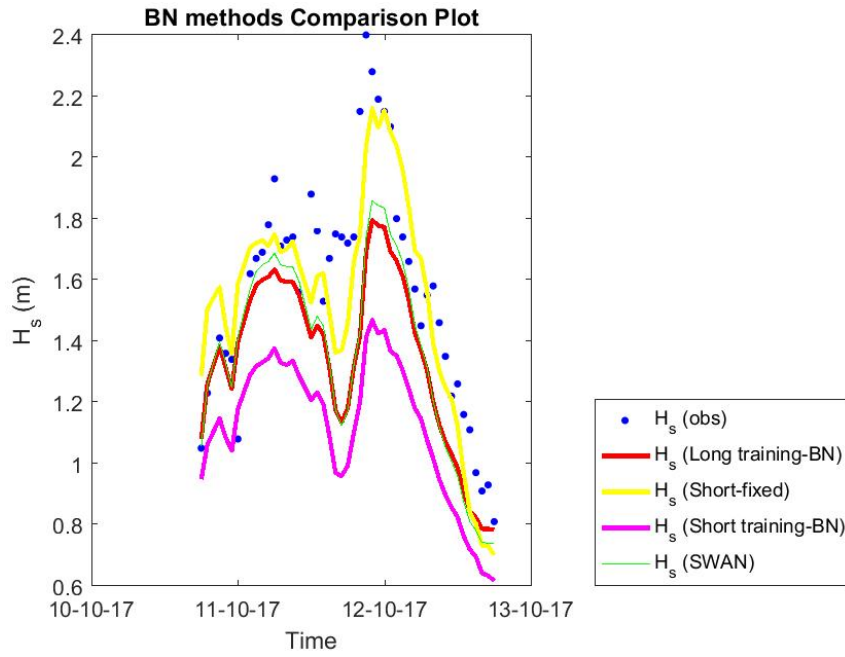

780


781 Figure 2. Example of a correction to the SWAN forecast under critical conditions given by
 782 the BN models (Gwynt-y-Mor).

783

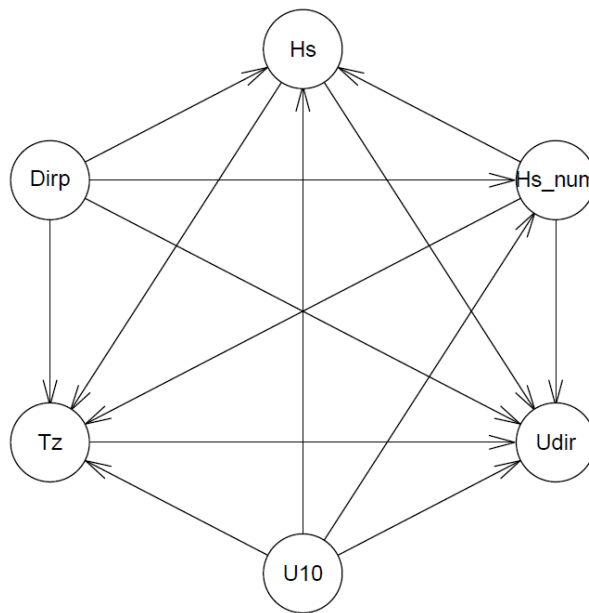

784

785 Figure 3. Structure for the long-trained and fixed BN models, incorporating 6 variables
 786 (Gwynt-y-Mor).

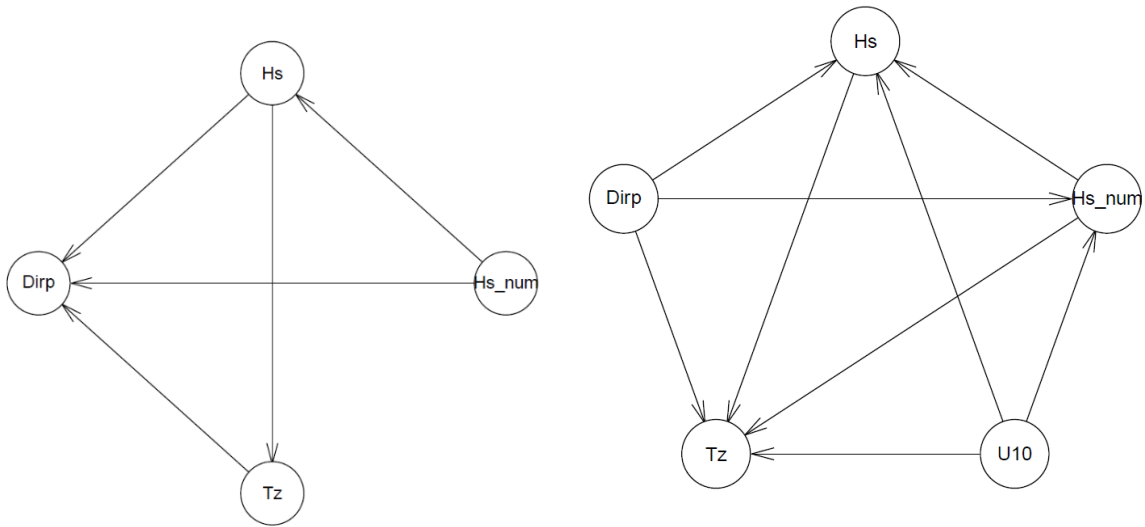

787 Figure 4. BN structures incorporating 4 and 5 variables for the long-trained models (Gwynt-
788 t-Mor)

789 Table Captions

790 Table 1. Evaluation metrics for the year of 2017 (Gwynt-y-Mor).

791 Table 2. Application specific metrics for the year of 2017 (Gwynt-y-Mor).

792 Table 3. Uncertainty comparison for the Gwynt-y-Mor case study.

793 Table 4. Correlation matrix for the long-trained BN models for the Gwynt-y-Mor case.

794 Table 5. Evaluation metrics for the case of the 5-variable BN models (Rhyl Flats).

795 Table 6. Application specific evaluation metrics for the case of the 5-variable BN models
796 (Rhyl Flats).

797 Table 7. Uncertainty estimates' performance for the case of a 5-variable BN structure (Rhyl
798 Flats).

799 Figure Captions

800 Figure 1. Results of the parametric distribution fitting procedure to the significant wave
801 height (H_s) data of Gwynt-y-Mor.

802 Figure 2. Example of a correction to the SWAN forecast under critical conditions given by
803 the BN models (Gwynt-y-Mor).

804 Figure 3. Structure for the long-trained and fixed BN models, incorporating 6 variables
805 (Gwynt-y-Mor).

806 Figure 4. BN structures incorporating 4 and 5 variables for the long-trained models (Gwynt-
807 t-Mor).