

Evaluation of DNA extraction yield from a chlorinated drinking water distribution system

Putri, Ratna E.; Kim, Lan Hee; Farhat, Nadia; Felemban, Mashael; Saikaly, Pascal E.; Vrouwenvelder, Johannes S.

DOI

[10.1371/journal.pone.0253799](https://doi.org/10.1371/journal.pone.0253799)

Publication date

2021

Document Version

Final published version

Published in

PLoS ONE

Citation (APA)

Putri, R. E., Kim, L. H., Farhat, N., Felemban, M., Saikaly, P. E., & Vrouwenvelder, J. S. (2021). Evaluation of DNA extraction yield from a chlorinated drinking water distribution system. *PLoS ONE*, *16*(6 June), Article e0253799. <https://doi.org/10.1371/journal.pone.0253799>

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

RESEARCH ARTICLE

Evaluation of DNA extraction yield from a chlorinated drinking water distribution system

Ratna E. Putri¹, Lan Hee Kim¹, Nadia Farhat^{1*}, Mashaël Felemban¹, Pascal E. Saikaly¹, Johannes S. Vrouwenvelder^{1,2}

1 Biological and Environmental Science and Engineering Division, Water Desalination and Reuse Center, King Abdullah University of Science and Technology, Thuwal, Saudi Arabia, **2** Faculty of Applied Sciences, Department of Biotechnology, Delft University of Technology, Delft, The Netherlands

* nadia.farhat@kaust.edu.sa



Abstract

Desalination technology based on Reverse Osmosis (RO) membrane filtration has been resorted to provide high-quality drinking water. RO produced drinking water is characterized by a low bacterial cell concentration. Monitoring microbial quality and ensuring membrane-treated water safety has taken advantage of the rapid development of DNA-based techniques. However, the DNA extraction process from RO-based drinking water samples needs to be evaluated regarding the biomass amount (filtration volume) and residual disinfectant such as chlorine, as it can affect the DNA yield. We assessed the DNA recovery applied in drinking water microbiome studies as a function of (i) different filtration volumes, (ii) presence and absence of residual chlorine, and (iii) the addition of a known *Escherichia coli* concentration into the (sterile and non-sterile, chlorinated and dechlorinated) tap water prior filtration, and directly onto the (0.2 μm pore size, 47 mm diameter) mixed ester cellulose membrane filters without and after tap water filtration. Our findings demonstrated that the co-occurrence of residual chlorine and low biomass/cell density water samples (RO-treated water with a total cell concentration ranging between 2.47×10^2 – 1.5×10^3 cells/mL) failed to provide sufficient DNA quantity (below the threshold concentration required for sequencing-based procedures) irrespective of filtration volumes used (4, 20, 40, 60 L) and even after performing dechlorination. After exposure to tap water containing residual chlorine (0.2 mg/L), we observed a significant reduction of *E. coli* cell concentration and the degradation of its DNA (DNA yield was below detection limit) at a lower disinfectant level compared to what was previously reported, indicating that free-living bacteria and their DNA present in the drinking water are subject to the same conditions. The membrane spiking experiment confirmed no significant impact from any potential inhibitors (e.g. organic/inorganic components) present in the drinking water matrix on DNA extraction yield. We found that very low DNA content is likely to be the norm in chlorinated drinking water that gives hindsight to its limitation in providing robust results for any downstream molecular analyses for microbiome surveys. We advise that measurement of DNA yield is a necessary first step in chlorinated drinking water distribution systems (DWDSs) before conducting any downstream omics analyses such as amplicon sequencing to avoid inaccurate interpretations of

OPEN ACCESS

Citation: Putri RE, Kim LH, Farhat N, Felemban M, Saikaly PE, Vrouwenvelder JS (2021) Evaluation of DNA extraction yield from a chlorinated drinking water distribution system. PLoS ONE 16(6): e0253799. <https://doi.org/10.1371/journal.pone.0253799>

Editor: Andrea Franzetti, Università degli Studi di Milano-Bicocca, ITALY

Received: March 3, 2021

Accepted: June 13, 2021

Published: June 24, 2021

Copyright: © 2021 Putri et al. This is an open access article distributed under the terms of the [Creative Commons Attribution License](https://creativecommons.org/licenses/by/4.0/), which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

Data Availability Statement: All relevant data are within the manuscript and its [Supporting information](#) files.

Funding: This research was supported by funding from King Abdullah University of Science and Technology (KAUST). The funders had no role in study design, data collection and analysis, decision to publish, or preparation of the manuscript.

Competing interests: The authors have declared that no competing interests exist.

results based on very low DNA content. This study expands a substantial source of bias in using DNA-based methods for low biomass samples typical in chlorinated DWDSs. Suggestions are provided for DNA-based research in drinking water with residual disinfectant.

Introduction

World Resources Institute reported that water withdrawal has doubled from the 1960s until 2019 due to the growing world's economy and population [1]. The current water resources and conventional approaches (e.g., groundwater and surface water) are no longer sufficient to meet human needs, especially in water-stressed countries [1,2]. The capacity and application of seawater reverse osmosis (SWRO) desalination technology has been rapidly growing worldwide, and many countries within the Arabian Peninsula, North Africa, and South Asia have already resorted to seawater desalination to alleviate their water supply [3]. This technology seems to offer an unlimited, steady supply of high-quality water [4]. Among the seven current categories of desalination technology present [2], reverse osmosis is known to be the most effective membrane-based filtration method for drinking water production with the ability to remove almost 99% of the bacterial cells and more than 5 log removal values of viruses [5,6]. In addition, efforts have been made to decrease the unit water cost by enhancing RO process efficiency, improving operating conditions and applying hybrid system [7,8].

Once the drinking water is produced, ensuring the biological stability and monitoring the water quality during distribution to/and at the point-of-use is paramount [9,10]. RO permeate water usually undergo post-treatment process such as remineralization, aeration that influence the final (microbial) water quality [11]. Besides the conventional culture-dependent techniques, culture-independent based methods such as quantitative PCR (qPCR), DNA-based or RNA-based sequencing have been applied to detect and monitor drinking water quality indicators/opportunistic bacteria (e.g., Total and Fecal Coliforms, *Legionella pneumophila*). These techniques have increased the understanding of microbial ecology in DWDSs [12,13].

For characterization of drinking water microbial communities present in the bulk water, the water volumes filtered are usually between 0.05 to 5 L to collect cell biomass and isolate DNA for diversity estimates [14–16]. However, there is no consensus on the sampling volume required for optimal DNA recovery from drinking water [12,17].

Reverse osmosis (RO) treatment can produce drinking water with significantly low bacterial cell concentrations [5], and residual chlorine application can further reduce bacterial loads in the delivered drinking water [18,19]. At the microbial community levels, chlorine reduced the relative abundance of Proteobacteria phylotypes [20] and created a more homogenous bacterial population [21]; while at the molecular levels, a decrease in DNA concentrations has been observed with an increase of chlorine exposure time [22]. It is common to perform dechlorination in drinking water microbiome studies [23–26] although some studies have demonstrated the detrimental effect of chlorine on the bacterial cells and their DNA [27–29] that challenges the interpretation of DNA-based studies in chlorinated DWDSs. To the best of the authors' knowledge, no evaluation study has been done addressing the effect of biomass amount (i.e., filtration volume) and residual chlorine on the DNA yield.

This study aims to investigate: (i) the impact of different filtration volumes, (ii) the effect of residual chlorine presence/absence, and (iii) the effect of spiking using *Escherichia coli* (into the water and onto the membrane filter) on the DNA recovery from tap (drinking) water. Batch experiments were designed in three scenarios: 1) tap water without *E. coli* spiking, 2)

with *E. coli* spiking into the (sterile and non-sterile—indigenous microbes present/absent—and chlorinated/chlorine maintained and dechlorinated/chlorine removed) tap water, and 3) with *E. coli* spiking onto the membrane filter without and after tap water filtration. This study aids in understanding the challenges associated with DNA extraction from chlorinated drinking water distribution systems (DWDSs) that may suffer from bacterial cell destruction and DNA degradation. This paper provides additional insight into potential biases that may arise from using DNA-based methods for studying the microbiomes in DWDSs.

Materials and methods

Experimental design

To evaluate DNA extraction yield, (drinking) tap water was collected in triplicate for different filtration volumes (4, 20, 40, 60 L) from a single (drinking) tap in the Water Desalination and Reuse Center (WDRC) laboratory, King Abdullah University of Science and Technology, Saudi Arabia (Fig 1B). The tap water is produced by seawater reverse osmosis (SWRO) membrane systems in KAUST, and chlorine is added to maintain a residual disinfectant during distribution. The KAUST SWRO process description has been mentioned in previous studies [30,31]. Before the sampling, the tap was opened for 2–5 minutes at a moderate flow rate to achieve network quality water. Polystyrene bottles (Corning[®], USA) that were previously sterilized using 0.5% (v/v) of sodium hypochlorite (NaOCl), followed by thorough rinsing with deionized (DI) water were used for tap water sample collection.

Preparation of (sterile, non-sterile, chlorinated, dechlorinated) water samples

Batch experiments were designed to assess the effect of residual chlorine and addition of *Escherichia coli* on DNA yield. The batch experiments evaluated (i) the presence and removal

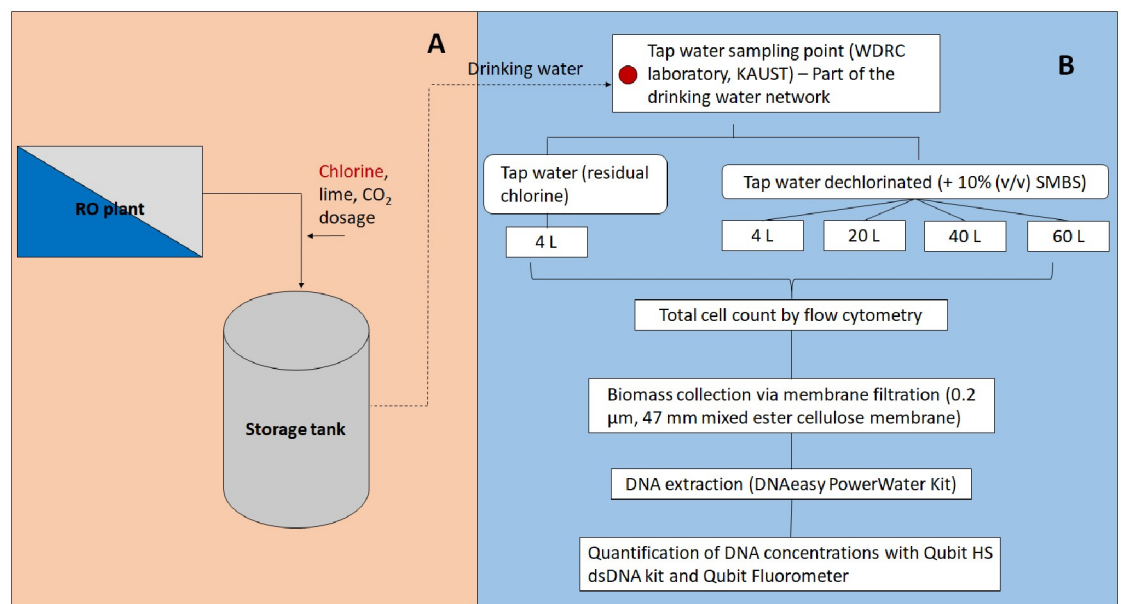


Fig 1. The upstream part of KAUST seawater reverse osmosis plant (A) and the schematic overview of the DNA recovery evaluation with different filtration volumes from tap (drinking) water in this study (B). A 10% (v/v) solution of sodium metabisulfite (SMBS) ($\text{Na}_2\text{S}_2\text{O}_5$) was used to quench the free chlorine (referred as dechlorination).

<https://doi.org/10.1371/journal.pone.0253799.g001>



















Tap water without <i>E. coli</i> spiking (control)		<i>E. coli</i> spiking into the tap water (prior filtration)				<i>E. coli</i> spiking onto the membrane (without and after filtration)		
Tap water (residual chlorine) (T)	Dechlorinated (TD)	Tap water (residual chlorine)		Dechlorinated		No tap water filtration (-T+M+EC)	After filtration of tap water (residual chlorine) (+T+M+EC)	After filtration of dechlorinated tap water (+TD+M+EC)
		Sterile (T sterile + EC)	Non-sterile (T non-sterile + EC)	Sterile (TD sterile + EC)	Non-sterile (TD non-sterile + EC)			
								
								
0.2 µm, 47 mm mixed ester cellulose membrane		<i>E. coli</i>	<i>E. coli</i>	<i>E. coli</i>	<i>E. coli</i>	<i>E. coli</i>	<i>E. coli</i>	<i>E. coli</i>
N (replicates) = 3	N = 3	N = 3	N = 3	N = 3	N = 3	N = 3	N = 3	N = 3

Fig 2. Scheme of the batch experiments for evaluating DNA extraction yield via addition of *E. coli* cell solution. The experiments were designed with three main scenarios: Tap water without *E. coli* spiking, tap water with *E. coli* spiking prior filtration, membrane spiking with *E. coli* without and after tap water filtration; and sub-scenarios (T: Tap water with residual chlorine, TD: Dechlorinated tap water, sterile: Tap water was pre-sterilized with membrane filtration to remove indigenous microbes, non-sterile: Tap water with no prior pre-filtration). Each replicate (n) comprises of four liters of tap water. Each treatment is explicitly assigned with the code shown at the second row of the table. Sterile mixed ester cellulose membrane filter (0.2 µm, 47 mm diameter) was used for tap water filtration (i.e., biomass collection). A 100 µL of 10% (v/v) solution sodium metabisulfite (SMBS) (Na₂S₂O₅) was used as the dechlorinating agent.

<https://doi.org/10.1371/journal.pone.0253799.g002>

of chlorine; and (ii) addition of known concentration of *E. coli* into tap water (sterile and non-sterile; presence and absence of residual chlorine), and onto the membrane filter (with and without filtration of tap water) (Fig 2).

Tap water (4 L) containing residual chlorine (referred to as chlorinated) was taken from a single tap in our laboratory on the same day in sterile polystyrene bottles (Corning®, USA). Tap water was quenched (referred to as dechlorinated) by adding a 10% (v/v) sodium metabisulfite or SMBS (Na₂S₂O₅) of pH 7.6 [32]. Theoretically, each part of chlorine residual requires 1.34 parts of SMBS (i.e., 1.34 mg/L SMBS to neutralize 1 mg/L of chlorine) [32]. In practice, 50 µL was effective to dechlorinated one liter of tap water containing 0.2 mg/L residual chlorine but particularly in this study, the dosage was doubled to diminish the minute effect of chlorine. KAUST tap water have pH around 8.9–9.2 and addition of 10% (v/v) SMBS solution reduced pH, thus adjustment was made using NaOH or HCL 0.1 N to ensure that the batch experiment was subjected to the same conditions (see S1 Table in Supporting Information). For the *E. coli* spiking experiment, pH of tap water was set to 7.6 in order not exposing bacteria to harsh conditions.

To prepare sterile tap water, the tap water (4 L) was pre-filtered through a 0.2 µm, 47 diameter of sterile mixed ester cellulose membrane filter (Millipore, USA) to remove indigenous microbial community. Meanwhile, non-sterile (either chlorine maintained or removed) tap water received no prior sterilization.

To check the physicochemical properties of the tap water, pH was measured using a multimeter probe (WTW, Germany), while total chlorine in the water samples was determined by the diethyl-p-phenylenediamine (DPD) method using Hach Pocket Colorimeter™ II. Water properties are presented in [S1 Table](#) (Supporting Information).

Preparation of *E. coli* cell stock solution

Escherichia coli (DSM 1103) was first incubated in Luria Bertani (LB) broth (BD, USA) overnight at 37°C and 120 rpm. The cultured *E. coli* were sub-cultured twice in LB broth to maintain bacterial activity before use. The bacterial cells were harvested by centrifugation at 6,953×g (~8000 rpm) for 10 min, and the pellet was washed twice with sterilized 1× phosphate-buffered saline (PBS) solution. The harvested *E. coli* pellet was then suspended in a 50 mL sterile PBS (referred to as the stock solution of *E. coli*).

Quantification of bacterial cell concentration using flow cytometry

The concentration of *E. coli* cell in the stock solution was determined before spiking into the water and onto the membranes using an Accuri C6 Plus flow cytometer (BD Biosciences, USA). Determination of total bacterial cell concentration using flow cytometry (FCM) and staining procedures was done as described in previous studies [33–35]. In brief, 990 µL of water sample was pipetted into a 2 mL sterile amber tube, stained with 10 µL of SYBR Green I (100× diluted from stock in sterile DI water), and incubated at 37°C for 10 minutes. A 200 µL of the stained samples were later transferred to a 96-well plate, and the bacterial cell concentration was measured. Cell counting was carried out by enumerating the number of events in a 50 µL volume (default setting) that pass through the fluidics system. A fixed gate was set on FL1 > 600 at a fast flow rate of 66 µL/min. Electronic gating on density plots was set on green versus red fluorescence (FL1: 533/30 nm/FL3: > 670 nm). The lower detection limit for total cell quantification was 1000 cells/mL (see [S3 Fig](#) and *Detection limit of flow cytometry used in this study-methods* in Supporting Information), similar to previous report [36]. To perform batch experiments, the concentration of *E. coli* used for spiking was adjusted to reach ~10⁵ cells/mL (water spiking) and ~10⁷ cells/cm² (membrane spiking).

DNA extraction

To collect the cell biomass, tap water was filtered with a 0.2 µm, 47 mm diameter of sterile mixed-estercellulose membrane (Millipore, USA). The addition of 100 µL of 10% (v/v) SMBS solution was done for dechlorinated sample designees and three hours of contact time before filtration was maintained for all treatments to minimize the effect of a minute amount of chlorine present after quenching. For the spiking experiment, *E. coli* (to reach a final of concentration 10⁵ cells/mL in 4 L tap water) was added, and the same three hours of contact time were used to attenuate the *E. coli* before filtration (i.e., biomass collection). For the membrane spiking, *E. coli* was directly spiked (spiking concentration 10⁷ cells/cm²) onto the membrane filter, and after tap water (chlorinated/dechlorinated) filtration. All membrane filters containing cell biomass were stored at -20°C until DNA extraction was performed.

The DNA was extracted using a DNeasy PowerWater Kit (Qiagen, Germany) according to the manufacturer's instructions. The kit yields higher DNA amount and has a better reproducibility and a broad OTUs identification fits for drinking water microbiome study [14]. The DNA extraction was performed in three independent replicates and a negative control (sterile/virgin membrane) was added to quantify possible contamination from the materials used, or the environment (e.g., sample handling, extraction kit, membrane and air contact). The quantification of DNA concentration was performed using Qubit[®] 4 Fluorometer (Thermo Fisher

Scientific, USA) and Qubit dsDNA High Sensitivity (HS) Assay Kit (detection range 0.01–100 ng/ μ L) (Thermo Fisher Scientific, USA).

Statistical analysis

All plots were generated using OriginPro (version 2019). All statistical analyses, including descriptive statistics and regression were performed with R studio version 3.6.1 [37]. One-way ANOVA for comparison of means and post-hoc Tukey's test for multiple pairwise comparisons of sample groups was used to determine significant differences in DNA concentrations between and within treatment groups/sub-treatment groups (Fig 2). Correction for multiple inferences was done using Benjamini-Hochberg methods by adjusting p values to ensure false discovery rate upper bound. The level of significance was set at $p < 0.05$.

Results

DNA extraction yield of tap water with different filtration volumes

Evaluation of the DNA recovery with varying filtration volumes of tap water (details are presented in Figs 1 and 2) with three independent replicates, whether it maintained residual chlorine (T: chlorinated) or not (TD: dechlorinated), showed low DNA yields. None of the samples had measurable DNA concentrations (limit of quantification of Qubit HS dsDNA assay is 0.01 ng/ μ L). There was no difference in the bacterial cell concentration between dechlorinated tap water and the tap water with residual chlorine (T and TD, Fig 3). Tap water had a low total cell concentration of two- \log_{10} cells/mL (below the limit of detection of FCM at 10^3 cells/mL, S3 Fig) even after the removal of chlorine (Fig 3). Fig 3 also indicates that dechlorination did not improve DNA yield.

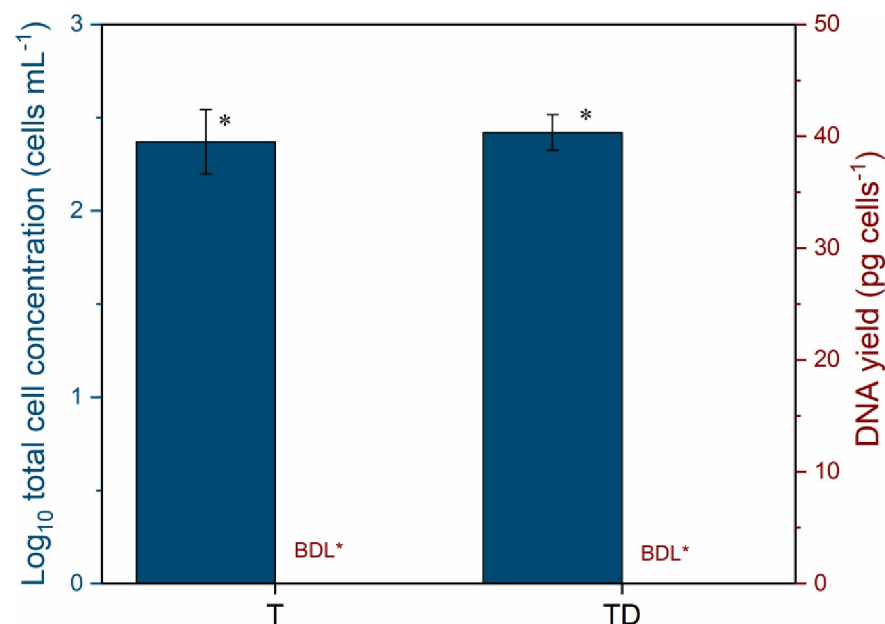


Fig 3. Cell concentration and DNA yield obtained from (T) tap water with residual chlorine and (TD) dechlorinated tap water. The tap (drinking) water treatments were done by maintaining or removing residual chlorine, as summarized in Fig 2. A blue-coloured star indicates that total bacterial cell concentration was below the limit of detection (LOD) of flow cytometry which is 10^3 cells/mL. A red-coloured star indicates that the DNA concentration measured was below detection limit (BDL) of Qubit High Sensitivity assay dsDNA ≤ 0.01 ng/ μ L. The error bars show errors from three independent replicates.

<https://doi.org/10.1371/journal.pone.0253799.g003>

Table 1. DNA recovery from different filtration volumes of dechlorinated tap water before and after PCR, means \pm SD.

Sample volume (L)	Extracted DNA concentration (ng/ μ L)	PCR concentration ^b (ng/ μ L)
4	$\leq 0.01^a$	6.41 \pm 0.70
20	≤ 0.01	6.22 \pm 0.62
40	≤ 0.01	5.75 \pm 0.60
60	≤ 0.01	6.09 \pm 0.34

^aBelow detection limit of Qubit HS dsDNA assay.

^bPCR concentration is the concentration of amplicon PCR based on 16s rRNA gene (see Supporting Information [S3 Text](#) for *PCR amplification of extracted DNA-methods*). Measurement of DNA and PCR concentration was done with Qubit dsDNA HS assay.

<https://doi.org/10.1371/journal.pone.0253799.t001>

Different sampling volumes (4, 20, 40, 60 L) of tap water were filtered (summarized in [Fig 1](#)), anticipating higher cell biomass and DNA yield. On the contrary, higher volumes did not correspond to a proportional increase in the DNA concentrations. The amount of DNA was below the detection limit in all samples ([Table 1](#)). A subsequent PCR also resulted in similar DNA concentrations around 6 ng/ μ L ([Table 1](#)). Overall, irrespective of filtration volumes and dechlorination, there was no impact proportional to the DNA yield. As visualized by qualitative gel electrophoresis, the absence of intact DNA signifies the damaging effect of chlorine on the DNA ([S1 Fig](#)).

DNA extraction yield of tap water spiked with *E. coli*

The spiking experiment was performed to compare the DNA yield between the original and spiked cell concentrations, both for chlorinated and dechlorinated tap water. Details of the spiking are presented in [S2 Table](#) (Supporting Information). The results revealed that DNA yields differ between spiked and non-spiked drinking water samples that were co-influenced by the presence of residual chlorine.

The impact of indigenous microbes' presence in tap water was also assessed via pre-sequential membrane filtration of tap water before spiking. *E. coli* cells were maintained in dechlorinated tap water, i.e., cell recovery was within the same order of magnitude of expected final total cell concentration (around 96% cell recovery, [S2 Table](#) in Supporting Information). The total cell numbers, however, substantially lower than the detection limit of FCM (0.2% cell recovery) in tap water that contained residual chlorine (0.2 mg/L) with *E. coli* spiking within three hours of contact time ([Fig 4](#) and [S2 Table](#) in Supporting Information).

With the absence of the spiked *E. coli* cells in the chlorinated tap water, the DNA yield was below the detection limit, both for (T sterile + EC) sterile and (T non-sterile + EC) non-sterile tap water ([Fig 4](#)). In contrast, a considerably higher DNA yield was obtained from spiked dechlorinated tap water (TD sterile/non-sterile + EC) proportional to the increase of total cell number ([Fig 4](#)). To sum up, the addition of *E. coli* biomass and removal of residual chlorine substantially increased DNA yield. This study confirmed DNA degradation at a lower chlorine concentration than what was previously reported in the literature. Additionally, note that spiked dechlorinated tap water (TD non-sterile + EC, containing indigenous microbes) had a 40% reduction of DNA yield compared to sterile dechlorinated tap water spiked with *E. coli* (TD sterile + EC).

DNA yield of membrane filters spiked with *E. coli*

To assess the impact of the RO water matrix (i.e., organic/non-organic constituents) retained on the membrane filter towards DNA recovery, *E. coli* was spiked directly onto the membrane.

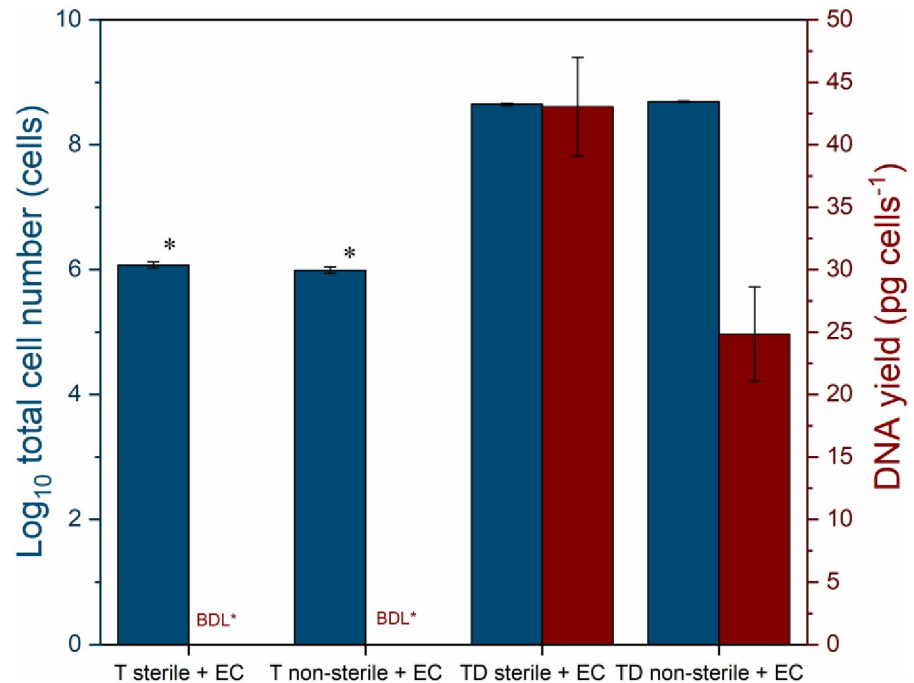


Fig 4. Total cell numbers and DNA yield obtained after *Escherichia coli* spiking into sterile and non-sterile (T) tap water with residual chlorine and (TD) dechlorinated tap water prior membrane filtration. The details for (sterile, non-sterile) tap water treatments used for spiking treatments are summarized in Fig 2. Sterile: Tap water was pre-filtered by membrane filtration (0.2 μm , 47 mm diameter) before spiking. Non-sterile: Tap water without sterilization. + EC: Addition of *Escherichia coli* solution. A blue-coloured star indicates that total bacterial cell concentration was below the limit of detection (LOD) of flow cytometry which is 10^3 cells/mL. A red-coloured star indicates that the DNA concentration measured was below detection limit (BDL) of Qubit High Sensitivity assay dsDNA ≤ 0.01 ng/ μL . The error bars show errors from triplicate samples.

<https://doi.org/10.1371/journal.pone.0253799.g004>

E. coli was injected onto the membrane filters (details in S2 Table Supporting Information) after filtration of chlorinated (T) and dechlorinated tap water (TD), and also a negative control (-T: without tap water filtration, Fig 5). Similar total cell numbers were obtained from all treatments (10^7 cells/cm², S2 Table). DNA yields from all the spiked membrane treatments had no comparable differences, consistent with the total cell numbers (Fig 5). Apparently, the accumulated components (i.e., organic/inorganic compounds) present in the water (S2A Fig in Supporting Information) did not affect DNA recovery from the membrane filters.

None of the chlorinated tap water (T) samples were included in the statistical test (One-way ANOVA) due to the insufficient DNA amounts (i.e., below detectable level ≤ 0.01 ng/ μL). For the (TD) dechlorinated tap water, DNA concentrations were significantly higher after *E. coli* spiking, whether the water was sterilized or not, compared to the control (TD: dechlorinated tap water without *E. coli* spiking) ($p < 0.001$, Fig 6A). The similar DNA concentration obtained from the spiked membrane treatments demonstrate the negligible impact from tap water constituents (i.e. organics and inorganics as summarized in S3 Table and S4 Fig in Supporting Information) retained on the membrane filters towards the DNA extraction efficiency ($p > 0.05$, Fig 6B). There was no substantial difference for the DNA amount yielded from sterile dechlorinated water (TD sterile + EC) spiked with *E. coli* prior filtration compared to the spiked membrane filter (+TD + M + EC) after filtration ($p > 0.05$, Fig 6C). However, the DNA concentration reduced significantly for the non-sterile dechlorinated tap water (TD non-sterile + EC) compared to both sterile dechlorinated tap water (TD sterile + EC) and membrane

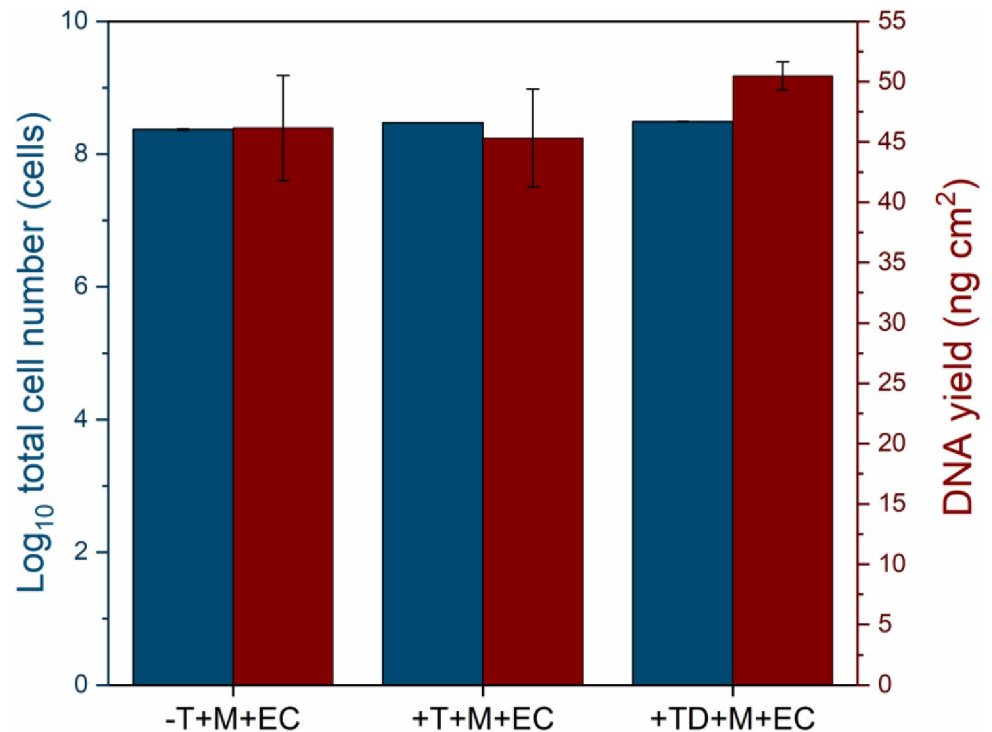


Fig 5. Total cells and DNA yield obtained from spiking onto membrane filters without and after tap water (T: Tap water with residual chlorine and TD: Dechlorinated tap water) filtration. The details for membrane spiking treatments are summarized in Fig 2. T: Tap water containing residual chlorine. TD: Tap water with the removal of residual chlorine (addition of SMBS 10% (v/v)). -T + M + EC: Membrane spiked with *E. coli* only (without tap water filtration). +T + M + EC: Membrane spiked with *E. coli* after tap water (with residual chlorine) filtration. +TD + M + EC: Membrane spiked with *E. coli* after tap water (dechlorinated) filtration. The error bars show errors from triplicate samples.

<https://doi.org/10.1371/journal.pone.0253799.g005>

spiked with *E. coli* after dechlorinated tap water filtration (+TD + M + EC; $p < 0.001$, Fig 6C). In summary, the spiked membrane spiked experiment shows that constituents (originated from the tap water matrix) accumulated on the membrane filters during filtration had no pronounced impact on the DNA extraction yield.

Discussion

Batch experiments with three independent replicates were used to evaluate the DNA extraction yield from a chlorinated drinking water system based on: (i) different filtration volumes, (ii) presence and removal of chlorine, and (iii) spiking treatments of *Escherichia coli* (into the water suspension and onto the membrane filters) (details in Figs 1 and 2). To our knowledge, no study has evaluated the accuracy of the low quantity (or absence) of DNA related to residual chlorine presence on the interpretation of drinking water microbiome study. By performing spiking experiments using *E. coli*, we elucidated the effect of residual chlorine, RO-treated drinking water matrix on the recovery of cell biomass, and the impact of indigenous (background) microbes towards DNA recovery.

No impact of water volume on DNA recovery

In this study, the RO-treated tap (drinking) water samples that maintained residual chlorine harbored total bacterial cell concentration between 2.47×10^2 – 1.5×10^3 cells/mL, in agreement

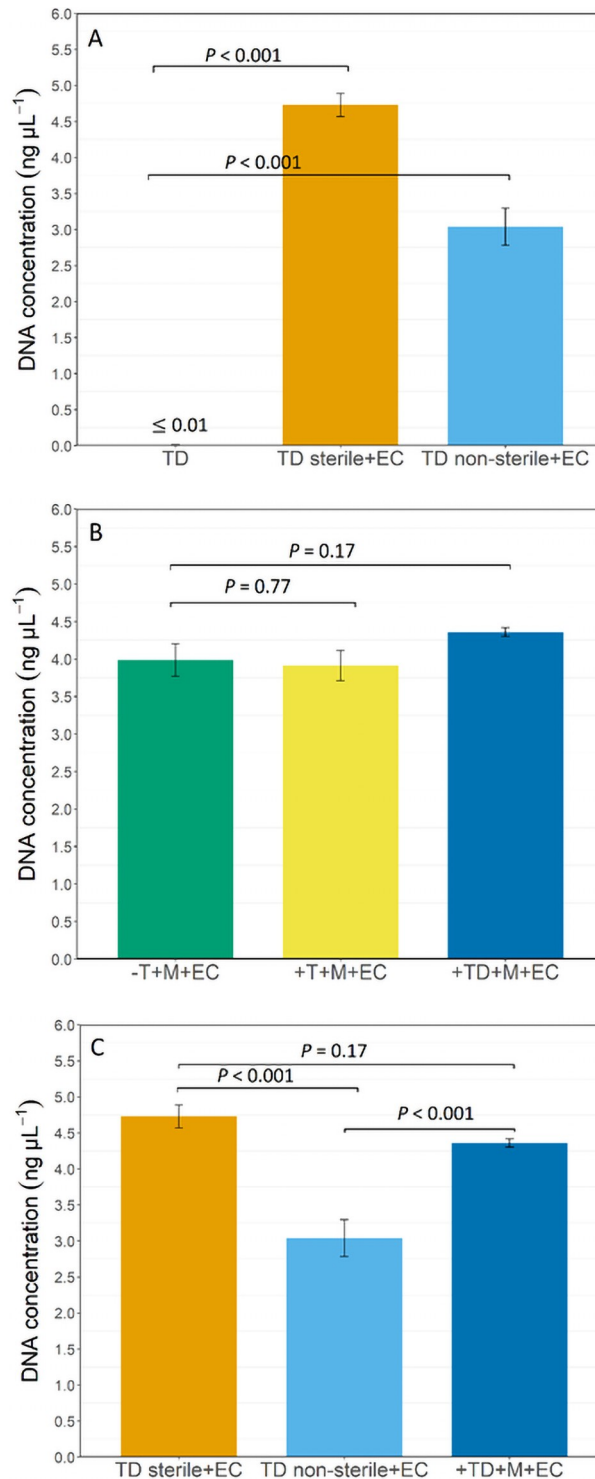


Fig 6. The extracted DNA concentration collected from dechlorinated tap water (A), membrane filters (B) spiked with *Escherichia coli*, and its subset (C) (sterile, non-sterile) dechlorinated tap water and membrane spiked with *E. coli* after filtration of dechlorinated tap water). + EC: Addition of *Escherichia coli*. TD: Dechlorinated tap water (addition of SMBS 10%). TD sterile: Dechlorinated tap water received prior membrane sterilization. TD non-sterile: Dechlorinated tap water without prior tap water sterilization. -T + M + EC: Membrane only (without tap water filtration) with the addition of *E. coli*. +T + M + EC: Membrane spiked with *E. coli* after filtration of tap water (residual chlorine). +TD + M + EC: Membrane spiked with *E. coli* after filtration of dechlorinated tap water. The error bars show errors from triplicate samples. *P*-value was shown for pairwise comparison (vs. control designs) based on ANOVA and post hoc Tukey's test.

<https://doi.org/10.1371/journal.pone.0253799.g006>

with previously reported studies [38–40]. Irrespective of filtration volumes (4, 20, 40, 60 L), the yield of DNA was very low (i.e., ≤ 0.01 ng/ μ L, below detection limit, Table 1). This result coincides with the previous report that found insufficient DNA quantity (sample volume filtered was 100 L of microfiltration-reverse osmosis (MF-RO) treated water receiving post-treatment ultraviolet advanced oxidation process) [38]. The same author reported that the result of 16s rRNA qPCR from those samples was below the negative control ($< 10^2$ copies genes/mL) and thus prevented further sequencing analysis (i.e., metagenomics and metatranscriptomics) [38]. Our study confirms a vast biomass reduction in the drinking water produced by RO, as previously reported [39–41]. The presence of residual chlorine further suppresses the bacterial content (i.e., lower cell density) in the water.

The required sampling volume for different environments (i.e., drinking water sources/treatments) will differ provided that it gives a representative sample diversity [42,43]. For drinking water microbiome studies, different sampling volumes in the range of 0.05–5 L were reported for DNA extraction [14]. In the current study, increasing the water filtration volume from 4L to 60L did not result in increased DNA recovery, which is in contrast to the suggestion made by several studies [15,44].

Aiming to increase DNA yield by increasing the biomass amount is problematic because the mean DNA yield per cell has been reported to have a negative correlation with cell density (as the total bacterial cell count increases, the DNA yield per cell decreases) [45,46]. Thus, normalizing the DNA recovery based on the mean mass of DNA per cell was proposed [46]. However, the mean mass will change according to the physiological factors (e.g., cell state, cell size, intra- and inter-variation of the bacterial genome within the microbial community) and physicochemical conditions of the environments [46–50].

In our case, the low DNA yield is very likely to be caused by extensive biomass reduction by the RO membrane (i.e., a larger fraction of RO-treated water would contain no cells) and the post-disinfection applied in the networks. The SEM images (S2A Fig) pinpoint the low presence (qualitative, no microscopy cell counting conducted; the total cell concentration was measured by flow cytometry in this study) of bacterial cells on the membrane filters, supporting this argument. The presence of chlorine is known to negatively affect planktonic bacteria's growth in DWDSs [18,51]. In terms of the quality of extracted DNA, gel electrophoresis (S1 Fig) shows the prominent absence of intact DNA, indicating low DNA integrity caused by degradation [52,53].

The inherently low DNA yield in chlorinated drinking water samples has implications for the downstream analysis (sequencing-based procedures). Illumina recommends microbial genomic DNA concentration to be at least 5 ng/ μ L [54], and working at a lower boundary of this concentration needs to ensure enough replicates/sampling size and inclusion of negative controls (to identify potential cross-contamination) [55]. A rarefaction curve is also useful to assess whether the maximum sample diversity has been achieved and down amplification to lower reads (e.g., 10–100 reads/gene copies) is justifiable. However, low DNA concentration or any genetic markers have been demonstrated to give high false-negative results, increased false discovery and artefactual results [44,52] that is likely to be the case for sequencing-based studies in chlorinated drinking water [29]. We found that many reported drinking water microbiome studies from chlorinated systems (including 16s rRNA amplicon sequencing/metabarcoding, metagenomics) [20,56–64] often exclude raw experimental data of extracted DNA concentrations that is crucial to assess the quality of the sequencing results.

Residual chlorine reduced the DNA yield of tap water and *E. coli* spiking

The total cell number after *E. coli* spiking was highly reduced in tap water containing residual chlorine due to the strong oxidant activity of the free chlorine species that damage bacterial

cell membranes and oxidize their intracellular machinery (i.e., enzymes) [65,66]. The loss of cell membrane integrity of *E. coli* at < 1 mg/L of chemically-dosed chlorine (10 and 40 min contact time) [67], and reduction of intact cell concentration after chlorine exposure at 0.3–0.6 mg/L (up to 72 hours contact time) [68] have been reported. Following reduced *E. coli* cell concentration in tap water containing residual chlorine (0.2 mg/L), the subsequent DNA yield was below the detectable level (Fig 4). Our results negate the previous study that found no linear correlation between the significant reduction of the number of target bacterial cells with their genome quantity (i.e., DNA concentration) [69]. The present results are in agreement with a study that demonstrated (extracellular) DNA fragmentation and destruction of DNA carrying antibiotic resistance genes' integrity caused by typical chlorine dosages (1–20 mg Cl₂/L) [27]. The current results affirm DNA degradation at a lower level of chlorine (~0.2 mg/L) than previously reported [70]. DNA lesion (i.e., the kink of double-stranded DNA similar to pyrimidine dimers formation) is known to be the mechanism of the DNA degradation by chlorine [22,71].

The RO water matrix had no impact on the DNA yield

The results show that water constituents (S3 Table in Supporting Information) retained on the membrane filters had no pronounced impact on the DNA yields from membrane spiked with *E. coli* treatments (Figs 5 and 6B). Organic materials and other biological particulates accumulating on the membrane filter has been known to affect DNA extraction efficiency [15]. Additionally, SEM images reveal deposits of water constituents on the membrane filters used for biomass filtration (S2A and S2B Fig in Supporting Information). In this study, however, no adverse inhibitory effect on DNA extraction yield was seen as there were no comparable differences between extracted DNA concentrations obtained from the membrane filters spiked with *E. coli* after tap water (with or without residual chlorine) filtration versus control (virgin membrane filters spiked with *E. coli* without tap water filtration, Fig 6B). While surface water used as RO feed water is known to contain humic-like substances that can inhibit the DNA extraction process [72], RO permeate has been reported to be deficient from humic-like substances that may cause DNA extraction failure [39]. The three dimensional spectra of tap water produced by RO membrane treatment used in this study confirms the absence of humic-like substances, i.e., a fluorophore signature at 300–340/400–450 nm (excitation/emission) that may inhibit DNA extraction process (S4 Fig).

In search of a possible explanation for the effect of indigenous microbes on reduction of DNA yield in non-sterile dechlorinated tap water spiked with *E. coli* (TD non-sterile + EC, Fig 4); a hypothesis could be the antagonistic effect of the indigenous microbial community towards *E. coli*. Vital and colleagues reported that *E. coli*:O157 growth was drastically restricted in the presence of competing bacteria in drinking water containing low nutrient concentration due to its inferior kinetic properties [73]. The origins of these microbial community may come from RO membrane elements and its O-ring seals seeding the network [74,75], or dislodged and survived planktonic cells from biofilm in occurrence with residual chlorine decay [51,76].

Another explanation for the resistance of *E. coli* in the presence of competing indigenous microbes is by forming aggregates and adhering to the batch container surfaces, i.e. biofilm formation [77]. The link between reduced DNA yields and biofilm or aggregate formation could be through *E. coli* extracellular DNA (eDNA) release. *E. coli* cells have been known to release eDNA through secretion in a planktonic state during static growth [78]. Depending on the strain, besides the structural role of eDNA for 'normal' biofilm formation, eDNA can act as an adhering compound for cell-to-cell attachment in planktonic cultures [79,80]. eDNA also facilitates favorable acid-base interactions, explaining the effect of eDNA on aggregation and

adhesion to the surface [81]. Our data cannot reveal the underlying mechanisms of the antagonistic effect and the presented hypotheses bases on the previous findings that can be considered for future studies. Nevertheless, the presence of indigenous microbes in dechlorinated RO-treated tap water had a significant impact towards *E. coli* and the obtained DNA yields.

A follow-up experiment could be performed to determine the time effect (incubation) following dechlorination (e.g., growth potential assay), and the effect of mixing ultra-pure quality water (membrane-treated) with drinking water treated with different processes (e.g., slow sand filtration, advanced water purification) or taken from different sources (e.g., surface, groundwater) which can contain higher microbial load on the final microbial water quality of the mixed water that are linked to a different functional (microbial) diversity [38].

Implications

This study focusses on the poorly understood features [82–84] regarding the microbial DNA in chlorinated drinking water rather than focusing on evaluating extraction methods (or DNA extraction kits) to increase the DNA yield, which has been addressed elsewhere [14,85]. The present results reveal that low DNA quantity is likely to be the norm in chlorinated drinking water. The low DNA quantity may be a true reflection of low cell biomass/low cell density that could not be improved by increasing filtration volumes as presented in this study (Table 1). An attempt to use different DNA extraction methods like phenol-chloroform to increase DNA yield has its own inherent bias regarding the need for extensive purification, leading to a decreased DNA concentration, species diversity alteration, and low DNA purity [48,55,86].

The presence of low DNA quantity—as a consequence of low biomass/low cell density samples—in drinking water networks containing a residual disinfectant (e.g., chlorine) challenges the interpretation of DNA sequencing (e.g., 16S rRNA amplicon sequencing, metagenomics) data. Chlorinated drinking water samples have a total cell concentration between 10^3 – 10^5 cells per/mL [18,87,88], and could be below 10^3 cells/mL if the drinking water is produced by membrane-based processes like RO, as shown in this study. Analyses of microbial community composition of “low”-density samples ($< 10^6$ cells per/mL) using 16S amplicon sequencing have shown changes in the relative abundance and representation of species, and overrepresentation of taxa in the phylum Proteobacteria [89]. Contamination from chemicals, kits and solutions [90,91] and the errors in sequencing are likely to introduce more taxa, causing shifts in the microbial profiles from the true profiles [89,90]. Therefore, shifts in “within-sample” diversity (alpha diversity) cannot be ruled out at a very low DNA concentration [89]. Further, potential error of using too low DNA concentration cannot be estimated or corrected for rare taxa and thus should be avoided [49]. However, we expect the impact of low DNA concentrations to be less pronounced on beta diversity (i.e., comparing bacterial communities between different samples) than alpha diversity. Nevertheless, we advise that it is imperative to report the concentration of extracted DNA to avoid biases in the interpretation sequencing data.

While using DNA-/RNA-based sequencing technologies (i.e., 454 pyrosequencing, Illumina, PacBio) have revealed more microbial functions than what previously known in different drinking water networks [92,93], understanding its limitations (i.e., the concordance of low quantity of the extracted microbial DNA) in chlorinated drinking water system is critical. We suggest that microbial community composition studies in chlorinated drinking water should integrate absolute cell quantification like flow cytometry (i.e., total and/or viable cell concentration), as used in this study, to provide a more comprehensive overview. For example, comparison across samples with the same cell densities can correct taxa that appears to be a ‘rare’ genus [46]. Alternatively, qPCR (with and without propidium monoazide/PMA treatment) together with heterotrophic plate counts (HPC) can be applied to quantify total and

viable opportunistic bacteria of concern in full scale chlorinated DWDSs [62]. We also foresee the increased importance of metaproteomics and metabolomics [94,95] to provide a complementary understanding of drinking water microbial communities.

The bacteria spiking approach into tap water suspension applied in this study could be employed further to investigate the biological (in)stability of RO-treated water (or any membrane-treated water), e.g., potential growth assay (via model organism or through simulation of (wastewater) contamination. Evaluation of the possible influences from water constituents (organic or inorganic compounds) present in (but not limited to) chlorinated tap water towards DNA extraction yield can be done based on our membrane spiking approach.

Conclusions

We evaluated the DNA recovery from chlorinated drinking water as a function of sampling volumes, presence and absence of a low-level residual chlorine (0.2 mg/L), and the effect of spiking a known *E. coli* concentration (into the water and onto the membrane filters). Samples with low bacterial cell content/density like RO-produced drinking water with residual chlorine had low DNA quantity that failed to be improved by higher filtration volumes and dechlorination. The DNA yield was below the minimum criteria for downstream (sequencing) molecular analysis. From the *E. coli* spiking experiments, we demonstrated that a low level of chlorine (0.2 mg/L) present in tap water had a destructive effect on the *E. coli* cells and their DNA, and likewise on the planktonic bacteria and any extracellular DNA present in a chlorinated drinking water network. The water spiking approach used in this study is advantageous for studying the biostability of high-quality drinking water. The membrane spiking is useful for evaluating effects from water matrix constituents towards DNA extraction yield. The findings from this study expand the sources of bias that may affect the interpretation of sequencing data that are intended for studying the microbial community structure and function in chlorinated drinking water systems.

Supporting information

S1 Fig. Gel electrophoresis image of the extracted (genomic DNA) of samples with different filtration volumes sample shows prominent absence of intact DNA (similar to low DNA integrity number (DIN) caused by degradation). DNA Integrity Number (DIN) is based on the molecular weight of intact DNA (low DIN: DNA with lower band position; high DIN: with higher band position). 1% Agarose gel (1X TAE buffer), 100V 25 mins, sample 1 μ l loading, control 10 ng loading.

(DOCX)

S2 Fig. A. Morphology of the membrane surface after filtration of MilliQ and original tap water before (A) and after dechlorination (B). The surface appearance of the membrane filter used for biomass filtration was observed at zero and three hours contact times after adding 10% (v/v) sodium metabisulfate (SMBS) ($\text{Na}_2\text{S}_2\text{O}_5$) to quench the residual chlorine. **B.** Morphology of the membrane surface used for filtration of tap water containing residual chlorine (A) and dechlorinated (added with 10% SMBS) tap water (B) followed with *E. coli* spiking concentration of 10^7 cells/cm².

(DOCX)

S3 Fig. Relationship between the expected and measured cell concentration of *E. coli* by flow cytometry plotted on log-log scale. A good linear correlation was observed between expected *E. coli* concentration and measured concentration by flow cytometry (FCM) from

10^3 to 10^7 cells/mL. Limit of detection of the FCM was as low as 1000 cells/mL in this study.
(DOCX)

S4 Fig. Three dimensional fluorescence spectra of RO-treated tap water used in this study.

A spectrofluorophotometer 3D-fluorescence excitation-emission matrix (3D-FEEM) was used to detect the fluorescence fingerprints of dissolved organic matters present in the tap water samples. Warm color panel indicates higher while cold color indicates lower abundance abundance of a particular organic fingerprints.

(DOCX)

S1 Table. Characteristics of tap water used in the batch experiments, means \pm SD.

(DOCX)

S2 Table. Details of *Escherichia coli* spiking experiment and cell recovery on tap water suspension and membrane (without and after filtration of tap water). Mean values (\pm SD) are shown for each variable (except cell recovery) based on triplicate samples. The effective membrane filter (0.2 μm , 47 mm diameter sterile mixed ester cellulose membrane) area used for tap water filtration was 11.58 cm^2 .

(DOCX)

S3 Table. Organics and inorganics composition of tap water samples.

(DOCX)

S1 Text. Detection limit of flow cytometry used in this study-methods.

(DOCX)

S2 Text. Scanning Electron Microscopy (SEM) analysis-methods.

(DOCX)

S3 Text. PCR amplification of extracted DNA-methods.

(DOCX)

Author Contributions

Conceptualization: Ratna E. Putri, Lan Hee Kim, Nadia Farhat, Mashael Felemban, Pascal E. Saikaly, Johannes S. Vrouwenvelder.

Data curation: Ratna E. Putri, Nadia Farhat, Mashael Felemban.

Formal analysis: Ratna E. Putri, Mashael Felemban.

Funding acquisition: Johannes S. Vrouwenvelder.

Methodology: Lan Hee Kim, Nadia Farhat, Pascal E. Saikaly.

Supervision: Lan Hee Kim, Nadia Farhat, Johannes S. Vrouwenvelder.

Writing – original draft: Ratna E. Putri.

Writing – review & editing: Ratna E. Putri, Lan Hee Kim, Nadia Farhat, Pascal E. Saikaly, Johannes S. Vrouwenvelder.

References

1. Hofste RW, Reig P, Schleifer L. 17 Countries, Home to One-Quarter of the World's Population, Face Extremely High Water Stress 2019 (Cited 27 September 2020). <https://www.wri.org/blog/2019/08/17-countries-home-one-quarter-world-population-face-extremely-high-water-stress>.

2. Jones E, Qadir M, van Vliet MTH, Smakhtin V, Kang SM. The state of desalination and brine production: A global outlook. *Sci Total Environ*. 2019; 657:1343–56. Epub 2019/01/27. <https://doi.org/10.1016/j.scitotenv.2018.12.076> PMID: 30677901.
3. Villacorte LO, Tabatabai SAA, Dhakal N, Amy G, Schippers JC, Kennedy MD. Algal blooms: an emerging threat to seawater reverse osmosis desalination. *Desalination and Water Treatment*. 2015; 55(10):2601–11. <https://doi.org/10.1080/19443994.2014.940649>
4. Elimelech M, Phillip WA. The future of seawater desalination: Energy, technology, and the environment. *Science*. 2011; 333(6043):712–7. <https://doi.org/10.1126/science.1200488> PMID: 21817042
5. Park S-k Hu JY. Assessment of the extent of bacterial growth in reverse osmosis system for improving drinking water quality. *Journal of Environmental Science and Health, Part A*. 2010; 45(8):968–77. <https://doi.org/10.1080/10934521003772386> PMID: 20512722
6. Pype ML, Lawrence MG, Keller J, Gernjak W. Reverse osmosis integrity monitoring in water reuse: The challenge to verify virus removal—A review. Elsevier Ltd; 2016. p. 384–95.
7. Ling C, Wang Y, Min C, Zhang Y. Economic evaluation of reverse osmosis desalination system coupled with tidal energy. *Frontiers in Energy*. 2018; 12(2):297–304. <https://doi.org/10.1007/s11708-017-0478-2>
8. Choi Y, Shin Y, Cho H, Jang Y, Hwang T-M, Lee S. Economic evaluation of the reverse osmosis and pressure retarded osmosis hybrid desalination process. *Desalination and Water Treatment*. 2016; 57(55):26680–91. <https://doi.org/10.1080/19443994.2016.1190114>
9. Prest EI, Hammes F, van Loosdrecht MC, Vrouwenvelder JS. Biological Stability of Drinking Water: Controlling Factors, Methods, and Challenges. *Front Microbiol*. 2016; 7:45. Epub 2016/02/13. <https://doi.org/10.3389/fmicb.2016.00045> PMID: 26870010.
10. Proctor CR, Hammes F. Drinking water microbiology—from measurement to management. *Curr Opin Biotechnol*. 2015; 33:87–94. Epub 2015/01/13. <https://doi.org/10.1016/j.copbio.2014.12.014> PMID: 25578740.
11. Sousi M, Liu G, Salinas-Rodriguez SG, Knezev A, Blankert B, Schippers JC, et al. Further developing the bacterial growth potential method for ultra-pure drinking water produced by remineralization of reverse osmosis permeate. *Water Research*. 2018; 145:687–96. <https://doi.org/10.1016/j.watres.2018.09.002> PMID: 30212807
12. Douterelo I, Boxall JB, Deines P, Sekar R, Fish KE, Biggs CA. Methodological approaches for studying the microbial ecology of drinking water distribution systems. *Water Res*. 2014; 65:134–56. Epub 2014/08/12. <https://doi.org/10.1016/j.watres.2014.07.008> PMID: 25105587.
13. Vierheilig J, Savio D, Farnleitner AH, Reischer GH, Ley RE, Mach RL, et al. Potential applications of next generation DNA sequencing of 16S rRNA gene amplicons in microbial water quality monitoring. *Water Science and Technology*. 2015; 72(11):1962–72. <https://doi.org/10.2166/wst.2015.407> PMID: 26606090
14. Brandt J, Albertsen M. Investigation of Detection Limits and the Influence of DNA Extraction and Primer Choice on the Observed Microbial Communities in Drinking Water Samples Using 16S rRNA Gene Amplicon Sequencing. *Front Microbiol*. 2018; 9:2140. Epub 2018/09/25. <https://doi.org/10.3389/fmicb.2018.02140> PMID: 30245681.
15. Hunter ME, Ferrante JA, Meigs-Friend G, Ulmer A. Improving eDNA yield and inhibitor reduction through increased water volumes and multi-filter isolation techniques. *Sci Rep*. 2019; 9(1):5259. Epub 2019/03/29. <https://doi.org/10.1038/s41598-019-40977-w> PMID: 30918268.
16. Wilcox TM, Carim KJ, Young MK, McKelvey KS, Franklin TW, Schwartz MK. Comment: The Importance of Sound Methodology in Environmental DNA Sampling. *North American Journal of Fisheries Management*. 2018; 38(3):592–6. <https://doi.org/10.1002/nafm.10055>
17. Zhang Y, Liu WT. The application of molecular tools to study the drinking water microbiome—Current understanding and future needs. *Critical Reviews in Environmental Science and Technology*. 2019; 49(13):1188–235. <https://doi.org/10.1080/10643389.2019.1571351>
18. Nescerecka A, Rubulis J, Vital M, Juhna T, Hammes F. Biological instability in a chlorinated drinking water distribution network. *PLoS One*. 2014; 9(5):e96354. Epub 2014/05/07. <https://doi.org/10.1371/journal.pone.0096354> PMID: 24796923.
19. Rosario-Ortiz F, Rose J, Speight V, Gunten Uv, Schnoor J. How do you like your tap water? *Science*. 2016; 351(6276):912. <https://doi.org/10.1126/science.aaf0953> PMID: 26917751
20. Poitelon JB, Joyeux M, Welte B, Duguet JP, Prestel E, DuBow MS. Variations of bacterial 16S rDNA phylotypes prior to and after chlorination for drinking water production from two surface water treatment plants. *J Ind Microbiol Biotechnol*. 2010; 37(2):117–28. Epub 2009/11/13. <https://doi.org/10.1007/s10295-009-0653-5> PMID: 19908076.
21. Bertelli C, Courtois S, Rosikiewicz M, Piriou P, Aeby S, Robert S, et al. Reduced chlorine in drinking water distribution systems impacts bacterial biodiversity in biofilms. *Frontiers in Microbiology*. 2018; 9(OCT):1–11. <https://doi.org/10.3389/fmicb.2018.02520> PMID: 30405577

22. Ersoy ZG, Dinc O, Cinar B, Gedik ST, Dimoglo A. Comparative evaluation of disinfection mechanism of sodium hypochlorite, chlorine dioxide and electroactivated water on *Enterococcus faecalis*. *Lwt*. 2019; 102:205–13. <https://doi.org/10.1016/j.lwt.2018.12.041>
23. Ji P, Parks J, Edwards MA, Pruden A. Impact of Water Chemistry, Pipe Material and Stagnation on the Building Plumbing Microbiome. *PLoS One*. 2015; 10(10):e0141087. Epub 2015/10/27. <https://doi.org/10.1371/journal.pone.0141087> PMID: 26495985.
24. Wang H, Bedard E, Prevost M, Camper AK, Hill VR, Pruden A. Methodological approaches for monitoring opportunistic pathogens in premise plumbing: A review. *Water Res*. 2017; 117:68–86. Epub 2017/04/09. <https://doi.org/10.1016/j.watres.2017.03.046> PMID: 28390237.
25. Bedard E, Charron D, Lalancette C, Deziel E, Prevost M. Recovery of *Pseudomonas aeruginosa* culturability following copper- and chlorine-induced stress. *FEMS Microbiol Lett*. 2014; 356(2):226–34. Epub 2014/06/05. <https://doi.org/10.1111/1574-6968.12494> PMID: 24893953.
26. Li H, Li S, Tang W, Yang Y, Zhao J, Xia S, et al. Influence of secondary water supply systems on microbial community structure and opportunistic pathogen gene markers. *Water Res*. 2018; 136:160–8. Epub 2018/03/05. <https://doi.org/10.1016/j.watres.2018.02.031> PMID: 29501760.
27. Zhang M, Chen S, Yu X, Vikesland P, Pruden A. Degradation of extracellular genomic, plasmid DNA and specific antibiotic resistance genes by chlorination. *Frontiers of Environmental Science & Engineering*. 2019; 13(3). <https://doi.org/10.1007/s11783-019-1124-5>
28. He H, Zhou P, Shimabuku KK, Fang X, Li S, Lee Y, et al. Degradation and Deactivation of Bacterial Antibiotic Resistance Genes during Exposure to Free Chlorine, Monochloramine, Chlorine Dioxide, Ozone, Ultraviolet Light, and Hydroxyl Radical. *Environ Sci Technol*. 2019; 53(4):2013–26. Epub 2019/02/05. <https://doi.org/10.1021/acs.est.8b04393> PMID: 30712343.
29. Acharya K, Halla FF, Massawa SM, Mgana SM, Komar T, Davenport RJ, et al. Chlorination effects on DNA based characterization of water microbiomes and implications for the interpretation of data from disinfected systems. *J Environ Manage*. 2020; 276:111319. Epub 2020/09/06. <https://doi.org/10.1016/j.jenvman.2020.111319> PMID: 32889498.
30. Farhat N, Kim LH, Vrouwenvelder JS. Online characterization of bacterial processes in drinking water systems. *npj Clean Water*. 2020; 3(1):1–7. <https://doi.org/10.1038/s41545-020-0065-7>
31. Belila A, El-Chakhtoura J, Otaibi N, Muyzer G, Gonzalez-Gil G, Saikaly PE, et al. Bacterial community structure and variation in a full-scale seawater desalination plant for drinking water production. *Water Res*. 2016; 94:62–72. Epub 2016/03/02. <https://doi.org/10.1016/j.watres.2016.02.039> PMID: 26925544.
32. Massart NS, Ladan H. Chapter 11 Dechlorination. In: Desiderio DM, Nibbering NMM, editors. *WHITE'S HANDBOOK OF CHLORINATION AND ALTERNATIVE DISINFECTANTS*. 9. Fifth ed: John Wiley and Sons, Inc; 2010. p. 76–99.
33. Berney M, Vital M, Hülshoff I, Weilenmann H-U, Egli T, Hammes F. Rapid, cultivation-independent assessment of microbial viability in drinking water. *Water Research*. 2008; 42(14):4010–8. <https://doi.org/10.1016/j.watres.2008.07.017> PMID: 18694583
34. Van Nevel S, Koetzsch S, Weilenmann HU, Boon N, Hammes F. Routine bacterial analysis with automated flow cytometry. *J Microbiol Methods*. 2013; 94(2):73–6. Epub 2013/05/21. <https://doi.org/10.1016/j.mimet.2013.05.007> PMID: 23684992.
35. Prest EI, Hammes F, Kötzsch S, van Loosdrecht MCM, Vrouwenvelder JS. Monitoring microbiological changes in drinking water systems using a fast and reproducible flow cytometric method. *Water Research*. 2013; 47(19):7131–42. <https://doi.org/10.1016/j.watres.2013.07.051> PMID: 24183559
36. Ziemba C, Larivé O, Deck S, Huisman T, Morgenroth E. Comparing the anti-bacterial performance of chlorination and electrolysis post-treatments in a hand washing water recycling system. *Water Research X*. 2019; 2:100020. <https://doi.org/10.1016/j.wroa.2018.100020> PMID: 31119215
37. R Development Core Team. *R: A language and environment for statistical computing*. Vienna, Austria: R Foundation for Statistical Computing; 2019.
38. Stamps BW, Leddy MB, Plumlee MH, Hasan NA, Colwell RR, Spear JR. Characterization of the Microbiome at the World's Largest Potable Water Reuse Facility. *Front Microbiol*. 2018; 9:2435. Epub 2018/11/13. <https://doi.org/10.3389/fmicb.2018.02435> PMID: 30416489.
39. Park JW, Lee YJ, Meyer AS, Douterelo I, Maeng SK. Bacterial growth through microfiltration membranes and NOM characteristics in an MF-RO integrated membrane system: Lab-scale and full-scale studies. *Water Research*. 2018; 144:36–45. <https://doi.org/10.1016/j.watres.2018.07.027> PMID: 30014977
40. Fujioka T, Hoang AT, Aizawa H, Ashiba H, Fujimaki M, Leddy M. Real-Time Online Monitoring for Assessing Removal of Bacteria by Reverse Osmosis. *Environmental Science and Technology Letters*. 2018; 5(6):389–93. <https://doi.org/10.1021/acs.estlett.8b00200>

41. Sousi M, Salinas-Rodriguez SG, Liu G, Schippers JC, Kennedy MD, van der Meer W. Measuring Bacterial Growth Potential of Ultra-Low Nutrient Drinking Water Produced by Reverse Osmosis: Effect of Sample Pre-treatment and Bacterial Inoculum. *Frontiers in Microbiology*. 2020; 11:791-. <https://doi.org/10.3389/fmicb.2020.00791> PMID: 32411118
42. Hermans SM, Buckley HL, Lear G. Optimal extraction methods for the simultaneous analysis of DNA from diverse organisms and sample types. *Mol Ecol Resour*. 2018; 18(3):557–69. Epub 2018/02/03. <https://doi.org/10.1111/1755-0998.12762> PMID: 29394525.
43. Lear G, Dickie I, Banks J, Boyer S, Buckley H, Buckley T, et al. Methods for the extraction, storage, amplification and sequencing of DNA from environmental samples. *New Zealand Journal of Ecology*. 2018. <https://doi.org/10.20417/nzjecol.42.9>
44. Schultz MT, Lance RF. Modeling the Sensitivity of Field Surveys for Detection of Environmental DNA (eDNA). *PLoS One*. 2015; 10(10):e0141503. Epub 2015/10/29. <https://doi.org/10.1371/journal.pone.0141503> PMID: 26509674.
45. Boström KH, Simu K, Hagström Å, Riemann L. Optimization of DNA extraction for quantitative marine bacterioplankton community analysis. *Limnology and Oceanography: Methods*. 2004; 2(11):365–73. <https://doi.org/10.4319/lom.2004.2.365>
46. Luk AW, Beckmann S, Manefield M. Dependency of DNA extraction efficiency on cell concentration confounds molecular quantification of microorganisms in groundwater. *FEMS Microbiol Ecol*. 2018; 94(10). Epub 2018/08/24. <https://doi.org/10.1093/femsec/fiy146> PMID: 30137345.
47. Button DK, Robertson BR. Determination of DNA content of aquatic bacteria by flow cytometry. *Appl Environ Microbiol*. 2001; 67(4):1636–45. Epub 2001/04/03. <https://doi.org/10.1128/AEM.67.4.1636-1645.2001> PMID: 11282616.
48. Hugerth LW, Andersson AF. Analysing microbial community composition through amplicon sequencing: From sampling to hypothesis testing. *Frontiers Media S.A.*; 2017. p. 1561-. <https://doi.org/10.3389/fmicb.2017.01561> PMID: 28928718
49. Bonk F, Popp D, Harms H, Centler F. PCR-based quantification of taxa-specific abundances in microbial communities: Quantifying and avoiding common pitfalls. *Elsevier B.V.*; 2018. p. 139–47.
50. Luef B, Frischkorn KR, Wrighton KC, Holman HY, Birarda G, Thomas BC, et al. Diverse uncultivated ultra-small bacterial cells in groundwater. *Nat Commun*. 2015; 6:6372. Epub 2015/02/28. <https://doi.org/10.1038/ncomms7372> PMID: 25721682.
51. Nescerecka A, Juhna T, Hammes F. Identifying the underlying causes of biological instability in a full-scale drinking water supply system. *Water Res*. 2018; 135:11–21. Epub 2018/02/16. <https://doi.org/10.1016/j.watres.2018.02.006> PMID: 29448079.
52. Manzari C, Oranger A, Fosso B, Piancone E, Pesole G, D'Erchia AM. Accurate quantification of bacterial abundance in metagenomic DNAs accounting for variable DNA integrity levels. *Microb Genom*. 2020. Epub 2020/08/05. <https://doi.org/10.1099/mgen.0.000417> PMID: 32749951.
53. Padmanaban A. DNA Integrity Number (DIN) For the Assessment of Genomic DNA Samples in Real-Time Quantitative PCR (qPCR) Experiments. *Agilent Technologies, Inc.* <https://doi.org/10.13140/RG.2.1.1011.9122>
54. Illumina. 16S Metagenomic Sequencing Library Preparation: Preparing 16S Ribosomal RNA Gene Amplicons for the Illumina MiSeq System. 2013.
55. Hwang C, Ling F, Andersen GL, LeChevallier MW, Liu WT. Evaluation of methods for the extraction of DNA from drinking water distribution system biofilms. *Microbes Environ*. 2012; 27(1):9–18. Epub 2011/11/15. <https://doi.org/10.1264/jsme2.me11132> PMID: 22075624.
56. Dias V, Durand A-A, Constant P, Prévost M, Bédard E. Identification of Factors Affecting Bacterial Abundance and Community Structures in a Full-Scale Chlorinated Drinking Water Distribution System. *Water*. 2019; 11(3).
57. Bruno A, Sandionigi A, Bernasconi M, Panio A, Labra M, Casiraghi M. Changes in the Drinking Water Microbiome: Effects of Water Treatments Along the Flow of Two Drinking Water Treatment Plants in a Urbanized Area, Milan (Italy). *Front Microbiol*. 2018; 9:2557. Epub 2018/11/16. <https://doi.org/10.3389/fmicb.2018.02557> PMID: 30429832.
58. Potgieter S, Pinto A, Sigudu M, du Preez H, Ncube E, Venter S. Long-term spatial and temporal microbial community dynamics in a large-scale drinking water distribution system with multiple disinfectant regimes. *Water Res*. 2018; 139:406–19. Epub 2018/04/21. <https://doi.org/10.1016/j.watres.2018.03.077> PMID: 29673939.
59. Eichler S, Christen R, Hoeltje C, Westphal P, Boetel J, Brettar I, et al. Composition and Dynamics of Bacterial Communities of a Drinking Water Supply System as Assessed by RNA- and DNA-Based 16S rRNA Gene Fingerprinting. 2007; 72(3):2017-.

60. Baron JL, Vikram A, Duda S, Stout JE, Bibby K. Shift in the Microbial Ecology of a Hospital Hot Water System following the Introduction of an On-Site Monochloramine Disinfection System. *PLoS ONE*. 2014; 9(7):e102679–e. <https://doi.org/10.1371/journal.pone.0102679> PMID: 25033448
61. Dai Z, Sevillano-Rivera MC, Calus ST, Bautista-de Los Santos QM, Eren AM, van der Wielen P, et al. Disinfection exhibits systematic impacts on the drinking water microbiome. *Microbiome*. 2020; 8(1):42. Epub 2020/03/22. <https://doi.org/10.1186/s40168-020-00813-0> PMID: 32197656.
62. Guo L, Wan K, Zhu J, Ye C, Chabi K, Yu X. Detection and distribution of vbnc/viable pathogenic bacteria in full-scale drinking water treatment plants. *Journal of Hazardous Materials*. 2021; 406:124335. <https://doi.org/10.1016/j.jhazmat.2020.124335> PMID: 33160785
63. Zhou Z, Xu L, Zhu L, Liu Y, Shuai X, Lin Z, et al. Metagenomic analysis of microbiota and antibiotic resistance in household activated carbon drinking water purifiers. *Environment International*. 2021; 148:106394. <https://doi.org/10.1016/j.envint.2021.106394> PMID: 33486296
64. Del Olmo G, Husband S, Sánchez Briones C, Soriano A, Calero Preciado C, Macian J, et al. The microbial ecology of a Mediterranean chlorinated drinking water distribution systems in the city of Valencia (Spain). *Science of The Total Environment*. 2021; 754:142016. <https://doi.org/10.1016/j.scitotenv.2020.142016> PMID: 33254950
65. Ramseier MK, von Gunten U, Freihofer P, Hammes F. Kinetics of membrane damage to high (HNA) and low (LNA) nucleic acid bacterial clusters in drinking water by ozone, chlorine, chlorine dioxide, monochloramine, ferrate(VI), and permanganate. *Water Research*. 2011; 45(3):1490–500. <https://doi.org/10.1016/j.watres.2010.11.016> PMID: 21146846
66. Shorney-Darby H, Harms LL. Chlorination of Potable Water. *White's Handbook of Chlorination and Alternative Disinfectants: Fifth Edition*. 2010:230–325.
67. Wang Y, Claeys L, Van Der Ha D, Verstraete W, Boon N. Effects of chemically and electrochemically dosed chlorine on *Escherichia coli* and *Legionella* *beliardensis* assessed by flow cytometry. *Applied Microbiology and Biotechnology*. 2010; 87(1):331–41. <https://doi.org/10.1007/s00253-010-2526-2> PMID: 20352423
68. Liu X, Wang J, Liu T, Kong W, He X, Jin Y, et al. Effects of assimilable organic carbon and free chlorine on bacterial growth in drinking water. *PLoS One*. 2015; 10(6):e0128825. Epub 2015/06/04. <https://doi.org/10.1371/journal.pone.0128825> PMID: 26034988.
69. Benami M, Gillor O, Gross A. The question of pathogen quantification in disinfected graywater. *Science of the Total Environment*. 2015; 506:496–504. <https://doi.org/10.1016/j.scitotenv.2014.11.051> PMID: 25437766
70. Van Aken B, Lin LS. Effect of the disinfection agents chlorine, UV irradiation, silver ions, and TiO₂ nanoparticles/near-UV on DNA molecules. *Water Sci Technol*. 2011; 64(6):1226–32. Epub 2012/01/05. <https://doi.org/10.2166/wst.2011.684> PMID: 22214074.
71. Xu L, Zhang C, Xu P, Wang XC. Mechanisms of ultraviolet disinfection and chlorination of *Escherichia coli*: Culturability, membrane permeability, metabolism, and genetic damage. *J Environ Sci (China)*. 2018; 65:356–66. Epub 2018/03/20. <https://doi.org/10.1016/j.jes.2017.07.006> PMID: 29548407.
72. Stoeckle BC, Beggel S, Cerwenka AF, Motivans E, Kuehn R, Geist J. A systematic approach to evaluate the influence of environmental conditions on eDNA detection success in aquatic ecosystems. *PLoS One*. 2017; 12(12):e0189119. Epub 2017/12/09. <https://doi.org/10.1371/journal.pone.0189119> PMID: 29220394.
73. Vital M, Hammes F, Egli T. Competition of *Escherichia coli* O157 with a drinking water bacterial community at low nutrient concentrations. *Water Res*. 2012; 46(19):6279–90. Epub 2012/10/16. <https://doi.org/10.1016/j.watres.2012.08.043> PMID: 23062788.
74. Fujioka T, Boivin S. Assessing bacterial infiltration through reverse osmosis membrane. *Environmental Technology and Innovation*. 2020; 19:100818-. <https://doi.org/10.1016/j.eti.2020.100818>
75. Fujioka T, Hoang AT, Ueyama T, Nghiem LD. Integrity of reverse osmosis membrane for removing bacteria: New insight into bacterial passage. *Environmental Science: Water Research and Technology*. 2019; 5(2):239–45. <https://doi.org/10.1039/c8ew00910d>
76. Hwang C, Ling F, Andersen GL, LeChevallier MW, Liu WT. Microbial community dynamics of an urban drinking water distribution system subjected to phases of chloramination and chlorination treatments. *Appl Environ Microbiol*. 2012; 78(22):7856–65. Epub 2012/09/04. <https://doi.org/10.1128/AEM.01892-12> PMID: 22941076.
77. Devaraj A, Buzzo JR, Mashburn-Warren L, Gloag ES, Novotny LA, Stoodley P, et al. The extracellular DNA lattice of bacterial biofilms is structurally related to Holliday junction recombination intermediates. *Proceedings of the National Academy of Sciences*. 2019; 116(50):25068. <https://doi.org/10.1073/pnas.1909017116> PMID: 31767757
78. Sanchez-Torres V, Maeda T, Wood TK. Global regulator H-NS and lipoprotein NlpI influence production of extracellular DNA in *Escherichia coli*. *Biochemical and Biophysical Research Communications*. 2010; 401(2):197–202. <https://doi.org/10.1016/j.bbrc.2010.09.026> PMID: 20833130

79. Ibáñez de Aldecoa AL, Zafra O, González-Pastor JE. Mechanisms and Regulation of Extracellular DNA Release and Its Biological Roles in Microbial Communities. *Frontiers in Microbiology*. 2017; 8:1390. <https://doi.org/10.3389/fmicb.2017.01390> PMID: 28798731
80. Allesen-Holm M, Barken KB, Yang L, Klausen M, Webb JS, Kjelleberg S, et al. A characterization of DNA release in *Pseudomonas aeruginosa* cultures and biofilms. *Molecular Microbiology*. 2006; 59(4):1114–28. <https://doi.org/10.1111/j.1365-2958.2005.05008.x> PMID: 16430688
81. Das T, Sharma PK, Busscher HJ, van der Mei HC, Krom BP. Role of extracellular DNA in initial bacterial adhesion and surface aggregation. *Applied and environmental microbiology*. 2010; 76(10):3405–8. Epub 2010/04/02. <https://doi.org/10.1128/AEM.03119-09> PMID: 20363802.
82. Cristescu ME, Hebert PDN. Uses and Misuses of Environmental DNA in Biodiversity Science and Conservation. *Annual Review of Ecology, Evolution, and Systematics*. 2018; 49(1):209–30. <https://doi.org/10.1146/annurev-ecolsys-110617-062306>
83. Barnes MA, Turner CR. The ecology of environmental DNA and implications for conservation genetics. *Conservation Genetics*. 2016; 17(1):1–17. <https://doi.org/10.1007/s10592-015-0775-4>
84. Darling JA, Mahon AR. From molecules to management: adopting DNA-based methods for monitoring biological invasions in aquatic environments. *Environ Res*. 2011; 111(7):978–88. Epub 2011/03/01. <https://doi.org/10.1016/j.envres.2011.02.001> PMID: 21353670.
85. Kennedy NA, Walker AW, Berry SH, Duncan SH, Farquarson FM, Louis P, et al. The Impact of Different DNA Extraction Kits and Laboratories upon the Assessment of Human Gut Microbiota Composition by 16S rRNA Gene Sequencing. *PLOS ONE*. 2014; 9(2):e88982. <https://doi.org/10.1371/journal.pone.0088982> PMID: 24586470
86. Gerasimidis K, Bertz M, Quince C, Brunner K, Bruce A, Combet E, et al. The effect of DNA extraction methodology on gut microbiota research applications. *BMC Res Notes*. 2016; 9:365-. <https://doi.org/10.1186/s13104-016-2171-7> PMID: 27456340.
87. Kennedy LC, Miller SE, Kantor RS, Nelson KL. Effect of disinfectant residual, pH, and temperature on microbial abundance in disinfected drinking water distribution systems. *Environmental Science: Water Research & Technology*. 2021; 7(1):78–92. <https://doi.org/10.1039/D0EW00809E>
88. Li W, Zhang J, Wang F, Qian L, Zhou Y, Qi W, et al. Effect of disinfectant residual on the interaction between bacterial growth and assimilable organic carbon in a drinking water distribution system. *Chemosphere*. 2018; 202:586–97. <https://doi.org/10.1016/j.chemosphere.2018.03.056> PMID: 29597176
89. Biesbroek G, Sanders EA, Roeselers G, Wang X, Caspers MP, Trzcinski K, et al. Deep sequencing analyses of low density microbial communities: working at the boundary of accurate microbiota detection. *PLoS One*. 2012; 7(3):e32942. Epub 2012/03/14. <https://doi.org/10.1371/journal.pone.0032942> PMID: 22412957.
90. Salter SJ, Cox MJ, Turek EM, Calus ST, Cookson WO, Moffatt MF, et al. Reagent and laboratory contamination can critically impact sequence-based microbiome analyses. *BMC Biology*. 2014; 12(1):87. <https://doi.org/10.1186/s12915-014-0087-z> PMID: 25387460
91. Humphrey B, McLeod N, Turner C, Sutton JM, Dark PM, Warhurst G. Removal of Contaminant DNA by Combined UV-EMA Treatment Allows Low Copy Number Detection of Clinically Relevant Bacteria Using Pan-Bacterial Real-Time PCR. *PLOS ONE*. 2015; 10(7):e0132954. <https://doi.org/10.1371/journal.pone.0132954> PMID: 26172943
92. Roeselers G, Coolen J, van der Wielen PW, Jaspers MC, Atsma A, de Graaf B, et al. Microbial biogeography of drinking water: patterns in phylogenetic diversity across space and time. *Environ Microbiol*. 2015; 17(7):2505–14. Epub 2015/01/13. <https://doi.org/10.1111/1462-2920.12739> PMID: 25581482.
93. Ling F, Whitaker R, LeChevallier MW, Liu WT. Drinking water microbiome assembly induced by water stagnation. *ISME J*. 2018; 12(6):1520–31. Epub 2018/03/29. <https://doi.org/10.1038/s41396-018-0101-5> PMID: 29588495.
94. Beale DJ, Dunn MS, Morrison PD, Porter NA, Marlow DR. Characterisation of bulk water samples from copper pipes undergoing microbially influenced corrosion by diagnostic metabolomic profiling. *Corrosion Science*. 2012; 55:272–9. <https://doi.org/10.1016/j.corsci.2011.10.026>
95. Yu Z, Miller HC, Puzon GJ, Clowers BH. Application of untargeted metabolomics for the detection of pathogenic *Naegleria fowleri* in an operational drinking water distribution system. *Water Research*. 2018; 145:678–86. <https://doi.org/10.1016/j.watres.2018.09.003> PMID: 30212806