

**Pre-treatments to enhance the biodegradability of waste activated sludge  
Elucidating the rate limiting step**

Gonzalez, A.; Hendriks, A. T.W.M.; van Lier, J. B.; de Kreuk, M.

**DOI**

[10.1016/j.biotechadv.2018.06.001](https://doi.org/10.1016/j.biotechadv.2018.06.001)

**Publication date**

2018

**Document Version**

Accepted author manuscript

**Published in**

Biotechnology Advances

**Citation (APA)**

Gonzalez, A., Hendriks, A. T. W. M., van Lier, J. B., & de Kreuk, M. (2018). Pre-treatments to enhance the biodegradability of waste activated sludge: Elucidating the rate limiting step. *Biotechnology Advances*, 36(5), 1434-1469. <https://doi.org/10.1016/j.biotechadv.2018.06.001>

**Important note**

To cite this publication, please use the final published version (if applicable).  
Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights.  
We will remove access to the work immediately and investigate your claim.

1 **Pre-treatments to enhance the biodegradability of waste activated sludge: elucidating the rate**  
2 **limiting step**

3  
4 A. Gonzalez<sup>1,\*</sup>, A.T.W.M. Hendriks<sup>1</sup>, J.B. van Lier, and M. de Kreuk

5  
6 Faculty of Civil Engineering and Geosciences, Department of Water Management, Sanitary Engineering  
7 Section, Delft University of Technology (TU Delft), Stevinweg 1, 2628 CN Delft, The Netherlands

8 <sup>1</sup> Equally contributing authors

9 \*Corresponding author. Tel: +31 015 2781916. E-mail address: [j.a.gonzalezortega@tudelft.nl](mailto:j.a.gonzalezortega@tudelft.nl)

10  
11 **Abstract:**

12  
13 Pre-treatments for waste activated sludge (WAS) are, in most cases, an attempt to increase the  
14 biodegradation and/or improve hydrolysis rate of WAS after anaerobic digestion. This review presents  
15 an extensive analysis of WAS pre-treatments effectiveness focusing on increasing the biodegradability.  
16 In the first part of the review, WAS is considered as a cluster of organic components: proteins,  
17 carbohydrates, humic substances and cells. Based on this breakdown into components, the effect of  
18 different pre-treatments on each component (and in combination) is described. Also, possible reasons  
19 for the contradictory results frequently found among different studies dealing with the same pre-  
20 treatment are included. In the second part, the review describes the effects on volatile solids removal by  
21 digestion after pre-treatment and on the dewaterability of the final digestate. The energy balance and  
22 potential limiting factors for each pre-treatment are also taken into account. From the published works  
23 it is concluded that some pre-treatment techniques, such as thermal hydrolysis, thermal phased  
24 anaerobic digestion and low-temperature pre-treatment are effective ways to increase energy  
25 production and to improve other sludge properties, such as dewatering. However, these techniques are  
26 very energy intensive and require a large capital outlay, so research on milder pre-treatment techniques  
27 is valuable.

28  
29 **Keywords:** anaerobic digestion; methane production; pre-treatment; review; sewage sludge; waste-  
30 activated sludge.

31  
32 **1. Introduction:**

33  

---

  
Abbreviation list: AD, anaerobic digestion; AOP, advanced oxidation process; BMP, biochemical methane  
potential; CER, cation exchange resin; CHP, combined heat power; COD, chemical oxygen demand; DNA,  
deoxyribonucleic acid; EPS, extracellular polymeric substances; E<sub>s</sub>, specific energy; LCA, life cycle  
assessment; n/a, not available; n/d, not determined; n/f, not found; PS, primary sludge; SRT, solids  
retention time; TPAD, thermal phased anaerobic digestion; TS, total solids; US, ultrasonic; VFA, volatile  
fatty acids; VS, volatile solids; VSS, volatile suspended solids; WAS, waste activated sludge; WWTP,  
wastewater treatment plant.

© 2018 Manuscript version made available under CC-BY-NC-ND 4.0 license  
<https://creativecommons.org/licenses/by-nc-nd/4.0/>

1 Waste activated sludge (WAS) and primary sludge are the main by-products from conventional  
2 activated sludge treatment and their disposal is relevant because it causes around 50% of the total  
3 operational costs of a sewage treatment plant (Kroiss, 2004; Pilli et al., 2011). Methods like anaerobic  
4 digestion (AD) are used to reduce the costs associated with sludge disposal. AD is a widely used sludge  
5 treatment method. Its advantages include low energy input, methane production and reduction of  
6 sludge quantity. However, its application is often limited by low biodegradability and high retention  
7 times, because the complexity of WAS limits the efficacy of the biological process (Ruffino et al., 2016).  
8 For instance, in WAS originating from biological nutrient removal wastewater treatment plants (WWTP),  
9 only about 30-35% of the organic solids are anaerobically biodegraded in a mesophilic reactor at 20-25  
10 days solids retention time (SRT) (Hiraoka et al., 1985; Ruffino et al., 2015; Valo et al., 2004). To  
11 overcome these drawbacks, a substantial amount of research has been done with the aim of increasing  
12 both the rate and extent of WAS bioconversion. As a result, several conditioning techniques or *pre-*  
13 *treatments* of sludge prior to AD have been tested in bench, pilot, and full scale. These methods have  
14 been applied mostly to WAS, as primary sludge is easier to biodegrade (Kuglarz et al., 2013; Müller,  
15 2001).

16  
17 The effects of each pre-treatment method depend on its inherent mechanisms. For instance, Salsabil et  
18 al. (2010) postulated that the degree of sludge solubilization depends upon the kind of treatment  
19 (mechanical, oxidative, thermal) rather than upon the specific energy input. Similarly, Cella et al. (2015)  
20 concluded that the innate characteristics of the pre-treatment method are likely more important than  
21 energy input. The objectives of this review paper are a) to identify the effects of different pre-treatment  
22 methods on the proteins, carbohydrates, humic substances and cells contained in the WAS; b) to assess  
23 and compare the biological degradability (hydrolysis rate, biogas production and removal of organic  
24 matter), dewaterability of the digestate and energy consumption between the pre-treatments. The  
25 paper considers only the effects of individual pre-treatments (combinations of pre-treatments are  
26 excluded). It starts with an introduction of how anaerobic biodegradability and biodegradation should  
27 be defined and gives an overview of the composition of WAS. Then, several pre-treatment methods are  
28 discussed based on their underlying mechanisms; the effects on the main WAS components and their  
29 strengths and limiting factors. Finally, a discussion and conclusion with an overview of present  
30 knowledge gaps is presented.

### 31 32 1.1. Anaerobic biodegradability and biodegradation

33  
34 Chemical oxygen demand (COD) solubilization is commonly used as a parameter to evaluate the  
35 effectiveness of pre-treatment (Neumann et al., 2016). Indeed, applying certain pre-treatment  
36 conditions, some studies have documented that there is a relationship between COD solubilization and  
37 biodegradation (Bougrier et al., 2008; Uma Rani et al., 2012). However, in other cases, higher COD  
38 solubilization did not result in a higher biogas production, but sometimes in the same or even lower  
39 biogas production (Dhar et al., 2012; Haug et al., 1978; D.-H. Kim et al., 2013; J. Kim et al., 2013; Nazari  
40 et al., 2016; Sapkaite et al., 2017). Since COD solubilization is apparently not an accurate parameter to  
41 predict the effectiveness of subsequent biogas production (Sapkaite et al., 2017), until now, batch or  
42 (semi)continuous, anaerobic digestion methods are the only useful and accurate tools to assess the  
43 effect of pre-treatments on the anaerobic biodegradability of WAS. In this sense, biodegradability is a  
44 characteristic of sludge, and in anaerobic digestion processes it is composed of hydrolysis rate and  
45 biodegradation extent. Biodegradation is determined via biomethane potential (BMP) test, which in  
46 turn is determined by cumulative methane production. This methane production depends, amongst  
47 other variables, on activity of the inoculum, temperature, sludge retention time, inoculum-substrate  
48 ratio, BMP and hydrolysis rate (Angelidaki et al., 2009; Chen and Hashimoto, 1980; Holliger et al., 2016;

1 Wang et al., 2013). Many papers, however, use different digestion times, which make comparison of  
2 data difficult; others report biogas or methane production without disclosing COD or volatile solids (VS)  
3 of WAS, making the calculation of biodegradability impossible. As a consequence, in this paper, we  
4 mostly use biodegradation to assess the effectiveness of pre-treatments.

5  
6 A standard method for BMP determination is published in Holliger et al. (2016): research would benefit  
7 from adapting to this methodology in order to be able to better compare data. In addition, by only  
8 giving information regarding biodegradation, it is not clear if a pre-treatment only has an effect on the  
9 BMP, or also on the hydrolysis rate constant, or on both. To be able to accurately perform inter-study  
10 comparison, BMP and hydrolysis rate should be both reported (instead of only showing the multi-  
11 interpretable change in biogas production).

12  
13 As mentioned, because many papers do not mention BMP nor the hydrolysis rate, the biodegradation  
14 ( $B_0$ ), shown in Eq. 1, will be used to assess the effectiveness of pre-treatments in this review. This value  
15 is presented as “absolute biodegradation” and it is calculated based on the given data from the different  
16 studies reviewed.  $B_0$  is the actual methane production of a sludge sample divided by the maximum  
17 theoretical conversion of COD to methane (0.35 L  $CH_4$ /gCOD, at standard temperature and pressure)(D.-  
18 H. Kim et al., 2013; Mottet et al., 2009). This parameter, however, does not consider what is needed for  
19 bacterial cell growth, their maintenance, nor the COD reduction due to the presence of other electron  
20 acceptors. The contribution of growth and maintenance to COD removal has been reported to be 5-10%  
21 of organic material degraded (Angelidaki and Sanders, 2004). This means that an underestimation of the  
22 biodegraded part occurs because not all biodegraded COD is transformed into methane. Whenever  
23 possible, in this manuscript the apparent first order hydrolysis rate ( $k_{hyd}$ ) and volatile solids (VS)  
24 reduction are also used along with  $B_0$  to assess the effects of pre-treatments on anaerobic  
25 biodegradability of WAS.

26  
27 
$$B_0 (\%) = 100 \times \frac{\text{Measured Methane production} \left( Nml \frac{CH_4}{gCOD_{added}} \right)}{350 ml \frac{CH_4}{gCOD_{added}}} \quad (Eq. 1)$$

## 28 29 1.2. Composition of waste activated sludge

30  
31 To comprehend the effects of the different pre-treatments on the anaerobic biodegradability of WAS, its  
32 composition should be known. Table 1 shows the results of a collection of studies that focused on the  
33 composition of WAS in terms of viable and nonviable cells, proteins, carbohydrates, humic acids and  
34 DNA. Despite a myriad of studies that provide WAS characterization in terms of COD, proteins and  
35 carbohydrates, only a few show the concentration of cells, active biomass and humic substances. From  
36 Table 1, a remarkable variation of the WAS composition is observed. For instance, in terms of %VS, it is  
37 composed of 10-24% bacterial biomass; 7-19% carbohydrates; 25-62.4% proteins; 7.7-28.6% humic  
38 substances; and <3.5% DNA. It is important to note that the method used to determine each component  
39 influences the results (Bourven et al., 2012; Comte et al., 2006; Wilén et al., 2003). Nonetheless, from  
40 Table 1, it is concluded that WAS is composed mostly of proteins and humic substances with some  
41 bacterial biomass and carbohydrates (listed in decreasing order of %VS).

42  
43 Proteins, DNA and carbohydrates are anaerobically biodegradable compounds. However, when they are  
44 combined into an organized structure like WAS, their biodegradability apparently decreases (Stuckey  
45 and McCarty, 1984). Cells are difficult to break down under anaerobic digestion, showing their  
46 recalcitrant nature (Foladori et al., 2015; Wett et al., 2010). Similarly, the presence of humic substances

1 is challenging for anaerobic digestion as they affect enzymatic activity by immobilizing enzymes, which,  
2 consequently lowers biodegradability (Azman et al., 2015a, 2015b; Fernandes et al., 2015; Frølund et al.,  
3 1995; Wetzel, 1991). In addition, humic substances themselves are difficult or impossible to degrade  
4 anaerobically (Nielsen et al., 1997; Pinnekamp, 1989; Tian et al., 2015a; Zahmatkesh et al., 2016). Since  
5 humic substances account for 10-20% of the COD of WAS, the maximum attainable anaerobic  
6 biodegradation of WAS cannot exceed 80-90%. Therefore, an assessment of a pre-treatment method  
7 must consider that obtaining a 100% degradation is difficult unless oxidative methods are incorporated.

1 *Table 1 Literature review of WAS composition. Values as %VS (unless otherwise stated)*

Bacterial Biomass	Protein	Carbohydrate	Humic substances	DNA	Uronic acids	Wastewater source	Type of treatment	Determination method for bacterial biomass; exopolymeric substances (EPS) and humic substances	Reference
15%*	25*	7*	16*	<1*		Municipal	n/a This sample was a biofilm	Polysaccharide: anthrone method (glucose as standard) Uronic acids: m-hydroxydiphenil sulfuric acid method (D-glucuronic as standard) DNA: 4',6'-diamidino-2-phenylindole Protein: Lowry method (corrected for humic substances) Humic substances: modified Lowry methods Cell number: epifluorescence microscopy	(Jahn and Nielsen, 1998)
11-24	76-89				n/d	n/a	n/a	Bacterial biomass: acridine orange staining and confocal laser scanning microscopy Other components: subtraction of cell volume from total volume	(Zhang and Fang, 2001)
n/d	"Most abundant fraction"	"Similar as humic substances"	15-20	n/d	n/d	n/a	n/a	cation exchange resin (CER) (Dowex®)	(Frølund et al., 1995)
10-15	46-52	17	18-23	n/d	n/d	n/a	Biological and chemical nutrient removal	CER (Dowex®); 4',6'-diamidino-2-phenylindole; staining and acridine orange	(Frølund et al., 1996)
9-14*	n/d	n/d	n/d	n/d	n/d	n/a	Biological nutrient removal	Acridine orange staining	(Münch and Pollard, 1997)
n/d	n/d	n/d	17 (of TOC)	n/d	n/d	Domestic	n/a	Sodium hydroxide and sulphuric acid	(Riffaldi, 1982)
n/d	46.1	13.5	7.7	n/d	n/d	10 sources	n/a	CER (Dowex®)	(Mikkelsen and Keiding, 2002)
n/d	50	16-19	16-19	n/d	1	Domestic	Biological and chemical nutrient removal	CER (Dowex®)	(Nielsen et al., 1996)
n/d	62.4	10.8	26.4	0.4	n/d	n/a	n/a	CER (Dowex®)	(Schmid et al., 2003)
n/d	59	15.9	24.9	0.2	n/d				
n/d	53.4	17.8	28.6	0.2	n/d				
14.5*	n/d	n/d	n/d	n/d	n/d	Municipal	-	SYBR® green staining	(Foladori et al., 2010)
n/d	27.1	10.4	24.4	2	n/d	Domestic and industrial	Nutrient removal	CER (Dowex®)	(Wilén et al., 2003)
n/d	48.4	8.8	26.2	1.6	n/d	Domestic	Secondary		
n/d	32.2	11.3	16.1	1.9	n/d	Domestic	Nutrient removal		
n/d	37.8	11.6	16.4	3.5		Domestic	Nutrient removal		

n/d	31.5	8.6	15.6	2.1		Domestic	Nutrient removal		
n/d	27.1 (as VSS)	10.4 (as VSS)	24.4 (as VSS)	n/d		50% domestic, 50% industrial	C, N and P removal	CER (Dowex®)	(Jin et al., 2004)
n/d	48.4 (as VSS)	8.8 (as VSS)	26.2 (as VSS)	n/d		Mainly domestic	Carbon removal		
n/d	31.8 (as VSS)	11.1 (as VSS)	15.9 (as VSS)	n/d		Mainly domestic	Carbon and nitrogen removal		
n/d	38.2 (as VSS)	11.8 (as VSS)	16.6 (as VSS)	n/d		Mainly domestic	C, N and P removal		
n/d	31.5 (as VSS)	8.6 (as VSS)	15.6 (as VSS)	n/d		Mainly domestic	C, N and P removal		
n/d	40.0 (as VSS)	7.6 (as VSS)	8.7 (as VSS)	n/d		Oil refinery	Carbon removal		
n/d	32.4 (as VSS)	9.3 (as VSS)	31.0 (as VSS)	n/d		Leachate	Carbon and nitrogen removal		

- 1 <sup>a</sup> Carbohydrates and humic acids were considered together
- 2 n/a: not available
- 3 n/d: not determined
- 4 \*Based on COD

## 2. Pre-treatment methods

In the following sections, several sludge pre-treatment methods will be discussed. First a process description of the pre-treatment will be given, whereupon the effect of the pre-treatment on the different individual WAS components will be discussed.

### 2.1 Thermal pre-treatment <100°C

#### *Process description and mode of action*

Mild-thermal or low-temperature thermal pre-treatment consists of the application of a temperature in the range of 55-100°C from minutes to several hours. It is differentiated from thermal phased anaerobic digestion (TPAD) in which longer times (in the range of 1-3 days are applied). TPAD is analyzed in the following section. Low-quality heat (e.g. waste heat) can be applied through heat exchangers. The operational parameters are temperature and application time. Its main effect is the disintegration of cell membranes and a concomitant solubilization of organic compounds (Nazari et al., 2016).

#### *Effects on WAS*

##### *Floc and cell disruption*

Reduction in particle size (i.e. deflocculation) has been observed in the range of 50-95°C (Laurent et al., 2009a; Prorot et al., 2011), which, in turn, reduces sludge dewaterability (Pérez-Elvira et al., 2010), but could increase hydrolysis rate because of the increased surface area (Vavilin et al., 2008). Regarding cell disruption, according to Forster et al. (2002) more than 95% of the bacterial biomass in WAS consists of Gram-negative bacteria. Gram-negative bacteria are more sensitive to heat than Gram-positive (Salton and Horne, 1951). Prorot et al. (2011) observed that lysis of a portion of the cells already occurred at 50°C and treatment times of 20 minutes, and also that cell lysis increased proportionally to temperature up to 95°C. Salton and Horne (1951) also visually determined that cell disruption occurred from 70-100°C and 5 minute application times, and that different bacterial strains were disrupted at different temperatures. Thus, during low-temperature thermal pre-treatment, the cell wall of at least a fraction of the bacterial biomass is ruptured and the internals of the bacteria should become available for digestion. As a consequence, a (relatively small) increase in WAS biodegradability is expected.

##### *Carbohydrates, proteins and humic substances*

The effect of low-temperature thermal pre-treatment on carbohydrates is an increase in solubilization, as unpuobserved by Dong et al. (2015) at 60°C, and by Appels et al. (2010) at 80°C. The solubilization of carbohydrates could increase the biodegradation rate during anaerobic digestion, but probably not the biodegradability of WAS, because carbohydrates are usually biodegraded to a large extent by anaerobic microorganisms. An exception are extracellular polymeric substances (EPS) of aerobic granular sludge (Guo et al., unpublished results), which are also present in WAS.

Protein denaturation typically occurs above temperatures of 75°C (De Graaf, 2000). Denaturation makes proteins more prone to biodegradation (Anson, 1938), so an increase in biodegradation rate would be expected at pre-treatment temperatures above 75°C. The solubilization of proteins is higher than that of carbohydrates (Appels et al., 2010; Dong et al., 2015), which results in the availability of more easily



1 degradable organic matter. Nevertheless, Appels et al. (2010) and Dong et al. (2015) observed that the  
2 solubilization of both components did not exceed 20% of their total fraction. This suggests that a  
3 significant amount of carbohydrates and proteins remain bound in the WAS matrix, forming a heat  
4 stable fraction.

5  
6 Humic acids only become more flexible above their glass transition temperature at about 70-80°C  
7 (Kolokassidou et al., 2007). However, the fraction of solubilized humic substances remained constant  
8 from 75 to 120°C (Laurent et al., 2009b) and from 25 to 80°C (Zhen et al., 2012), suggesting that humic  
9 acids are not affected during low-temperature thermal pre-treatment. Nonetheless, the presence of  
10 humic-like substances could affect WAS biodegradability. For instance, Wang et al. (2015) stated that  
11 protein-like components could be trapped by humic-like components thus forming molecular assemblies  
12 and making proteins less susceptible to microbial degradation (Azman et al., 2015b; Tan et al., 2008;  
13 Wang et al., 2015). A humic acid-protein assembly would mean that proteins are protected from  
14 denaturation and degradation thus limiting WAS biodegradability and explaining why proteins are not  
15 completely degraded, even at applied pre-treatment temperatures of around 90°C, as observed by  
16 Appels et al. (2010).

#### 17 18 *Hydrolysis rate and biodegradation*

19  
20 Liao et al. (2016) and Prorot et al. (2011) have reported that low-temperature thermal pre-treatment  
21 increases hydrolysis rates at temperatures ranging from 60 to 70°C. Sanders et al. (2000) and Vavilin et  
22 al. (2008) stated that when dealing with particulate organic material (such as WAS), the decrease in  
23 particle size results in higher hydrolysis rates during anaerobic digestion. Complementarily, the  
24 solubilization of organic material could also speed up the hydrolysis rate.

25 Regarding sludge biodegradation, despite most studies claim an increase, Prorot et al. (2011) found no  
26 significant impact in methane yield, even though organic matter solubilization and cell lysis occurred.  
27 The operational conditions were a temperature of 95°C and an application time of 20 minutes. For the  
28 studies that report an increase in biodegradation, the varying results are shown in Table 2. An  
29 explanation for the different outcomes after pre-treatment may be the relation between temperature  
30 and treatment time, as has been observed by Hiraoka et al. (1985). This hypothetical relation may be  
31 observed (for instance) in the study of Appels et al. (2010) (Table 2, entries g and h), which shows similar  
32 methane production at 80°C coupled with an application time of 60 minutes and at 90°C with an  
33 application time of 15 minutes. Probably because of the temperature-time relation, an analysis of the  
34 biodegradation of WAS must consider the effect of both parameters.

35  
36 Pre-treatments with a temperature range of 50-95°C and an application time of 60 minutes or less  
37 (entries from a to j) generally result in increased methane production, even though the results are very  
38 different among the studies (Table 2). A word of caution must be said about the paper of Appels et al.  
39 (2010) (entries e, g and h) in which the control sample had a very low biodegradation, probably because  
40 of a low inoculum-substrate ratio of 0.10 during the digestion and a very limited solubilization for the  
41 sample that was pre-treated at 70°C. The changes in the different elements of WAS, as described above,  
42 are due to the following factors: disruption of cell membranes; maximized solubilization of carbohydrate  
43 and protein; and protein denaturation at temperatures above 75°C. These factors could influence the  
44 observed increase in biodegradation at 50-95°C and application times of less than 60 minutes.

45  
46 Increased application times (6-15 hours) at a moderate temperature increase (60-70°C), seems to result  
47 not only in an increased biodegradation, but also in steadier results (Table 2, entries k to o). The

1 observed increase in methane production cannot be explained solely by the COD solubilization, as its  
2 maximum release is reached at times lower than one hour. It is hypothesized that the pre-treatment  
3 may have had an effect on the particulate fraction when longer application times are applied, thus  
4 increasing its biodegradation. A further increase in application times (up to 1-7 days) at a temperature  
5 between 55 and 70°C, seems to result in a similar or even lower biodegradation compared to the  
6 untreated samples (Table 2, entries p to s). A possible explanation is the occurrence of the amino-  
7 carbonyl (Maillard) reaction (Appels et al., 2010; Liao et al., 2016), which occurs at a low rate at  
8 temperatures of 60°C (Chiu et al., 2009). The products of the Maillard reaction are refractory; and  
9 decrease digestibility; and inhibit proteolytic and glycolytic enzymes activity (Friedman, 1996); and are  
10 generally detrimental to cells and organisms (Szwergold, 2013).

11  
12 Finally, as observed in entries t to w, a simultaneous increase in temperature (between 80-90°C) and  
13 application time (3 to 10 hours) results in conflictive and spread results. The results in this range are  
14 comparable to the ones obtained at 60-75°C and application times between 3 and 15 hours.

1 *Table 2 Effects on the biodegradation of WAS after thermal pre-treatment <100°C.*

Entry	Temperature, °C	Application time	Change in biodegradation (vs. control)†	Change in CH <sub>4</sub> production (vs. control)	Change in biogas production (vs. control)	Reference
<b>Temperature 50-95°C Application times ≤ 60 minutes</b>						
a	50	30 minutes		↑ 13.8%		(Dhar et al., 2012)
b	60	60 minutes			↑ 30%	(Hiraoka et al., 1985)
c	60	60 minutes			↑ 12%	(Ennouri et al., 2016)
d	70	30 minutes		↑ 18.8%		(Dhar et al., 2012)
e	70	60 minutes		↑ 1.6%		(Appels et al., 2010)
f	72	7.5 minutes	↑11% (from 29 to 40)			(Vergine et al., 2014)
g	80	60 minutes		↑ 124%		(Appels et al., 2010)
h	90	15 minutes		↑ 123%		(Appels et al., 2010)
i	90	30 minutes		↑ 13.2%		(Dhar et al., 2012)
j	95	20 minutes	=			(Prerot et al., 2011)
<b>Temperature 60-75°C Application times between 3 and 15 hours</b>						
k	60	6 hours	↑ 8% (from 21 to 29)			(J. Kim et al., 2013)
l	70	3 hours	↑ 7% (from 32 to 39)			(Ruffino et al., 2015)
m	70	9 hours			↑ 50%	(Climent et al., 2007)
n	70	15 hours	↑ 6% (from 32 to 38)			(Ruffino et al., 2015)
o	75	6 hours	↑ 14% (from 21 to 35)			(J. Kim et al., 2013)
<b>Temperature 55-70°C Application times between 1 and 7 days</b>						
p	55	24 hours	↑ 1% (from 38 to 39)			(Wang et al., 2014)
q	70	24 hours	↑ 3% (from 38 to 41)			(Wang et al., 2014)
r	70	1-7 days		↑ 5%		(Gavala et al., 2003)
s	70	3 days			↓ 10%	(Climent et al., 2007)
<b>Temperature 80-90°C Application times between 3 and 10 hours</b>						
t	80	3 hours	↑ 9% (from 28 to 37)			(Ruffino et al. 2015)
u	80	10 hours		↓ from 291 to 281 ml/gVS		(Nielsen et al., 2011)
v	90	3 hours	↑ 9% (from 28 to 37)			(Ruffino et al. 2015)
w	90	6 hours	↑ 5% (from 21 to 26)			(J. Kim et al., 2013)

2  
3 † An empty cell indicates that there was not sufficient information to calculate biodegradation. In those cases, increase in methane or biogas  
4 production is presented.

## 1 *Limiting factors, advantages and perspectives*

2  
3 Low-temperature thermal pre-treatment is a potential inexpensive way to increase the sludge  
4 biodegradability. Because the influence of both time and temperature, a proper selection of both  
5 parameters may be fundamental. The mechanism of the temperature-time dependence remains unclear  
6 and should be further studied. Nonetheless, steady and more reliable increases in methane production  
7 have been found at 60-75°C and application times between 3 and 15 hours. At temperatures of 80-90°C  
8 conflictive results have been found, probably due to the increased rate of the Maillard reaction. Finally,  
9 the option of using low quality heat has a positive effect on the energy balance of the entire process  
10 (Table A.1). An unfortunate side-effect of this technique is the worsening of the dewaterability of the  
11 digestate (Table 14).

## 13 2.2 Temperature phased anaerobic digestion (TPAD)

### 15 *Process description and mode of action*

16  
17 TPAD separates the digestion process into at least two stages, each one providing optimum conditions  
18 for hydrolytic/acidogenic and acetogenic/methanogenic microorganisms. The selection mechanisms  
19 (and operational parameters) are temperature, application time and pH. Temperature has more  
20 relevance to the outcomes of the process compared to application time (Ge et al., 2011a). For the  
21 acidogenic phase, temperatures between 45°C and 70°C and retention times of 2-6 days are used, while  
22 for the methanogenic phase mesophilic or thermophilic conditions with solids retention time of 14-30  
23 days are used.

### 25 *Effects on WAS*

#### 27 *Floc and cell disruption / carbohydrates, proteins and humic substances*

28  
29 Ghasimi et al. (2016b) observed that thermophilic hydrolysis might be increased due to a high sludge  
30 loading leading to accumulation of protein-like substances in the reactor broth, which might be related  
31 to hydrolytic enzymes. However, to our best knowledge no studies have been conducted dealing with  
32 the fate of cells, proteins, carbohydrates and humic substances in the first stage of TPAD. Nonetheless,  
33 the effects are expected to be similar to those described for thermal pre-treatment below 100°C, since  
34 the same range of temperatures are used, while only application times are lengthened. As TPAD involves  
35 a biological stage coupled with a temperature increase, the mechanism of action and the contribution of  
36 both chemical and biological conversions require further research.

#### 38 *Hydrolysis rate and biodegradation*

39  
40 From Table 3, it is clear that TPAD increases the WAS biodegradation. J. Yu et al. (2013) observed an  
41 increase of 84.8% in methane production in an acidogenic stage at 45°C with a retention time of 4 days,  
42 while Ge et al. (2011a) found no increase in methane production at 50°C and 60°C, but an increased  
43 hydrolysis rate in the subsequent methanogenic stage. The increase in biodegradability observed in the  
44 same study at 70°C with 4 days of retention time, suggests that the effects of Maillard reaction, usually  
45 occurring during thermal pre-treatment <100°C, were absent in TPAD. A reason could be that the  
46 increased enzymatic activity in the first stage of TPAD (Ghasimi et al., 2016b) can alleviate the effects of  
47 the formation of Maillard products due to the increased presence of hydrolytic enzymes or to the fact  
48 that some organisms have enzymatic ways to protect themselves against the Maillard reaction products

- 1 (Szwergold, 2013). During the acidogenic stage, Ge et al. (2011b) reported the production of methane
- 2 even at residence times shorter than four days, and at temperatures between 50°C and 60°C.

1 *Table 3 Effects on the biodegradation of WAS after TPAD.*

Entry	Acidogenic stage			Methanogenic stage			Change in biodegradation (compared to single stage)	Change in CH <sub>4</sub> production (compared to single stage)	Reference
	Temperature, °C	Retention time, day	pH	Temperature, °C	Retention time, day	pH			
a	45	4	6.05	35	16	-		↑85%	(J. Yu et al., 2013)
b	50	2	7	37	14	-	34% †		(Ge et al., 2011a)
c	55	6	7.54	35	24	7.53	↑ 18% (from 39 to 57)		(Wu et al., 2016)
d	55	2	6.8	55	18	8.2	↑ 11% (from 33 to 44)		(Leite et al., 2016)
e	60	2	7	37	14	-	41% †		(Ge et al., 2011a)
f	65	2	7	37	14	-	43% †		(Ge et al., 2011a)
g	65	2	6.3	55	18	7.9	↑ 5% (from 51 to 56)		(Bolzonella et al., 2012)
h	70	2	7	37	14	-	48% †		(Ge et al., 2011a)
i	70	2	-	35	14	-	↑ 15% (from 16 to 31)		(Ge et al., 2011b)

2 †absolute biodegradation, no control disclosed

1 Thermophilic conditions, applying 2-3 days retention time, have been reported to provide better results  
2 in terms of increased biodegradation (Bolzonella et al., 2007; Ge et al., 2011a; Riau et al., 2012; Q. Wang  
3 et al., 2016). The pH seems to act as a selection mechanism, which impacts biodegradability; with pH  
4 values close to neutrality giving increased biodegradability (Ge et al., 2011a) or volatile fatty acids (VFA)  
5 yields (Q. Wang et al., 2016), as compared to pH values between 4 and 5. According to the reported  
6 studies, the best results during the acidification step occur at temperatures between 65 and 70°C;  
7 retention times ranging from 2 to 3 days; and a pH of 6-7.

### 9 *Limiting factors, advantages and perspectives*

11 Riau et al. (2012) observed that even though the acidogenic effluent has poor dewaterability, a  
12 subsequent mesophilic digestion was able to reduce the 'time-to-filter' by more than 50% compared to  
13 a single-stage anaerobic digestion with the same process duration. This suggests that with this  
14 technique the addition of an acidification step may reduce the required amounts of polyelectrolyte for  
15 dewatering the digestate. A comparison of the biodegradation changes for low-temperature thermal  
16 pre-treatment and TPAD in Table A.1 shows more prominent increases for TPAD, even though similar  
17 temperatures are applied. A possible explanation could be the higher production of protein-like  
18 substances at 55°C compared to 35°C conditions (Ghasimi et al., 2016b) caused by the presence of  
19 biological activity during the pre-treatment.

## 21 2.3 Thermal pre-treatment $\geq 100^\circ\text{C}$

### 23 *Process description and mode of action*

25 High-temperature thermal pre-treatment or thermal hydrolysis relies on the application of  
26 temperatures above 100°C and was originally developed to sterilize the sludge and produce class A  
27 biosolids. To provide heat, steam is commonly used through heat exchangers or more commonly by  
28 direct injection (Pilli et al., 2014). Both the steam injection and the temperature increase, rise the  
29 pressure, which is suddenly released once the target values of temperature, pressure and application  
30 time are reached. In such cases, not only the effect of temperature is present but also that of the abrupt  
31 pressure drop, which increases both solubilization (Donoso-Bravo et al., 2011) and methane production  
32 (Sapkaite et al., 2017). The relevant parameters are temperature, application time, pressure, and the  
33 presence of a sudden pressure drop. Compared with application time, temperature has a higher  
34 influence on solubilization (Li and Noike, 1992; Valo et al., 2004; Xiao and Liu, 2006). Cambi™ and  
35 Exelys™ are industrial-scale technologies consisting of one or more pressurized tanks; reaching up to  
36 160°C for 30 minutes and 6 bar for Cambi™; and up to 180°C for 60 minutes and 10 bar for Exelys™.  
37 Cambi™ works in batch mode; whilst Exelys™ operates in plug flow mode. 'Steam explosion' in the  
38 Cambi process is achieved by suddenly reducing the pressure to two bar. Heat is then recovered and  
39 returned to the preheating stage. A detailed description of these processes is provided by Pilli et al.  
40 (2014).

41 The mechanism of thermal hydrolysis is best understood by highlighting two observations from Bougrier  
42 et al. (2008). Firstly, they observed that from 95 to 170°C, the extent of biogas production from the  
43 soluble fraction was higher than that from the particulate fraction. Secondly, the observed increase in  
44 biodegradation was caused by the transfer of organic matter from the particulate fraction to the soluble  
45 one, but did not lead to an increase in the biodegradation of each fraction (Bougrier et al., 2008), while

1 Pérez-Elvira et al. (2016) found that the biodegradation of the solid fraction remained constant after  
2 pre-treatment at 170°C for 50 minutes. At temperatures above 190°C, biodegradation decreases  
3 compared to lower temperatures and can even be lower than the control (Mottet et al., 2009; Stuckey  
4 and McCarty, 1984).

## 5 6 *Effects on WAS*

### 7 8 *Floc and cell disruption*

9  
10 Temperatures from 100 up to 120°C were found to reduce particle size (Gao et al., 2013; Laurent et al.,  
11 2009b); which follows the trend observed in low-temperature pre-treatment. In contrast, at 170 and  
12 190°C, the particle size increased compared to the untreated sample, which was explained by the  
13 creation of chemical bonds (Bougrier et al., 2006). In a follow-up study, Bougrier et al. (2008) observed a  
14 temperature threshold of 150°C, below which temperature worsened dewaterability and above which  
15 temperature improved it. The decrease and increase in particle size is also reflected in the dewatering  
16 properties of the digestate.

17  
18 Already at 70-95°C permeabilization and cell destruction was observed (Prorot et al., 2011; Salton and  
19 Horne, 1951); and therefore it is expected that temperatures above 100°C will provoke extensive cell  
20 disruption and release of the intracellular content. Extensive solubilization seems to influence the  
21 observed increase in biodegradability for most of the studies reported (Table 4). However, as described  
22 below, care should be taken to avoid the negative effects of excessive temperatures. Moreover,  
23 considering the relatively low amount of bacterial mass in WAS (Table 1, 10-24%), the impact of  
24 temperature on other organic compounds needs to be considered.

### 25 26 *Carbohydrates, proteins and humic substances*

27  
28 The melting point of sugars (at 170°C) causes caramelization, and thus the formation of organic acids,  
29 aldehydes, and ketones. Caramelization does not involve proteins and should not be confused with the  
30 Maillard reaction (Vaclavik and Christian, 2008). Above 170°C, degradation of sugars is expected to  
31 occur. However, Wilson and Novak (2009) observed that below 220°C, the effect of thermal hydrolysis  
32 on carbohydrates was solubilization, not degradation. This fact agreed with their observation that pure  
33 carbohydrate solutions were not largely converted to mono or dimeric sugar units at 220°C (Wilson and  
34 Novak, 2009). Regarding proteins, extensive denaturation is expected at such high temperatures as well  
35 as degradation at temperatures around 190°C and 220°C, since ammonia concentration had been  
36 observed to increase up to nine times compared to the control (Wilson and Novak, 2009). This matched  
37 with the fact that protein degradation of pure bovine serum albumin was observed for the same  
38 temperature range (Wilson and Novak, 2009). Below 170°C, evidence of extensive protein degradation  
39 has not been observed (Bougrier et al., 2008; Morgan-Sagastume et al., 2011). An increase in enzymatic  
40 activity is not expected to play a significant role during high-temperature pre-treatment of WAS. In fact,  
41 enzyme degradation is a pivotal factor in the loss of enzymatic activity at temperatures in excess of 80  
42 °C (Daniel et al., 1996). Additionally, even though enzyme immobilization (e.g. with humic substances) is  
43 known to increase the half-life of enzymes, it only increases the denaturation temperature by 25 °C  
44 (Unsworth et al., 2007)."



1 Finally, Wilson and Novak (2009) reported that from 130 to 220°C, the relative solubilization of  
2 polysaccharides was higher than that of proteins, which is the opposite to what has been observed for  
3 low-temperature pre-treatment. It is hypothesized that for a temperature >100°C most of the proteins  
4 are already solubilized, whereas the bound carbohydrates only start to be solubilized at 130°C. Also, the  
5 Maillard reaction could take place, likely to a higher extent as compared to temperatures below 100°C,  
6 since reaction rates increase with temperature (Dwyer et al., 2008). Finally, at temperatures above  
7 110°C humic acids start to decompose (Kolokassidou et al., 2007), while at 150-180°C dissociation  
8 occurs (Bobleter, 1994; Garrote et al., 1999).

### 9 10 *Hydrolysis rate and biodegradation*

11  
12 The hydrolysis rate increases after application of thermal hydrolysis (Bougrier et al., 2006; Gao et al.,  
13 2013) and so does the biodegradation, as observed in Figure 1 and Table 4. A parabolic behavior for  
14 WAS biodegradation as a function of pre-treatment temperature is observed in Figure 1, with the  
15 highest values in the range of 170-190°C. Indeed, it has been widely documented that the maximum  
16 methane production is found at temperatures around 170-190°C (Bougrier et al., 2008, 2007b;  
17 Pinnekamp, 1989; Stuckey and McCarty, 1984) despite the fact that COD solubilization continues to  
18 increase in proportion to temperatures up to 220°C (Mottet et al., 2009) (Table 4, entry t). Similarly,  
19 Bougrier et al. (2007b) and Pinnekamp (1989) tested pre-treatments at 190 and 220°C respectively, and  
20 the maximum biodegradation was found below those temperatures, in contrast to VS destruction, which  
21 increased in proportion to temperature. Such observations suggest that the pre-treated sludge is  
22 mineralized under harsh pre-treatment conditions (Zhen et al., 2014)

23  
24 According to Stuckey and McCarty (1984) the observed peak in methane production could be caused by  
25 two competing mechanisms: the conversion of particulate organics into biodegradable dissolved matter,  
26 which increases methane yield; and the formation of soluble but refractory compounds that do not  
27 contribute to biogas production. The decline in methane production has been widely ascribed to  
28 Maillard reactions. Maillard reactions result in the formation of melanoidins (Neumann et al., 2016).  
29 Actually, due to their recalcitrant nature, melanoidins are also known as synthetic humic acids  
30 (Blondeau, 1989). The occurrence of the Maillard reaction produces color changes (Vaclavik and  
31 Christian, 2008), which correlate with the brownish supernatant of digested sludge observed by  
32 Bougrier et al. (2007b) at a temperature of 190°C. At 135°C or less (well below the methane production  
33 peak at 160-190°C), the formation of refractory products also already takes place as discussed for low-  
34 temperature pre-treatment, which could reduce WAS biodegradability. In contrast, it is likely that  
35 conditions up to 190°C promote a higher organic matter solubilization that outcompetes the formation  
36 of refractory compounds (Table 4, entry h). In addition, at 170°C, the caramelization of sugars starts,  
37 potentially producing the aldehyde furfural (C<sub>5</sub>H<sub>4</sub>O<sub>2</sub>), which has been shown to inhibit anaerobic  
38 biological processes at a concentration of around 2 g/L (Ghasimi et al., 2016a). Thus, a temperature of  
39 around 190°C is postulated as the temperature above which the formation of refractory components  
40 outcompetes the formation of biodegradable soluble components, thereby reducing biodegradation.  
41 The exact temperature, however, depends on sludge composition, and probably other factors.

1 *Table 4 Effects on the biodegradation of WAS after thermal pre-treatment ≥100°C.*

Entry	Temperature, °C	Application time, minutes	Pressure, MPa	Soluble COD	Change in biodegradation (vs. control)	Change in biogas production (vs. control)	Reference
a	100	10	0.1	↑ from 4.1 to 24.8%	↑ 11% (from 12 to 23)		(Gao et al., 2013)
b	110	30	n/d	↑ from 8.7 to 12.2%	↑ 6% (from 47 to 53)		(Mottet et al., 2009)
c	120	10	0.1	↑ from 4.1 to 75.9%	↑ 19% (from 12 to 31)		(Gao et al., 2013)
d	121	30	0.152	↑ from 8.1 to 17.7%	↑ 8% (from 26 to 34)		(Kim et al., 2003)
e	130	15	n/d			↑ 14% (as CH <sub>4</sub> )	(Nielsen et al., 2011)
f	130	45	n/d			↑ ≈68%	(Pinnekamp, 1989)
g	134	20	0.312	↑ from 0.0 to 14.1%	↑ 15% (from 31 to 46)		(Gianico et al., 2013)
h	135	30	n/d		↑ 6% (from 49 to 55)		(Bougrier et al., 2007b)
i	165	30	n/d	↑ from 8.7 to 25.2%	↑ 9% (from 47 to 56)		(Mottet et al., 2009)
j	170	0*	n/d	40.5% (initial value not disclosed)		↑ 1.59 times	(Bougrier et al., 2006)
k	170	15	n/d			↑ 9.2% (as CH <sub>4</sub> )	(Nielsen et al., 2011)
l	170	45	n/d			↑ 74%	(Pinnekamp, 1989)
m	170	60	n/d		↑ 20% (from 25 to 45)		(Valo et al., 2004)
n	175	60	n/d		↑ 13% (from 48 to 61)		(Stuckey and McCarty, 1984)
o	190	0*	n/d	49.0% (initial value not disclosed)		↑ 1.59 times	(Bougrier et al., 2006)
p	190	15	n/d		↑ 13% (from 49 to 62)		(Bougrier et al., 2007b)
q	190	30	n/d	≈63% (initial value not disclosed)		↑ ≈2.6 times	(Bougrier et al., 2008)
r	200	60	n/d		↑ 9% (from 48 to 57)		(Stuckey and McCarty, 1984)
s	210	30	n/d	≈67% (initial value not disclosed)		↑ ≈2.1 times	(Bougrier et al., 2008)
t	220	30	n/d	↑ from 8.7 to 33.4%	↓ 6% (from 47 to 41)		(Mottet et al., 2009)
u	220	45	n/d			↑ ≈11%	(Pinnekamp, 1989)
v	225	60	n/d		↑ 4% (from 48 to 52)		(Stuckey and McCarty, 1984)
w	250	60	n/d		=		(Stuckey and McCarty, 1984)
x	275	60	n/d		↓ 6% (from 48 to 42)		(Stuckey and McCarty, 1984)

- 2  
3 \* No holding time  
4 n/d: not determined

## 1 2 *Limiting factors, advantages and perspectives*

3  
4 Attention should be given to the effect of the refractory solubilized fraction resulting from thermal  
5 hydrolysis, as it may pose negative effects when returned back to the wastewater headworks. A way to  
6 minimize the effects of refractory compounds is to increase digestion times (whenever possible)  
7 (Stuckey and McCarty, 1984), provided the methanogenic consortia are able to adapt to these  
8 compounds. Adaptation may occur by allowing sufficient time for developing the required hydrolytic  
9 enzymes (Ghasimi et al., 2016b).

10  
11 Thermal hydrolysis has been observed to increase biogas production, with the largest impact on low-  
12 loaded activated sludge processes, for sludge samples with low initial biodegradation (Bougrier et al.,  
13 2008; Pinnekamp, 1989) and for digested sludges that are post-treated and then re-digested  
14 (Pinnekamp, 1989). In addition to its original objective of sludge sterilization (implying suitability for land  
15 disposal if regulations allow), thermal hydrolysis also increases the dewaterability of the digestate (at  
16 above 150°C) and results into high VS removal. Compared to low-temperature pre-treatment, thermal  
17 hydrolysis cannot operate using only low quality waste heat ( $\leq 80^{\circ}\text{C}$ ), high quality heat ( $>100^{\circ}\text{C}$ ) is also  
18 required, which can negatively impact the energy balance as observed in Table A.1 and Table B.1. To get  
19 a closed heat balance (or as closed as possible) dewatered WAS with a high VS concentration ( $>16\%$ )  
20 should be fed to the pre-treatment, instead of thickened or dewatered sludge with a VS concentration  
21 of around 3-6%, as compared to low-temperature pre-treatment Table B.1. Moreover, in many cases the  
22 required minimum VS concentration had to be 20-25%, or some primary sludge had to be co-digested to  
23 get a closed heat balance during thermal hydrolysis.

## 24 25 *2.4 Microwave pre-treatment*

### 26 27 *Process description and mode of action*

28  
29 Microwaves are high-frequency (around 2.45 GHz) electromagnetic waves, which create a changing  
30 electromagnetic field. This causes rapid alignment and realignment of dipoles in polar molecules (such  
31 as water and some EPS molecules), and thus generates friction that liberates heat (Vaclavik and  
32 Christian, 2008). In addition to the thermal effect, an “athermic” effect related to the breaking of the  
33 polymeric network due to the rotation of molecules has been hypothesized (Eskicioglu et al., 2006).  
34 Nonetheless, it has been demonstrated that under identical experimental conditions (heating/cooling  
35 rates and net absorbed energy), athermal effects do not exist, or at least, are insignificant compared to  
36 the thermal effects (Hosseini Koupaie and Eskicioglu, 2016; Mehdizadeh et al., 2013; Sóllyom et al., 2011;  
37 Vergine et al., 2014).

38  
39 Similar to conventional thermal pre-treatment (heat transfer by convection), temperature increase is  
40 the most relevant parameter during microwave pre-treatment (Hosseini Koupaie and Eskicioglu, 2016;  
41 Mehdizadeh et al., 2013). Increase in biodegradation is in proportion to applied temperature, for the  
42 low-temperature range ( $65\text{-}85^{\circ}\text{C}$ ) (Kennedy et al., 2007) as well as for the high temperature range  $110\text{-}$   
43  $175^{\circ}\text{C}$  (Toreci et al., 2011, 2010). Other important factors are the temperature increase rate, or ramp  
44 rate (Hosseini Koupaie and Eskicioglu, 2016) and the sludge solids concentration, as it affects the  
45 absorption of microwaves (Eskicioglu et al., 2007b) and thus the energy actually delivered to the sample.

### 46 47 *Effects on WAS*

1 *Floc and cell disruption*

2

3 Similarly to low-temperature pre-treatment, the mean particle size of the pre-treated sludge seems to  
4 decrease under microwave application (Kennedy et al., 2007; Yi et al., 2014). Unfortunately, no studies  
5 were found regarding the relationship between particle size distribution and temperature increase, at  
6 temperatures higher than 100°C, although a further decrease in particle size is expected at  
7 temperatures around 150°C, followed by an increase after this temperature, as has been reported for  
8 thermal hydrolysis.

9

10 Cella et al. (2015) found that the highest microbial destruction occurred at 2.62 kJ/g TS at a temperature  
11 of 80°C and 9 minutes of application time, which lowered the live/dead ratio from around 3 for the  
12 control to around 0.25 for the pre-treated sample. An additional input of energy did not cause  
13 significantly higher microbial death. Eskicioglu et al. (2007a) postulated that cell disruption is due to the  
14 absorbance of microwaves in the lipid bilayer of cell membranes. Several studies have reported an  
15 increase in cell disruption by using microwaves as compared to conventional heating at the same final  
16 temperature, the difference potentially being explained by the aforementioned athermic effect  
17 (Eskicioglu et al., 2007c; Hong et al., 2006, 2004; Kakita et al., 1995). However, in those studies, either  
18 the temperature increase rate or the energy actually absorbed by the sample was not strictly controlled.  
19 As a consequence, a higher energy input could have been actually delivered resulting in a higher cell  
20 death. Therefore, it is concluded that cell disruption exists during microwave pre-treatment, but the  
21 treatment is dominated by thermal effects, just as for conventional thermal pre-treatment.

22

23 *Carbohydrates, proteins and humic substances*

24

25 The observation that merely thermal effects are determining during microwave pre-treatment is also  
26 confirmed by trends observed for both thermal and microwave pre-treatments:

- 27 - Proportional increase in soluble COD at temperatures below 100°C (Eskicioglu et al., 2007c;  
28 Kennedy et al., 2007) as well as above 120°C (Eskicioglu et al., 2009; Toreci et al., 2009).  
29 Specifically, a proportional increase in the concentration of soluble sugars, protein and humic  
30 acids at 50-160°C (Eskicioglu et al., 2007a; Mehdizadeh et al., 2013).  
31 - Higher relative solubilization of proteins compared to carbohydrates (Eskicioglu et al., 2007c;  
32 Uma Rani et al., 2013). No degradation of proteins and sugars up to 80°C (8.23 kJ/gTS) (Appels  
33 et al., 2013).  
34 - Initial increase of reducing sugars in the supernatant at 50 and 75°C and subsequent decrease at  
35 96°C, probably explained by the occurrence of the Maillard reaction (Eskicioglu et al., 2007a).

36

37 *Hydrolysis rate and biodegradation*

38

39 In contrast to conventional thermal pre-treatment, conflicting results have been observed regarding the  
40 hydrolysis rate. Park et al. (2004) and Hosseini Koupaie et al. (2017) observed an increase; Eskicioglu, et  
41 al. (2007b) found no change; and Toreci et al. (2011) found a decrease. The latter could be explained by  
42 inhibition caused by toxic by-products formed during microwave pre-treatment, because temperatures  
43 up to 175°C had been used. Another possible explanation is the use of non-acclimated inoculum during  
44 batch digestion tests. Regarding sludge biodegradation, results match with observations for low and  
45 high temperature pre-treatment. Most of the studies observed an increase in biodegradation (Table 5),  
46 although some papers reported no increase (Cella et al., 2015; Eskicioglu et al., 2008).

1 *Table 5 Effects on the biodegradation of WAS after microwave pre-treatment.*

Entry	Temperature, °C	Application time, minute	Irradiation energy, kJ/L	Specific energy (E <sub>s</sub> ), kJ/gTS	Change in biodegradation (vs. control)	Change in CH <sub>4</sub> production (vs. control)	Change in biogas production (vs. control)	Reference
a*	60	7	1029	16.07 (ca.)	↓ 3% (from 53 to 50)			(Eskicioglu et al., 2008)
b*	80	8	1175	18.37 (ca.)	↑ 1% (from 53 to 54)			(Eskicioglu et al., 2008)
c*	80	3.5	336	8.23				(Appels et al., 2013)
d*	85	4.5	493	16.42 (ca.)		↑ 16%		(Kennedy et al., 2007)
e	91.2	7	588	19.55		↑ 30%		(Park et al., 2004)
f*	96	3	450	21.65 (ca.)			↑ 17%	(Eskicioglu et al., 2007b)
g*	96	6	900	17.51 (ca.) as kJ/gSS	↑ 10% (from 33 to 43)			(Coelho et al., 2011)
h*	100	9	1322	20.66 (ca.)	↑ 15% (from 53 to 68)			(Eskicioglu et al., 2008)
i	120	10	1470	22.96 (ca.)	↑ 1% (from 53 to 54)			(Eskicioglu et al., 2008)
j	130	46	3335	81.54 (ca.)	↑ 9% (from 46 to 55)			(Chi et al., 2011)
k	160	16	2880	501.8 (ca.) as kJ/gSS		↑ 11%		(Doğan and Sanin, 2009)
l	190	39	2830	69.13 (ca.)	↑ 11% (from 46 to 57)			(Chi et al., 2011)
m	n/d	n/d	975	38.08		↑ 46%		(Martínez et al., 2016)
n	n/d	n/d		20		↑ 6%		(Serrano et al., 2016)

2

3 \*Performed with mixed sludge (WAS=58%; primary sludge =42%, by volume)

4 n/d= not disclosed

5 ca. = calculated value based on the parameters of the study

1 The effect of the temperature increase rate during pre-treatment on sludge biodegradation should not  
2 be neglected. It has been observed that a slower temperature increase, enhances methane production  
3 for both low and high temperature scenarios (Eskicioglu et al., 2009; Hosseini Koupaie and Eskicioglu,  
4 2016; Park and Ahn, 2011; Toreci et al., 2011). This could be related to the application time-temperature  
5 dependence, that was observed by Hosseini Koupaie et al. (2017) for microwave pre-treatment under  
6 90-120°C and with application times of 1 to 2 hours. However, insufficient studies, on the time-  
7 temperature dependency with microwave pre-treatment, were found in literature to draw general  
8 conclusions regarding this mechanism.

### 9 10 *Limiting factors, advantages and perspectives*

11  
12 Despite the inherent differences between microwave and ultrasonic (US) pre-treatments, comparisons  
13 have been carried out under similar specific energy consumption. For microwaves, applying 2.62 kJ/g TS  
14 at a temperature of 80°C and 10 minutes of application time, and US pre-treatment, applying 2.37 kJ/g  
15 TS at a temperature <35°C, it was found that microwaves caused a fourfold to fivefold greater cell  
16 death, but this did not result in significantly different biodegradation (Cella et al., 2015). Westerholm et  
17 al. (2016) made a similar observation. This suggests that both microwave and ultrasonic pre-treatment  
18 result in comparable outcomes regarding biodegradation. Applying an alternative electromagnetic  
19 frequency (13.56 MHz versus the conventional 2.45 GHz) did not change the biogas production rate and  
20 biodegradation significantly (Hosseini Koupaie et al., 2017), although it was two times more energy  
21 efficient compared to the conventional frequency. A potential drawback of microwave pre-treatment is  
22 the observed short term inhibition of digestion after pre-treatment (Eskicioglu et al., 2007b; Toreci et  
23 al., 2011), however no studies have been performed to further understand its cause. Interestingly,  
24 microwave pre-treatment has been reported to improve the dewaterability of the digestate at  
25 temperatures below 96°C (Coelho et al., 2011; Eskicioglu et al., 2007b; Wang and Li, 2016), in contrast to  
26 the results of low-temperature thermal pre-treatment. Based on the discussions in previous sections,  
27 similar improvements to anaerobic digestion can be achieved with low-temperature or thermal  
28 hydrolysis pre-treatments. Furthermore, microwave pre-treatment requires a significantly higher energy  
29 expense (Table A.1), due to the fact that electricity is required, in contrast to the waste heat required for  
30 low-temperature pre-treatment.

### 31 32 *2.5 Freezing and thawing*

#### 33 34 *Process description and mode of action*

35  
36 Freeze and thaw consists of the freezing of sludge, usually at temperatures around -20°C for several  
37 hours and a subsequent thawing process at room temperature. The formation of ice crystals causes  
38 physical damage to the cells (Vaclavik and Christian, 2008). The sequence of mechanisms is: a) at 0°C, ice  
39 crystals are formed in the extracellular solution. Intracellular content remains liquid as it contains fluids  
40 with lower freezing points compared to extracellular content (Thomashow, 1998). The ice front pushes  
41 particulate matter together, forming clusters; b) solute concentrations just outside the cell increase due  
42 to the freezing of the extracellular solution. This causes osmotic pressure that leads to cell dehydration  
43 and shrinking (Wang et al., 2001); c) as freezing time increases or temperature is further decreased, to  
44 between -2 and -10°C, the intracellular content freezes and expands due to internal ice formation that  
45 then leads to cell lysis (Thomashow, 1998).

46  
47 Very limited research focused on increasing methane production with this method has been reported.  
48 Most of the relevant studies focused on dewatering effects. Temperature, freezing rate and pre-

1 treatment time (curing time) are relevant operational parameters that affected dewaterability (Hu et al.,  
2 2011; Vesilind and Martel, 1990; Wang et al., 2001). Lower freezing rates and colder temperatures result  
3 in better dewatering (Hu et al., 2011; Vesilind and Martel, 1990). Refreezing, in multiple freeze and thaw  
4 cycles, enlarges ice crystals, contributing to further cell disintegration (Vaclavik and Christian, 2008).

## 5 6 *Effects on WAS*

### 7 8 *Floc and cell disruption*

9  
10 It has been reported that the ice front formed during freezing of WAS squeezes the particulate fraction  
11 together into larger particles that tend to keep their new size after thawing (Gao, 2011; Wang et al.,  
12 2001). Other studies showed that freeze and thaw pre-treatment reduced the particle size of the sludge  
13 flocs and increased the settleability. Similarly, when subjected to cooling the proteins precipitate or  
14 aggregate (Chang et al., 1996; Heller et al., 1999; Yu et al., 2006). This suggests compaction of the sludge  
15 flocs due to the freezing process (Hu et al., 2011). As almost all studies report an increase in  
16 dewaterability, but with different trends in the modification of particle sizes, both increase in particle  
17 size and increase in density could be the mechanism behind dewaterability increase.

18  
19 The freeze and thaw pre-treatment causes a decrease in the fraction of viable cells (Diak and Örmeci,  
20 2016; Wang et al., 2001). Slow freezing is more preferable than rapid freezing or excessively lower  
21 temperatures (Wang et al., 2001). Authors concluded that at -80°C, the freezing speed was so rapid that  
22 some bacteria survived due to the prevention of the elution of proteins and carbohydrates. Cell survival  
23 at freezing temperatures could be due to the presence of cryoprotectant components, such as proteins  
24 and fats and glycerol (Montusiewicz et al., 2010).

### 25 26 *Carbohydrates, proteins and humic substances*

27  
28 COD solubilization increases linearly with freezing time, suggesting that long retention times could be  
29 required to have significant solubilization (Hu et al., 2011). Wang et al. (2001) observed a 25-fold  
30 increase in soluble proteins and an approximately 4-fold increase in soluble carbohydrates after 24  
31 hours of freezing at -10°C. They also observed a higher degree of solubilization in the case of freezing at  
32 -10°C as compared to freezing at -80°C. This was related to higher cell disruption at higher  
33 temperatures. Even though protein denaturation occurs as a result of freezing, freezing does not  
34 completely stop enzyme activity (Vaclavik and Christian, 2008). Regarding carbohydrates, the expelling  
35 of water from starch (an effect of the retrogradation reaction) is more likely to occur in WAS that is  
36 exposed to the effects of freeze–thaw cycles (Vaclavik and Christian, 2008).

### 37 38 *Hydrolysis rate and biodegradation*

39  
40 No information was found concerning the effect of freeze and thaw pre-treatments on the hydrolysis  
41 rate. However, an increase is expected since cell disruption and change in particle size occurs. In the few  
42 studies regarding biogas potential, increased biogas production has been reported (Jan et al., 2008;  
43 Montusiewicz et al., 2010; Pabón Pereira et al., 2012).

## 44 *Limiting factors, advantages and perspectives*

45  
46 Similar COD solubilization was observed for freeze and thaw and high-temperature thermal (103°C) pre-  
47 treatment (Gao, 2011). Unfortunately, the anaerobic biodegradability and biogas production was not

1 studied. The only successful freeze and thaw systems are found in natural freezing and thawing systems  
 2 in open beds (Hellström, 1997; Kinnunen et al., 2014; Vesilind and Martel, 1990). In these sludge beds,  
 3 the sludge is spread into thin layers during the winter months and allowed to freeze, while in warmer  
 4 weather the sludge thaws and the water drains out, leaving a dry WAS (Wang et al., 2001). Although this  
 5 mechanism is beneficial for improving dewaterability, it could cause a decrease in the biodegradation of  
 6 sludge, because soluble COD also leaks out if the sludge is not in an enclosed volume. Since no energy  
 7 input is required and an increase in methane production is expected, freeze and thaw using naturally  
 8 occurring conditions has a positive energy balance (Table A.1). However, this technique is restricted to  
 9 cold regions during the coldest seasons and is dependent on the actual climatic conditions (not all  
 10 winters are similarly cold). Also, in order to reduce the size of the bed, research on applicable exposure  
 11 times need to be performed. Artificial freezing does not seem to be a practical option, because of the  
 12 amount of electricity required, and the hypothetical large freezers for storing the sludge. For instance,  
 13 active freezing of sludge from 10 to -25°C assuming a total solids concentration of 40 g/L and a  
 14 coefficient of performance of 2.75 (Taib et al., 2010), would demand an expense of 4.25 kJ/gTS in  
 15 electric energy. Nonetheless, freeze and thaw increases the biomethane potential of WAS, while also  
 16 probably improving the dewaterability of the digestate. Moreover, in contrast to other pre-treatment  
 17 techniques, the formation of refractory compounds or undesirable by-products is probably absent at  
 18 freezing temperatures.

## 20 2.6 Ultrasonic pre-treatment

### 22 *Process description and mode of action*

24 Ultrasonic pre-treatment results in cavitation, a disturbance in the liquid resulting in the formation,  
 25 growth, and implosion of bubbles (Chatel, 2016). In order for cavitation to occur, weak points in the  
 26 liquid must exist, such as suspended particulate matter (Chatel, 2016). The efficacy of ultrasonic pre-  
 27 treatment of WAS depends on ambient conditions and operational parameters (Delmas et al., 2014).  
 28 Depending on the selection of ultrasonic parameters, the sudden collapse of bubbles creates shear  
 29 forces and/or formation of hydroxyl radicals.

31 Parameters such as frequency, ultrasonic density (Eq. 2), temperature and VS concentration should be  
 32 considered for a complete picture of the performance of ultrasonic pre-treatment. One of the most  
 33 widespread operational parameters for ultrasonic pre-treatment of WAS is the specific energy  
 34 requirement,  $E_s$  (Eq. 3), an umbrella term encompassing power, volume of the sample, application time  
 35 and the concentration of solids. Although useful for assessing the energy consumption, it should be  
 36 employed carefully as it does not replace the detailed selection of the main parameters of ultrasonic  
 37 pre-treatment. Table 6 lists the relevant parameters and their effects during sonication of WAS.

$$39 \quad D \left[ \frac{kW}{L} \right] = \frac{Power (kW)}{Volume (L)} \quad (Eq. 2)$$

$$41 \quad E_s \left[ \frac{kJ}{gTS} \right] = \frac{D \left( \frac{kW}{L} \right) \times time (s)}{Solids concentration \left( \frac{gTS}{L} \right)} \quad (Eq. 3)$$

43 *Table 6 Parameters with influence in the sonication of WAS*

Parameter, (unit)	Remarks
Frequency, (kHz)	Frequency determines whether cavitation or formation of hydroxyl radicals dominates: low frequencies (20-80 kHz) lead to physical effects (shockwaves, microjets, microconvection) (Chatel, 2016; Pilli et al., 2011); while high frequencies (150-2000 kHz) favour the production of hydroxyl radicals (Chatel, 2016; Tiehm et al.,



	2001).  For WAS ultrasonic pre-treatment, the range of 20 to 41 kHz has been commonly used.  Between 41 and 3217 kHz, higher particle size reduction and supernatant turbidity was observed at 41 kHz (Tiehm et al., 2001). Recently, the use of audible frequencies (<20kHz) has been assessed with promising results. At lower frequencies, like 12 kHz, higher COD solubilization has been observed than at 20 kHz (Delmas et al., 2014; Tuan et al., 2016; R. Wang et al., 2016a). Jiang et al. (2009) however had the highest COD solubilization at 25 kHz of the tested 19, 25, 40 and 80 kHz.
Ultrasonic density, acoustic power or power density, $D$ , (kW/L)	Power density is part of the parameters included in the calculation of the specific energy (Eq. 3). It has been observed that under the same value of $E_s$ , the higher the power density, the higher the solubilization (Pérez-Elvira et al., 2009; Show et al., 2007).
Temperature	Cavitation increases the temperature of the medium as a function of the sonication time (Chatel, 2016; Nguyen et al., 2016) and power density (Rombaut et al., 2014).  Temperature uncontrolled sonication led to higher COD solubilization compared to temperature controlled sonication (Tuan et al., 2016). However, the effect of shear forces by cavitation decreases at increasing temperatures, so it should be kept below 80°C (Delmas et al., 2014; Huan et al., 2009; Tuan et al., 2016).
Solids concentration, (gTS/L)	There is an optimum in the range of 1-3% TS for solubilization (Sahinkaya, 2015; Show et al., 2007) and biodegradation (Pilli et al., 2016). According to Show et al. (2007), an excess of solids in sludge results in a high energy loss during sonication, thus reducing the effectiveness of pre-treatment.
Application time, (s)	It has been observed for temperature controlled ultrasonic pre-treatment that increasing pre-treatment time over 60 minutes had essentially no effect on the sludge characteristics (Chu et al., 2001). However, for temperature uncontrolled ultrasonic pre-treatment, the effects of increasing pre-treatment time are increases in temperature and higher cellular death (Zielewicz, 2016).

1  
2 **Effects on WAS**

3  
4 **Floc and cell disruption:**

5  
6 Ultrasonic pre-treatment has been used as a dispersion technique for aggregates (Foladori et al., 2007;  
7 Jorand et al., 1995) such as WAS flocs. A reduction in particle size diameter is expected, which would  
8 make the organic matter more accessible for enzymatic attack (Jorand et al., 1995; Vavilin et al., 2008).  
9 For temperature controlled sonication, particle size decreased as the dosage of specific energy increased  
10 (Feng et al., 2009). This in turn results in an increase in hydrolysis rate, as will be described below.  
11 An effect of ultrasonic pre-treatment is the break-up or damage of the bacterial cell wall (Jorand et al.,  
12 1995). Indeed, cell disruption has been documented by flow cytometry of WAS as presented in Table 7.  
13 Entries a and b, were performed with very low TS concentrations that are not representative of  
14 thickened WAS that is used for AD, yielding excessive specific energy values. However, Cella et al.  
15 (2015), employed sewage sludge at 42 gTS/L and found that even though the percentage of damaged  
16 bacterial cell walls increased from around 33 to 50% (Table 7, entry c), the cell death did not increase  
17 overall WAS biodegradation; which might be attributed to the relatively low amount of cells in WAS  
18 (Cella et al., 2015). Nonetheless, more detailed research is necessary to determine the specific energy  
19 required to damage or rupture cell walls in thickened WAS.

20  
21 **Table 7 Effect of ultrasounds application in cell disruption**

Entry	Solids concentration	Ultrasonic density, (kW/L)	Specific energy ( $E_s$ )	Damaged cells (%)	Comment	Reference
a	0.00253 g TSS/L*	0	0	13	Control	(Guo et al., 2014)
		2.0	95,000 kJ/gTSS	20	Sonicated sample	
b	0.006-0.0088 gTSS/L*	0	0	18	Control	(Foladori et al., 2007)
		0.3-1.5	20,000 kJ/gTSS	25	Sonicated sample	
c	42 gTS/L	0	0	≈33	Control	(Cella et al., 2015)
		1	2.37 kJ/gTS	≈50	Sonicated sample	

\* Low solids concentrations are caused by dilution

22  
23 **Carbohydrates, proteins and humic substances**

During ultrasonic pre-treatment, for both temperature-controlled and uncontrolled conditions, the solubilization of proteins is higher compared to carbohydrates (Table 8), which matches with some findings from thermal pre-treatment below 100°C. During temperature-controlled ultrasonic pre-treatment, only a marginal increase in VFA concentration was observed (Cella et al., 2015). It remains unclear whether sonication is able to break down carbohydrates and proteins, as well as its effect on humic substances, which leaves ample room for further research.

Table 8 Release of biopolymers after ultrasonic pre-treatment

Entry	Temperature, °C	Ultrasonic density, (kW/L)	$E_s$ , kJ/gTS	Change in soluble carbohydrate (vs. control)	Change in soluble protein (vs. control)	Change in soluble humic substances (vs. control)	Reference
a	30	0.65	2.5-21	↑≈9 times	↑≈23 times		(Tian et al., 2015b)
b	"un-controlled"	0.1	100	↑11.4 times	↑13.3 times	↑3.9 times	(Jaziri et al., 2012)
c	"no increase detected"	0.5	2.209	↑8.0 times	↑10.9 times		(Braguglia et al., 2015)
d	"no increase detected"	0.5	8.838	↑25 times	↑25 times		(Braguglia et al., 2015)
e	Not disclosed	0.18	13.14 (as kJ/gSS)	↑0.5 times			(Brown and Lester, 1980)

### Hydrolysis rate and biodegradation

Hydrolysis rate increases with ultrasonic pre-treatment (Braguglia et al., 2012; Kianmehr et al., 2013; Zorba and Sanin, 2013). This can be ascribed to the inherent floc dispersion (de-agglomeration) which leads to an increased surface area; and also because of better mixing and diffusion of the components (Bougrier et al., 2006; D.-H. Kim et al., 2013; Rombaut et al., 2014; Sotodate et al., 2009).

Regarding sludge biodegradation, due to the associated increase in temperature (which could reach up to 70°C) under uncontrolled conditions, an analysis must consider the effect of temperature in order to differentiate between thermal and ultrasonic effects on the biodegradation. As shown in Table 9, when temperature was kept below 45°C, the increase in biodegradation was in the range of 1-5.5% (entries a to d), even though extensive COD solubilization occurred (Kianmehr et al., 2013). An explanation could be that most of the cell walls are only partially damaged or ruptured during ultrasonic pre-treatment and because biopolymers are only solubilized but not degraded. However, the study from Braguglia et al. (2015) (entry e) is an exception to this trend, as the increase in biodegradation was 14%. In addition, a full-scale study in Nieuwgraaf WWTP, The Netherlands, where about 35% of the total WAS stream was exposed to sonication at temperatures below 30°C (the temperature increase was 7°C) and  $D=0.096$  kW/L, resulted in a  $E_s$  of about 8 kJ/gTS. No difference between the sonication process and the untreated process was observed, neither for soluble COD increase nor for VS reduction (STOWA, 2013). On the other hand, when control of temperature is not carried out (entries f-g), biodegradation increased in the order of 7-18%, as well as methane production (entry h). It could therefore be inferred that thermal effects most likely causes the difference in sludge biodegradation. According to Salsabil et al. (2009), the production of biogas was proportional to  $E_s$  in the range 3.6-108 KJ/gTS, thus a higher energy input may result in remarkable increases in biodegradation. Nonetheless,  $E_s$  values of 14.3 and 25.9 kJ/gTS required hypothetical sludge biodegradation of 160 and 261%, respectively, implying that energy should be supplied in order to reach a neutral energy balance (Table B.2).

1 *Table 9 Effects of ultrasonication on WAS biodegradation*

2

Entry	Temperature	Ultrasonic density, (kW/L)	E <sub>s</sub> , kJ/gTS	Change in biodegradation (vs. control)	Change in CH <sub>4</sub> production (vs. control)	Notes	Reference
<b>Temperature control</b>							
a	Started at 25°C and “not increased significantly”	1.9	3.8	↑ 3% (from 20 to 23)			(Seng et al., 2010)
b	T<45°C	3.7		↑1-3%			(Kianmehr et al., 2013)
c	T<35°C	0.165	2.37	↑2% (from 41 to 43)		mix of primary sludge and WAS (33:67)	(Cella et al., 2015)
d	T<30°C	0.65	9	↑ 6% (from 56 to 62)		mix of primary sludge and WAS (1:1)	(Tian et al., 2015b)
e	“no temperature increase detected”	0.6	4.42	↑14% (from 34 to 48)		mix of primary sludge and WAS (33:67)	(Braguglia et al., 2015)
<b>No temperature control</b>							
f	No-controlled	7.5		↑ 7% (from 36 to 43)			(D.-H. Kim et al., 2013)
g	No-controlled	≈13.3	2.57	↑ 18% (from 42 to 60)			(Pérez-Elvira et al., 2010)
h	up to 70°C	0.51			↑ 74%		(Apul and Sanin, 2010)

1 The previous results suggest that temperature-controlled ultrasonic pre-treatment has lower methane  
2 yield compared to temperature-uncontrolled conditions. Tuan et al. (2016), already suggested that a  
3 better performance is obtained from the coupled effect between sonic waves and temperature. In other  
4 words, the effect of ultrasonic pre-treatment alone (i.e. excluding thermal effects) barely increases the  
5 WAS biodegradation, while an increase in temperature results in higher biodegradation, probably  
6 described by the mechanisms of thermal pre-treatment below 100°C. Finally, application of ultrasonic  
7 pre-treatment at 80°C resulted in similar COD solubilization to the sole application of temperature at  
8 80°C (Delmas et al., 2014).

### 9 10 *Limiting factors, advantages and perspectives*

11  
12 The energetic efficiency of ultrasonic pre-treatment is a burden because two energy conversions (with  
13 their respective energy losses) are carried out: conversion of electrical energy to mechanical vibration,  
14 and the conversion of mechanical vibration into cavitation (Pérez-Elvira et al., 2010). For instance, Chatel  
15 (2016) remarked that the conversion of electrical energy provided by the generator into acoustic energy  
16 transmitted to the medium is currently about 30-40% efficient for low-frequency ultrasound. This could  
17 be a reason why ultrasonic pre-treatment generally leads to negative electric energy balances, as  
18 observed in Table A.1. The main drawbacks of ultrasonic pre-treatment are thus a) electricity is required  
19 instead of heat and; b) a WAS solids concentration below 4% is required, as a higher solids  
20 concentration decreased the efficiency of the ultrasonic pre-treatment (Pilli et al., 2016; Sahinkaya,  
21 2015). Even though temperature-controlled ultrasonic pre-treatment results in a marginal rise in  
22 biodegradation, better outcomes are observed for temperature-uncontrolled ultrasonic pre-treatment.  
23 However, the observed increases in biodegradation are still less than those achieved by low-  
24 temperature pre-treatment.

## 25 26 2.7 Hydrodynamic cavitation, milling and homogenization

### 27 28 *Process description and mode of action*

29  
30 In addition to ultrasonic pre-treatment, hydrodynamic cavitation, milling and homogenization are also  
31 examples of mechanical pre-treatments. Cavitation can be produced by ultrasonic pre-treatment, but  
32 also by the flow of liquid under controlled conditions through venturi tubes or orifice plates (Kumar and  
33 Pandit, 1999; Lee and Han, 2013). The resulting cavitation bubbles result in disintegration of the sludge  
34 (Hirooka et al., 2009). According to Kim et al. (2008), the inclination angle and the number of venturi  
35 constrictions have been shown to be factors that affect the amount of COD solubilization.

36  
37 Sludge milling consists of a grinding mechanism in which moving beads impact the sludge particles by  
38 provoking their breakage. Jung et al. (2001) observed that the collision frequency between the moving  
39 beads correlated with sludge solubilization rates.

40  
41 Finally, homogenization is a method for cell disruption, originally developed for the stabilization of food  
42 and dairy emulsions (Zhang et al., 2012). During homogenization, sludge is pressurized to between 30  
43 and 150 MPa for 3-30 minutes, after which the sample is accelerated through a convergent section and  
44 collides on an impact ring. As a result, the effects of pressure gradient, cavitation and shear are present  
45 (Zhang et al., 2012). During homogenization, pressure is the most significant factor for increasing the  
46 solubilization of COD (Li et al., 2014; Wahidunnabi and Eskicioglu, 2014; Zhang et al., 2012), while the  
47 number of homogenization cycles is less relevant (Zhang et al., 2012).

1 Milling and homogenization can result in temperature increases up to 43°C (Jung et al., 2001; Zhang et  
2 al., 2012). This is lower than the threshold temperature required to cause significant changes in the  
3 physicochemical characteristics of WAS (see section 2.1). Furthermore, mechanical pre-treatments use  
4 electricity as energy input.

## 5 *Effects on WAS*

### 6 *Floc and cell disruption*

7  
8  
9  
10 Homogenization (temperature not mentioned) reduced the floc size: the median size of WAS was  
11 reported to become 3 to 4 times smaller (Fang et al., 2015). Similarly, a reduction in particle size was  
12 observed for milling (Lajapathi Rai et al., 2008). Cell disruption has also been reported; ball milling with  
13 temperature control, at an energy input of around 5 kJ/gTS, achieved a cell inactivation of 30%, while it  
14 increased to 80% at 35 kJ/gTS (Lajapathi Rai et al., 2008). This shows that for extensive cell disruption to  
15 occur, energy inputs must be substantially high.

### 16 *Carbohydrates, proteins and humic substances*

17  
18  
19 During ball milling, COD solubilization increased in proportion to energy input, similar to cell disruption  
20 (Lajapathi Rai et al., 2008). The same trend was observed for homogenization at pressures up to 60 MPa  
21 (Fang et al., 2015). Nonetheless, the solubilization extent was limited to about 17% for a  
22 homogenization pressure of 80 MPa and  $E_s=5.351$  kJ/gTS, while both protein and polysaccharide  
23 concentrations in sludge supernatant increased by a factor 1.4 (Zhang et al., 2012). For a  
24 depressurization at 0.52 MPa (75 psi), the soluble COD concentration in pre-treated sludge increased by  
25  $20 \pm 2\%$ , while soluble protein increased by 72% relative to the control (Dhar et al., 2011). The  
26 solubilization values of some mechanical pre-treatments are considerably lower compared to other  
27 techniques with comparable energy inputs (Braguglia et al., 2015; Tian et al., 2015b). No information  
28 could be found regarding a possible change in the structure of carbohydrates, proteins and humic acids  
29 during the mechanical pre-treatments.

### 30 *Hydrolysis rate and biodegradation*

31  
32  
33 Limited increases in hydrolysis rate, e.g. from 0.14 to 0.16 d<sup>-1</sup>, have been observed for homogenization  
34 and hydrodynamic cavitation (Dhar et al., 2011; Elliott and Mahmood, 2012; Lee and Han, 2013).  
35 Recorded increases in biodegradation were from 38 to 43% (Dhar et al., 2011) and from 13 to 15% (Lee  
36 and Han, 2013) for the same pre-treatments.

## 37 *Limiting factors, advantages and perspectives*

38  
39  
40 For ball milling and homogenization, it has been observed that a higher concentration of solids in the  
41 sample resulted in lower solubilization (Baier and Schmidheiny, 1997; Zhang et al., 2012). For  
42 hydrodynamic cavitation with temperature control, Kim et al. (2008) observed that a higher  
43 concentration of solids (in the range 0.5 to 4%TS) resulted in higher solubilization. The latter behavior is  
44 contradictory to what has been found for ultrasonic pre-treatment (section 2.6), on which an optimum  
45 value for solubilization has been found to be around 3% TS. It could be hypothesized that ultrasonic pre-  
46 treatment is limited in its ability to generate cavitation in concentrated sludge, whereas hydrodynamic  
47 cavitation may be less dependent of the solids concentration of WAS. In fact, the few comparisons

1 between hydrodynamic and ultrasonic cavitation are contradictory: Lee and Han (2013) compared  
2 ultrasonic pre-treatment (apparently with no temperature control) and hydrodynamic cavitation using  
3 WAS with about 1% TS at comparable specific energy values, and found that COD solubilization was  
4 similar in both cases. In contrast, Kim et al. (2008) found that ultrasonic pre-treatment reached three  
5 times higher COD solubilization as compared to a venturi using WAS at 4% TS.

6  
7 During ball milling the solubilization of organic material was not in-line with the enhanced  
8 biodegradation (Baier and Schmidheiny, 1997; Elliott and Mahmood, 2012; Wett et al., 2010). In all  
9 cases, the biodegradation remained low. This observation is puzzling and deserves further research,  
10 because of its significant implications for volume reduction in full scale-facilities. Finally, despite more  
11 information being required regarding the energy consumption of hydrodynamic cavitation, milling and  
12 homogenization, these techniques seem to result in a WAS biodegradation and energy requirements  
13 that are fairly comparable to other techniques, such as low-temperature pre-treatment. However,  
14 relevant differences are that energy must be provided in the form of electricity and there is the  
15 requirement of pressurized vessels for homogenization and hydrodynamic cavitation.

## 17 2.8 Chemical pre-treatments

18  
19 This category is sub-divided into alkaline pre-treatment, acid pre-treatment and advanced oxidation  
20 processes that use radicals to decompose organic matter.

### 22 2.8.1 Alkaline pre-treatment

#### 24 *Process description and mode of action*

25  
26 Alkaline pre-treatment consists of the increase in pH of the WAS matrix by means of an alkali, such as  
27 NaOH or Ca(OH)<sub>2</sub>, amongst others. The structure, surface properties and electrostatic charge of  
28 extracellular polymeric substances (EPS) are modified due to pH changes (Wang et al., 2012). The  
29 physicochemical properties of EPS depend on whether its functional groups, such as carboxylic or sulfate  
30 groups (pK<sub>a</sub> ≈ 4, Wang et al. 2012) and amino groups, (pK<sub>a</sub> 7.0–9.0, Wang et al. 2012) are deprotonated  
31 or protonated. A pH increase caused by alkaline pre-treatment could therefore have a pivotal effect on  
32 the structure of the WAS matrix.

33  
34 One effect of alkaline pre-treatment is the dissociation of acidic groups in EPS, which causes  
35 electrostatic repulsion between the negatively charged EPS (Wingender et al., 1999) and increases its  
36 solubilization. The repulsion is mostly due to the ionization of carboxyl and amino groups from proteins  
37 (Liao et al., 2002). Saponification of the lipid by-layer of the cell membrane (and a subsequent release of  
38 intracellular contents) and protein denaturation due to extreme pH values is another effect (Vaclavik  
39 and Christian, 2008). Relevant control parameters are the target pH and the (amount of) reagent used.  
40 Application times in the order of two hours are common; it has been found that around 60-82.9% of the  
41 total COD is released after 10-24 hours (Chang et al., 2002; Li et al., 2008).

42  
43 The type of reagents used, especially the metal salts, also affect dewaterability of digestate and VS  
44 reduction. For instance higher COD solubilization has been observed for sodium hydroxide compared to  
45 calcium hydroxide when using the same dose (in charge equivalents) (Li et al., 2008; Rajan et al., 1988).  
46 Similarly, at pH 12 with NaOH, KOH, Mg(OH)<sub>2</sub> and Ca(OH)<sub>2</sub> the COD solubilization values were 39.8%,

1 36.6%, 10.8% and 15.3%, respectively (Kim et al., 2003). Also, a higher VS removal has been observed for  
2 NaOH (34%) compared to  $\text{Ca}(\text{OH})_2$  (30%) (Ray et al., 1990). The same effect has been measured for the  
3 WAS biodegradation: Ray et al. (1990) observed that under the same alkali dose the use of NaOH caused  
4 a significantly higher biogas production compared to  $\text{Ca}(\text{OH})_2$ . In contrast, the dewatering performance  
5 of WAS, could be improved by adding calcium hydroxide instead of sodium hydroxide (Su et al., 2013).  
6 The lower COD solubilization and a better dewaterability obtained with calcium hydroxide could be  
7 caused by the calcium bridging (Wang et al., 2012; R. Wang et al., 2016b). Guan et al. (2012) observed  
8 that  $\text{Ca}^{2+}$  interacted with proteins, phenols and carboxylic and hydroxyl functional groups in the sludge  
9 flocs. This leads to re-flocculation of dissolved organic polymers, and thus to a decrease in soluble COD  
10 (Jin et al., 2009).

11

## 12 *Effects on WAS*

13

### 14 *Floc and cell disruption*

15

16 It has been observed that the average particle size of the sludge during alkaline pre-treatment decreases  
17 (Doğan and Sanin, 2009; Kim et al., 2003; Xiao et al., 2015). The high pH values cause floc break-up,  
18 which relates to an increase in hydrolysis rate and worsened dewaterability of the digestate. With  
19 regard to cell disruption, in the pH range of 8.0-12.5, Xiao et al. (2015) observed that most of the  
20 damage to the cell wall and cell membrane occurred at pH 10.00–12.50 and pH 9.00–12.50, respectively.  
21 Similarly, in a pure culture of *Flovabacterium aquatile* (a representative bacteria of WAS), disruption was  
22 observed to occur up to a pH of 12.30 (Erdincler and Vesilind, 2000), while Doğan and Sanin (2009)  
23 determined that pH 11 did not significantly cause cell damage compared to pH 12-12.5. Literature data  
24 suggest that extensive cell disruption is achieved at pH around 10-12.

25

### 26 *Carbohydrates, proteins and humic substances*

27

28 The solubilization of organic matter has been reported to be low at  $\text{pH} < 10$  and was found to increase  
29 with increasing pH (Chang et al., 2011; Valo et al., 2004; Xiao et al., 2015). However, a pH value of 13,  
30 only lead to a marginal increase in solubilization of organic matter as compared to pH 12 (Chang et al.,  
31 2011). During alkaline pre-treatment, proteins are solubilized (Brown and Lester, 1980; Doğan and  
32 Sanin, 2009; Shao et al., 2012), and partly degraded (Wang et al., 2012). In contrast to proteins, at pH 10  
33 and with application of  $\text{Ca}(\text{OH})_2$ , the hydrolysis of carbohydrates was not significantly affected (Su et al.,  
34 2013). Despite humic acids being stable compounds, considerable changes are observed in high pH  
35 solutions. For instance, their solubility increases in direct proportion to pH (Tipton et al., 1992).

36

### 37 *Hydrolysis and biodegradation*

38

39 After neutralization of the pre-treated sample, Shao et al. (2012) observed that the hydrolysis rate  
40 increased applying pH 10, but it was reduced using pH values of 11 and 12. The increase in hydrolysis  
41 rate could be explained by the solubilization of organic matter and the observed particle size reduction  
42 of WAS. The reduction in particle size can be ascribed to the formation of refractory products under  
43 highly alkaline conditions. Table 10 lists results from alkaline pre-treatments at room temperature. The  
44 majority of the reported studies had been performed with NaOH dosing. From intra-study comparison, it  
45 was concluded that different pH values result in different biogas yields. For example, after pre-  
46 treatment and neutralization, Shao et al. (2012) observed that biogas production was the highest when  
47 applying pH 10, and decreased in the following order: pH 9, pH 8, pH 11. In that study, the biogas

1 production at pH 12 was 18.1% lower than the control. Similarly, Valo et al. (2004) found that the biogas  
2 production using pH 12 (without post-neutralization but using a substrate:inoculum ratio of 1:10 v/v)  
3 was the same as the control. In general, pH values lower than 12 increased the biodegradation only  
4 marginally, i.e. by about 5% in absolute terms (Table 10, entries a to e). In contrast, above pH 12, the  
5 effects on biodegradation or biogas production become variable and contradictory (entries f to k), which  
6 could be caused by:

7 1) the formation of refractory compounds. Despite the observation that biodegradation remains the  
8 same or is even reduced at pH 12 (Penaud et al., 1999; Valo et al., 2004), an observed continuous  
9 increase in COD solubilization (Chang et al., 2011; Uma Rani et al., 2012; Valo et al., 2004), suggests  
10 formation of soluble but refractory compounds. A similar trend is observed for thermal hydrolysis.  
11 2) inhibition during anaerobic digestion caused by chemical reagents. Sodium concentrations of 3 g  
12 Na<sup>+</sup>/L or higher can inhibit digestion (Feijoo et al., 1995; D.-H. Kim et al., 2013). On the other hand,  
13 Penaud et al. (1999), found that just the presence of hydroxyl ions decreased biodegradation at a  
14 dosage of 327 mg NaOH/gTS or 5.7 g Na<sup>+</sup>/L (the presence of a buffer during the digestion was not clear).  
15 Moreover, after adaptation to high salinity conditions, sludge methanogenesis may proceed well, even  
16 under marine conditions (Zhang et al., 2013).

17  
18 A final consideration regarding biodegradation is the adjustment of pH before anaerobic digestion. Pre-  
19 treatment of sludge at pH 12 in a semi-continuous digestion, without pH adjustment after pre-  
20 treatment, increased biodegradation by 13% (Table 10, entry k), resulting in a pH of 7.84 in the digester  
21 (Lin et al., 1997). Provided that ammonium toxicity is more likely to occur at higher pH (Chen et al.,  
22 2008; Hansen et al., 1998), the previous result suggests that anaerobic digestion can cope with high pH  
23 values, thus avoiding or at least reducing the need of a neutralization step. Acclimation is also a  
24 possibility, as reviewed by Chen et al. (2008).

25



1 *Table 10 Effects on the biodegradation of WAS after alkaline pre-treatment.*

Entry	Temperature, °C	Reagent	pH	Required reagent to reach pH, mg reagent/gTS <sub>sludge</sub>	Change in biodegradation (vs. control)	Change in biogas production (vs. control)	pH neutralization	Reference
<b>pH from 8 to 11.6</b>								
a	25	NaOH	8.07	76	↑ 13% (from 28 to 41)		No neutralization	(Lin et al., 1997)
b	"Ambient"	NaOH	10	Not disclosed		↑15.4%	Down to pH 6.8	(Shao et al., 2012)
c	20	NaOH	10.10	40	↑ 4% (from 30 to 34)		Down to pH 8.5	(Ruffino et al., 2016)
d	20	NaOH	11.60	80	↑ 5% (from 26 to 31)		Down to pH 7.5	(Ruffino et al., 2016)
e	20	NaOH	11.60	80	↑ 4% (from 26 to 30)		Down to pH 8.5	(Ruffino et al., 2016)
<b>pH≥12.00</b>								
f	"Ambient"	NaOH	≈12.0	150.3	↑ 35% (from ≈17 to ≈52)		Not disclosed	(Penaud et al., 1999)
g	"Ambient"	NaOH	12	Not disclosed		↓18.1%	Down to pH 6.8	(Shao et al., 2012)
h	"Room"	KOH	12	213		=	Not disclosed	(Valo et al., 2004)
i	"Ambient"	NaOH	12	184	↑ 3% (from 26 to 29)		Not disclosed	(Kim et al., 2003)
j	"Ambient"	NaOH	≈12.2	852.9	↓12% (from ≈17 to ≈5)		Not disclosed	(Penaud et al., 1999)
k	25	NaOH	12.26	128	↑ 13% (from 28 to 41)		No neutralization	(Lin et al., 1997)

## 1 *Limiting factors, advantages and perspectives*

2  
3 A clear disadvantage of alkaline pre-treatment is the cost of chemical reagents and the addition of  
4 inorganics to the WAS. The production of chemicals requires energy (Folke et al., 1996; Kent, 2013), and  
5 therefore the energy feasibility of the process should be considered for alkali addition. Application of  
6 alkaline pre-treatment increases biodegradation in a similar degree as low-temperature thermal pre-  
7 treatment (see Table 2 and Table 10), although the energy input for alkaline pre-treatments seems  
8 lower according to Table A.1, even when the required energy for the manufacture of the alkali is  
9 considered.

## 10 11 2.8.2 Acid pre-treatment

### 12 13 *Process description and mode of action*

14  
15 During acid pre-treatment, pH ranges between 1 to 5.5 and chemical reagents such as HCl, H<sub>2</sub>SO<sub>4</sub>, H<sub>3</sub>PO<sub>4</sub>  
16 and HNO<sub>2</sub> are commonly used. In order to form HNO<sub>2</sub> (the protonated form of nitrite), a nitrite solution  
17 is added to reach a concentration of around 1 g NO<sub>2</sub><sup>-</sup>/L, while the pH is lowered to around 5.5. The  
18 resulting concentration of HNO<sub>2</sub> can be calculated via methods shown by prior research (Wang et al.,  
19 2013; T. Zhang et al., 2015). In contrast to other acids, HNO<sub>2</sub> does not seem to completely act under a  
20 pH-related mechanism (Zahedi et al., 2016). Lipid peroxidation (Horton and Philips, 1973) and the  
21 disruption of the cell envelope (Pijuan et al., 2012; Wu et al., 2018), are also effects of HNO<sub>2</sub>. For acid  
22 pre-treatment, the protonated states of the functional groups in EPS result in more dense and compact  
23 structures at a lower pH because of hydrophobicity and intermolecular hydrogen bonds (Wang et al.,  
24 2012). At low pH, hydrogen ions react with the ionized carboxyl groups to form undissociated acid  
25 groups and therefore carboxylic acid groups are present in their un-ionized form. Thus, ionization of the  
26 acid groups is suppressed, causing aggregation. The highest flocculation efficiency is achieved near the  
27 isoelectric point (Wang et al., 2012). Regarding proteins, their isoelectric point differs for each one of  
28 them, and depends upon the ratio of free ionized carboxyl groups to free ionized amino groups (Vaclavik  
29 and Christian, 2008).

### 30 31 *Effects on WAS*

#### 32 33 *Floc and cell disruption*

34  
35 Below the pH value of the isoelectric point of the sludge, a positive charge is present within the EPS,  
36 which prevents aggregation (Liao et al., 2002; Wang et al., 2012) and causes a reduction in particle size.  
37 For instance, at a pH 0.98 with application of H<sub>2</sub>SO<sub>4</sub>, Guo et al. (2014) observed that the average particle  
38 size was reduced from 159.62 to 97.18 μm. Similarly to alkaline pre-treatment, saponification of the cell  
39 wall could also occur under acidic pH values (Charton, 1975). Under acidic conditions, about 15% of the  
40 bacterial cells suffered from damaged cell membranes, compared to about 10% for the control (Guo et  
41 al., 2014). In contrast, when HNO<sub>2</sub> was used, even at pH 6, viable cells accounted for 20% in contrast to  
42 80% for the control (Pijuan et al., 2012). A significant reduction in viable cells was also found by Wu et  
43 al. (2018), suggesting the biocidal effect of HNO<sub>2</sub>.

#### 44 45 *Carbohydrates, proteins and humic substances*

1 Even though mild acid pre-treatment at pH 4 and 5 is able to solubilise COD, alkaline pre-treatment is  
 2 reported to be more effective for releasing COD (Chen et al., 2007; Guo et al., 2014). Acid pre-treatment  
 3 with HCl or H<sub>3</sub>PO<sub>4</sub> is effective for COD solubilization but, only at pH values of 1-2 (Devlin et al., 2011;  
 4 Sahinkaya, 2015), with a 4-fold and a 6-fold increase in solubilization of carbohydrates and proteins,  
 5 respectively (Devlin et al., 2011). On the other hand, application of HNO<sub>2</sub> at pH 5.5 even led to  
 6 deamination (T. Zhang et al., 2015). Humic acids are expected to precipitate under acidic conditions  
 7 (pH < 2), while fulvic acids remain in solution (Ghabbour and Davies, 2001). Humic and fulvic acids can  
 8 form complexes with proteins, which are difficult to degrade, but lowering the pH can cause the release  
 9 of proteins from these complexes, increasing bio-availability (Zahedifar et al., 2002). However, if the pH  
 10 is adjusted before digestion, humic acid-protein complexes will be re-established. HNO<sub>2</sub> was also able to  
 11 solubilize carbohydrates and proteins (Li et al., 2016).

12  
 13 *Hydrolysis and biodegradation*

14  
 15 Application of acid can lead to an increase in bioconversion rate (Devlin et al., 2011; Wang et al., 2014)  
 16 as well as biodegradation (Devlin et al., 2011). Biodegradation increased substantially when the applied  
 17 pH values reached 1 and 2 (Table 11, entries a and b), but not at pH values of 3 to 6 (Devlin et al., 2011),  
 18 when using different doses of HCl. The application of HNO<sub>2</sub> (Table 11, entries c and d), resulted in similar  
 19 increases in biodegradation compared to hydrochloric acid (HCl), although it may inhibit methanogens  
 20 (Li et al., 2016).

21  
 22 *Table 11 Effects on the biodegradation of WAS after acid pre-treatment.*

Entry	Temperature, °C	Reagent	pH	Required reagent to reach pH, mg reagent/gTS <sub>sludge</sub>	Change in biodegradation (vs. control)	pH neutralization	Reference
a	Not disclosed	HCl	1.00	369	↑12% from 41 to 53%	Up to pH 6.8	(Devlin et al., 2011)
b	Not disclosed	HCl	2.00	184	↑6% from 41 to 47%	Up to pH 6.8	(Devlin et al., 2011)
c	25	NO <sub>2</sub> <sup>-</sup> (then formed HNO <sub>3</sub> )	5.5 (controlled)	19.3	↑9% from 36 to 45%	Not disclosed	(Wang et al., 2013)
d	25	NO <sub>2</sub> <sup>-</sup> (then formed HNO <sub>3</sub> )	5.5 (controlled)	18.2	↑20% from 33 to 53%	Not disclosed	(T. Zhang et al., 2015)

23  
 24 *Limiting factors, advantages and perspectives*

25  
 26 Acid pre-treatment requires pH levels of pH ≤ 2 to deliver positive results (Devlin et al., 2011; Sahinkaya,  
 27 2015). Such a low pH value requires considerable amounts of both acid and alkaline solutions to adjust  
 28 the pH. Also, the reactors should be made of a material able to withstand these low pH values, thus  
 29 increasing capital investment. To our knowledge no studies have been conducted on the effect of pH  
 30 readjustment after acid pre-treatment. However, it is widely known that methanogenic organisms are  
 31 easily inhibited at low pH, inferring that neutralization is mandatory for acid pre-treatment. Regarding  
 32 the energy balance, added chemicals have an energy value and therefore acid pre-treatment with HCl  
 33 results in a similar energy balance and sludge biodegradation compared to alkaline pre-treatment (Table  
 34 A.1), although a lower solubilization during pre-treatment and a lower VS reduction during digestion is  
 35 reached. The use of HNO<sub>2</sub> for pre-treatment seems to provide comparable biodegradation increases as  
 36 with the use of HCl, but at milder pH values (e.g. 5.5). Furthermore, rejected water produced after  
 37 digestate dewatering could be used as a precursor for HNO<sub>2</sub> (Wang et al. 2013). As a consequence, HNO<sub>2</sub>  
 38 could be a sustainable, yet effective solution for WAS pre-treatment. However, additional research is

1 required to unveil the underlying mechanisms of pre-treatment with HNO<sub>2</sub> and to confirm the observed  
2 results.

### 3 4 2.8.3 Advanced oxidation processes (AOPs)

#### 5 6 *Process description and mode of action*

7  
8 Advanced oxidation relies on the oxidation abilities of hydroxyl radicals, a highly reactive and short-living  
9 species. Its reactivity is due to its standard electrode potential of +2.3 V (Farr and Kogoma, 1991). As a  
10 consequence, hydroxyl radicals react with (almost) every organic substance present in WAS without any  
11 selective mechanism. Advanced oxidation can even lead to the complete mineralization of WAS (Xu et  
12 al., 2010). The formation of radicals originates from processes such as ozonation and Fenton chemistry  
13 and from compounds such as hydroperoxides (i.e. hydrogen peroxide). These three oxidative agents will  
14 be discussed below.

15  
16 Ozone (O<sub>3</sub>) is an unstable molecule produced by the electrical stimulation of oxygen. Once produced, it  
17 is transferred from the gaseous into the liquid phase, where it decomposes into radicals and reacts with  
18 WAS (Bougrier et al., 2006). Ozone breaks high molecular weight organic compounds into lower weight  
19 products, such as carboxylic acids, hydrophilic acids, carbohydrates, amino acids and VFA (Bougrier et  
20 al., 2007a, 2006; Salsabil et al., 2010). The formation of acid compounds correlates with a typical  
21 decrease in the pH of about 1 or even 2 units after ozonation (Bougrier et al., 2006; Chu et al., 2008;  
22 Tian et al., 2015b). Yang et al. (2013) observed that ozone first reacted with the soluble fraction of the  
23 sludge and then oxidized the particulate fraction. However as more intracellular substances are  
24 released, the soluble fraction can have a scavenging effect on the ozone (Cesbron et al., 2003). In line  
25 with this finding, Bougrier et al. (2006) observed that the biodegradation of the particulate fraction was  
26 barely modified.

27  
28 The Fenton reaction leads to the formation of hydroxyl radicals through the reduction of hydrogen  
29 peroxide by reduced transition metals (typically iron), working as catalysts (Kohanski et al., 2007). The  
30 rate and extent of the Fenton reactions are dependent on iron and hydrogen peroxide concentration, as  
31 well as on the pH of the solution (Erden and Filibeli, 2011; Sahinkaya, 2015). At pH values of 4 and  
32 higher, ferric ion precipitates and loses its catalytic activity (W. Zhang et al., 2015). For WAS pre-  
33 treatment mainly pH values of 2 or 3 have been applied (Bao et al., 2015; Gong et al., 2015). Three  
34 features make this technique appealing: a) hydroxyl radical formation; b) low pH similar to acid pre-  
35 treatment; and c) improved dewaterability of the digestate due to coagulation by iron addition (Neyens  
36 and Baeyens, 2003). However, the addition of iron salts and other chemical reagents to adjust the pH  
37 leads to increased costs and energy usage.

38  
39 With the aim of reducing resource consumption, milder pre-treatments have been studied. The  
40 standalone application of H<sub>2</sub>O<sub>2</sub> oxidizes organic compounds to CO<sub>2</sub> and water (Eskicioglu et al., 2008)  
41 without leaving detrimental by-products nor disturbing sludge pH (Jung et al., 2014), in contrast to  
42 ozonation.

#### 43 44 *Effects on WAS*

##### 45 46 *Floc and cell disruption*

1 Oxidizing agents reduce the particle size of WAS (Demir and Filibeli, 2012). However, the reduction  
2 ceases at 100 to 160 mg O<sub>3</sub>/g TS (Bougrier et al., 2006). Oxidizing agents also disrupt cell walls, as up to  
3 50% of microorganisms were observed to be deactivated at an ozone dose of 20 mg O<sub>3</sub>/g TSS (Chu et al.,  
4 2008).

#### 5 *Carbohydrates, proteins and humic substances*

7 An important effect during AOPs is the mineralization process. It has the advantage of reducing the  
8 volume of solids, but the drawback of converting organic carbon to CO<sub>2</sub> (Délérís et al., 2000), resulting in  
9 less organic matter available for biogas production. Mineralization (measured by the reduction in COD)  
10 seems to increase with increased doses of oxidizing agent. A low dose of oxidizing agent (70 mg O<sub>3</sub>/g TS)  
11 was reported to result in minimal mineralization (Braguglia et al., 2012), while high doses >200 mg O<sub>3</sub>/g  
12 TS resulted in extensive mineralization (Ahn et al., 2002; Délérís et al., 2000). Sugars and humic acids  
13 showed the highest reduction in concentration during oxidative pre-treatment (Eskicioglu et al., 2008).

15 The reaction between radicals and proteins could lead to deactivation and degradation of enzymes (Farr  
16 and Kogoma, 1991). Silvestre et al. (2015) hypothesized that the change in the secondary and tertiary  
17 structure of the amino-acids could explain the observed higher biogas potential. On the other hand, the  
18 reaction between hydroxyl radicals and humic substances could increase the soluble COD concentration  
19 without the formation of biodegradable organic substrates (Goldstone et al., 2002).

#### 21 *Hydrolysis rate and biodegradation*

23 As indicated above, pre-treatments with AOPs reduce the mean particle size of WAS at low doses of  
24 oxidizing agents, which results in an increased hydrolysis rate. However, high doses of oxidizing agents  
25 were observed to lead to a decrease in hydrolysis rate (Appels et al., 2011; Silvestre et al., 2015; Tian et  
26 al., 2015b; T. Zhang et al., 2015; Zhou et al., 2015). Liu et al. (2015) showed an inhibitory effect of AOPs  
27 on anaerobic digestion.

29 Increasing the doses of an oxidizing agent, leads to an increase in sludge biodegradation, however,  
30 exceeding certain doses could lead to a decrease in biodegradation, sometimes even lower than the  
31 control (Braguglia et al., 2012; Silvestre et al., 2015; T. Zhang et al., 2015). The dose at which the  
32 maximum biodegradation could be achieved, differs among the various studies (Table 12), and is  
33 probably because of the variability in the composition of WAS that was used. The presented data,  
34 suggests that ozonation performs best around 150 mg O<sub>3</sub>/gTS, although lower doses could be sufficient  
35 for improvement over control (Table 12 entries d to f). The lower biogas production at higher doses  
36 could be due to a) inhibitory conditions; b) mineralization of organic biodegradable compounds; and c)  
37 formation of refractory compounds (Bougrier et al., 2006; Liu et al., 2015; Silvestre et al., 2015).

1 *Table 12 Effects on the biodegradation of WAS after AOPs pre-treatments.*

Entry	Type of AOP	Oxidant dose, mg reagent/gTS <sub>sludge</sub>	Oxidant dose, mmol reagent/gTS <sub>sludge</sub>	Change in biodegradation (vs. control)	Change in biogas production (vs. control)	Reference
a	Ozone	15	0.31		↑ 30%	(Bougrier et al., 2007a)
b	Ozone	40	0.83		↑ 4.7%	(Silvestre et al., 2015)
c	Ozone	50	1.04		↓ 5.8%	(Braguglia et al., 2012)
d	Ozone	59	1.23		↑ 21.6%	(Silvestre et al., 2015)
e	Ozone	60	1.25		↑ 58%	(Bougrier et al., 2007a)
f	Ozone	70	1.46		↑ 16.7%	(Braguglia et al., 2012)
g	Ozone	77	1.60		↓ 13.8%	(Silvestre et al., 2015)
h	Ozone	93	1.94		↓ 5.6%	(Silvestre et al., 2015)
i	Ozone	100	2.08		↑ 11%	(Bougrier et al., 2006)
j	Ozone	150	3.13		↑ 140%	(Bougrier et al., 2007a)
k	Ozone	160	3.33		↑ 23%	(Bougrier et al., 2006)
l	Ozone	180	3.75		↑ 91%	(Bougrier et al., 2007a)
m	H <sub>2</sub> O <sub>2</sub>	10	0.29	↑ 4% (from 33 to 37)		(T. Zhang et al., 2015)
n	H <sub>2</sub> O <sub>2</sub>	30	0.88	↑ 8% (from 33 to 41)		(T. Zhang et al., 2015)
o	H <sub>2</sub> O <sub>2</sub>	50	1.47		= (as CH <sub>4</sub> )	(Zhou et al., 2015)
p	H <sub>2</sub> O <sub>2</sub>	50	1.47	↑ 7% (from 33 to 40)		(T. Zhang et al., 2015)
q	H <sub>2</sub> O <sub>2</sub>	80	2.35	↑ 6% (from 33 to 39)		(T. Zhang et al., 2015)
r	Fenton	pH 3 Fe <sup>2+</sup> =4 mg/gTS H <sub>2</sub> O <sub>2</sub> = 40 mg/gTS	1.18	↑ 12% (from 20 to 32)		(Sahinkaya, 2015)
s	Fenton	pH 2 Fe <sup>2+</sup> =7 mg/gTS H <sub>2</sub> O <sub>2</sub> = 50 mg/gTS	1.47	↑ 6% (from 48 to 54)		(Zhou et al., 2015)
t	Fenton	pH 3 Fe <sup>2+</sup> =4 mg/gTS H <sub>2</sub> O <sub>2</sub> = 60 mg/gTS	1.76		↑ 19.3% (as CH <sub>4</sub> )	(Erden and Filibeli, 2011)

2

3 At similar hydrogen peroxide concentrations, the Fenton pre-treatment outcomes are comparable to  
 4 addition of H<sub>2</sub>O<sub>2</sub> (Table 12, entries r to t and entries m to q respectively, Figure 2). This is unexpected  
 5 because the low pH of the Fenton reaction should favor the formation of more radicals, thus increasing  
 6 organic matter degradation. The acidic environment should also increase the WAS biodegradation.

7

### 8 *Limiting factors, advantages and perspectives*

9

10 From an energy consumption viewpoint, 50% of the energy demand during ozonation is used for the  
 11 production of pure oxygen as an input element (Müller et al., 2004). As a consequence, ozonation is  
 12 scarcely applied to sludge because of its high electrical energy consumption (Xu et al., 2010). The Fenton  
 13 reaction requires not only H<sub>2</sub>O<sub>2</sub> but also other reagents to acidify and neutralize the pH of the WAS.  
 14 Fenton-treated sludge contains iron-hydroxide complexes, which could limit the usage alternatives of  
 15 the digested sludge in the final disposal stage (Sahinkaya, 2015). On the other hand, the sole addition of  
 16 hydrogen peroxide involves only the energy required for producing the reagents. Figure 2 shows that  
 17 the three AOPs techniques presented seem to deliver similar biogas or methane increases up to an  
 18 oxidizing dose of 100 mg/g TS. Then, if the improvements in biogas production are comparable between  
 19 AOPs, the best alternative seems to be H<sub>2</sub>O<sub>2</sub> addition, according to the energy balance (Table A.1). H<sub>2</sub>O<sub>2</sub>  
 20 addition can be considered the technique with the lowest energy demand. A niche application of AOPs  
 21 could be the oxidation of refractory substances (e.g. mineralization of humic substances), or for the  
 22 treatment of digested sludge, as it contains a higher fraction of refractory substances compared to WAS  
 23 (Kobayashi et al., 2009).

24

## 25 *2.9 Biological pre-treatment*

26

### 27 *Process description and mode of action*

28

1 Bacteria and archaea break down organic matter with the help of enzymes. Due to their catalytic nature,  
2 enzymes hydrolyze complex molecules at milder pH values, and temperatures, and without the  
3 production of hazardous waste, compared to chemical or physical pre-treatment methods (Parawira,  
4 2012). The products of hydrolysis are available for further conversion. Enzymes are located both inside  
5 and outside the cells. The latter are further divided into cell surface bound (ectoenzymes) and free form  
6 (exoenzymes). Exoenzymes are located in water and/or adsorbed within the extracellular polymeric  
7 substances of the sludge matrix (Burgess and Pletschke, 2008). However, in contrast to ectoenzymes,  
8 exoenzymes do not show relevant lytic activity (Burgess and Pletschke, 2008). In order to increase the  
9 lytic potential, intracellular enzymes should be released by disrupting the cell membrane (Kavitha et al.,  
10 2014). However, free enzymes are prone to self-degradation before sludge hydrolysis starts (Müller,  
11 2001). In order to overcome self-degradation, the enzymes must be immobilized onto solid media such  
12 as substrate, extracellular polymeric substances and flocs, which make them more stable (Burgess and  
13 Pletschke, 2008; Matsumoto and Ohashi, 2003) and usable as pre-treatment. On the other hand,  
14 immobilization has been postulated to decrease the efficiency of the pre-treatment (Kavitha et al., 2014;  
15 Parawira, 2012).

16  
17 There are two ways to do enzymatic pre-treatment: active addition of enzymatic solutions, which  
18 according to Parmar et al. (2001) makes the pre-treatment economically infeasible; or by  
19 bioaugmentation. The latter method fosters the endogenous enzyme (or enzyme-producing  
20 microorganisms) (S. Yu et al., 2013). Recently, surfactants that can be biologically produced by many  
21 different microorganisms, such as rhamnolipids, have been used for pre-treatment (He et al., 2016;  
22 Kavitha et al., 2016, 2014; Zhou et al., 2013). According to Zhou et al. (2013), rhamnolipids increase the  
23 solubility of compounds and provoke the EPS to detach from the attached cell surface. Also, they  
24 observed an increase in hydrolytic enzyme activity, and postulated that rhamnolipids hindered the  
25 immobilization of naturally present enzymes in the sludge or liberated the trapped enzymes within the  
26 floc matrix.

## 27 28 *Effects on WAS*

### 29 30 *Floc and cell disruption*

31  
32 By testing an amylase-producing-stain, a protease-producing stain and a blend of both, S. Yu et al.  
33 (2013) found that the mean particle size decreased from 87.4  $\mu\text{m}$  (control) to 74.1, 85.4, and 65.8  $\mu\text{m}$   
34 for amylase, protease and blended pre-treated samples, respectively. The effect of protease was  
35 negligible in particle size reduction. They hypothesized that the reduction in particle size was not caused  
36 by the direct conversion from solid to soluble particles, but because enzymes acted against EPS that  
37 have a role in sludge aggregation. In contrast, with a protease treatment at a dosage of 100 mg/L the  
38 average particle size reduced from 128 to 81  $\mu\text{m}$  (Yi et al., 2014). Operation at sub-optimal levels of  
39 enzyme may explain the conflicting results.

40  
41 Endogenous enzymes did not cause significant lysis, indicating that the observed effects related to  
42 increasing soluble organic matter mainly derived from EPS, whereas enzymatic treatment on sludge  
43 integrity was limited (S. Yu et al., 2013). Sesay et al. (2006) measured viable cell counts after application  
44 of  $\alpha$ -amylase, cellulase and proteinase, and observed an insignificant amount of cell lysis. Finally, based  
45 on scanning electron microscopic imaging and the increase in DNA, Yi et al. (2014) inferred that protease  
46 treatment did not result in bacterial cells being destroyed.

### 47 48 *Carbohydrates, proteins and humic substances*

1  
2 After protease pre-treatment, only a low amount (4%) of proteins were solubilized, while the amount of  
3 soluble humic substances increased from 361 to 1108 mg/L (Yi et al., 2014) probably because of the  
4 destruction of protein-humic acid assemblies.

#### 5 6 *Hydrolysis rate and biodegradation*

7  
8 In some cases, the hydrolysis rate of enzymatically pre-treated WAS increased with the sole addition of a  
9 protease (Ushani et al., 2016), while in other cases a blend of amylase and protease was required to  
10 increase the hydrolysis rate (S. Yu et al., 2013). The results concerning WAS biodegradation are  
11 conflicting. In some cases, enzymatic pre-treatment (with amylase only, and amylase with protease) led  
12 to an enhancement of the specific biogas production (S. Yu et al., 2013). While in other cases the  
13 biodegradation did not increase using these enzymes (Bayr et al., 2013) nor using solely proteases (S. Yu  
14 et al., 2013). The added enzymes may increase the amount of biogas produced, due to their own  
15 digestion, and this could be a cause for the contradictory results observed. Unfortunately, no mass  
16 balances were found to corroborate this hypothesis. Finally, rhamnolipids does not seem to be a  
17 suitable pre-treatment for increasing methane production, as the activity of methanogens is inhibited  
18 (Zhou et al., 2013). Nonetheless, acidifiers are not impaired during this process, making it a suitable  
19 method for VFA production from WAS.

#### 20 21 *Limiting factors, advantages and perspectives*

22  
23 It seems that the sole addition of proteases does not result in significant solubilization (Yi et al., 2014)  
24 nor biodegradation increase (S. Yu et al., 2013), while amylase seems to increase both parameters. As  
25 different enzymes have varying pH and temperature optima and tolerance ranges, it is possible that the  
26 enzyme had to work at suboptimal levels (Burgess and Pletschke, 2008), resulting in the spread of  
27 results observed during enzymatic pre-treatment. Even though information is missing about the  
28 optimum conditions required for the use of an enzyme blend on a complex substrate such as WAS, the  
29 costs of even low-purity enzymes is still prohibitive (Parawira, 2012). Even though, bioaugmentation  
30 could be a strategy for producing the required enzymes, this also has its drawbacks. For instance,  
31 culturing the proper microorganisms demands pH control and substrate addition.

### 32 33 3. Overall discussion

34  
35 A brief summary of the effects of different pre-treatments on the main components of WAS is presented  
36 in Table 13. In Table 14 a qualitative assessment of the effects of different pre-treatments on the sludge  
37 characteristics, regarding degradability and economic feasibility, is shown.

38  
39 From Table 14 it is clear that most of the pre-treatments increase the hydrolysis rate. The improvement  
40 is particularly high for thermal and ultrasonic pre-treatments. Since hydrolysis is regarded as the rate-  
41 limiting step in WAS treatment, an increased hydrolysis rate is indicative for a potential increased solids  
42 loading rate to existing sludge digesters without retrofitting the sewage treatment plant. However, in  
43 some cases chemical and microwave pre-treatments have shown conflicting results regarding the  
44 resulting hydrolysis rate. Likely, this can be ascribed to the excessive utilization of chemicals or energy  
45 inputs, which can potentially create refractory, inhibitory or even toxic products that cannot be  
46 degraded during batch tests. Thermal hydrolysis, TPAD and microwave pre-treatments all substantially  
47 increase the sludge biodegradation. In this respect, the effect of low-temperature pre-treatment on



1 biodegradation remains somewhat uncertain. The latter could be related to the applied temperature  
2 increase rate, which has also been considered relevant for other thermal pre-treatments such as  
3 microwave and freeze and thaw (Hosseini Koupaie et al., 2017; Montusiewicz et al., 2010).  
4 Montusiewicz et al. (2010) considered the similarity of the freezing and thermal treatment effects as  
5 well, in the sense that the temperature-change rate could have an impact on the outcome of the  
6 process. Nonetheless, further research regarding the specific mechanisms of low-temperature pre-  
7 treatment are still missing.

8  
9 As shown in Appendix B (Table B.1), the minimum amount of VS required to achieve a neutral energy  
10 balance is around 30 gVS/L for low-temperature thermal pre-treatment and about 160 gVS/L for thermal  
11 pre-treatment above 100°C (thermal hydrolysis). In addition to the higher temperature, other  
12 characteristics of thermal hydrolysis that explain the higher minimum solids concentration are: i) the  
13 low potentials for the recovery of high-quality heat from the combined heat power plant (CHP) to be  
14 used to produce steam, and ii) a lower efficiency of heat exchange to pre-heat the incoming sludge. In  
15 order to reduce the required solids concentration, in practice, non-treated primary sludge is blended  
16 with treated WAS before digestion. This step increases methane production, and allows a lower solids  
17 concentration to be used without affecting the overall energy balance. Another option is the direct  
18 generation of steam by the biogas, instead of burning the biogas in a CHP for electricity production.

19  
20 Thermal hydrolysis, TPAD, alkaline, microwave, and mechanical pre-treatments are all methods to  
21 substantially increase VS removal and thus reduce the volume of the digestate to be disposed.  
22 Microwave, ultrasonic and mechanical pre-treatment techniques all have a high electricity requirement.  
23 The pre-treatment itself could lead to an increase in biodegradation, but the energy balance regarding  
24 electricity production of these pre-treatments becomes less positive or even negative. For instance,  
25 according to Appendix B (Table B.2), absolute biodegradation, even exceeding the theoretical limit of  
26 100%, is required to achieve a neutral electricity-balance in some cases, such as for ultrasonic pre-  
27 treatment. In the latter case, increasing the solids concentration is not an option as it may reduce the  
28 efficiency of the ultrasonic pre-treatment. For microwave pre-treatment, the energy consumption is  
29 even higher: a hypothetical biodegradation of 100% after pre-treatment would only cover 50% of the  
30 energy requirement (Appendix B, Table B.2). For alkaline pre-treatments, the costs of chemical reagents  
31 remain as a principal drawback. The freeze and thaw pre-treatment requires a large surface area and  
32 naturally occurring freezing temperatures. This pre-treatment is only applicable in a few regions because  
33 of these naturally limiting factors. If freezing temperatures are to be achieved artificially, the electrical  
34 consumption would make the energy balance negative.

35  
36 Regarding dewaterability, low-temperature, ultrasonic and alkaline pre-treatments, seem to reduce the  
37 dewatering ability of the digestate. In contrast, TPAD, thermal hydrolysis, acid, AOPs and microwave  
38 pre-treatments seem to improve this parameter. Floc size is known to have substantial impact on sludge  
39 dewaterability (Gao, 2011). However, the reduction in particle size after the pre-treatment does not  
40 necessarily reduce the dewaterability of the digestate, as observed for acid, AOPs and mechanical  
41 techniques. Finally, with increasing attention on VFA production instead of methane, alkaline pre-  
42 treatment looks particularly attractive, since alkali dosing is often required to promote VFA formation.

43  
44 The selection of an optimal pre-treatment method depends on (natural) local conditions, but also on  
45 economics and regulations. Firstly, full-scale disintegration technologies are feasible only if the sludge  
46 disposal costs are high (Müller et al., 2004). Secondly, investment and operational costs must be  
47 considered (Table 14). In general, chemical and enzymatic pre-treatments are not favored because of  
48 the dosage of reagents, whereas thermal hydrolysis seems ideal when pasteurization or sterilization of

1 sludge is required by regulations prior to land disposal or agricultural reuse. Thermal hydrolysis also  
2 results in a high level of solids reduction, although investment and operational costs are high as well. It  
3 should be realized that due to fluctuating energy prices, the focus on increasing methane production is  
4 not always economically appealing. In fact, solids reduction is more relevant than methane production  
5 for countries such as the Netherlands, where costs for disposal are high, since incineration is the sole  
6 outlet. VS reduction as well as increased dewaterability is not only relevant for disposal costs, but also  
7 lower required polyelectrolyte dosing could increase the economic feasibility of the pre-treatment  
8 method.

9  
10 Life cycle assessment (LCA) could shed light on the overall cost effectiveness of each technique;  
11 however, studies performing LCA on sludge pre-treatment are missing in literature. Pre-treatments  
12 based on milder temperature and pH conditions, seem to represent a good opportunity to develop less  
13 resource-demanding pre-treatments. Low-temperature, TPAD and hydrodynamic cavitation are  
14 techniques that have shown interesting results without the use of harsh conditions and can be  
15 considered cost effective pre-treatment techniques.

16  
17 Despite several studies comparing different pre-treatment techniques, direct comparisons are often  
18 unfair. The operational parameters of some techniques are occasionally assayed far from their optimum  
19 values, with disproportionate energy inputs or are set at values that could produce recalcitrant or even  
20 toxic by-products, resulting in reduced or low performance. It is very important to consider these factors  
21 when doing comparisons between the different pre-treatments. On the other hand, considerable  
22 research has also been done to assess the synergetic effects of the combination of several different pre-  
23 treatments. For instance, Doğan and Sanin (2009) observed that the deteriorated dewaterability caused  
24 by alkaline pre-treatment can be improved by the incorporation of microwave irradiation and the  
25 protein release can be higher compared to the summation of the release by each method individually.  
26 Synergies have also been observed by Kim et al. (2010) and Joo et al. (2015). However, the combination  
27 of two pre-treatment techniques does not always result in a direct additive effect (Eskicioglu et al.,  
28 2008; Sahinkaya, 2015; Yeneneh et al., 2013), but may lead to an increase in the consumption of energy  
29 and/or chemical reagents.

30  
31 Regarding research gaps, it is clear that pre-treatments such as low-temperature or TPAD result in low  
32 electrical energy consumption compared to the more sophisticated methods, such as ultrasonic,  
33 microwave and freeze and thaw (if artificial freezing would be used). The exact working mechanisms of  
34 these pre-treatments are missing. Finally, information about the production of recalcitrant or inhibitory  
35 by-products, not only during thermal hydrolysis, but also during chemical pre-treatments, is still missing.  
36 These by-products could become problematic during anaerobic digestion of the pre-treated sludge  
37 and/or the subsequent side-stream treatment of the concentrated sludge reject water, or even for the  
38 treatment of the recycled reject water in the mainstream water line of the wastewater treatment plant.

39  
40 Finally, the use of COD solubilization for judging the efficiency of pre-treatments must be discouraged.  
41 Until now, the sludge biodegradation assays or BMP tests remain as the only method to accurately  
42 assess the performance of WAS pre-treatments to maximize methane production. Proper inter-study  
43 comparisons between pre-treatments are only possible if hydrolysis rate, biodegradation and/or BMP  
44 values, and COD balances of the samples are reported. Also, additional efforts should be taken to  
45 characterize the sludge into its specific components and not merely into VS and/or COD. The use of  
46 thickened sludge in performing research on pre-treatment methods must also be promoted to account  
47 for real-world conditions. For calculations regarding the economic viability of a pre-treatment the  
48 amount of energy consumed (heat and/or electrical) by the equipment, energy losses, energy actually

1 delivered to the sample, and in the case of chemical pre-treatments, the actual amount of reagent used,  
2 should be mentioned. Valuable add-ons are the change in dewaterability and VS reduction. All these  
3 features would increase the reproducibility and comparability of results, despite the varying  
4 composition of WAS.

1 *Table 13 Effects of pre-treatments on some WAS components*

Pre-treatment technique	Bacterial biomass	Protein	Carbohydrate	Humic substances	Effects on other components or in combinations
Thermal <100°C	Cell wall starts rupturing at ≥50°C	Denaturation occurs at around 75°C	Only solubilization	Unaffected. Solubilization up to around 75°C and they become flexible at 70-80°C (T <sub>glass</sub> )	Proteins and humic acids form assemblies, protecting the former from biological degradation  Proteins and carbohydrates: amino carbonyl reaction occurs even at 60°C, and rate increasing in proportion to application time
Temperature phased anaerobic digestion (TPAD)	Same as thermal <100°C pre-treatment	Same as thermal <100°C pre-treatment	Same as thermal <100°C pre-treatment	Same as thermal <100°C pre-treatment	Same as thermal <100°C pre-treatment
Thermal >100°C	Extensive cell wall and membrane disruption	Extensive denaturation Protein degradation starting at >170-190°C	Theory: caramelization at 170°C (formation of aldehydes and ketones)  Practice: solubilization and low degree of degradation into mono or dimeric sugars at 220°C	≥110°C gradual decomposition of humic acids, resulting in the production of CO <sub>2</sub> and CO  Dissociation at 150-180°C	Maillard reaction proceeds faster as compared to thermal pre-treatment below 100°C
Microwave	Cell lysis due to thermal effects	Same as thermal pre-treatment <100°C and thermal hydrolysis, depending on temperature			
Freeze and thaw	Limited cell lysis probably because of cryoprotectant components (e.g. glycerol)	Enzymes still working  Protein denaturation and formation of aggregates			
Ultrasonic (temperature <40°C)	Extensive deflocculation  Limited cell disruption	Solubilization, probably caused by deflocculation			
Hydrodynamic cavitation, milling and homogenization	Limited cell lysis due to grinding or cavitation	Solubilization			
Alkaline	Extensive cell disruption at pH 12	Destruction of amide groups and unordered random coil conformation at pH 5.7-10.5	At pH 10 and application of Ca(OH) <sub>2</sub> , hydrolysis of carbohydrate was not significantly affected	Solubilization and formation of negative charges	Saponification of lipids
Acidic	Limited cell membrane disruption	Denaturation and hydrolysis	Solubilization (but in a lower extent as alkaline)	Precipitation	Hydrolysis of esters
AOPs	Potential damage to cells by lipid peroxidation	Inactivation of proteins by modification of amino acid.  In the absence of oxygen,		Production of inorganic carbon	

		cross-linking was observed			
Biological	No cell lysis	With protease, very limited solubilization and degradation into amino acids	With amylase, limited solubilization, but relatively higher than proteins	Limited solubilization probably because of destruction of humic acid and protein complexes	

1

1 *Table 14 Qualitative assessment of the effect of different pre-treatments on the sludge characteristics regarding degradability and economic feasibility*

2

Pre-treatment technique	Hydrolysis rate ( $k_{\text{hyd}}$ )	Biodegradation ( $B_0$ )	VS removal	Dewaterability of digestate	Economical potential for increased methane production	Economical potential for increased VFA production	Investment costs	Operational costs
Thermal <100°C	↑↑	↑/↓	↑	↓	↑	↑/↓	Low	Low
TPAD	↑↑	↑↑	↑↑	↑	↑↑	↑/↓	Low	Low
Thermal >100°C	↑↑	↑↑	↑↑	↑	↑↑	↓	High	High
Microwave	↑/↓	↑↑	↑↑	↑	↑	↑/↓	High	High
Freeze and thaw	n/f (increase is expected)	↑	↑	n/f (improvement is expected)	↑/↓	↑/↓	Low/High	Low/High
Ultrasonic	↑↑	↑	↑	↓	↓	↓	High	High
Hydrodynamic cavitation, milling and homogenization	↑	↑	↑↑	↑	↑	↑/↓	Low	Low/High
Alkaline	↑/↓	↑	↑↑	↓	↑/↓	↑↑	Low	High
Acidic	↑/↓	↑	=	↑	↓	↓	High	High
AOPs	↑/↓	↑/↓	↑↑	↑	↑/↓	↑/↓	High	High
Biological	↑	↑/↓	n/f (increase is expected)	n/f (improvement is expected)	↑/↓	↑/↓	Low	High

3 Notes:

4 ↑ increase

5 ↓ decrease

6 = no change

7 n/f: not found in literature

## 4. Conclusion

Based on the current knowledge, the best alternative for a pre-treatment method is defined based on the objectives of the treatment (the listed pre-treatment techniques are not specifically ordered):

- Increasing methane production: thermal pre-treatment  $>100^{\circ}\text{C}$ , TPAD and microwave
- Increasing volatile solids removal: thermal pre-treatment  $>100^{\circ}\text{C}$ , TPAD and alkaline
- Improving the dewaterability of digestate: thermal pre-treatment  $>100^{\circ}\text{C}$ , TPAD and microwave
- Lowering energy consumption: TPAD and thermal pre-treatment  $<100^{\circ}\text{C}$
- Lowering operating and capital costs: TPAD and thermal pre-treatment  $<100^{\circ}\text{C}$

Microwave, however, uses electrical energy and is thus economically not advantageous. Therefore, overall, low- and high-temperature pre-treatment and TPAD are the most promising pre-treatment methods.

Finally, to thoroughly understand the different mechanisms of different pre-treatment methods, more attention should be paid to the conversion of, and structural change in, the different (complex) components of waste activated sludge during their application.

1 Appendix A

2  
3

Table A.1 Energy balance

Pre-treatment conditions	Methane generation, L <sub>CH<sub>4</sub></sub> /kgVS <sub>fed</sub>	Biodegradation, %	TS, g/L	VS/TS	Heat consumed, kJ/gTS*	Electricity consumed, kJ/gTS	Heat produced, kJ/gTS	Electricity produced, kJ/gTS	Heat balance, kJ/gTS	Electricity balance, kJ/gTS	VS reduction, %	Reference	
<b>Thermal pre-treatment &lt;100°C</b>													
Control	138	28	47.40	0.73	2.52	0.00	-1.84	-1.36	0.68	-1.36	27.0	(Ruffino et al., 2015)	
Pre-treated: Temperature: 80°C Treatment time: 3 hours	179	37	47.40	0.73	6.49	0.00	-2.39	-1.77	4.10	-1.77	33.5		
Pre-treated: Temperature: 90°C Treatment time: 3 hours	182	37	47.40	0.73	7.37	0.00	-2.43	-1.80	4.94	-1.80	37.5		
Control	167	32	38.20	0.70	3.13	0.00	-2.13	-1.58	1.00	-1.58	34.5		
Pre-treated: Temperature: 70°C Treatment time: 3 hours	202	39	38.20	0.70	6.96	0.00	-2.58	-1.91	4.38	-1.91	36.0		
Pre-treated: Temperature: 70°C Treatment time: 15 hours	199	38	38.20	0.70	6.96	0.00	-2.54	-1.88	4.42	-1.88	37.0		
Control	126	21	12.35	0.80	9.75	0.00	-1.84	-1.36	7.91	-1.36	35.0		(J. Kim et al., 2013)
Pre-treated: Temperature: 60°C Treatment time: 6 hours	171	29	12.35	0.80	18.21	0.00	-2.49	-1.85	15.71	-1.85	45.0		
Pre-treated: Temperature: 75°C Treatment time: 6 hours	208	35	12.35	0.80	23.29	0.00	-3.04	-2.25	20.24	-2.25	45.0		
Pre-treated: Temperature: 90°C Treatment time: 6 hours	155	26	12.35	0.80	28.36	0.00	-2.27	-1.68	26.10	-1.68	45.0		
Control	203	38	48.70	0.81	3.06	0.00	-2.99	-2.21	0.07	-2.21	n/a	(Wang et al., 2014)	
Pre-treated: Temperature: 35°C Treatment time: 24 hours	203	38	48.70	0.81	3.06	0.00	-2.99	-2.21	0.07	-2.21	n/a		
Pre-treated: Temperature: 55°C Treatment time: 24 hours	206	39	48.70	0.81	4.60	0.00	-3.03	-2.25	1.57	-2.25	n/a		
Pre-treated: Temperature: 70°C Treatment time: 24 hours	216	41	48.70	0.81	5.89	0.00	-3.18	-2.35	2.71	-2.35	n/a		
<b>Thermal phased anaerobic digestion (TPAD)</b>													
Control (single-stage): Temperature: 35°C SRT: 14 days	90	16	25.40	0.69	4.53	0.00	-1.13	-0.84	3.40	-0.84	48	(Ge et al., 2011b)	
Pre-treated: Acidogenic stage: Temperature: 70°C SRT: 2 days; Methanogenic stage: Temperature: 35°C	170	31	25.40	0.69	10.29	0.00	-2.13	-1.58	8.16	-1.58	48.		



SRT: 14 days													
Control (single-stage): Temperature: 55°C SRT: 20 days	288	51	58.00	0.78	3.71	0.00	-4.08	-3.02	-0.36	-3.02	48	(Bolzonella et al., 2012)	
Pre-treated: Acidogenic stage: Temperature: 65°C SRT: 2 days; Methanogenic stage: Temperature: 55°C SRT: 18 days	313	56	58.00	0.78	4.39	0.00	-4.43	-3.28	-0.04	-3.28	55		
Control (single-stage): Temperature: 35°C SRT: 30 days	220	39	46.20	0.78	2.75	0.00	-3.14	-2.32	-0.39	-2.32	40.9	(Wu et al., 2016)	
Pre-treated: Acidogenic stage: Temperature: 55°C SRT: 6 days; Methanogenic stage: Temperature: 35°C SRT: 24 days	320	57	46.20	0.78	4.46	0.00	-4.56	-3.38	-0.10	-3.38	49.1		
Control (single-stage): Temperature: 55°C SRT: 20 days	130	33	62.40	0.69	3.45	0.00	-1.64	-1.21	1.81	-1.21	34	(Leite et al., 2016)	
Pre-treated: Acidogenic stage: Temperature: 55°C SRT: 2 days; Methanogenic stage: Temperature: 55°C SRT: 18 days	173	44	62.40	0.69	3.41	0.00	-2.18	-1.61	1.23	-1.61	38		
<b>Thermal pre-treatment &gt;100°C</b>													
Control	261	49	14.50	0.81	8.25	0.00	-3.84	-2.84	4.41	-2.84	39	(Bougrier et al., 2007b)	
Pre-treated: Temperature: 135°C Treatment time: 30 min	292	55	14.50	0.81	37.08	0.00	-4.31	-3.19	32.77	-3.19	41		
Pre-treated: Temperature: 190°C Treatment time: 15 min	327	62	14.50	0.81	52.93	0.00	-4.82	-3.57	48.11	-3.57	57		
Control	154	31	20.80	0.69	10.02	0.00	-1.94	-1.43	8.09	-1.43	43	(Gianico et al., 2013)	
Pre-treated: Temperature: 134°C Treatment time: 20 min Pressure: 312 kPa	223	46	20.50	0.70	26.28	0.00	-2.86	-2.11	23.42	-2.11	46		
Control	128	25	17.10	0.70	7.00	0.00	-1.64	-1.21	5.36	-1.21	34.8	(Valo et al., 2004)	
Pre-treated: Temperature: 170°C Treatment time: 60 min Pressure: not disclosed	228	45	17.10	0.70	40.00	0.00	-2.91	-2.16	37.08	-2.16	66.9		
<b>Microwave pre-treatment</b>													
Control: Mixed sludge, primary and WAS 42:58 v/v	308	53	64.00	0.73	0.35	0.00	-4.12	-3.05	-3.77	-3.05	n/a	(Eskicioglu et al., 2008)	

Pre-treated: Temperature: 100°C Mixed sludge, primary and WAS 42:58 v/v	397	68	64.00	0.73	0.35	20.66	-5.30	-3.93	-4.96	16.73	n/a	
Control: Mixed sludge, primary and WAS 42:58 v/v	192	33	51.40	0.70	0.29	0.00	-2.45	-1.82	-2.16	-1.82	37.4	
Pre-treated: Temperature: 96°C Mixed sludge, primary and WAS 42:58 v/v	254	43	51.40	0.70	0.29	17.51	-3.25	-2.40	-2.95	15.11	44.1	(Coelho et al., 2011)
Control:	245	46	40.90	0.77	1.00	0.00	-3.41	-2.53	-2.41	-2.53	n/a	
Pre-treated: Temperature: 190°C	304	57	40.90	0.77	1.00	69.13	-4.24	-3.13	-3.24	66.00	n/a	(Chi et al., 2011)
<b>Freezing and thawing</b>												
Control Mixed sludge, primary and WAS 60:40 v/v	277	57	41.00	0.77	0.37	0.00	-3.86	-2.86	-3.49	-2.86	51.9	
Pre-treated: Freezing stage: Temperature: -25°C SRT: 1 day; Thawing stage: Temperature: 20°C SRT: 0.5 day; Mixed sludge, primary and WAS 60:40 v/v	309	63	41.00	0.77	0.37	0.00	-4.30***	-3.18	-3.93	-3.18***	53.8	(Montusiewicz et al., 2010)
<b>Ultrasonic pre-treatment</b>												
Control	221	41	42.00	0.83	0.36	0.00	-3.35	-2.48	-2.99	-2.48	50.0	
Pre-treated: US density: 1 kW/L Specific energy: 2.37 kJ/gTS Temperature: <35°C Mixed sludge, primary and WAS 33:67 v/v	231	44	42.00	0.83	0.36	14.28	-3.50	-2.59	-3.14	11.69	51.5	(Cella et al., 2015)
Control	170	34	27.70	0.68	0.59	0.00	-2.10	-1.56	-1.52	-1.56	37	
Pre-treated: US density: 0.5 kW/L Specific energy: 2.209 kJ/gTS Temperature: "no increase detected"	240	48	27.30	0.68	0.60	4.42	-2.99	-2.21	-2.39	2.20	40	(Braguglia et al., 2015)
Control	248	42	33.30	0.83	0.49	0.00	-3.73	-2.76	-3.24	-2.76	n/a	
Pre-treated: US density: ~13.3 kW/L Specific energy: 2.57 kJ/gTS Temperature: un-controlled	349	60	33.30	0.83	0.49	2.57	-5.25	-3.88	-4.76	-1.31	n/a	(Pérez-Elvira et al., 2010)
Control	114	20	30.00	0.87	0.68	0.00	-1.81	-1.34	-1.13	-1.34	19.6	
Pre-treated: US density: 1.9 kW/L Specific energy: 3.8 kJ/gTS Temperature: "not increased significantly"	129	23	30.00	0.87	0.68	3.80	-2.05	-1.52	-1.37	2.28	22.2	(Seng et al., 2010)
<b>Hydrodynamic cavitation, milling and homogenization</b>												

Control	159	35	52.50	0.67	0.31	0.00	-1.95	-1.44	-1.64	-1.44	n/a	(Wett et al., 2010)
Pre-treated: Ball milling $E_s=1.76$ kJ/gTS (assumed that 60% of biogas was methane) (assumed that VSS=VS)	249	54	52.50	0.67	0.31	1.76	-3.05	-2.26	-2.74	-0.50	n/a	
Control	72	13	9.85	0.65	1.07	0.00	-0.85	-0.63	0.22	-0.63	n/a	(Lee & Han, 2013)
Pre-treated: Hydrodynamic cavitation $E_s=1.20$ kJ/gTS	81	15	9.85	0.65	1.07	1.20	-0.96	-0.71	0.12	0.49	n/a	
<b>Alkaline pre-treatment</b>												
Control: pH: 6.70 Mix sludge, primary and WAS 50:50 v/v	96	26	38.00	0.68	0.15	0.00	-1.20	-0.89	-1.05	-0.89	20.5	(Kim et al., 2003)
Pre-treated: pH: 12.00 Dose: 184 mg NaOH/gTS Neutralization: not disclosed Mix sludge, primary and WAS 50:50 v/v	109	29	38.00	0.68	4.07	1.18	-1.35	-1.00	2.72	0.18	29.8	
Control: pH: 6.86	154	28	10.15	0.75	1.49	0.00	-2.12	-1.57	-0.63	-1.57	35	(Lin et al., 1997)
Pre-treated: pH: 8.07 Dose: 76 mg NaOH/gTS Neutralization: not performed	239	41	10.53	0.69	3.05	0.49	-2.98	-2.21	0.07	-1.72	36	
Pre-treated: pH: 12.26 Dose: 128 mg NaOH/gTS Neutralization: not performed	210	41	12.48	0.69	3.94	0.82	-2.63	-1.95	1.31	-1.13	42	
Control: pH: 6.5-7.5	122	26	8.00	0.70	1.89	0.00	-1.56	-1.15	0.33	-1.15	n/a	
Pre-treated: pH: 11.60 Dose: 80 mg NaOH/gTS Neutralization: yes, down to pH 7.5	145	31	8.00	0.70	3.71	0.52	-1.85	-1.37	1.86	-0.85	n/a	(Ruffino et al., 2016)
Pre-treated: pH: 11.60 Dose: 80 mg NaOH/gTS Neutralization: yes, down to pH 8.5	143	30	8.00	0.70	3.69	0.52	-1.82	-1.35	1.87	-0.83	n/a	
Control: pH: 6.5-7.5	142	30	8.00	0.70	1.89	0.00	-1.34	-1.80	0.09	-1.34	n/a	
Pre-treated: pH: 10.10 Dose: 40 mg NaOH/gTS Neutralization: yes, down to pH 8.5	160	34	8.00	0.70	2.78	0.26	-1.51	-2.04	0.74	-1.25	n/a	
<b>Acid pre-treatment</b>												
Control: pH: 6.84 (assumed that 60% of biogas was methane)	141	31	50.00	0.74	0.18	0.00	-1.90	-1.41	-1.72	-1.41	32.7	(Devlin et al., 2011)

Pre-treated: pH: 2.13 Dose: 184 mg HCl/gTS Neutralization: yes, up to pH 6.8 (assumed that 60% of biogas was methane)	156	36	50.00	0.78	5.19	1.37	-2.22	-1.64	2.97	-0.27	34.4	
Control: pH: 6.4	201	36	42.60	0.79	0.84	0.00	-2.89	-2.14	-2.05	-2.14	n/a	(Wang et al., 2013)
Pre-treated: pH: 5.5 Dose: 19 mg NO <sub>2</sub> <sup>-</sup> /gTS Neutralization: not disclosed	255	45	42.60	0.79	0.84	0.00**	-3.67	-2.72	-2.83**	-2.72	n/a	
Control: pH: 6.5-6.9	164	33	36.10	0.83	1.00	0.00	-2.47	-1.83	-1.48	-1.83	n/a	(T. Zhang et al., 2015)
Pre-treated: pH: 5.5 Dose: 18.2 mg NO <sub>2</sub> <sup>-</sup> /gTS Neutralization: not disclosed	260	53	36.10	0.83	1.00	0.00**	-3.92	-2.90	-2.93**	-2.90	n/a	
<b>AOPs: Ozonation</b>												
Control: Mix sludge, primary and WAS 1:1 (TS based)	314	56	16.70	0.78	0.68	0.00	-4.44	-3.29	-3.76	-3.29	n/a	(Tian et al, 2015)
Pre-treated: Dose: 36 mg O <sub>3</sub> /gTS Mixed sludge, primary and WAS 1:1 (TS based)	362	64	16.70	0.78	0.68	3.14	-5.13	-3.79	-4.45	-0.65	n/a	(Tian et al, 2015)
Control: (assumed that 60% of biogas was methane)	114	26	16.10	0.86	0.91	0.00	-1.78	-1.32	-0.87	-1.32	n/a	(Bougrier, 2007)
Pre-treated: Dose: 150 mg O <sub>3</sub> /gTS (assumed that 60% of biogas was methane)	278	63	16.10	0.86	0.91	13.10	-4.33	-3.21	-3.42	9.89	n/a	(Bougrier, 2007)
<b>AOPs: Hydrogen peroxide</b>												
Control	164	33	36.10	0.83	1.00	0.00	-2.47	-1.83	-1.48	-1.83	n/a	(T. Zhang et al., 2015)
Pre-treated: Dose: 30 mg H <sub>2</sub> O <sub>2</sub> /gTS	201	41	36.10	0.83	1.30	0.00	-3.03	-2.24	-1.73	-2.24	n/a	
Control	242	48	13.90	0.73	1.35	0.00	-3.20	-2.37	-1.85	-2.37	n/a	(Zhou et al., 2015)
Dose: 50 mg H <sub>2</sub> O <sub>2</sub> /gTS	245	48	13.90	0.73	1.86	0.00	-3.24	-2.40	-1.38	-2.40	n/a	
Control	308	53	64.00	0.73	0.35	0.00	-4.12	-3.05	-3.77	-3.05	n/a	
Pre-treated: Dose: 1000 mg H <sub>2</sub> O <sub>2</sub> /gTS Mixed sludge, primary and WAS 42:58 v/v	304	52	52.00	0.73	10.56	0.00	-4.04	-2.99	6.51	-2.99	n/a	(Eskicioglu et al., 2008)
<b>AOPs: Fenton</b>												
Control	242	48	13.90	0.73	1.35	0.00	-3.20	-2.37	-1.85	-2.37	n/a	(Zhou et al., 2015)
Pre-treated: pH 2.0 H <sub>2</sub> O <sub>2</sub> = 50 mg/gTS Fe <sup>2+</sup> = 7 mg/gTS	273	54	13.90	0.73	5.46**	0.00	-3.61	-2.67	1.85**	-2.67	n/a	

1  
2

Notes:

- 1 The signs for energy computations are negative for energy production and positive for energy consumption  
 2 n/a: not available  
 3 SRT: solids retention time  
 4 \* Includes the heat and electricity required for the production of the chemical reagents used for chemical pre-treatments  
 5 \*\* Excludes the energy required for the chemical reagents  
 6 \*\*\* Assumes natural freezing is performed

7

8 **Assumptions regarding energy calculations:**

9 Only the energy required for the pre-treatment itself and for anaerobic digestion was considered.

10	Specific heat of sludge	4.18	MJ/°C m <sup>3</sup>
11	Specific latent heat of fusion	333	MJ/m <sup>3</sup>
12	Density of WAS	1000	kg/m <sup>3</sup>
13	Ambient temperature	10	°C
14	Energy content of CH <sub>4</sub>	36	MJ/m <sup>3</sup> CH <sub>4</sub>
15	Density of methane	0.656	kg/m <sup>3</sup>
16	Heat transfer coefficient	0.7	W/m <sup>2</sup> °C
17	Digester specific surface	0.5	m <sup>2</sup> of digester walls and roof/ m <sup>3</sup> sludge
18	Theoretical methane production	0.35	LCH <sub>4</sub> /gCOD
19	Efficiency CHP (electricity)	0.37	-
20	Efficiency CHP (heat)	0.5	-

1 Appendix B

2  
3

Table B.1 Energy balance for thermal pre-treatment <100°C and thermal pre-treatment >100°C

Sample type	Temperature, °C	Application time, h	Methane production, LCH <sub>4</sub> /kgVS <sub>added</sub>	VS g/L	COD/VS	VS/TS	VS reduction, %	Recuperation efficiency of heat exchanger	Heat Recuperation efficiency of CHP	Required energy for heating, MJ/m <sup>3</sup>	Energy released as heat, MJ/m <sup>3</sup>	Digester temperature, °C	Sludge temperature after pre-treatment, °C	Required energy for heating sludge (for digester), MJ/m <sup>3</sup>	Digestion time, d	Heat loss digester, MJ/m <sup>3</sup>	Overall energy balance, MJ/m <sup>3</sup>	Minimum VS concentration required to close balance, gVS/L	Reference
<b>Thermal pre-treatment &lt;100°C</b>																			
Control	10	0	138	34.8	1.39	0.73	27.00%	0.7	0.5	0	-86	35	10	105	20	15.1	-71	6	(Ruffino et al., 2015)
Pre-treated	80	3	179	34.8	1.39	0.73	33.50%	0.7	0.5	88	-112	35	31	17	20	15.1	-9	32	
Pre-treated	90	3	182	34.8	1.39	0.73	37.50%	0.7	0.5	100	-114	35	34	4	20	15.1	1	35	
Control	10	0	167	26.77	1.49	0.70	34.50%	0.7	0.5	0	-80	35	10	105	20	15.1	-65	5	
Pre-treated	70	3	202	26.77	1.49	0.70	36.00%	0.7	0.5	75	-97	35	28	29	20	15.1	-7	25	
Pre-treated	70	15	199	26.77	1.49	0.70	37.00%	0.7	0.5	75	-96	35	28	29	20	15.1	-6	25	
Control	10	0	126	7.0	1.68	0.80	35.00%	0.7	0.5	0	-16	35	10	105	21	15.9	0	7	(J. Kim et al., 2013)
Pre-treated	60	6	171	9.9	1.68	0.80	45.00%	0.7	0.5	63	-30	35	25	42	21	15.9	48	26	
Pre-treated	75	6	208	9.9	1.68	0.80	45.00%	0.7	0.5	82	-37	35	29.5	23	21	15.9	60	26	
Pre-treated	90	6	155	9.9	1.68	0.80	45.00%	0.7	0.5	100	-28	35	34	4	21	15.9	89	42	
Control	10	24	203	39.4	1.52	0.81	35.00%	0.7	0.5	0	-144	37	10	113	44	35.9	-108	10	(Wang et al., 2014)
Pre-treated	35	24	203	39.4	1.52	0.81	35.00%	0.7	0.5	31	-144	37	17.5	82	44	35.9	-77	18	
Pre-treated	55	24	206	39.4	1.52	0.81	35.00%	0.7	0.5	56	-146	37	23.5	56	44	35.9	-54	25	
Pre-treated	70	24	216	39.4	1.52	0.81	35.00%	0.7	0.5	75	-153	37	28	38	44	35.9	-42	29	
<b>Thermal pre-treatment &gt;100°C</b>																			
Control	10	0	359	11.8	1.51	0.81	39.00%	0.5	0.2 (as steam)	0	-31	35	10	105	20	15.1	-15	6	(Bougrier et al., 2007b)
Pre-treated	135	0.5	383	11.8	1.51	0.81	41.00%	0.5	0.2 (as steam)	261	-33	35	72.5	0	20	15.1	244	100	
Pre-treated	190	0.5	308	11.8	1.51	0.81	57.00%	0.5	0.2 (as steam)	334	-26	35	90	0	20	15.1	323	157	
Control	10	0	154	14.4	1.40	0.69	43.00%	0.5	0.2 (as steam)	0	-16	55	10	188	15	20.4	4	18	(Gianico et al., 2013)
Pre-treated	134	0.33	223	14.4	1.40	0.70	46.00%	0.5	0.2 (as steam)	259	-23	55	72	0	15	20.4	256	174	
Control	10	0	128	12.0	1.45	0.70	34.80%	0.5	0.2 (as steam)	0	-11	35	10	105	20	15.1	4	16	(Valo et al., 2004)
Pre-treated	170	1	228	12.0	1.45	0.70	66.90%	0.5	0.2 (as steam)	334	-20	35	90	0	20	15.1	330	213	

4  
5

1 **Table B.2 Energy balance for ultrasonic and microwave pre-treatments**

Sample	Notes	CH <sub>4</sub> production, L CH <sub>4</sub> /kgVS	COD/VS	Biodegradation, %	VS, g/L	VS/TS	Electricity consumption, kJ/gTS	Pre-treatment specific energy (as electricity), MJ/m <sup>3</sup>	Electricity released, MJ/m <sup>3</sup>	Required heat to warm the sludge, MJ/m <sup>3</sup>	Heat losses in digester, MJ/m <sup>3</sup>	Heat released, MJ/m <sup>3</sup>	Heat balance, MJ/m <sup>3</sup>	Electricity balance, MJ/m <sup>3</sup>	Biodegradation required for neutral electricity balance, %	Reference
<b>Ultrasonic pre-treatment</b>																
Untreated		114	1.61	20	26.2	0.87	0	0.00	-60.6	112.86	20.4	-53.8	79.5	-60.65		(Seng et al., 2010)
Treated		129	1.61	23	26.2	0.87	3.79	114.00	-68.6	112.86	20.4	-60.8	72.4	45.37	38	
Untreated		248	1.67	42	27.5	0.83	0.00	0.00	-138.5	104.5	15.1	-122.8	-3.1	-138.48		(Pérez-Elvira et al., 2010)
Treated		349	1.67	60	27.5	0.83	25.90	858.00	-194.9	104.5	15.1	-172.8	-53.1	663.12	261	
Untreated	Mixed sludge PS:WAS = 33:67	170	1.42	34	18.8	0.68	0.00	0.00	-65.0	112.86	16.3	-57.7	71.5	-65.03		(Braguglia et al., 2015)
Treated	Mixed sludge PS:WAS = 33:67	240	1.42	48	18.7	0.68	4.40	120.00	-91.1	112.86	16.3	-80.8	48.4	28.87	64	
Untreated	Mixed sludge PS:WAS = 33:67	221	1.53	41	35.0	0.83	0.00	0.00	-156.8	104.5	15.1	-139.0	-19.4	-156.85		(Cella et al., 2015)
Treated	Mixed sludge PS:WAS = 33:67	230	1.51	44	35.0	0.83	14.29	600.00	-163.7	104.5	15.1	-145.2	-25.5	436.26	160	
<b>Microwave pre-treatment</b>																
Untreated	Mixed sludge PS:WAS = 42:58	308	1.66	53	47.0	0.73	0.00	0.00	-293.9	96.14	22.3	-260.6	-142.2	-293.93		(Eskicioglu et al., 2008)
Treated	Mixed sludge PS:WAS = 42:58	290	1.66	50	47.0	0.73	16.07	1034.64	-276.4	96.14	22.3	-245.0	-126.6	758.27	187	
Untreated	Mixed sludge PS:WAS = 42:58	192	1.67	33	36.1	0.70	0.00	0.00	-140.7	104.5	15.1	-124.8	-5.1	-140.74		(Coelho et al., 2011)
Treated	Mixed sludge PS:WAS = 42:58	254	1.67	43	36.1	0.70	17.51	900.00	-186.2	104.5	15.1	-165.0	-45.4	713.82	210	
Untreated		245	1.52	46	31.3	0.77	0.00	0.00	-155.7	188.1	40.8	-138.0	90.9	-155.71		(Chi et al., 2011)
Treated		304	1.52	57	31.3	0.77	69.13	2827.42	-193.2	188.1	40.8	-171.3	57.7	2634.21	838	


2  
3 **Assumptions regarding energy calculations:**

- 4 Specific heat of sludge 4.18 MJ/°C m<sup>3</sup>
- 5 Density of WAS 1000 kg/m<sup>3</sup>
- 6 Ambient temperature 10 °C
- 7 Energy content of CH<sub>4</sub> 36 MJ/m<sup>3</sup> CH<sub>4</sub>
- 8 Density of methane 0.656 kg/m<sup>3</sup>
- 9 Heat transfer coefficient 0.7 W/m<sup>2</sup>°C
- 10 Digester specific surface 0.5 m<sup>2</sup> of digester walls and roof/ m<sup>3</sup> sludge
- 11 Theoretical methane production 0.35 LCH<sub>4</sub>/gCOD

1	Efficiency CHP (electricity)	0.37	-
2	Efficiency CHP (heat)	0.5	-
3	Efficiency CHP (steam)	0.2	-



1 Appendix C

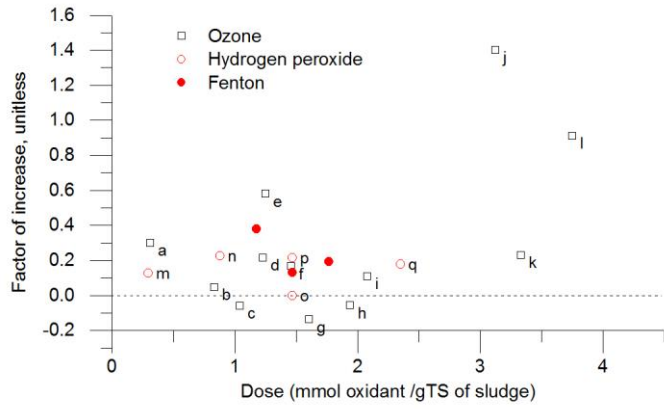

2

Note: for Fenton reaction, H<sub>2</sub>O<sub>2</sub> is shown

3

Fig C.1 Effect of oxidant doses in the biogas production. Letters refer to entries in Table 12.

1 Acknowledgements:

2

3 This work was supported by the Mexican National Council of Science and Technology (CONACyT) by  
4 means of the doctoral scholarship No. 410688 granted to the first author and by the Netherlands  
5 Organisation for Scientific Research (NWO) for the Aspasia grant (015.011.024) granted to the last  
6 author. The authors thank Didier de Villiers for his revision on English language usage.

1   References:

- 2
- 3   Ahn, K.H., Park, K.Y., Maeng, S.K., Hwang, J.H., Lee, J.W., Song, K.G., Choi, S., 2002. Ozonation of  
4       wastewater sludge for reduction and recycling. *Water Sci. Technol.* 46, 71–77.
- 5   Angelidaki, I., Alves, M., Bolzonella, D., Borzacconi, L., Campos, J.L., Guwy, A.J., Kalyuzhnyi, S.,  
6       Jenicek, P., Van Lier, J.B., 2009. Defining the biomethane potential (BMP) of solid organic  
7       wastes and energy crops: A proposed protocol for batch assays. *Water Sci. Technol.* 59,  
8       927–934. doi:10.2166/wst.2009.040
- 9   Angelidaki, I., Sanders, W., 2004. Assessment of the anaerobic biodegradability of  
10       macropollutants. *Rev. Environ. Sci. Biotechnol.* 3, 117–129.
- 11   Anson, M.L., 1938. The estimation of pepsin, trypsin, papain, and cathepsin with hemoglobin. *J.*  
12       *Gen. Physiol.* 22, 79–89. doi:10.1085/jgp.22.1.79
- 13   Appels, L., Degrève, J., Van der Bruggen, B., Van Impe, J., Dewil, R., 2010. Influence of low  
14       temperature thermal pre-treatment on sludge solubilisation, heavy metal release and  
15       anaerobic digestion. *Bioresour. Technol.* 101, 5743–5748.  
16       doi:10.1016/j.biortech.2010.02.068
- 17   Appels, L., Houtmeyers, S., Degrève, J., van Impe, J., Dewil, R., 2013. Influence of microwave pre-  
18       treatment on sludge solubilization and pilot scale semi-continuous anaerobic digestion.  
19       *Bioresour. Technol.* 128, 598–603. doi:10.1016/j.biortech.2012.11.007
- 20   Appels, L., van Assche, A., Willems, K., Degrève, J., van Impe, J., Dewil, R., 2011. Peracetic acid  
21       oxidation as an alternative pre-treatment for the anaerobic digestion of waste activated  
22       sludge. *Bioresour. Technol.* 102, 4124–4130. doi:10.1016/j.biortech.2010.12.070
- 23   Apul, O.G., Sanin, F.D., 2010. Ultrasonic pretreatment and subsequent anaerobic digestion under  
24       different operational conditions. *Bioresour. Technol.* 101, 8984–8992.  
25       doi:10.1016/j.biortech.2010.06.128
- 26   Azman, S., Khadem, A.F., van Lier, J.B., Zeeman, G., Plugge, C.M., Azman, S., Khadem, A.F., Lier,  
27       J.B. Van, Zeeman, G., 2015a. Presence and role of anaerobic hydrolytic microbes in  
28       conversion of lignocellulosic biomass for biogas production presence and role of anaerobic  
29       hydrolytic microbes in conversion of lignocellulosic biomass for biogas production. *Crit. Rev.*  
30       *Environ. Sci. Technol.* 45, 2523–2564. doi:10.1080/10643389.2015.1053727
- 31   Azman, S., Khadem, A.F., Zeeman, G., van Lier, J.B., 2015b. Mitigation of humic acid inhibition in  
32       anaerobic digestion of cellulose by addition of various salts. *Bioengineering* 2(2), 54–65.  
33       doi:10.3390/bioengineering2020054
- 34   Baier, U., Schmidheiny, P., 1997. Enhanced anaerobic degradation of mechanically disintegrated  
35       sludge. *Water Sci. Technol.* 36, 137–143. doi:10.1016/S0273-1223(97)00678-1
- 36   Bao, H., Jiang, L., Chen, C., Yang, C., He, Z., Feng, Y., Cai, W., Liu, W., Wang, A., 2015.  
37       Combination of ultrasound and Fenton treatment for improving the hydrolysis and  
38       acidification of waste activated sludge. *RSC Adv.* 5, 48468–48473. doi:10.1039/c5ra05791d
- 39   Bayr, S., Kaparaju, P., Rintala, J., 2013. Screening pretreatment methods to enhance thermophilic  
40       anaerobic digestion of pulp and paper mill wastewater treatment secondary sludge. *Chem.*  
41       *Eng. J.* 223, 479–486. doi:10.1016/j.cej.2013.02.119
- 42   Blondeau, R., 1989. Biodegradation of natural and synthetic humic acids by the white rot fungus  
43       *Phanerochaete chrysosporium*. *Appl. Environ. Microbiol.* 55, 1282–5.
- 44   Bobleter, O., 1994. Hydrothermal degradation of polymers derived from plants. *Prog. Polym. Sci.*

1 19, 797–841. doi:10.1016/0079-6700(94)90033-7  
2 Bolzonella, D., Cavinato, C., Fatone, F., Pavan, P., Cecchi, F., 2012. High rate mesophilic,  
3 thermophilic, and temperature phased anaerobic digestion of waste activated sludge: A  
4 pilot scale study. *Waste Manag.* 32, 1196–1201. doi:10.1016/j.wasman.2012.01.006  
5 Bolzonella, D., Pavan, P., Zanette, M., Cecchi, F., 2007. Two-phase anaerobic digestion of waste  
6 activated sludge: effect of an extreme thermophilic prefermentation. *Ind. Eng. Chem. Res.*  
7 46, 6650–6655. doi:10.1021/ie061627e  
8 Bougrier, C., Albasi, C., Delgenès, J.P., Carrère, H., 2006. Effect of ultrasonic, thermal and ozone  
9 pre-treatments on waste activated sludge solubilisation and anaerobic biodegradability.  
10 *Chem. Eng. Process. Process Intensif.* 45, 711–718. doi:10.1016/j.cep.2006.02.005  
11 Bougrier, C., Battimelli, A., Delgenes, J.P., Carrere, H., 2007a. Combined ozone pretreatment and  
12 anaerobic digestion for the reduction of biological sludge production in wastewater  
13 treatment. *Ozone Sci. Eng.* 29, 201–206. doi:10.1080/01919510701296754  
14 Bougrier, C., Delgenes, J.P., Carrere, H., 2007b. Impacts of thermal pre-treatments on the semi-  
15 continuous anaerobic digestion of waste activated sludge. *Biochem. Eng. J.* 34, 20–27.  
16 doi:10.1016/j.bej.2006.11.013  
17 Bougrier, C., Delgenès, J.P., Carrère, H., 2008. Effects of thermal treatments on five different  
18 waste activated sludge samples solubilisation, physical properties and anaerobic digestion.  
19 *Chem. Eng. J.* 139, 236–244. doi:10.1016/j.cej.2007.07.099  
20 Bourven, I., Costa, G., Guibaud, G., 2012. Qualitative characterization of the protein fraction of  
21 exopolymeric substances (EPS) extracted with EDTA from sludge. *Bioresour. Technol.* 104,  
22 486–496. doi:10.1016/j.biortech.2011.11.033  
23 Braguglia, C.M., Gianico, A., Gallipoli, A., Mininni, G., 2015. The impact of sludge pre-treatments  
24 on mesophilic and thermophilic anaerobic digestion efficiency: Role of the organic load.  
25 *Chem. Eng. J.* 270, 362–371. doi:10.1016/j.cej.2015.02.037  
26 Braguglia, C.M., Gianico, A., Mininni, G., 2012. Comparison between ozone and ultrasound  
27 disintegration on sludge anaerobic digestion. *J. Environ. Manage.* 95, S139–S143.  
28 doi:10.1016/j.jenvman.2010.07.030  
29 Brown, M.J., Lester, J.N., 1980. Comparison of bacterial extracellular polymer extraction methods  
30 comparison of bacterial extracellular polymer extraction methods. *Appl. Environ. Microbiol.*  
31 40, 179–185.  
32 Burgess, J.E., Pletschke, B.I., 2008. Hydrolytic enzymes in sewage sludge treatment: A mini-  
33 review. *Water S A* 34, 343–350.  
34 Cella, M.A., Akgul, D., Eskicioglu, C., 2015. Assessment of microbial viability in municipal sludge  
35 following ultrasound and microwave pretreatments and resulting impacts on the efficiency  
36 of anaerobic sludge digestion. *Appl. Microbiol. Biotechnol.* 1–14. doi:10.1007/s00253-015-  
37 7139-3  
38 Cesbron, D., Déléris, S., Debellefontaine, H., Roustan, M., Paul, E., 2003. Study of competition for  
39 ozone between soluble and particulate matter during activated sludge ozonation. *Chem.*  
40 *Eng. Res. Des.* 81, 1165–1170. doi:http://dx.doi.org/10.1205/026387603770866335  
41 Chang, B.S., Kendrick, B.S., Carpenter, J.F., 1996. Surface-induced denaturation of proteins  
42 during freezing and its inhibition by surfactants. *J. Pharm. Sci.* 85, 1325–1330.  
43 doi:10.1021/js960080y  
44 Chang, C.J., Tyagi, V.K., Lo, S.L., 2011. Effects of microwave and alkali induced pretreatment on

1 sludge solubilization and subsequent aerobic digestion. *Bioresour. Technol.* 102, 7633–  
2 7640. doi:10.1016/j.biortech.2011.05.031

3 Chang, C.N., Ma, Y.S., Lo, C.W., 2002. Application of oxidation-reduction potential as a controlling  
4 parameter in waste activated sludge hydrolysis. *Chem. Eng. J.* 90, 273–281.  
5 doi:10.1016/S1385-8947(02)00015-3

6 Charton, M., 1975. Steric effects. I. Esterification and acid-catalyzed hydrolysis of esters. *J. Am.*  
7 *Chem. Soc.* 97, 1552–1556. doi:10.1021/ja00839a047

8 Chatel, G., 2016. *Sonochemistry: New opportunities for green chemistry.* World Scientific  
9 Publishing Europe, London.

10 Chen, Y., Cheng, J.J., Creamer, K.S., 2008. Inhibition of anaerobic digestion process: A review.  
11 *Bioresour. Technol.* 99, 4044–4064. doi:10.1016/j.biortech.2007.01.057

12 Chen, Y., Jiang, S., Yuan, H., Zhou, Q., Gu, G., 2007. Hydrolysis and acidification of waste activated  
13 sludge at different pHs. *Water Res.* 41, 683–9. doi:10.1016/j.watres.2006.07.030

14 Chen, Y.R., Hashimoto, A.G., 1980. Substrate Utilization Kinetic Model for Biological Treatment  
15 Processes. *Biotechnol. Bioeng.* XXII, 2081–2095.

16 Chi, Y., Li, Y., Fei, X., Wang, S., Yuan, H., 2011. Enhancement of thermophilic anaerobic digestion  
17 of thickened waste activated sludge by combined microwave and alkaline pretreatment. *J.*  
18 *Environ. Sci.* 23, 1257–1265. doi:10.1016/S1001-0742(10)60561-X

19 Chiu, T., Chen, M., Chang, H., 2009. Comparisons of emulsifying properties of Maillard reaction  
20 products conjugated by green, red seaweeds and various commercial proteins. *Food*  
21 *Hydrocoll.* 23, 2270–2277. doi:10.1016/j.foodhyd.2009.06.003

22 Chu, C.P., Chang, B.V., Liao, G.S., Jean, D.S., Lee, D.J., 2001. Observations on changes in  
23 ultrasonically treated waste-activated sludge. *Water Res.* 35, 1038–1046.  
24 doi:10.1016/S0043-1354(00)00338-9

25 Chu, L.B., Yan, S.T., Xing, X.H., Yu, A.F., Sun, X.L., Jurcik, B., 2008. Enhanced sludge solubilization  
26 by microbubble ozonation. *Chemosphere* 72, 205–212.  
27 doi:10.1016/j.chemosphere.2008.01.054

28 Climent, M., Ferrer, I., Baeza, M. del M., Artola, A., Vázquez, F., Font, X., 2007. Effects of thermal  
29 and mechanical pretreatments of secondary sludge on biogas production under  
30 thermophilic conditions. *Chem. Eng. J.* 133, 335–342. doi:10.1016/j.cej.2007.02.020

31 Coelho, N.M.G., Droste, R.L., Kennedy, K.J., 2011. Evaluation of continuous mesophilic,  
32 thermophilic and temperature phased anaerobic digestion of microwaved activated sludge.  
33 *Water Res.* 45, 2822–34. doi:10.1016/j.watres.2011.02.032

34 Comte, S., Guibaud, G., Baudu, M., 2006. Relations between extraction protocols for activated  
35 sludge extracellular polymeric substances (EPS) and EPS complexation properties: Part I.  
36 Comparison of the efficiency of eight EPS extraction methods. *Enzyme Microb. Technol.* 38,  
37 237–245. doi:10.1016/j.enzmictec.2005.06.016

38 Daniel, R.M., Dines, M., Petach, H.H., 1996. The denaturation and degradation of stable enzymes  
39 at high temperatures 11, 1–11.

40 De Graaf, L.A., 2000. Denaturation of proteins from a non-food perspective. *J. Biotechnol.* 79,  
41 299–306. doi:10.1016/S0168-1656(00)00245-5

42 Déléris, S., Paul, E., Audic, J.M., Roustan, M., Debellefontaine, H., 2000. Effect of Ozonation on  
43 Activated Sludge Solubilization and Mineralization. *Ozone Sci. Eng.* 22, 473–486.  
44 doi:10.1080/01919510009408791

- 1 Delmas, H., Le, N.T., Barthe, L., Julcour-Lebigue, C., 2014. Optimization of hydrostatic pressure at  
2 varied sonication conditions - power density, intensity, very low frequency - for isothermal  
3 ultrasonic sludge treatment. *Ultrason. Sonochem.* 25, 51–59.  
4 doi:10.1016/j.ultsonch.2014.08.011
- 5 Demir, O., Filibeli, A., 2012. Fate of return activated sludge after ozonation: An optimization  
6 study for sludge disintegration. *Environ. Technol.* 33, 1869–78.  
7 doi:10.1080/09593330.2011.650220
- 8 Devlin, D.C., Esteves, S.R.R., Dinsdale, R.M., Guwy, A.J., 2011. The effect of acid pretreatment on  
9 the anaerobic digestion and dewatering of waste activated sludge. *Bioresour. Technol.* 102,  
10 4076–4082. doi:10.1016/j.biortech.2010.12.043
- 11 Dhar, B.R., Nakhla, G., Ray, M.B., 2012. Techno-economic evaluation of ultrasound and thermal  
12 pretreatments for enhanced anaerobic digestion of municipal waste activated sludge.  
13 *Waste Manag.* 32, 542–549. doi:10.1016/j.wasman.2011.10.007
- 14 Dhar, B.R., Youssef, E., Nakhla, G., Ray, M.B., 2011. Pretreatment of municipal waste activated  
15 sludge for volatile sulfur compounds control in anaerobic digestion. *Bioresour. Technol.*  
16 102, 3776–3782. doi:10.1016/j.biortech.2010.12.020
- 17 Diak, J., Örmeci, B., 2016. Individual and combined effects of freeze-thaw and ferrate(VI)  
18 oxidation for the treatment and dewatering of wastewater sludges. *Clean soil, air, water*  
19 227, 1–16. doi:10.1007/s11270-016-3039-0
- 20 Doğan, I., Sanin, F.D., 2009. Alkaline solubilization and microwave irradiation as a combined  
21 sludge disintegration and minimization method. *Water Res.* 43, 2139–2148.  
22 doi:10.1016/j.watres.2009.02.023
- 23 Dong, B., Gao, P., Zhang, D., Chen, Y., Dai, L., Dai, X., 2015. A new process to improve short-chain  
24 fatty acids and bio-methane generation from waste activated sludge. *J. Environ. Sci.*  
25 doi:10.1016/j.jes.2015.10.004
- 26 Donoso-Bravo, A., Pérez-Elvira, S., Aymerich, E., Fdz-Polanco, F., 2011. Assessment of the  
27 influence of thermal pre-treatment time on the macromolecular composition and anaerobic  
28 biodegradability of sewage sludge. *Bioresour. Technol.* 102, 660–666.  
29 doi:10.1016/j.biortech.2010.08.035
- 30 Dwyer, J., Starrenburg, D., Tait, S., Barr, K., Batstone, D.J., Lant, P., 2008. Decreasing activated  
31 sludge thermal hydrolysis temperature reduces product colour, without decreasing  
32 degradability. *Water Res.* 42, 4699–4709. doi:10.1016/j.watres.2008.08.019
- 33 Elliott, A., Mahmood, T., 2012. Comparison of mechanical pretreatment methods for the  
34 enhancement of anaerobic digestion of pulp and paper waste activated sludge. *Water*  
35 *Environ. Res.* 84, 497–505. doi:10.2175/106143012X13347678384602
- 36 Ennouri, H., Miladi, B., Diaz, S.Z., Güelfo, L.A.F., Solera, R., Hamdi, M., Bouallagui, H., 2016. Effect  
37 of thermal pretreatment on the biogas production and microbial communities balance  
38 during anaerobic digestion of urban and industrial waste activated sludge. *Bioresour.*  
39 *Technol.* 214, 184–191. doi:10.1016/j.biortech.2016.04.076
- 40 Erden, G., Filibeli, A., 2011. Effects of Fenton pre-treatment on waste activated sludge  
41 properties. *Clean soil, air, water* 39, 626–632. doi:10.1002/clen.201000199
- 42 Erdinçler, A., Vesilind, P.A., 2000. Effect of sludge cell disruption on compactibility of biological  
43 sludges. *Water Sci. Technol.* 42, 119–126.
- 44 Eskicioglu, C., Droste, R.L., Kennedy, K.J., 2007a. Performance of anaerobic waste activated

1 sludge digesters after microwave pretreatment. *Water Environ. Res.* 79, 2265–2273.  
2 doi:10.2175/106143007X176004

3 Eskicioglu, C., Kennedy, K.J., Droste, R.L., 2009. Enhanced disinfection and methane production  
4 from sewage sludge by microwave irradiation. *Desalination* 248, 279–285.  
5 doi:10.1016/j.desal.2008.05.066

6 Eskicioglu, C., Kennedy, K.J., Droste, R.L., 2007b. Enhancement of batch waste activated sludge  
7 digestion by microwave pretreatment. *Water Environ. Res.* 79, 2304–2317.  
8 doi:10.2175/106143007X184069

9 Eskicioglu, C., Kennedy, K.J., Droste, R.L., 2006. Characterization of soluble organic matter of  
10 waste activated sludge before and after thermal pretreatment. *Water Res.* 40, 3725–3736.  
11 doi:10.1016/j.watres.2006.08.017

12 Eskicioglu, C., Prorot, A., Marin, J., Droste, R.L., Kennedy, K.J., 2008. Synergetic pretreatment of  
13 sewage sludge by microwave irradiation in presence of H<sub>2</sub>O<sub>2</sub> for enhanced anaerobic  
14 digestion. *Water Res.* 42, 4674–4682. doi:10.1016/j.watres.2008.08.010

15 Eskicioglu, C., Terzian, N., Kennedy, K.J., Droste, R.L., Hamoda, M., 2007c. Athermal microwave  
16 effects for enhancing digestibility of waste activated sludge. *Water Res.* 41, 2457–2466.  
17 doi:10.1016/j.watres.2007.03.008

18 Fang, W., Zhang, P., Ye, J., Wu, Y., Zhang, H., Liu, J., Zhu, Y., Zeng, G., 2015. Physicochemical  
19 properties of sewage sludge disintegrated with high pressure homogenization. *Int.*  
20 *Biodeterior. Biodegradation* 102, 126–130. doi:10.1016/j.ibiod.2015.02.030

21 Farr, S.B., Kogoma, T., 1991. Oxidative stress responses in *Escherichia coli* and *Salmonella*  
22 *typhimurium*. *Microbiol. Rev.* 55, 561–585.

23 Feijoo, G., Soto, M., Méndez, R., Lema, J.M., 1995. Sodium inhibition in the anaerobic digestion  
24 process: Antagonism and adaptation phenomena. *Enzyme Microb. Technol.* 17, 180–188.  
25 doi:10.1016/0141-0229(94)00011-F

26 Feng, X., Lei, H., Deng, J., Yu, Q., Li, H., 2009. Physical and chemical characteristics of waste  
27 activated sludge treated ultrasonically. *Chem. Eng. Process. Process Intensif.* 48, 187–194.  
28 doi:10.1016/j.cep.2008.03.012

29 Fernandes, T. V., van Lier, J.B., Zeeman, G., 2015. Humic acid-like and fulvic acid-like inhibition on  
30 the hydrolysis of cellulose and tributyrin. *Bioenergy Res.* 8, 821–831. doi:10.1007/s12155-  
31 014-9564-z

32 Foladori, P., Bruni, L., Tamburini, S., Ziglio, G., 2010. Direct quantification of bacterial biomass in  
33 influent, effluent and activated sludge of wastewater treatment plants by using flow  
34 cytometry. *Water Res.* 44, 3807–3818. doi:10.1016/j.watres.2010.04.027

35 Foladori, P., Laura, B., Gianni, A., Giuliano, Z., 2007. Effects of sonication on bacteria viability in  
36 wastewater treatment plants evaluated by flow cytometry—Fecal indicators, wastewater  
37 and activated sludge. *Water Res.* 41, 235–243. doi:10.1016/j.watres.2006.08.021

38 Foladori, P., Velho, V.F., Costa, R.H.R., Bruni, L., Quaranta, A., Andreottola, G., 2015. Concerning  
39 the role of cell lysis-cryptic growth in anaerobic side-stream reactors: The single-cell  
40 analysis of viable, dead and lysed bacteria. *Water Res.* 74, 132–142.  
41 doi:10.1016/j.watres.2015.01.042

42 Folke, J., Renberg, L., McCubbin, N., 1996. Environmental aspects of ECF vs. TCF pulp bleaching,  
43 Environmental Fate and Effects of Pulp and Paper Mill Effluents.

44 Forster, S., Snape, J.R., Lappin-Scott, H.M., Porter, J., 2002. Simultaneous fluorescent gram

1 staining and activity assessment of activated sludge bacteria. *Appl. Environ. Microbiol.* 68,  
2 4772–4779. doi:10.1128/AEM.68.10.4772-4779.2002

3 Friedman, M., 1996. Food browning and its prevention: An overview. *J. Agric. Food Chem.* 44,  
4 631–653. doi:10.1021/jf950394r

5 Frølund, B., Griebe, T., Nielsen, P.H., 1995. Enzymatic activity in the activated-sludge floc matrix.  
6 *Appl. Microbiol. Biotechnol.* 43, 755–761.

7 Frølund, B., Palmgren, R., Keiding, K., Nielsen, P.H., 1996. Extraction of extracellular polymers  
8 from activated sludge using a cation exchange resin. *Water Res.* 30, 1749–1758.  
9 doi:10.1016/0043-1354(95)00323-1

10 Gao, W., 2011. Freezing as a combined wastewater sludge pretreatment and conditioning  
11 method. *Desalination* 268, 170–173. doi:10.1016/j.desal.2010.10.014

12 Gao, Z., Zhang, C., Su, H., Tan, T., 2013. Live steam-pretreatment and anaerobic digestion of  
13 waste activated sludge. *Environ. Eng. Sci.* 30, 546–554. doi:10.1089/ees.2012.0480

14 Garrote, G., Domínguez, H., Parajó, J.C., 1999. Hydrothermal processing of lignocellulosic  
15 materials. *Holz als Roh- und Werkst.* 57, 191–202. doi:10.1007/s001070050039

16 Gavala, H.N., Yenal, U., Skiadas, I. V., Westermann, P., Ahring, B.K., 2003. Mesophilic and  
17 thermophilic anaerobic digestion of primary and secondary sludge. Effect of pre-treatment  
18 at elevated temperature. *Water Res.* 37, 4561–72. doi:10.1016/S0043-1354(03)00401-9

19 Ge, H., Jensen, P.D., Batstone, D.J., 2011a. Increased temperature in the thermophilic stage in  
20 temperature phased anaerobic digestion (TPAD) improves degradability of waste activated  
21 sludge. *J. Hazard. Mater.* 187, 355–361. doi:10.1016/j.jhazmat.2011.01.032

22 Ge, H., Jensen, P.D., Batstone, D.J., 2011b. Temperature phased anaerobic digestion increases  
23 apparent hydrolysis rate for waste activated sludge. *Water Res.* 45, 1597–1606.  
24 doi:10.1016/j.watres.2010.11.042

25 Ghabbour, E.A., Davies, G., 2001. Humic substances: structures, models and functions. Royal  
26 Society of Chemistry.

27 Ghasimi, D.S.M., Aboudi, K., de Kreuk, M., Zandvoort, M.H., van Lier, J.B., 2016a. Impact of  
28 lignocellulosic-waste intermediates on hydrolysis and methanogenesis under thermophilic  
29 and mesophilic conditions. *Chem. Eng. J.* 295, 181–191. doi:10.1016/j.cej.2016.03.045

30 Ghasimi, D.S.M., de Kreuk, M., Maeng, S.K., Zandvoort, M.H., van Lier, J.B., 2016b. High-rate  
31 thermophilic bio-methanation of the fine sieved fraction from Dutch municipal raw sewage:  
32 Cost-effective potentials for on-site energy recovery. *Appl. Energy* 165, 569–582.  
33 doi:10.1016/j.apenergy.2015.12.065

34 Gianico, A., Braguglia, C.M., Cesarini, R., Mininni, G., 2013. Reduced temperature hydrolysis at  
35 134 °C before thermophilic anaerobic digestion of waste activated sludge at increasing  
36 organic load. *Bioresour. Technol.* 143, 96–103. doi:10.1016/j.biortech.2013.05.069

37 Goldstone, J. V., Pullin, M.J., Bertilsson, S., Voelker, B.M., 2002. Reactions of hydroxyl radical with  
38 humic substances: Bleaching, mineralization, and production of bioavailable carbon  
39 substrates. *Environ. Sci. Technol.* 36, 364–372. doi:10.1021/es0109646

40 Gong, C., Jiang, J., Li, D., Tian, S., 2015. Ultrasonic application to boost hydroxyl radical formation  
41 during Fenton oxidation and release organic matter from sludge. *Sci. Rep.* 5, 11419.  
42 doi:10.1038/srep11419

43 Guan, B., Yu, J., Fu, H., Guo, M., Xu, X., 2012. Improvement of activated sludge dewaterability by  
44 mild thermal treatment in CaCl<sub>2</sub> solution. *Water Res.* 46, 425–432.



1       doi:10.1016/j.watres.2011.11.014  
2       Guo, H., Fang, J., Felz, S., Lin, Y., van Lier, J.B., de Kreuk, M., (Unpublished results, ), n.d.  
3       Anaerobic degradation of structural extracellular polymeric substances: a comparison  
4       between flocculated activated sludge and aerobic granules.  
5       Guo, X., Liu, J., Xiao, B., 2014. Evaluation of the damage of cell wall and cell membrane for  
6       various extracellular polymeric substance extractions of activated sludge. *J. Biotechnol.* 188,  
7       130–135. doi:10.1016/j.jbiotec.2014.08.025  
8       Hansen, K.H., Angelidaki, I., Ahring, B.K., 1998. Anaerobic digestion of swine manure: Inhibition  
9       by ammonia. *Water Res.* 32, 5–12. doi:10.1016/S0043-1354(97)00201-7  
10      Haug, R.T., Stuckey, D.C., Gossett, J.M., McCarty, P.L., 1978. Effect of thermal pretreatment on  
11      digestibility and dewaterability of organic sludges. *J. Water Pollut. Control Fed.* 50, 73–85.  
12      He, Z.-W., Yang, C.-X., Wang, L., Guo, Z.-C., Wang, A.-J., Liu, W.-Z., 2016. Feasibility of short-term  
13      fermentation for short-chain fatty acids production from waste activated sludge at initial  
14      pH10: Role and significance of rhamnolipid. *Chem. Eng. J.* 290, 125–135.  
15      doi:10.1016/j.cej.2016.01.033  
16      Heller, M.C., Carpenter, J.F., Randolph, T.W., 1999. Protein formulation and lyophilization cycle  
17      design: Prevention of damage due to freeze-concentration induced phase separation.  
18      *Biotechnol. Bioeng.* 63, 166–174. doi:10.1002/(SICI)1097-0290(19990420)63:2<166::AID-  
19      BIT5>3.0.CO;2-H  
20      Hellström, D., 1997. Natural sludge dewatering. II: Thawing-drying process in full-scale sludge  
21      freezing ditches. *J. Cold Reg. Eng.* 11, 15–29.  
22      Hiraoka, M., Takeda, N., Sakai, S., Yasuda, A., 1985. Highly efficient anaerobic digestion with  
23      thermal pretreatment. *Water Sci. Technol.* 17, 529–539.  
24      Hirooka, K., Asano, R., Yokoyama, A., Okazaki, M., Sakamoto, A., Nakai, Y., 2009. Reduction in  
25      excess sludge production in a dairy wastewater treatment plant via nozzle-cavitation  
26      treatment: Case study of an on-farm wastewater treatment plant. *Bioresour. Technol.* 100,  
27      3161–3166. doi:10.1016/j.biortech.2009.01.011  
28      Holliger, C., Alves, M., Andrade, D., Angelidaki, I., Astals, S., Baier, U., Bougrier, C., Buffiere, P.,  
29      Carballa, M., de Wilde, V., Ebertseder, F., Fernandez, B., Ficara, E., Fotidis, I., Frigon, J.-C., de  
30      Laclos, H.F., Ghasimi, D.S.M., Hack, G., Hartel, M., Heerenklage, J., Horvath, I.S., Jenicek, P.,  
31      Koch, K., Krautwald, J., Lizasoain, J., Liu, J., Mosberger, L., Nistor, M., Oechsner, H., Oliveira,  
32      J. V., Paterson, M., Pauss, A., Pommier, S., Porqueddu, I., Raposo, F., Ribeiro, T., Rusch  
33      Pfund, F., Stromberg, S., Torrijos, M., van Eekert, M., van Lier, J., Wedwitschka, H., Wierinck,  
34      I., 2016. Towards a standardization of biomethane potential tests. *Water Sci. Technol.* 1–9.  
35      doi:10.2166/wst.2016.336  
36      Hong, S.M., Park, J.K., Lee, Y.O., 2004. Mechanisms of microwave irradiation involved in the  
37      destruction of fecal coliforms from biosolids. *Water Res.* 38, 1615–1625.  
38      doi:10.1016/j.watres.2003.12.011  
39      Hong, S.M., Park, J.K., Teeradej, N., Lee, Y.O., Cho, Y.K., Park, C.H., 2006. Pretreatment of sludge  
40      with microwaves for pathogen destruction and improved anaerobic digestion performance.  
41      *Water Environ. Res.* 78, 76–83. doi:10.2175/106143005X84549  
42      Horton, D., Philips, K.D., 1973. The nitrous acid deamination of glycosides and acetates of 2-  
43      amino-2-deoxy-D-glucose. *Carbohydr. Res.* 30, 367–374. doi:10.1016/S0008-  
44      6215(00)81823-6

- 1 Hosseini Koupaie, E., Eskicioglu, C., 2016. Conventional heating vs. microwave sludge  
2 pretreatment comparison under identical heating/cooling profiles for thermophilic  
3 advanced anaerobic digestion. *Waste Manag.* doi:10.1016/j.wasman.2016.04.014
- 4 Hosseini Koupaie, E., Johnson, T., Eskicioglu, C., 2017. Advanced anaerobic digestion of municipal  
5 sludge using a novel and energy-efficient radio frequency pretreatment system. *Water Res.*  
6 118, 70–81. doi:10.1016/j.watres.2017.04.017
- 7 Hu, K., Jiang, J.Q., Zhao, Q.L., Lee, D.J., Wang, K., Qiu, W., 2011. Conditioning of wastewater  
8 sludge using freezing and thawing: Role of curing. *Water Res.* 45, 5969–5976.  
9 doi:10.1016/j.watres.2011.08.064
- 10 Huan, L., Yiyang, J., Mahar, R.B., Zhiyu, W., Yongfeng, N., 2009. Effects of ultrasonic disintegration  
11 on sludge microbial activity and dewaterability. *J. Hazard. Mater.* 161, 1421–1426.  
12 doi:10.1016/j.jhazmat.2008.04.113
- 13 Jahn, A., Nielsen, P.H., 1998. Cell biomass and exopolymer composition in sewer biofilms. *Water*  
14 *Sci. Technol.* 37, 17–24.
- 15 Jan, T.W., Adav, S.S., Lee, D.J., Wu, R.M., Su, A., Tay, J.H., 2008. Hydrogen fermentation and  
16 methane production from sludge with pretreatments. *Energy and Fuels* 22, 98–102.  
17 doi:10.1021/ef700278j
- 18 Jaziri, K., Casellas, M., Dagot, C., 2012. Comparing the effects of three pre-treatment  
19 disintegration techniques on aerobic sludge digestion: biodegradability enhancement and  
20 microbial community monitoring by PCR-DGGE. *Environ. Technol.* 33, 1435–44.  
21 doi:10.1080/09593330.2011.632653
- 22 Jiang, J., Yang, S., Chen, M., Zhang, Q., 2009. Disintegration of sewage sludge with bifrequency  
23 ultrasonic treatment. *Water Sci. Technol.* 60, 1445–1453. doi:10.2166/wst.2009.469
- 24 Jin, B., Wilén, B.M., Lant, P., 2004. Impacts of morphological, physical and chemical properties of  
25 sludge flocs on dewaterability of activated sludge. *Chem. Eng. J.* 98, 115–126.  
26 doi:10.1016/j.cej.2003.05.002
- 27 Jin, Y., Li, H., Mahar, R.B., Wang, Z., Nie, Y., 2009. Combined alkaline and ultrasonic pretreatment  
28 of sludge before aerobic digestion. *J. Environ. Sci.* 21, 279–284. doi:10.1016/S1001-  
29 0742(08)62264-0
- 30 Joo, S.H., Dello Monaco, F., Antmann, E., Chorath, P., 2015. Sustainable approaches for  
31 minimizing biosolids production and maximizing reuse options in sludge management: A  
32 review. *J. Environ. Manage.* 158, 133–45. doi:10.1016/j.jenvman.2015.05.014
- 33 Jorand, F., Zartarian, F., Thomas, F., Block, J.C., Bottero, J.Y., Villemin, G., Urbain, V., Manem, J.,  
34 1995. Chemical and structural (2D) linkage between bacteria within activated sludge flocs.  
35 *Water Res.* 29, 1639–1647. doi:10.1016/0043-1354(94)00350-G
- 36 Jung, H., Kim, J., Lee, S., Lee, C., 2014. Effect of mild-temperature H<sub>2</sub>O<sub>2</sub> oxidation on  
37 solubilization and anaerobic digestion of waste activated sludge. *Environ. Technol.* 35,  
38 1702–9. doi:10.1080/09593330.2014.880517
- 39 Jung, J., Xing, X.H., Matsumoto, K., 2001. Kinetic analysis of disruption of excess activated sludge  
40 by Dyno Mill and characteristics of protein release for recovery of useful materials.  
41 *Biochem. Eng. J.* 8, 1–7. doi:10.1016/S1369-703X(00)00123-6
- 42 Kakita, Y., Kashige, N., Murata, K., Kuroiwa, A., Funatsu, M., Watanabe, K., 1995. Inactivation  
43 microwave of lactobacillus bacteriophage irradiation PL-1 by microwave irradiation.  
44 *Microbiol. Immunol.* 39, 571–576.

1 Karshikoff, A., Nilsson, L., Ladenstein, R., 2015. Rigidity versus flexibility: the dilemma of  
2 understanding protein thermal stability. *FEBS J* 282, 3899–3917. doi:10.1111/febs.13343

3 Kavitha, S., Jayashree, C., Adish Kumar, S., Yeom, I.T., Rajesh Banu, J., 2014. The enhancement of  
4 anaerobic biodegradability of waste activated sludge by surfactant mediated biological  
5 pretreatment. *Bioresour. Technol.* 168, 159–166. doi:10.1016/j.biortech.2014.01.118

6 Kavitha, S., Stella, P.B.C., Kaliappan, S., Yeom, I.T., Banu, J.R., 2016. Enhancement of anaerobic  
7 degradation of sludge biomass through surfactant-assisted bacterial hydrolysis. *Process Saf.*  
8 *Environ. Prot.* 99, 207–215. doi:10.1016/j.psep.2015.11.009

9 Kennedy, K.J., Thibault, G., Droste, R.L., 2007. Microwave enhanced digestion of aerobic SBR  
10 sludge. *Water SA* 33, 261–270. doi:10.4314/wsa.v33i2.49085

11 Kent, J.A., 2013. *Handbook of industrial chemistry and biotechnology*. Springer Science &  
12 Business Media.

13 Kianmehr, P., Parker, W., Seto, P., 2013. Assessment of waste-activated-sludge pretreatment by  
14 ultrasound and applicability of biodegradability indicators. *J. Environ. Eng.* 139, 545–553.  
15 doi:10.1061/(ASCE)EE .1943-7870.0000657

16 Kim, D.-H., Cho, S.K., Lee, M.K., Kim, M.S., 2013. Increased solubilization of excess sludge does  
17 not always result in enhanced anaerobic digestion efficiency. *Bioresour. Technol.* 143, 660–  
18 664. doi:10.1016/j.biortech.2013.06.058

19 Kim, D.H., Jeong, E., Oh, S.E., Shin, H.S., 2010. Combined (alkaline+ultrasonic) pretreatment  
20 effect on sewage sludge disintegration. *Water Res.* 44, 3093–3100.  
21 doi:10.1016/j.watres.2010.02.032

22 Kim, H.J., Nguyen, D.X., Bae, J.H., 2008. The performance of the sludge pretreatment system with  
23 venturi tubes. *Water Sci. Technol.* 57, 131–137. doi:10.2166/wst.2008.717

24 Kim, J., Park, C., Kim, T.-H., Lee, M., Kim, S., Kim, S.-W., Lee, J., 2003. Effects of various  
25 pretreatments for enhanced anaerobic digestion with waste activated sludge. *J. Biosci.*  
26 *Bioeng.* 95, 271–275. doi:10.1263/jbb.95.271

27 Kim, J., Yu, Y., Lee, C., 2013. Thermo-alkaline pretreatment of waste activated sludge at low-  
28 temperatures: Effects on sludge disintegration, methane production, and methanogen  
29 community structure. *Bioresour. Technol.* 144, 194–201.  
30 doi:10.1016/j.biortech.2013.06.115

31 Kinnunen, V., Craggs, R., Rintala, J., 2014. Influence of temperature and pretreatments on the  
32 anaerobic digestion of wastewater grown microalgae in a laboratory-scale accumulating-  
33 volume reactor. *Water Res.* 57, 247–257. doi:10.1016/j.watres.2014.03.043

34 Kobayashi, T., Li, Y.Y., Harada, H., Yasui, H., Noike, T., 2009. Upgrading of the anaerobic digestion  
35 of waste activated sludge by combining temperature-phased anaerobic digestion and  
36 intermediate ozonation. *Water Sci. Technol.* 59, 185–193. doi:10.2166/wst.2009.510

37 Kohanski, M.A., Dwyer, D.J., Hayete, B., Lawrence, C.A., Collins, J.J., 2007. A common mechanism  
38 of cellular death induced by bactericidal antibiotics. *Cell* 130, 797–810.  
39 doi:10.1016/j.cell.2007.06.049

40 Kolokassidou, C., Pashalidis, I., Costa, C.N., Efstathiou, A.M., Buckau, G., 2007. Thermal stability  
41 of solid and aqueous solutions of humic acid. *Thermochim. Acta* 454, 78–83.  
42 doi:10.1016/j.tca.2006.12.022

43 Kroiss, H., 2004. What is the potential for utilizing the resources in sludge? *Water Sci. Technol.*  
44 49, 1–10.

1 Kuglarz, M., Karakashev, D., Angelidaki, I., 2013. Microwave and thermal pretreatment as  
2 methods for increasing the biogas potential of secondary sludge from municipal wastewater  
3 treatment plants. *Bioresour. Technol.* 134, 290–297. doi:10.1016/j.biortech.2013.02.001  
4 Kumar, P.S., Pandit, A.B., 1999. Modeling Hydrodynamic Cavitation. *Chem. Eng. Technol.* 22,  
5 1017–1027. doi:10.1002/(SICI)1521-4125(199912)22:12<1017::AID-CEAT1017>3.0.CO;2-L  
6 Lajapathi Rai, C., Mueller, J., Struenkmann, G., Gangadhar Rao, P., 2008. Microbial growth  
7 reduction in sewage sludge by stirred ball mill disintegration and estimation by  
8 respirometry. *J. Chem. Technol. Biotechnol.* 83, 269–278. doi:10.1002/jctb.1803  
9 Laurent, J., Pierra, M., Casellas, M., Dagot, C., 2009a. Fate of cadmium in activated sludge after  
10 changing its physico-chemical properties by thermal treatment. *Chemosphere* 77, 771–777.  
11 doi:10.1016/j.chemosphere.2009.08.024  
12 Laurent, J., Pierra, M., Casellas, M., Pons, M.N., Dagot, C., 2009b. Activated sludge properties  
13 after ultrasonic and thermal treatments and their potential influence on dewaterability. *J.*  
14 *Residuals Sci. Technol.* 6, 19–25.  
15 Lee, I., Han, J.I., 2013. The effects of waste-activated sludge pretreatment using hydrodynamic  
16 cavitation for methane production. *Ultrason. Sonochem.* 20, 1450–1455.  
17 doi:10.1016/j.ultsonch.2013.03.006  
18 Leite, W.R.M., Gottardo, M., Pavan, P., Belli Filho, P., Bolzonella, D., 2016. Performance and  
19 energy aspects of single and two phase thermophilic anaerobic digestion of waste activated  
20 sludge. *Renew. Energy* 86, 1324–1331. doi:10.1016/j.renene.2015.09.069  
21 Li, H., Jin, Y., Mahar, R., Wang, Z., Nie, Y., 2008. Effects and model of alkaline waste activated  
22 sludge treatment. *Bioresour. Technol.* 99, 5140–4. doi:10.1016/j.biortech.2007.09.019  
23 Li, X., Zhao, J., Wang, D., Yang, Q., Xu, Q., Deng, Y., Yang, W., Zeng, G., 2016. An efficient and  
24 green pretreatment to stimulate short-chain fatty acids production from waste activated  
25 sludge anaerobic fermentation using free nitrous acid. *Chemosphere* 144, 160–167.  
26 doi:10.1016/j.chemosphere.2015.08.076  
27 Li, Y., Hu, Y., Wang, G., Lan, W., Lin, J., Bi, Q., Shen, H., Liang, S., 2014. Screening pretreatment  
28 methods for sludge disintegration to selectively reclaim carbon source from surplus  
29 activated sludge. *Chem. Eng. J.* 255, 365–371. doi:10.1016/j.cej.2014.06.034  
30 Li, Y.Y., Noike, T., 1992. Upgrading of anaerobic digestion of waste activated sludge by thermal  
31 pretreatment. *Water Sci. Technol.* 26, 857–866. doi:10.1016/j.energy.2015.04.110  
32 Liao, B.Q., Allen, D.G., Leppard, G.G., Droppo, I.G., Liss, S.N., 2002. Interparticle interactions  
33 affecting the stability of sludge flocs. *J. Colloid Interface Sci.* 249, 372–80.  
34 doi:10.1006/jcis.2002.8305  
35 Liao, X., Li, H., Zhang, Y., Liu, C., Chen, Q., 2016. Accelerated high-solids anaerobic digestion of  
36 sewage sludge using low-temperature thermal pretreatment. *Int. Biodeterior.*  
37 *Biodegradation* 106, 141–149. doi:10.1016/j.ibiod.2015.10.023  
38 Lin, J.-G., Chang, C.-N., Chang, S.-C., 1997. Enhancement of anaerobic digestion of waste  
39 activated sludge by alkaline solubilization. *Bioresour. Technol.* 62, 85–90.  
40 doi:10.1016/S0960-8524(97)00121-1  
41 Liu, J., Jia, R., Wang, Y., Wei, Y., Zhang, J., Wang, R., Cai, X., 2015. Does residual H<sub>2</sub>O<sub>2</sub> result in  
42 inhibitory effect on enhanced anaerobic digestion of sludge pretreated by microwave-H<sub>2</sub>O<sub>2</sub>  
43 pretreatment process? *Environ. Sci. Pollut. Res.* 9016–9025. doi:10.1007/s11356-015-5704-  
44 z

1 Martínez, E.J., Gil, M. V., Rosas, J.G., Moreno, R., Mateos, R., Morán, A., Gómez, X., 2016.  
2 Application of thermal analysis for evaluating the digestion of microwave pre-treated  
3 sewage sludge. *J. Therm. Anal. Calorim.* 127, 1209–1219. doi:10.1007/s10973-016-5460-4  
4 Matsumoto, M., Ohashi, K., 2003. Effect of immobilization on thermostability of lipase from  
5 *Candida rugosa*. *Biochem. Eng. J.* 14, 75–77. doi:10.1016/S1369-703X(02)00138-9  
6 Mehdizadeh, S.N., Eskicioglu, C., Bobowski, J., Johnson, T., 2013. Conductive heating and  
7 microwave hydrolysis under identical heating profiles for advanced anaerobic digestion of  
8 municipal sludge. *Water Res.* 47, 5040–5051. doi:10.1016/j.watres.2013.05.055  
9 Mikkelsen, L.H., Keiding, K., 2002. Physico-chemical characteristics of full scale sewage sludges  
10 with implications to dewatering. *Water Res.* 36, 2451–2462. doi:10.1016/S0043-  
11 1354(01)00477-8  
12 Montusiewicz, A., Lebiocka, M., Rozej, A., Zacharska, E., Pawłowski, L., 2010. Freezing/thawing  
13 effects on anaerobic digestion of mixed sewage sludge. *Bioresour. Technol.* 101, 3466–  
14 3473. doi:10.1016/j.biortech.2009.12.125  
15 Morgan-Sagastume, F., Pratt, S., Karlsson, A., Cirne, D., Lant, P., Werker, A., 2011. Production of  
16 volatile fatty acids by fermentation of waste activated sludge pre-treated in full-scale  
17 thermal hydrolysis plants. *Bioresour. Technol.* 102, 3089–3097.  
18 doi:10.1016/j.biortech.2010.10.054  
19 Mottet, A., Steyer, J.P., Déléris, S., Vedrenne, F., Chauzy, J., Carrère, H., 2009. Kinetics of  
20 thermophilic batch anaerobic digestion of thermal hydrolysed waste activated sludge.  
21 *Biochem. Eng. J.* 46, 169–175. doi:10.1016/j.bej.2009.05.003  
22 Müller, J.A., 2001. Prospects and problems of sludge pre-treatment processes. *Water Sci.*  
23 *Technol.* 44, 121–128.  
24 Müller, J.A., Winter, A., Strükmann, G., 2004. Investigation and assessment of sludge pre-  
25 treatment processes. *Water Sci. Technol.* 49, 97–104.  
26 Münch, E. V., Pollard, P.C., 1997. Measuring bacterial biomass-COD in wastewater containing  
27 particulate matter. *Water Res.* 31, 2550–2556. doi:10.1016/S0043-1354(97)00089-4  
28 Nazari, L., Yuan, Z., Santoro, D., Sarathy, S., Ho, D., Batstone, D., Xu, C. (Charles), Ray, M.B., 2016.  
29 Low-temperature thermal pre-treatment of municipal wastewater sludge: Process  
30 optimization and effects on solubilization and anaerobic degradation. *Water Res.* 113, 111–  
31 123. doi:10.1016/j.watres.2016.11.055  
32 Neumann, P., Pesante, S., Venegas, M., Vidal, G., 2016. Developments in pre-treatment methods  
33 to improve anaerobic digestion of sewage sludge. *Rev. Environ. Sci. Biotechnol.* 15, 173–  
34 211. doi:10.1007/s11157-016-9396-8  
35 Neyens, E., Baeyens, J., 2003. A review of classic Fenton's peroxidation as an advanced oxidation  
36 technique. *J. Hazard. Mater.* 98, 33–50. doi:10.1016/S0304-3894(02)00282-0  
37 Nguyen, D.D., Yoon, Y.S., Nguyen, N.D., Bach, Q.V., Bui, X.T., Chang, S.W., Le, H.S., Guo, W., Ngo,  
38 H.H., 2016. Enhanced efficiency for better wastewater sludge hydrolysis conversion through  
39 ultrasonic hydrolytic pretreatment. *J. Taiwan Inst. Chem. Eng.* 71, 244–252.  
40 doi:10.1016/j.jtice.2016.12.019  
41 Nielsen, H.B., Thygesen, A., Thomsen, A.B., Schmidt, J.E., 2011. Anaerobic digestion of waste  
42 activated sludge-comparison of thermal pretreatments with thermal inter-stage  
43 treatments. *J. Chem. Technol. Biotechnol.* 86, 238–245. doi:10.1002/jctb.2509  
44 Nielsen, P.H., Frølund, B., Keiding, K., 1996. Changes in the composition of extracellular

1       polymeric substances in activated sludge during anaerobic storage. *Appl. Microbiol.*  
2       *Biotechnol.* 44, 823–830. doi:10.1007/BF00178625

3       Nielsen, P.H., Jahn, A., Palmgren, R., 1997. Conceptual model for production and composition of  
4       exopolymers in biofilms. *Water Sci. Technol.* 36, 11–19.

5       Pabón Pereira, C.P., Castañares, G., Van Lier, J.B., 2012. An OxiTop® protocol for screening plant  
6       material for its biochemical methane potential (BMP). *Water Sci. Technol.* 66, 1416–1423.  
7       doi:10.2166/wst.2012.305

8       Parawira, W., 2012. Enzyme research and applications in biotechnological intensification of  
9       biogas production. *Crit. Rev. Biotechnol.* 32, 172–186. doi:10.3109/07388551.2011.595384

10      Park, B., Ahn, J.H., Kim, J., Hwang, S., 2004. Use of microwave pretreatment for enhanced  
11      anaerobiosis of secondary sludge. *Water Sci. Technol.* 50, 17–23.

12      Park, W.J., Ahn, J.H., 2011. Optimization of microwave pretreatment conditions to maximize  
13      methane production and methane yield in mesophilic anaerobic sludge digestion. *Env.*  
14      *Technol* 32, 1533–1540. doi:10.1080/09593330.2010.543929

15      Parmar, N., Singh, A., Ward, O., 2001. Enzyme treatment to reduce solids and improve settling of  
16      sewage sludge. *J. Ind. Microbiol. Biotechnol.* 26, 383–386. doi:10.1038/sj.jim.7000150

17      Penaud, V., Delgenes, J.P., Moletta, R., 1999. Thermo-chemical pretreatment of a microbial  
18      biomass: influence of sodium hydroxide addition on solubilization and anaerobic  
19      biodegradability. *Enzyme Microb. Technol.* 25, 258–263. doi:10.1080/09593332108618141

20      Pérez-Elvira, S., Fdz-Polanco, M., Plaza, F.I., Garralón, G., Fdz-Polanco, F., 2009. Ultrasound pre-  
21      treatment for anaerobic digestion improvement. *Water Sci. Technol.* 60, 1525–1532.  
22      doi:10.2166/wst.2009.484

23      Pérez-Elvira, S.I., Ferreira, L.C., Donoso-Bravo, A., Fdz-Polanco, M., Fdz-Polanco, F., 2010. Full-  
24      stream and part-stream ultrasound treatment effect on sludge anaerobic digestion. *Water*  
25      *Sci. Technol.* 61, 1363–1372. doi:10.2166/wst.2010.893

26      Pérez-Elvira, S.I., Sapkaite, I., Fdz-Polanco, F., 2016. Separate digestion of liquid and solid  
27      fractions of thermally pretreated secondary sludge. assessment and global evaluation.  
28      *Brazilian J. Chem. Eng.* 33, 699–704. doi:10.1590/0104-6632.20160334s20150277

29      Pijuan, M., Wang, Q., Ye, L., Yuan, Z., 2012. Improving secondary sludge biodegradability using  
30      free nitrous acid treatment. *Bioresour. Technol.* 116, 92–8.  
31      doi:10.1016/j.biortech.2012.04.016

32      Pilli, S., Bhunia, P., Yan, S., LeBlanc, R.J., Tyagi, R.D., Surampalli, R.Y., 2011. Ultrasonic  
33      pretreatment of sludge: a review. *Ultrason. Sonochem.* 18, 1–18.  
34      doi:10.1016/j.ultsonch.2010.02.014

35      Pilli, S., Yan, S., Tyagi, R.D., Surampalli, R.Y., 2016. Anaerobic digestion of ultrasonicated sludge at  
36      different solids concentrations - Computation of mass-energy balance and greenhouse gas  
37      emissions. *J. Environ. Manage.* 166, 374–386. doi:10.1016/j.jenvman.2015.10.041

38      Pilli, S., Yan, S., Tyagi, R.D., Surampalli, R.Y., 2014. Thermal Pretreatment of Sewage Sludge to  
39      Enhance Anaerobic Digestion: A Review. *Crit. Rev. Environ. Sci. Technol.* 45, 669–702.  
40      doi:10.1080/10643389.2013.876527

41      Pinnekamp, J., 1989. Effects of thermal pretreatment of sewage sludge on anaerobic digestion.  
42      *Water Sci. Technol.* 21, 97–108.

43      Prorot, A., Julien, L., Christophe, D., Patrick, L., 2011. Sludge disintegration during heat treatment  
44      at low temperature: a better understanding of involved mechanisms with a multiparametric

1 approach. *Biochem. Eng. J.* 54, 178–184. doi:10.1016/j.bej.2011.02.016  
2 Rajan, R.V., Lin, J.-G., Ray, B.T., 1988. Improved anaerobic digestion with low level chemical  
3 pretreatment, in: 43 Rd Industrial Waste Conference May 10-12, 1988. Lewis Publishers,  
4 Purdue University, West Lafayette, Indiana., pp. 327–337.  
5 Ray, B., Lin, J.-G., Rajan, R., 1990. Low-level alkaline solubilization for enhanced anaerobic  
6 digestion. *Res. J. Water Pollut. Control Fed.* 62, 81–87.  
7 Riau, V., De la Rubia, M.A., Pérez, M., 2012. Assessment of solid retention time of a temperature  
8 phased anaerobic digestion system on performance and final sludge characteristics. *J.*  
9 *Chem. Technol. Biotechnol.* 87, 1074–1082. doi:10.1002/jctb.3709  
10 Riffaldi, R., 1982. Humic substances in sewage sludges. *Environ. Pollut.* 139–146.  
11 Rombaut, N., Tixier, A.S., Bily, A., Chemat, F., 2014. Green extraction processes of natural  
12 products as tools for biorefinery. *Biofuels, Bioprod. Biorefining* 8, 530–544.  
13 doi:10.1002/bbb.1486  
14 Ruffino, B., Campo, G., Cerutti, A., Zanetti, M., Lorenzi, E., Scibilia, G., Genon, G., 2016.  
15 Preliminary technical and economic analysis of alkali and low temperature thermo-alkali  
16 pretreatments for the anaerobic digestion of waste activated sludge. *Waste Biomass*  
17 *Valorization* 7, 667–675. doi:10.1007/s12649-016-9537-x  
18 Ruffino, B., Campo, G., Genon, G., Lorenzi, E., Novarino, D., Scibilia, G., Zanetti, M., 2015.  
19 Improvement of anaerobic digestion of sewage sludge in a wastewater treatment plant by  
20 means of mechanical and thermal pre-treatments: Performance, energy and economical  
21 assessment. *Bioresour. Technol.* 175, 298–308. doi:10.1016/j.biortech.2014.10.071  
22 Sahinkaya, S., 2015. Disintegration of municipal waste activated sludge by simultaneous  
23 combination of acid and ultrasonic pretreatment. *Process Saf. Environ. Prot.* 93, 201–205.  
24 doi:10.1016/j.psep.2014.04.002  
25 Salsabil, M.R., Laurent, J., Casellas, M., Dagot, C., 2010. Techno-economic evaluation of thermal  
26 treatment, ozonation and sonication for the reduction of wastewater biomass volume  
27 before aerobic or anaerobic digestion. *J. Hazard. Mater.* 174, 323–333.  
28 doi:10.1016/j.jhazmat.2009.09.054  
29 Salsabil, M.R., Prorot, A., Casellas, M., Dagot, C., 2009. Pre-treatment of activated sludge: Effect  
30 of sonication on aerobic and anaerobic digestibility. *Chem. Eng. J.* 148, 327–335.  
31 doi:10.1016/j.cej.2008.09.003  
32 Salton, M.R.J., Horne, R.W., 1951. Studies of the bacterial cell wall. *Biochim. Biophys. Acta* 7, 19–  
33 42.  
34 Sanders, W.T.M., Geerink, M., Zeeman, G., Lettinga, G., 2000. Anaerobic hydrolysis kinetics of  
35 particulate substrates. *Water Sci. Technol.* 41, 17–24.  
36 Sapkaite, I., Barrado, E., Fdz-Polanco, F., Pérez-Elvira, S.I., 2017. Optimization of a thermal  
37 hydrolysis process for sludge pre-treatment. *J. Environ. Manage.* 192, 25–30.  
38 doi:10.1016/j.jenvman.2017.01.043  
39 Schmid, M., Thill, A., Purkhold, U., Walcher, M., Bottero, J.Y., Ginestet, P., Nielsen, P.H., Wuertz,  
40 S., Wagner, M., 2003. Characterization of activated sludge flocs by confocal laser scanning  
41 microscopy and image analysis. *Water Res.* 37, 2043–2052. doi:10.1016/S0043-  
42 1354(02)00616-4  
43 Seng, B., Khanal, S.K., Visvanathan, C., 2010. Anaerobic digestion of waste activated sludge  
44 pretreated by a combined ultrasound and chemical process. *Environ. Technol.* 31, 257–65.

1       doi:10.1080/09593330903453236  
2       Serrano, A., Siles, J.A., Martín, M.A., Chica, A.F., Estévez-Pastor, F.S., Toro-Baptista, E., 2016.  
3       Improvement of anaerobic digestion of sewage sludge through microwave pre-treatment. *J.*  
4       *Environ. Manage.* 177, 231–239. doi:10.1016/j.jenvman.2016.03.048  
5       Sesay, M.L., Özcengiz, G., Dilek Sanin, F., 2006. Enzymatic extraction of activated sludge  
6       extracellular polymers and implications on bioflocculation. *Water Res.* 40, 1359–1366.  
7       doi:10.1016/j.watres.2006.01.045  
8       Shao, L., Wang, X., Xu, H., He, P., 2012. Enhanced anaerobic digestion and sludge dewaterability  
9       by alkaline pretreatment and its mechanism. *J. Environ. Sci. (China)* 24, 1731–1738.  
10      doi:10.1016/S1001-0742(11)61031-0  
11      Show, K.-Y., Mao, T., Lee, D., 2007. Optimisation of sludge disruption by sonication. *Water Res.*  
12      41, 4741–4747. doi:10.1016/j.watres.2007.07.017  
13      Silvestre, G., Ruiz, B., Fiter, M., Ferrer, C., Berlanga, J.G., Alonso, S., Canut, A., 2015. Ozonation as  
14      a pre-treatment for anaerobic digestion of waste-activated sludge: Effect of the ozone  
15      doses. *Ozone Sci. Eng.* 37, 316–322. doi:10.1080/01919512.2014.985817  
16      Sólyom, K., Mato, R.B., Pérez-Elvira, S.I., Cocero, M.J., 2011. The influence of the energy  
17      absorbed from microwave pretreatment on biogas production from secondary wastewater  
18      sludge. *Bioresour. Technol.* 102, 10849–10854. doi:10.1016/j.biortech.2011.09.052  
19      Sotodate, J., Inaba, K.I., Tajima, H., Yamagiwa, K., 2009. Effect of ultrasonication on excess sludge  
20      bioavailability for methane production. *J. Chem. Eng. Japan* 42, 67–72.  
21      STOWA, 2013. Vervolgonderzoek slibdesintegratie RWZI Nieuwgraaf (In Dutch). Amersfoort.  
22      Stuckey, D.C., McCarty, P.L., 1984. The effect of thermal pretreatment on the anaerobic  
23      biodegradability and toxicity of waste activated sludge. *Water Res.* 18, 1343–1353.  
24      doi:10.1016/0043-1354(84)90002-2  
25      Su, G., Huo, M., Yuan, Z., Wang, S., Peng, Y., 2013. Hydrolysis, acidification and dewaterability of  
26      waste activated sludge under alkaline conditions: Combined effects of NaOH and Ca(OH)<sub>2</sub>.  
27      *Bioresour. Technol.* 136, 237–243. doi:10.1016/j.biortech.2013.03.024  
28      Szwergold, B.S., 2013. Maillard reactions in hyperthermophilic archaea: implications for better  
29      understanding of non-enzymatic glycation in biology. *Rejuvenation Res.* 16, 259–72.  
30      doi:10.1089/rej.2012.1401  
31      Taib, M.Y., Aziz, A.A., Alias, B.S., 2010. Performance analysis of a domestic refrigerator, National  
32      Conference in Mechanical Engineering Research and Postgraduate Students.  
33      Tan, W.F., Koopal, L.K., Weng, L.P., van Riemsdijk, W.H., Norde, W., 2008. Humic acid protein  
34      complexation. *Geochim. Cosmochim. Acta* 72, 2090–2099. doi:10.1016/j.gca.2008.02.009  
35      Thomashow, M.F., 1998. Role of cold-responsive genes in plant freezing tolerance. *Plant Physiol.*  
36      118, 1–8. doi:10.1104/pp.118.1.1  
37      Tian, X., Trzcinski, A.P., Lin, L.L., Ng, W.J., 2015a. Impact of ozone assisted ultrasonication pre-  
38      treatment on anaerobic digestibility of sewage sludge. *J. Environ. Sci. (China)* 33, 29–38.  
39      doi:10.1016/j.jes.2015.01.003  
40      Tian, X., Wang, C., Trzcinski, A.P., Lin, L., Ng, W.J., 2015b. Interpreting the synergistic effect in  
41      combined ultrasonication-ozonation sewage sludge pre-treatment. *Chemosphere* 140, 63–  
42      71. doi:10.1016/j.chemosphere.2014.09.007  
43      Tiehm, A., Nickel, K., Zellhorn, M., Neis, U., 2001. Ultrasonic waste activated sludge  
44      disintegration for improving anaerobic stabilization. *Water Res.* 35, 2003–2009.



1       doi:10.1016/S0043-1354(00)00468-1  
2       Tipton, H., Powell, J., Town, R.M., 1992. Solubility and fractionation of humic acid; effect of pH  
3       and ionic medium. *Anal. Chumca Acta* 267, 47–54. doi:10.1016/0003-2670(92)85005-Q  
4       Toreci, I., Droste, R.L., Kennedy, K.J., 2011. Mesophilic anaerobic digestion with high-  
5       temperature microwave pretreatment and importance of inoculum acclimation. *Water*  
6       *Environ. Res.* 83, 549–559.  
7       Toreci, I., Droste, R.L., Kennedy, K.J., 2010. Microwave pretreatment for soluble phase  
8       mesophilic anaerobic digestion. *Environ. Prog. Sustain. Energy* 29, 242–248. doi:10.1002/ep  
9       Toreci, I., Kennedy, K.J., Droste, R.L., 2009. Effect of high temperature microwave thickened  
10       waste-activated sludge pretreatment on distribution and digestion of soluble organic  
11       matter. *Environ. Eng. Sci.* 26, 981–991. doi:10.1089/ees.2008.0297  
12       Tuan, N., Julcour-Lebigue, C., Barthe, L., Delmas, H., 2016. Optimisation of sludge pretreatment  
13       by low frequency sonication under pressure. *J. Environ. Manage.* 165, 206–212.  
14       doi:10.1016/j.jenvman.2015.09.015  
15       Uma Rani, R., Adish Kumar, S., Kaliappan, S., Yeom, I., Rajesh Banu, J., 2013. Impacts of  
16       microwave pretreatments on the semi-continuous anaerobic digestion of dairy waste  
17       activated sludge. *Waste Manag.* 33, 1119–1127. doi:10.1016/j.wasman.2013.01.016  
18       Uma Rani, R., Adish Kumar, S., Kaliappan, S., Yeom, I.T., Rajesh Banu, J., 2012. Low temperature  
19       thermo-chemical pretreatment of dairy waste activated sludge for anaerobic digestion  
20       process. *Bioresour. Technol.* 103, 415–424. doi:10.1016/j.biortech.2011.09.124  
21       Ushani, U., Kavitha, S., Johnson, M., Yeom, I.T., Banu, J.R., 2016. Upgrading the hydrolytic  
22       potential of immobilized bacterial pretreatment to boost biogas production. *Environ. Sci.*  
23       *Pollut. Res.* 1–14. doi:10.1007/s11356-016-7819-2  
24       Vaclavik, V., Christian, E.W., 2008. *Essentials of Food Science*. doi:10.1007/978-1-4757-5173-4  
25       Valo, A., Carrère, H., Delgenès, J.P., 2004. Thermal, chemical and thermo-chemical pre-treatment  
26       of waste activated sludge for anaerobic digestion. *J. Chem. Technol. Biotechnol.* 79, 1197–  
27       1203. doi:10.1002/jctb.1106  
28       Vavilin, V.A., Fernandez, B., Palatsi, J., Flotats, X., 2008. Hydrolysis kinetics in anaerobic  
29       degradation of particulate organic material: An overview. *Waste Manag.* 28, 939–951.  
30       doi:10.1016/j.wasman.2007.03.028  
31       Vergine, P., Záborská, J., Canziani, R., 2014. Low temperature microwave and conventional  
32       heating pre-treatments to improve sludge anaerobic biodegradability. *Water Sci. Technol.*  
33       69, 518–24. doi:10.2166/wst.2013.735  
34       Vesilind, B.P.A., Martel, C.J., 1990. Freezing of water and wastewater sludges. *J. Environ. Eng.*  
35       116, 854–862.  
36       Wahidunnabi, A.K., Eskicioglu, C., 2014. High pressure homogenization and two-phased  
37       anaerobic digestion for enhanced biogas conversion from municipal waste sludge. *Water*  
38       *Res.* 66, 430–446. doi:10.1016/j.watres.2014.08.045  
39       Wang, J., Li, Y., 2016. Synergistic pretreatment of waste activated sludge using CaO<sub>2</sub> in  
40       combination with microwave irradiation to enhance methane production during anaerobic  
41       digestion. *Appl. Energy* 183, 1123–1132. doi:10.1016/j.apenergy.2016.09.042  
42       Wang, L.-L., Wang, L.-F., Ren, X.-M., Ye, X.-D., Li, W.-W., Yuan, S.-J., Sun, M., Sheng, G.-P., Yu, H.-  
43       Q., Wang, X.-K., 2012. pH dependence of structure and surface properties of microbial EPS.  
44       *Environ. Sci. Technol.* 46, 737–744.

- 1 Wang, Q., Fujisaki, K., Ohsumi, Y., Ogawa, H.I., 2001. Enhancement of dewaterability of thickened  
2 waste activated sludge by freezing and thawing treatment. *J. Env. Sci. Heal. A Tox Hazard*  
3 *Subst. Env. Eng.* 36, 1361–1371. doi:10.1081/ESE-100104884
- 4 Wang, Q., Jiang, G., Ye, L., Yuan, Z., 2014. Enhancing methane production from waste activated  
5 sludge using combined free nitrous acid and heat pre-treatment. *Water Res.* 63, 71–80.  
6 doi:10.1016/j.watres.2014.06.010
- 7 Wang, Q., Liang, Y., Zhao, P., Li, Q.X., Guo, S., Chen, C., 2016. Potential and optimization of two-  
8 phase anaerobic digestion of oil refinery waste activated sludge and microbial community  
9 study. *Sci. Rep.* 6, 1–10. doi:10.1038/srep38245
- 10 Wang, Q., Ye, L., Jiang, G., Jensen, P.D., Batstone, D.J., Yuan, Z., 2013. A novel free nitrous acid  
11 (FNA)-based technology for enhancing methane production from waste activated sludge.  
12 *Environ. Sci. Technol.* 47, 11897–11904.
- 13 Wang, R., Liu, J., Lv, Y., Ye, X., 2016a. Sewage sludge disruption through sonication to improve  
14 the co-preparation of coal-sludge slurry fuel: the effects of sonic frequency. *Appl. Therm.*  
15 *Eng.* 99, 645–651. doi:http://dx.doi.org/10.1016/j.applthermaleng.2016.01.098
- 16 Wang, R., Zhao, Z., Yin, Q., Liu, J., 2016b. Effects of the low-temperature thermo-alkaline method  
17 on the rheological properties of sludge. *J. Environ. Manage.* 177, 74–83.  
18 doi:10.1016/j.jenvman.2016.04.021
- 19 Wang, Z., Cao, J., Meng, F., 2015. Interactions between protein-like and humic-like components  
20 in dissolved organic matter revealed by fluorescence quenching. *Water Res.* 68, 404–413.  
21 doi:10.1016/j.watres.2014.10.024
- 22 Westerholm, M., Crauwels, S., van Geel, M., Dewil, R., Lievens, B., Appels, L., 2016. Microwave  
23 and ultrasound pre-treatments influence microbial community structure and digester  
24 performance in anaerobic digestion of waste activated sludge. *Appl. Microbiol. Biotechnol.*  
25 1–14. doi:10.1007/s00253-016-7321-2
- 26 Wett, B., Phothilangka, P., Eladawy, A., 2010. Systematic comparison of mechanical and thermal  
27 sludge disintegration technologies. *Waste Manag.* 30, 1057–1062.  
28 doi:10.1016/j.wasman.2009.12.011
- 29 Wetzel, R.G., 1991. Extracellular enzymatic interactions: storage, redistribution and interspecific  
30 communication, in: *Microbial Enzymes in Aquatic Environments*. Springer Berlin Heidelberg,  
31 p. 6.
- 32 Wilén, B.M., Jin, B., Lant, P., 2003. The influence of key chemical constituents in activated sludge  
33 on surface and flocculating properties. *Water Res.* 37, 2127–2139. doi:10.1016/S0043-  
34 1354(02)00629-2
- 35 Wilson, C.A., Novak, J.T., 2009. Hydrolysis of macromolecular components of primary and  
36 secondary wastewater sludge by thermal hydrolytic pretreatment. *Water Res.* 43, 4489–  
37 4498. doi:10.1016/j.watres.2009.07.022
- 38 Wingender, J., Neu, T.R., Flemming, H.-C., 1999. What are bacterial extracellular polymeric  
39 substances?, in: *Microbial Extracellular Polymeric Substances*. Springer, pp. 1–19.
- 40 Wu, J., Yang, Q., Luo, W., Sun, J., Xu, Q., Chen, F., Zhao, J., Yi, K., Wang, X., Wang, D., Li, X., Zeng,  
41 G., 2018. Role of free nitrous acid in the pretreatment of waste activated sludge:  
42 Extracellular polymeric substances disruption or cells lysis? *Chem. Eng. J.* 336, 28–37.  
43 doi:10.1016/j.cej.2017.11.038
- 44 Wu, L.-J., Higashimori, A., Qin, Y., Hojo, T., Kubota, K., Li, Y.-Y., 2016. Upgrading of mesophilic

1 anaerobic digestion of waste activated sludge by thermophilic pre-fermentation and  
2 recycle: Process performance and microbial community analysis. *Fuel* 169, 7–14.  
3 doi:10.1016/j.fuel.2015.11.091

4 Xiao, B., Liu, C., Liu, J., Guo, X., 2015. Evaluation of the microbial cell structure damages in  
5 alkaline pretreatment of waste activated sludge. *Bioresour. Technol.* 196, 109–115.  
6 doi:10.1016/j.biortech.2015.07.056

7 Xiao, B., Liu, J., 2006. Effects of thermally pretreated temperature on bio-hydrogen production  
8 from sewage sludge. *J. Environ. Sci.* doi:10.1007/s11434-009-0100-z

9 Xu, G., Chen, S., Shi, J., Wang, S., Zhu, G., 2010. Combination treatment of ultrasound and ozone  
10 for improving solubilization and anaerobic biodegradability of waste activated sludge. *J.*  
11 *Hazard. Mater.* 180, 340–346. doi:10.1016/j.jhazmat.2010.04.036

12 Yang, S.S., Guo, W.Q., Meng, Z.H., Zhou, X.J., Feng, X.C., Zheng, H.S., Liu, B., Ren, N.Q., Cui, Y.S.,  
13 2013. Characterizing the fluorescent products of waste activated sludge in dissolved organic  
14 matter following ultrasound assisted ozone pretreatments. *Bioresour. Technol.* 131, 560–  
15 563. doi:10.1016/j.biortech.2013.01.024

16 Yeneneh, A.M., Chong, S., Sen, T.K., Ang, H.M., Kayaalp, A., 2013. Effect of ultrasonic, microwave  
17 and combined microwave-ultrasonic pretreatment of municipal sludge on anaerobic  
18 digester performance. *Water. Air. Soil Pollut.* 224. doi:10.1007/s11270-013-1559-4

19 Yi, W.G., Lo, K.V., Mavinic, D.S., 2014. Effects of microwave, ultrasonic and enzymatic treatment  
20 on chemical and physical properties of waste-activated sludge. *J. Env. Sci Heal. A Tox Hazard*  
21 *Subst Env. Eng* 49, 203–209. doi:10.1080/10934529.2013.838880

22 Yu, J., Zheng, M., Tao, T., Zuo, J., Wang, K., 2013. Waste activated sludge treatment based on  
23 temperature staged and biologically phased anaerobic digestion system. *J. Environ. Sci.* 25,  
24 2056–2064. doi:10.1016/S1001-0742(12)60266-6

25 Yu, S., Zhang, G., Li, J., Zhao, Z., Kang, X., 2013. Effect of endogenous hydrolytic enzymes  
26 pretreatment on the anaerobic digestion of sludge. *Bioresour. Technol.* 146, 758–761.  
27 doi:10.1016/j.biortech.2013.07.087

28 Yu, Z., Johnston, K.P., Williams, R.O., 2006. Spray freezing into liquid versus spray-freeze drying:  
29 Influence of atomization on protein aggregation and biological activity. *Eur. J. Pharm. Sci.*  
30 27, 9–18. doi:10.1016/j.ejps.2005.08.010

31 Zahedi, S., Icaran, P., Yuan, Z., Pijuan, M., 2016. Assessment of free nitrous acid pre-treatment on  
32 a mixture of primary sludge and waste activated sludge: Effect of exposure time and  
33 concentration. *Bioresour. Technol.* 216, 870–875. doi:10.1016/j.biortech.2016.06.038

34 Zahedifar, M., Castro, F.B., Ørskov, E.R., 2002. Effect of hydrolytic lignin on formation of protein-  
35 lignin complexes and protein degradation by rumen microbes. *Anim. Feed Sci. Technol.* 95,  
36 83–92. doi:10.1016/S0377-8401(01)00305-4

37 Zahmatkesh, M., Spanjers, H., Toran, M., Blázquez, P., van Lier, J.B., 2016. Bioremoval of  
38 humic acid from water by white rot fungi: exploring the removal mechanisms. *AMB Express*  
39 6 (1). doi:10.1186/s13568-016-0293-x

40 Zhang, T., Fang, H.H.P., 2001. Quantification of extracellular polymeric substances in biofilms by  
41 confocal laser scanning microscopy. *Biotechnol. Lett.* 23, 405–409.  
42 doi:10.1023/A:1005620730265

43 Zhang, T., Wang, Q., Ye, L., Batstone, D., Yuan, Z., 2015. Combined free nitrous acid and  
44 hydrogen peroxide pre-treatment of waste activated sludge enhances methane production

1 via organic molecule breakdown. *Sci. Rep.* 5, 16631. doi:10.1038/srep16631  
2 Zhang, W., Yang, P., Yang, X., Chen, Z., Wang, D., 2015. Insights into the respective role of  
3 acidification and oxidation for enhancing anaerobic digested sludge dewatering  
4 performance with Fenton process. *Bioresour. Technol.* 181, 247–253.  
5 doi:10.1016/j.biortech.2015.01.003  
6 Zhang, X., Spanjers, H., van Lier, J.B., 2013. Potentials and limitations of biomethane and  
7 phosphorus recovery from sludges of brackish/marine aquaculture recirculation systems: A  
8 review. *J. Environ. Manage.* 131, 44–54. doi:10.1016/j.jenvman.2013.09.016  
9 Zhang, Y., Zhang, P., Ma, B., Wu, H., Zhang, S., Xu, X., 2012. Sewage sludge disintegration by high-  
10 pressure homogenization: A sludge disintegration model. *J. Environ. Sci.* 24, 814–820.  
11 doi:10.1016/S1001-0742(11)60834-6  
12 Zhen, G., Lu, X., Li, Y.Y., Zhao, Y., 2014. Combined electrical-alkali pretreatment to increase the  
13 anaerobic hydrolysis rate of waste activated sludge during anaerobic digestion. *Appl. Energy*  
14 128, 93–102. doi:10.1016/j.apenergy.2014.04.062  
15 Zhen, G., Lu, X., Wang, B., Zhao, Y., Chai, X., Niu, D., Zhao, A., Li, Y., Song, Y., Cao, X., 2012.  
16 Synergetic pretreatment of waste activated sludge by Fe(II)-activated persulfate oxidation  
17 under mild temperature for enhanced dewaterability. *Bioresour. Technol.* 124, 29–36.  
18 doi:10.1016/j.biortech.2012.08.039  
19 Zhou, A., Yang, C., Guo, Z., Hou, Y., Liu, W., Wang, A., 2013. Volatile fatty acids accumulation and  
20 rhamnolipid generation in situ from waste activated sludge fermentation stimulated by  
21 external rhamnolipid addition. *Biochem. Eng. J.* 77, 240–245. doi:10.1016/j.bej.2013.06.007  
22 Zhou, X., Wang, Q., Jiang, G., 2015. Enhancing methane production from waste activated sludge  
23 using a novel indigenous iron activated peroxidation pre-treatment process. *Bioresour.*  
24 *Technol.* 182, 267–271. doi:10.1016/j.biortech.2015.01.132  
25 Zielewicz, E., 2016. Effects of ultrasonic disintegration of excess sewage sludge. *Appl. Acoust.*  
26 103, 182–189. doi:10.1016/j.apacoust.2015.05.007  
27 Zorba, G.T., Sanin, F.D., 2013. Disintegration of sludge by sonication and improvement of  
28 methane production rates in batch anaerobic digesters. *Clean soil, air, water* 41, 396–402.  
29 doi:10.1002/clen.201100391  
30