

**An efficient and robust sampler for Bayesian inference
Transitional Ensemble Markov Chain Monte Carlo**

Lye, Adolphus; Cicirello, Alice; Patelli, Edoardo

DOI

[10.1016/j.ymssp.2021.108471](https://doi.org/10.1016/j.ymssp.2021.108471)

Publication date

2022

Document Version

Final published version

Published in

Mechanical Systems and Signal Processing

Citation (APA)

Lye, A., Cicirello, A., & Patelli, E. (2022). An efficient and robust sampler for Bayesian inference: Transitional Ensemble Markov Chain Monte Carlo. *Mechanical Systems and Signal Processing*, 167(Part B), 1-23. Article 108471. <https://doi.org/10.1016/j.ymssp.2021.108471>

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Green Open Access added to TU Delft Institutional Repository

'You share, we take care!' - Taverne project

<https://www.openaccess.nl/en/you-share-we-take-care>

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.



An efficient and robust sampler for Bayesian inference: Transitional Ensemble Markov Chain Monte Carlo

Adolphus Lye^a, Alice Cicirello^{a,b}, Edoardo Patelli^{a,c,*}

^a Institute for Risk and Uncertainty, University of Liverpool, United Kingdom

^b Faculty of Civil Engineering and Geoscience, Delft University of Technology, The Netherlands

^c Centre for Intelligent Infrastructure, Department of Civil and Environmental Engineering, University of Strathclyde, United Kingdom

ARTICLE INFO

Communicated by M. Faes

Keywords:

Bayesian inference
Model updating
Affine-invariant
Ensemble sampler
Transitional Markov Chain Monte Carlo
Structural health monitoring

ABSTRACT

Bayesian inference is a popular approach towards parameter identification in engineering problems. Such technique would involve iterative sampling methods which are often robust. However, these sampling methods often require significant computational resources and also the tuning of a large number of parameters. This motivates the development of a sampler called the Transitional Ensemble Markov Chain Monte Carlo.

The proposed approach implements the Affine-invariant Ensemble sampler in place of the classical Metropolis–Hastings sampler as the Markov chain Monte Carlo move kernel. In doing so, it allows for the sampling of badly-scaled and highly-anisotropic distributions without requiring extra computational costs. This makes the proposed sampler computationally efficient as a result of having less auxiliary parameters to compute per iteration compared to the standard single particle Transitional Markov Chain Monte Carlo. In addition to such change, an adaptive tuning algorithm is also proposed within the new sampler. This algorithm allows for automatic tuning of the step-size of the Affine-invariant Ensemble sampler. Hence, such proposals not only ensure that the new sampler is “tune-free” for the users, but also improves its robustness by ensuring that the acceptance rate of samples is well-controlled within acceptable bounds. As a result, this approach could be significantly faster compared to standard Transitional Markov Chain Monte Carlo methods on badly scaled and highly skewed distributions, which can be encountered when dealing with complex engineering problems.

The proposed sampler will be implemented on 2 benchmark numerical examples of varying complexities to demonstrate its strengths and advantages. In addition, the sampler is validated by investigating its parameter identification capability on an Aluminium Frame using experimental data.

1. Introduction

In recent years, Bayesian model updating has been increasingly employed to address numerous inverse problems in engineering due to its ability to combine prior knowledge with the observed data to yield a probabilistic description of the inferred parameter [1, 2]. For this reason, such approach has been adopted for parameter identification in numerous engineering structures including: (1) footbridges [3–6], (2) buildings [7–11], and (3) aerospace designs [12–14]. Often, the Bayesian approach does not yield an analytical solution to the estimates of the inferred parameter(s) [15]. Hence, numerical techniques have been adopted in the form of sampling

* Corresponding author at: Centre for Intelligent Infrastructure, Department of Civil and Environmental Engineering, University of Strathclyde, United Kingdom.

E-mail address: edoardo.patelli@strath.ac.uk (E. Patelli).

<https://doi.org/10.1016/j.ymssp.2021.108471>

Received 10 February 2021; Received in revised form 28 July 2021; Accepted 20 September 2021

Available online 10 November 2021

0888-3270/© 2021 Published by Elsevier Ltd.

methods [16] such as Markov Chain Monte Carlo (MCMC) methods [15]. One such MCMC method is the Transitional Markov Chain Monte Carlo (TMCMC) sampler proposed by [17]. Recently, it has been applied in numerous engineering problems including: (1) characterizing the statistical uncertainties of the spatial variability parameters based on the Cone Penetration Test [18]; (2) analysing the multi-modality feature of the Bouc–Wen–Baber–Noori model of hysteresis [19]; (3) analysis of the creep behaviour of soft soil and its associated uncertainty [20]; (4) executing reliability-based optimization in linear structure designs subjected to random excitations [21]; and (5) in estimating epistemic parameters within the DLR-AIRMOD structure [22]. Such vast application of the TMCMC highlights its popularity in engineering [23,24]. This is attributed to its capability in estimating large number of parameters at one time (i.e. as many as 18 [15,22]), sample from complex-shaped distributions [17,19], and its ability to quantify the suitability of a model in describing the observed data under uncertainty [25–29].

Despite its strengths, the TMCMC algorithm presents numerous short-comings including: (1) having large number of auxiliary parameters to tune due to the choice of proposal distribution [30]; (2) being computationally expensive due to the need to recompute the auxiliary parameters at every iteration [15,30]; (3) does not provide a mechanism to control the acceptance rates of the samples within the acceptable bounds of [0.15, 0.50] [31]. To address those short-comings, an improved TMCMC approach, called the Transitional Ensemble Markov Chain Monte Carlo (TEMCMC) sampler, is presented. This approach employs the Affine-invariant Ensemble sampler (AIES) proposed by Goodman and Weare (2009) [32] in place of the Metropolis–Hastings (MH) sampler for the MCMC step. By using a sampler that satisfies the affine-invariance property, the performance of the method becomes independent from the complexity of the distribution [32]. To the best of the authors' knowledge, the proposed sampler has not been investigated yet in the literature. The motivations behind the proposed approach are: (1) the AIES can sample efficiently from highly-skewed distribution functions [32]; (2) it can be parallelized [33]; and (3) it removes the need of a proposal distribution, thereby reducing the number of auxiliary parameters to tune and the computational cost [32]. Moreover, an adaptive tuning algorithm is also proposed to automatically tune the step-size parameter of the AIES for every iteration. Thus, the objectives of the proposed TEMCMC sampler are to provide: (1) a sampler which is “tune-free” to the users; (2) a computationally less-expensive sampler than the existing TMCMC sampler, and (3) a robust method to effectively moderate acceptance rates within the acceptable bounds across the iterations.

The performance and the results obtained from the proposed algorithm will be compared and verified against the TMCMC. This will be done through the following numerical examples: (1) a Coupled Oscillator system where the objective is to infer 4 epistemic parameters (see Section 4.1); and (2) a 4-peaked Himmelblau's function where the objective is to observe the performance of each sampler in sampling from a multi-peaked posterior (see Section 4.2). Such comparisons will be done on the basis of the estimation of the inferred parameters, computational time elapsed in generating the posterior samples, and acceptance rates across the iterations j by the respective samplers. To validate the performance of the proposed algorithm under realistic settings, an application example in the form of the Aluminium Frame problem [34] is presented where the objective is to perform Bayesian model updating and infer the mass positions using actual experimental data (see Section 5).

2. Bayesian model updating

Bayesian model updating is based on the well-known concept of Bayesian inference [1,2,35] where prior assumptions or belief and the information available and/or measurements, are represented in terms of probability density functions. The posterior distribution on a set of parameters of interest is obtained according to [36]:

$$P(\theta|D, M) = \frac{P(D|\theta, M) \cdot P(\theta|M)}{P(D|M)} \quad (1)$$

where θ represents the vector of uncertain parameters that is to be estimated, D represents the vector of the measurements (or observations) used in updating our knowledge of θ , and M represents the model (usually a function of θ) which is believed to best represent the available observations D . The terms expressed in Eq. (1) are as such:

- $P(\theta|M)$ is the prior distribution which describes our prior knowledge of θ before any observation(s) is/are made,
- $P(D|\theta, M)$ is the likelihood function which reflects the degree of agreement and the error between D and the model output from M ,
- $P(\theta|D, M)$ is the posterior distribution which describes our updated knowledge of θ after observing the data D ,
- $P(D|M)$ is the evidence which serves as the normalizing constant of the posterior.

Due to $P(D|M)$ being a constant which is independent of θ , it can be neglected and the posterior is re-expressed up to a normalizing constant:

$$P(\theta|D, M) \propto P(D|\theta, M) \cdot P(\theta|M) \quad (2)$$

Details to the above terms can be found in [15].

Due to the nature of $P(\theta|D, M)$ in Eq. (2), standard Monte Carlo approaches become inapplicable as they require that the analytical function of the distribution to be normalized and that they have a defined Cumulative Distribution Function (CDF) [37,38]. For these reasons, advanced sampling techniques have been developed to sample from unnormalized distributions including: (1) Markov Chain Monte Carlo (MCMC) [39], (2) Sequential Monte Carlo (SMC), and (3) Transitional Markov Chain Monte Carlo (TMCMC) samplers [40]. Detailed explanations to each of these techniques are provided in [15].

2.1. Review of the Transitional Markov Chain Monte Carlo

TMCMC is one of the most successfully applied sampling techniques in engineering applications [23,24]. It is based on the Adaptive Metropolis–Hastings (AMH) technique [41] whereby samples are obtained from a series of intermediate “transitional” distributions P^j defined as [17]:

$$P^j \propto P(\mathbf{D}|\theta, M)^{\beta_j} \cdot P(\theta|M) \tag{3}$$

Here, j denotes the transition step number taking values between 0 to m , where m indicates the last iteration number, β_j is the tempering parameter which takes values such that $\beta_0 = 0 < \beta_1 < \dots < \beta_{m-1} < \beta_m = 1$. In doing so, this allows for the transitional distribution to transit from the prior to the posterior distribution (i.e. $P^0 = P(\theta|M)$ to $P^m = P(\theta|\mathbf{D}, M)$) in an iterative manner. A critical aspect of TMCMC is the choice of the step-size $\Delta\beta_j = \beta_j - \beta_{j-1}$ to ensure a smooth and gradual transition from $P(\theta|M)$ to $P(\theta|\mathbf{D}, M)$ [17]. In addition, the magnitude of $\Delta\beta_j$ itself has a direct impact on the acceptance-rates of the samples [15]. A large step-size leads to large number of rejected proposed samples due to an increased likelihood of these samples lying outside the support of the posterior (whilst still within the support of the prior). A small $\Delta\beta_j$ leads to an increase in the number of iterations required. The optimal value of $\Delta\beta_j$ is such that the Coefficient Of Variation (COV) of the nominal weights of the samples θ_i , defined as [17]:

$$w_i^j = P(\mathbf{D}|\theta_i, M)^{\Delta\beta_j} \tag{4}$$

is close to 1 for any given iteration j . As such, the optimal tempering factor β_j for each iteration can then be determined as [17,30]:

$$\arg \max_{\beta_j} \{|\sigma(w^j)/\mu(w^j) - 1|\} \tag{5}$$

At iteration $j = 0$, the TMCMC algorithm is initialized by generating N samples from the prior $P(\theta|M)$ via direct Monte Carlo sampling. Next, at iteration $j = 1$ (i.e. while $\beta_j < 1$), the nominal weight of the samples is computed according Eq. (4) and normalized by dividing the weights by its summation (i.e. $\sum_{i=1}^N w_i^j$). Let the normalized weights be denoted as \hat{w}_i^j . Following which, N single-step Markov Chains are initiated. To determine the starting samples for each of the Markov Chains, N samples of θ_i are resampled (with replacement) via weighted resampling. This is done such that θ_i is sampled with probability \hat{w}_i^j [42]. The MH approach is then used to generate 1 sample from each of those Markov Chains [39]: candidate samples θ^* are sampled from a proposal distribution $q(\theta^*|\theta)$ with mean $\bar{\theta}^j$ and covariance matrix Σ^j defined as:

$$\bar{\theta}^j = \sum_{i=1}^N \theta_i \cdot \hat{w}_i^j \tag{6}$$

and

$$\Sigma^j = \gamma^2 \cdot \sum_{i=1}^N \hat{w}_i^j \cdot [\{\theta_i - \bar{\theta}\} \times \{\theta_i - \bar{\theta}\}^T]. \tag{7}$$

γ is the scaling parameter of Σ^j . The i th candidate sample is accepted with probability α_i :

$$\alpha_i = \min \left[1, \frac{P^j(\theta_i^*)}{P^j(\theta_i)} \right] \tag{8}$$

where $P^j(\theta_i^*)$ is the density value of P^j computed at θ_i^* while $P^j(\theta_i)$ is the density value of P^j computed at θ_i . The values of the new tempering parameter is updated and the algorithm repeats the described procedure for subsequent iterations $j = j + 1$ till $\beta_j = 1$.

The TMCMC sampler computes the evidence term $P(\mathbf{D}|M)$ of the posterior distribution [17,30]. The metric $P(\mathbf{D}|M)$ quantifies how well a given model M describes the available observations \mathbf{D} . The $P(\mathbf{D}|M)$ is estimated as the product of the mean of the nominal weights w_i^j at any given iteration j :

$$P(\mathbf{D}|M) \approx \prod_{j=1}^m \frac{1}{N} \cdot \sum_{i=1}^N w_i^j \tag{9}$$

2.2. Limitations of the approach

One key problem in the TMCMC technique is that there is no fixed universal value for the scaling parameter γ although it was stated in [17] that the “optimal” value would be 0.2. This was highlighted in [30] where it was argued that this “optimal” value is not applicable for all cases. In fact, different values for γ have been utilized in different research such as 0.5 in [21] and 1.0 in [18]. Hence, [30] proposed a tuning algorithm to adaptively adjust γ . Starting from an initial value of $\gamma^{j=1} = \frac{2.4}{\sqrt{N_d}}$ [38,43] where N_d is the dimension of θ . Upon the conclusion of the MCMC step in updating the samples, the mean acceptance rate for the current iteration α^j is obtained. This mean acceptance rate is then compared against the target acceptance rate α_{tr} , which is defined as [31]:

$$\alpha_{tr} = \frac{0.21}{N_d} + 0.23 \tag{10}$$

Once this is done, the scale parameter is then tuned and updated according to:

$$\gamma^{j+1} = \gamma^j \cdot \exp\left[\frac{\alpha^j - \alpha_{tr}}{j}\right] \quad (11)$$

Such approach should also help to moderate the overall acceptance rate of the samples such that α^j falls between 0.2 and 0.5 as much as possible [31]. However, to the best of the authors' knowledge, investigations into the acceptance rates of the TMCMC sampler across iterations have not been done. The TMCMC sampling procedure is summarized in Algorithm 1.

Algorithm 1 TMCMC sampler algorithm

```

1: procedure (Generate  $N$  samples from  $P(\theta|\mathbf{D}, M)$ )
2:   Set  $j = 0$  and  $\beta_j = 0$  ▷ Initialize iteration counters
3:   Set  $\gamma^{j+1} = \frac{2.4}{\sqrt{N_d}}$  ▷ Initialize scale parameter
4:   Draw initial  $N$  sample set:  $\theta_i \sim P(\theta|M)$  ▷ Generate samples from the prior
5:   while  $\beta_j < 1$  do ▷ Main sampling loop
6:     Set  $j = j + 1$ 
7:     Compute  $\Delta\beta_j$  using Eq. (5)
8:     Compute  $P^j$  using Eq. (3)
9:     for  $i = 1 : N$  do ▷ For each  $i^{th}$  chain (MCMC step)
10:      Resample:  $\theta_i \sim \hat{v}_i^j$ 
11:      Draw candidate sample:  $\theta^* \sim q(\theta^*|\theta_i)$ 
12:      Accept/Reject  $\theta^*$  with probability  $\alpha_i$  using Eq. (8)
13:     end for
14:     Compute  $\gamma^{j+1}$  using Eq. (11)
15:   end while
16:   Compute  $P(\mathbf{D}|M)$  using Eq. (9)
17: end procedure

```

The current TMCMC sampler is also computational inefficient since the mean $\bar{\theta}^j$ and covariance matrix Σ^j need to be calculated at each iteration j . This adds additional parameters that need to be adaptively tuned, on top of β_j and γ^j , as a result of the choice of proposal distribution $q(\theta^*|\theta_i)$ used. Furthermore, there is a loose assumption that it is optimal to set $q(\theta^*|\theta_i)$ as a Normal distribution [39]. Strictly speaking, such choice only provides convenience in simplifying the sampling process of θ^* from $P(\theta|\mathbf{D}, M)$ and the computation of the acceptance ratio α . Such convenience is attributed to the symmetrical nature of the Normal distribution [39,44]. In fact, there are specific cases whereby asymmetric proposal distributions are required. For instance, if one is to estimate the posterior of a variance parameter, to ensure that the proposed candidate samples θ^* are never less than 0, the proposal distribution should be such that it is skewed towards positive values (i.e. $\theta^* > 0$) such as the Log-normal distribution [45]. This would ensure that the overall acceptance rates α would not be too low (i.e. $\alpha < 0.15$) [46]. Optimally, the proposal distribution should follow that of the posterior [44] but such approach is not feasible due to the lack of apriori knowledge over the analytical form of the actual posterior itself. Thus, the choice of $q(\theta^*|\theta_i)$ adds some degree of uncertainty.

3. Transitional Ensemble Markov chain Monte Carlo

Numerous alternative MCMC kernels in TMCMC have been considered in previous studies including: (1) Slice sampler (i.e. TMCMC-Slice) [47,48], (2) Metropolis-Adjusted-Langevin (MAL) sampler (i.e. L-TMCMC) [49], and (3) Differential evolution MCMC kernel (i.e. DE-TMCMC) [50]. A summary to each of the above TMCMC variants is provided.

The TMCMC-Slice is able to produce estimates with significantly lower COV than that of TMCMC. This is because the Slice sampler algorithm [51] draws samples more efficiently than MH from P^j such that candidate samples θ_i^* are now drawn closer to regions of higher probability in $P(\theta|\mathbf{D}, M)$. This leads to a higher convergence of θ_i and a smaller spread about the sample space defined by $P(\theta|\mathbf{D}, M)$ [47]. In addition, the use of the Slice sampler algorithm removes the need for $q(\theta^*|\theta_i)$ thereby removing the need to compute θ' and Σ^j [48,51]. A significant drawback of the TMCMC-Slice is its relatively long computational time compared to the TMCMC due to the computation cost involved in tuning the auxiliary variables and step-size of the Slice sampler [48].

The L-TMCMC demonstrated high parallel efficiency by adopting an adaptive kriging metamodel, in place of the true model, to perform the model evaluations when computing the likelihood function [49]. This reduces computation time, thereby making the algorithm computationally less-expensive compared to the TMCMC [49]. In addition, due to the use of the MAL move kernel, it allows for the L-TMCMC to sample more efficiently from multi-modal $P(\theta|\mathbf{D}, M)$ as well as a better identification of parameters, especially those which were unidentifiable by TMCMC [49]. However, its performance suffers when $P(\theta|\mathbf{D}, M)$ is highly-dimensional due to the computation of the gradient information by the MAL algorithm which is computationally ineffective and inefficient under such settings [49].

The DE-TMCMC demonstrated high parallel efficiency due to the use of the Differential evolution kernel, thereby making it computationally more efficient compared to the TMCMC [50]. In addition, the sampler is able to produce estimates with higher

degree of accuracy due to its maximum a posteriori estimates being closer to the true values of the inferred parameter(s) compared to the TMCMC [50]. However, the sampler still has significant number of auxiliary parameters to tune for the differential evolution MCMC kernel. This could add significant computational costs [50].

In this work, we implement the AIES as the alternative MCMC kernel to the MH. The reasons for this are the following: (1) to exploit the efficiency of the AIES in its ability to sample from highly-skewed and anisotropic distributions; (2) the AIES can be parallelized; and (3) no proposal distribution is required which, in turn, reduces the number of auxiliary parameters to tune. This gives rise to the TEMCMC to which an additional feature proposed is the adaptive tuning algorithm which automatically tunes its step-size parameter and moderate the sampler's acceptance rates.

3.1. Review of the affine-invariant ensemble sampler

The AIES is a MCMC sampling technique recently developed which possesses the affine-invariance property [32]. Currently, it has been applied across numerous research fields such as Cosmology [20,33,52–55], Physics [56–58], and Engineering [59–63]. To provide an understanding of the AIES sampler, this section will first present the concept of affine-transformation, followed by a definition and description of an ensemble before finally, explaining the sampler.

An affine-transformation operation ψ is an invertible linear mapping from a \mathbb{R}^{N_d} to \mathbb{R}^{N_d} space [64]:

$$\psi(\theta) : \Theta = \hat{A} \theta + b \tag{12}$$

where Θ represents θ in the affine-transformed space, \hat{A} is the N_d -by- N_d non-singular transformation matrix and b is the N_d -by-1 translation vector. This simple transformation transforms a difficult sampling problem into a tractable one, in a similar way in which a deterministic optimization problem is transformed to deal with a well-scaled function [32]. Let $P'(\Theta|\mathbf{D}, M)$ represents a general class of densities describing the posterior distribution of Θ where P' denotes the distribution function in the Θ -space. If the following condition holds [32]:

$$P'(\Theta|\mathbf{D}, M) = P'(\psi(\theta)|\mathbf{D}, M) \propto P(\theta|\mathbf{D}, M) \tag{13}$$

then, Θ -space and θ -space are said to be affine-invariant [65]. Therefore, the Affine-invariant sampler can be constructed by using a proposal distribution q' with the form [32]:

$$q'(\Theta^*|\Theta_i) = q'(\psi(\theta^*)|\psi(\theta_i)) \propto q(\theta^*|\theta_i) \tag{14}$$

This proposal distribution is also invariant under affine-transformation, i.e. the probability of generating a sample Θ^* given Θ_i in the transformed Θ -space is equal to the probability of generating a sample θ^* given θ_i in the original θ -space [32].

Within the AIES, a collection of N_c Markov chains: $\vec{\theta}_i = \{\theta_{1,i}, \theta_{2,i}, \dots, \theta_{N_c-1,i}, \theta_{N_c,i}\}$ is first generated. The proposal sample θ_k^* is then obtained by using a move kernel that is invariant towards an affine-transformation and that uses the current sample and that obtained from a complementary chain. In practice, it is required that the number of chains N_c be at least twice the dimension of θ (i.e. $N_c \geq 2 \times N_d$) [32]. Each chain generates 1 sample from the prior giving the first ensemble $\vec{\theta}_i$ for $i = 1$. Once this is done, the samples in the ensemble are then updated one chain at a time. To update the k th chain (for $k = 1, \dots, N_c$), a sample from a complementary chain is randomly selected from the set $\vec{\theta}_{[k],i} = \{\theta_{1,i+1}, \dots, \theta_{k-1,i+1}, \theta_{k+1,i}, \dots, \theta_{N_c,i}\}$. Let this chosen sample from the set $\vec{\theta}_{[k],i}$ be denoted as $\theta_{[k]}$. Following which, the candidate sample for the k th chain θ_k^* is generated. This can be expressed as [32,33]:

$$\theta_k^* = \theta_{[k]} + \lambda \cdot (\theta_{k,i} - \theta_{[k]}) \tag{15}$$

whereby λ is real-valued scalar proposal stretch factor of the stretch-move affine-transformation [32,33]. λ can be represented as a random variable following a proposal distribution $g(\lambda)$ [32]. Analogous to the MH algorithm where a symmetric $q(\theta^*|\theta_i)$ is used, $g(\lambda)$ is chosen to satisfy the symmetry condition such that [32]:

$$g\left(\frac{1}{\lambda}\right) = \lambda \cdot g(\lambda) \tag{16}$$

so that the stretch-move in Eq. (15) is symmetric [32]. For this reason, $g(\lambda)$ is proposed in [32] as:

$$g(\lambda) = \begin{cases} \frac{1}{2 \cdot (\sqrt{u} - \frac{1}{\sqrt{u}})} \cdot \frac{1}{\sqrt{\lambda}} & \text{if } \lambda \in [\frac{1}{u}, u] \\ 0 & \text{otherwise} \end{cases} \tag{17}$$

whereby u serves as the user-defined step-size of the AIES sampler which needs to be strictly greater than 1. Once θ_k^* is sampled following Eq. (15), it is then accepted with probability α_k :

$$\alpha_k = \min \left[1, \lambda^{N_d-1} \cdot \frac{P(\theta_k^*|\mathbf{D}, M)}{P(\theta_{k,i}|\mathbf{D}, M)} \right] \tag{18}$$

Once the samples in all N_c chains have been updated, set $i = i + 1$ and the updating procedure repeats itself until $i = N$. In summary, the entire sampling procedure by AIES is summarized and illustrated in Algorithm 2. Interested readers will find further theoretical and numerical investigations of ensemble samplers with affine invariance properties in Ref. [32].

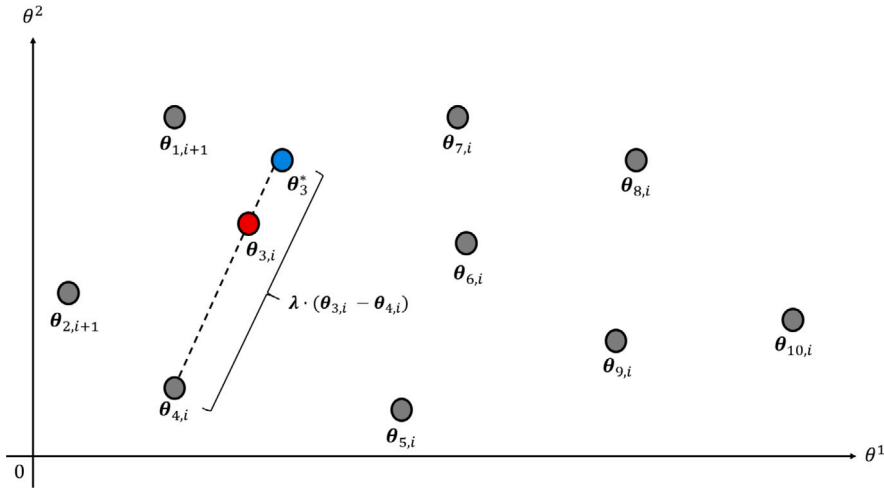


Fig. 1. Schematic diagram of the stretch-move that is used to update the sample of the 3rd chain in red. Here, the candidate sample for the 3rd chain is represented in blue while the randomly chosen complementary sample in this case is that from the 4th chain.
Source: Image adapted from [32].

Fig. 1 illustrates the stretch-move in a 2D sample space $\theta = \{\theta^1, \theta^2\}$. In the figure, the sample of the 3rd chain (in red) is being updated. The complementary sample for this case is $\theta_{4,i}$. A straight line initiating from $\theta_{4,i}$ is drawn to include $\theta_{3,i}$. This straight line is the path along which the candidate sample $\theta_{3,i}^*$ could possibly lie. By sampling λ from $g(\lambda)$, and using Eq. (15), $\theta_{3,i}^*$ is defined and represented in blue.

Algorithm 2 AIES sampler algorithm

- 1: **procedure** (Generate N samples from $P(\theta|D, M)$)
 - 2: Define N_c chains: $\vec{\theta}_1 = \{\theta_{1,1}, \theta_{2,1}, \dots, \theta_{N_c-1,1}, \theta_{N_c,1}\}$
 - 3: **for** $i = 1 : N - 1$ **do**
 - 4: **for** $k = 1 : N_c$ **do**
 - 5: Select randomly $\theta_{[k]}$ from set $\vec{\theta}_{[k],i}$
 - 6: Sample: $\lambda \sim g(\lambda)$
 - 7: Generate θ_k^* using Eq. (15)
 - 8: Calculate acceptance probability α_{AIES} using Eq. (18)
 - 9: Sample: $r \sim U[0, 1]$
 - 10: **if** $\alpha_k > r$ **then**
 - 11: Set $\theta_{k,i+1} = \theta_k^*$
 - 12: **else**
 - 13: Set $\theta_{k,i+1} = \theta_{k,i}$
 - 14: **end if**
 - 15: **end for**
 - 16: **end for**
 - 17: **end procedure**
-

The affine-invariant property of the stretch-move is explained as such. Supposed 2 independent sampling procedures are conducted by the AIES: one to sample θ from $P(\theta|D, M)$, and the other to sample Θ from $P'(\Theta|D, M)$. Given the same sequence of λ_i in both runs for $i \geq 2$, and that the starting samples Θ_1 and θ_1 are related according to Eq. (18), the AIES is able to generate sample sequences such that the relationship between Θ_i and θ_i is always upheld for all iterations i . The mathematical illustration of the affine-invariant stretch-move is provided by Eq. (15). By performing an affine-transformation on both sides of the equation, we obtain [32] (see Fig. 2). :

$$\Theta_k^* : \psi(\Theta_k^*) = \psi(\theta_{[k]}) + \lambda_i \cdot (\psi(\theta_{k,i}) - \psi(\theta_{[k]})) \tag{19}$$

Expanding and re-arranging the above equation, one will obtain the final expression [32]:

$$\Theta_{[k]} + \lambda_i \cdot (\Theta_{k,i} - \Theta_{[k]}) = \hat{A} [\theta_{[k]} + \lambda_i \cdot (\theta_{k,i} - \theta_{[k]})] + b \tag{20}$$

Eq. (20) implies 2 key things: (1) the generation of samples from the affine-transformed Θ -space is no different from sampling from the original θ -space up to an affine-transformation [32]; and (2) the probability of sampling Θ_k^* starting from $\Theta_{k,i}$ in the Θ -space

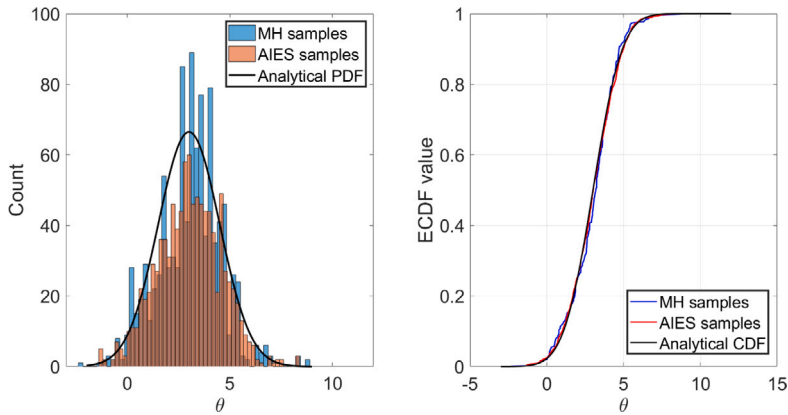


Fig. 2.

is equal to the probability of sampling θ_k^* starting from $\theta_{k,i}$ in the original θ -space. The second point satisfies the condition defined by Eq. (14) which endows the stretch-move its affine-invariant property.

Hence, one key advantage of the AIES sampler over the MH sampler is its ability to sample from a poorly-scaled and highly-anisotropic distributions just as effectively and efficiently as it would from a well-scaled affine-transformed distribution [32,66]. To illustrate this, a numerical example is presented in Appendix to which readers can refer to.

Another advantage that the AIES sampler has over the MH sampler is the absence of any user-defined $q(\theta^*|\theta_i)$ to generate candidate samples. This reduces the degree-of-freedom as well as the number of parameters to be adaptively tuned by 2 given that the sample mean $\bar{\theta}$ and its covariance matrix Σ^j need not be computed at every j . This leaves β_j and u as the only parameters to be adaptively tuned, thereby improving the computational efficiency for the TEMCMC sampler.

As such, this motivates the implementation of the AIES algorithm in the proposed TEMCMC sampler given that the “transitional” distributions P^j (see Eq. (3)) can be highly-skewed and anisotropic in general and its sampling performance would be least affected by the scaling of P^j across the transition step j .

3.2. Adaptive-tuning algorithm

To adaptively tune the step-size parameter u , an algorithm is proposed based on the work by [30]. The initial step-size value $u^{j=1}$ is set at 2 given that this is the “optimal” value for most problems [33,52]. From this initial value, the nominal step-size u_{nom} is computed after the MCMC step:

$$u_{nom} = u^j \cdot \exp[\alpha^j - \alpha_{tr}] \tag{21}$$

where α^j is the acceptance rate for the current iteration and α_{tr} is the target acceptance rate (see Eq. (10)). The acceptance rate α^j is treated as a random variable. Consequently, the nominal step-size u_{nom} is also a random variable which can be randomized and adapted through α^j . Such implementation is not limited to AIES, but is a generic property of MCMC samplers [30,67]. If $u_{nom} > 1$, then $u^{j+1} = u_{nom}$. Otherwise, the algorithm sets $u^{j+1} = 1.01$ to ensure that the step-size would never fall below 1. This procedure is repeated at the end of every iteration until the last transition step $j = m$.

In summary, the proposed TEMCMC sampler has 3 key benefits: (1) it is practically “tune-free” for the users; (2) it is computationally less expensive compared to TCMCMC sampling; and (3) its acceptance rate is moderated such that it falls within the acceptance range between 0.15 and 0.50 [46] for the majority of the transition steps j . Such benefits and strengths of the TEMCMC sampler will be illustrated in the numerical examples as well as the Aluminium Frame application problem in Sections 4 and 5 respectively. A pseudoalgorithm of the TEMCMC sampler is provided in Algorithm 3.

4. Numerical examples

4.1. 2-DOF Coupled Oscillator system

The objective of this numerical example is to observe and compare the differences in the performance of the TCMCMC sampler and the proposed TEMCMC sampler in a 4-dimensional Bayesian model updating set-up. This comparison will be done on the basis of the COV of the estimation of the epistemic parameters θ , the computation time elapsed in sampling from the posterior, and the acceptance rates across the transition steps j .

Fig. 3 illustrates a simple 2 Degrees-of-Freedom (DOF) coupled oscillator set-up consisting of 2 equal-sized blocks with equal mass m attached to primary springs with stiffness k and an inter-mass secondary spring with stiffness k_{12} . x_1 and x_2 denote the respective instantaneous displacement of the blocks. In this problem, the mass of the blocks are fixed at $m = 0.5$ kg. In addition,

Algorithm 3 Proposed TEMCMC sampler algorithm

```

1: procedure (Generate  $N$  samples from  $P(\theta|D, M)$ )
2:   Set  $j = 0$  and  $\beta_j = 0$  ▷ Initialize
3:   Draw  $N$  initial sample set:  $\theta_i \sim P(\theta|M)$ 
4:   Set  $a^{j+1} = 2$  ▷ Set initial value of step-size
5:   while  $\beta_j < 1$  do ▷ Main sampling loop
6:     Set  $j = j + 1$ 
7:     Compute  $\Delta\beta_j$  using Eq. (5)
8:     Compute  $P^j$  using Eq. (3)
9:     Resample  $N$  samples:  $\theta_i \sim \hat{w}_i^j$ 
10:    Set  $\theta_i = \theta_{i,1}$  in ensemble  $\hat{\theta}_1$  ▷ Initiate ensemble
11:    Update  $\hat{\theta}_1$  with 1 iteration of AIES (see Algorithm 2) ▷ MCMC step
12:    Set samples in ensemble  $\theta_2$  as samples of  $P^j$ 
13:    Compute  $u_{nom}$  using Eq. (21) ▷ Tuning the step-size
14:    if  $a_{nom} > 1$  then
15:      Set  $u^{j+1} = u_{nom}$ 
16:    else
17:      Set  $u^{j+1} = 1.01$ 
18:    end if
19:  end while
20:  Compute  $P(D|M)$  using Eq. (9)
21: end procedure

```

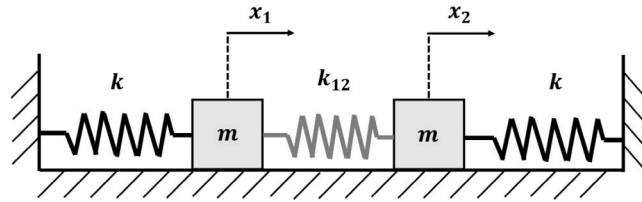


Fig. 3. Schematic diagram of the 2-DOF Coupled Oscillator system based on the set-up in [68].

it is assumed that both k and k_{12} take on fixed values, $\{k, k_{12}\} = \{0.6, 1.0\}$ N/m, but these values are not known (i.e. epistemic uncertainty). In order to infer k and k_{12} , measurements are obtained in the form of the eigenfrequencies $D = \{\omega_1, \omega_2\}$ whereby ω_1 and ω_2 are the 2 eigenfrequencies associated with the in-phase and out-of-phase mode shapes of the symmetric system respectively which can be easily computed as follows [68]:

$$\hat{\omega}_1 = \sqrt{\frac{k}{m}} \tag{22}$$

$$\hat{\omega}_2 = \sqrt{\frac{(k + 2 \cdot k_{12})}{m}} \tag{23}$$

The above equations constitute the model class $M = \{\hat{\omega}_1, \hat{\omega}_2\}$ to be updated. The frequency measurements of ω_1 and ω_2 are however corrupted with “noise” ϵ_1 and ϵ_2 respectively such that:

$$\omega_1 = \hat{\omega}_1 + \epsilon_1 \tag{24}$$

$$\omega_2 = \hat{\omega}_2 + \epsilon_2 \tag{25}$$

whereby ϵ_1 and ϵ_2 are the “noise” terms following a Normal distribution with means 0 Hz and standard deviations σ_1 and σ_2 respectively. Here, σ_1 and σ_2 are fixed values set at 10% of the nominal values of ω_1 and ω_2 respectively. This yields $\{\sigma_1, \sigma_2\} = \{0.110, 0.228\}$ Hz. For simplicity, it is assumed that the measurement “noise” ϵ_1 and ϵ_2 are not correlated and that the “noise” between individual measurements of ω_1 and ω_2 are also independent. In this problem, 15 independent realizations of ω_1 and ω_2 are obtained and these synthetic data are presented in the form of a scatterplot shown in Fig. 4 while the numerical values are presented in Table 1.

4.1.1. Bayesian model updating set-up

For this problem, the priors for k and k_{12} are set to be Uniform priors taking values between 0.01 N/m and 4.0 N/m. In addition, despite σ_1 and σ_2 being predetermined values, in reality, these 2 parameters are unknown and are also set as epistemic

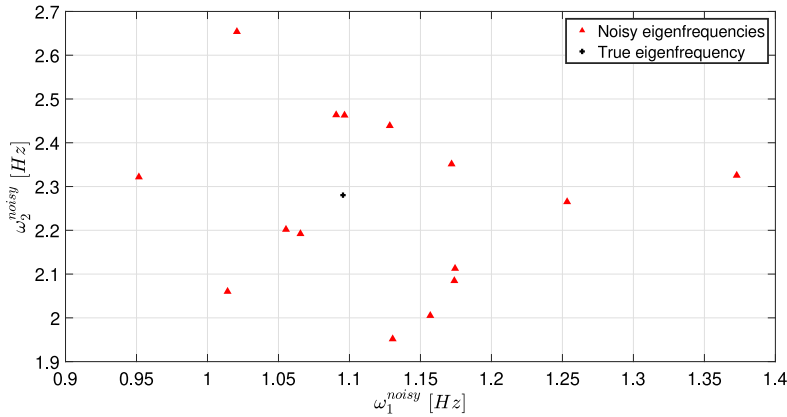


Fig. 4. Scatterplot of the 15 different “measured” values ω_1 and ω_2 .

Table 1
Numerical values of ω_1 and ω_2 shown in Fig. 4.

Measurement no.	ω_1 [Hz]	ω_2 [Hz]	Measurement no.	ω_1 [Hz]	ω_2 [Hz]
1	1.172	2.351	9	1.055	2.202
2	1.097	2.463	10	1.253	2.265
3	1.157	2.005	11	0.952	2.322
4	1.091	2.464	12	1.130	1.952
5	1.021	2.654	13	1.174	2.085
6	1.373	2.325	14	1.066	2.192
7	1.174	2.113	15	1.014	2.060
8	1.128	2.439	–	–	–

parameters to be inferred. The priors for σ_1 and σ_2 are also set to be Uniform priors taking values between 1.0×10^{-5} Hz and 1.0 Hz. Therefore, the total number of epistemic parameters to 4, thereby making this a 4-dimensional Bayesian model updating problem: $\theta = \{k, k_{12}, \sigma_1, \sigma_2\}$. It is assumed that the epistemic parameters are independent from one another. The likelihood function is modelled to follow a Normal distribution and assuming independence between individual observations, it is expressed as follows:

$$P(\mathbf{D}|\theta, M) = \prod_{n=1}^{15} \frac{1}{2 \cdot \pi \cdot \sigma_1 \cdot \sigma_2} \cdot \exp \left[-\frac{(\omega_{1,n} - \hat{\omega}_1)^2}{2 \cdot \sigma_1^2} - \frac{(\omega_{2,n} - \hat{\omega}_2)^2}{2 \cdot \sigma_2^2} \right] \tag{26}$$

4.1.2. Results

From the posterior $P(\theta|\mathbf{D}, M)$, 1000 samples are generated using the TMCMC sampler and the proposed TEMCMC sampler and the sampling time elapsed is of 48.60 s and 6.04 s respectively. Both samplers required 8 iterations. Fig. 5 shows the evolution of the statistics of β_j and of the acceptance rates across all iterations j for both TMCMC and TEMCMC samplers. From these plots, it can be seen that the evolution of β_j across all j are identical for both the TMCMC and TEMCMC samplers while the acceptance rates for the TMCMC sampler shows a higher degree of variation compared to that of the TEMCMC sampler. In addition, it can also be observed that out of 8 iterations, only 3 lie within the optimal limits of acceptance rate for the case of the TMCMC sampler and 7 for the case of the TEMCMC sampler. This highlights the effectiveness of the proposed adaptive tuning algorithm in moderating the step-size u in the TEMCMC sampler such that for majority of the iterations, the acceptance rates of the sampler is kept within the optimal range.

The resulting scatterplot matrix of the posterior samples is shown in Fig. 6 and from there, the numerical results of the estimates of the epistemic parameters by the respective samplers are obtained. These results are presented and summarized in Table 2. From these results, it is possible to conclude that the TEMCMC sampler is generally able to perform as well as the TMCMC sampler and does so with a relatively lower computational cost. This highlights the relative computational efficiency of the TEMCMC sampler.

Finally, the resulting scatterplot of the model output is compared against the scatterplot of the data for ω_1 and ω_2 . The results of the model updating for the case of the TMCMC sampler and the TEMCMC sampler are illustrated in Fig. 7. As seen from the figure, the resulting model outputs from the posterior samples obtained encompass the true solution of ω_1 and ω_2 for both the TMCMC and TEMCMC samplers. This highlights that the TEMCMC sampler works just as effectively as the TMCMC sampler as a tool in Bayesian model updating.

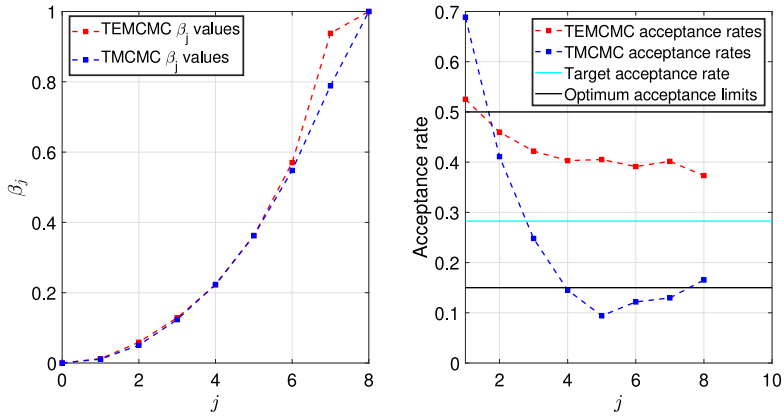


Fig. 5. The statistics of β_j and the acceptance rates across all iterations j . The target acceptance rate is 0.283.

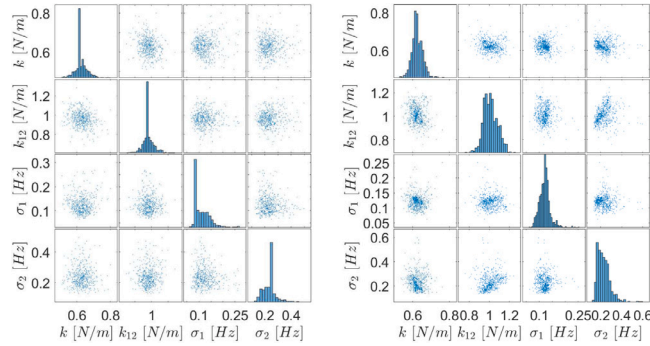


Fig. 6. Scatterplot matrix illustrating the resulting posterior of the epistemic parameters.

Table 2

A summary of the statistics of the estimation of the epistemic parameters $\theta = \{k, k_{12}, \sigma_1, \sigma_2\}$ via the posterior samples obtained using the TMCMC and TEMCMC samplers.

Parameter, θ	Reference value	TMCMC		TEMCMC	
		Mean, $E[\theta]$	COV [%]	Mean, $E[\theta]$	COV [%]
k	0.6 N/m	0.625 N/m	5.67	0.625 N/m	5.67
k_{12}	1.0 N/m	0.962 N/m	6.48	1.013 N/m	6.80
σ_1	0.110 Hz	0.114 Hz	28.29	0.121 Hz	17.25
σ_2	0.228 Hz	0.236 Hz	20.86	0.229 Hz	26.15

4.2. 2-D multi-modal posterior

The following set-up is based on the problem presented in [70] and the objective of this numerical example is to observe and compare the differences in the performance of the TMCMC sampler and the proposed TEMCMC sampler in generating samples from a multi-modal posterior. This comparison will be done on the basis of the sample distribution in relation to the analytical solution of the posterior, the computation time elapsed in sampling from the posterior, and the acceptance rates across the transition steps j .

In this study, a 2-dimensional posterior with 4 peaks, defined by the dimensionless variables x_1 and x_2 , is presented and illustrated in Fig. 8. The analytical function of this posterior is based upon the Himmelblau’s function which is a test-function used in mathematical optimization problems to test the performance of optimization algorithms. The Himmelblau’s function $H(x_1, x_2)$ is mathematically defined as [69]:

$$H(x_1, x_2) = (x_1^2 + x_2 - 11)^2 + (x_1 + x_2^2 - 7)^2 \tag{27}$$

which yields 1 solution of local maximum at $\{x_1, x_2\} = \{-0.271, -0.923\}$ and 4 distinct solutions of local minima at $\{x_1, x_2\} = \{3.0, 2.0\}, \{-2.805, 3.131\}, \{-3.779, -3.283\},$ and $\{3.584, -1.848\}$. From which, the posterior of interest is then defined as

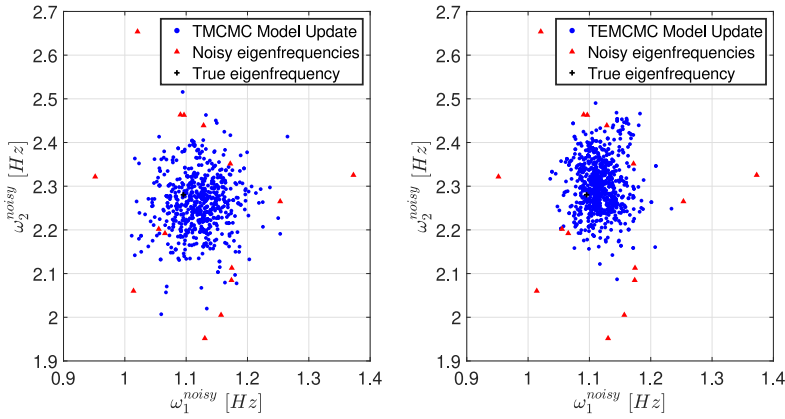


Fig. 7. Scatterplot matrix illustrating the resulting posterior of the epistemic parameters.

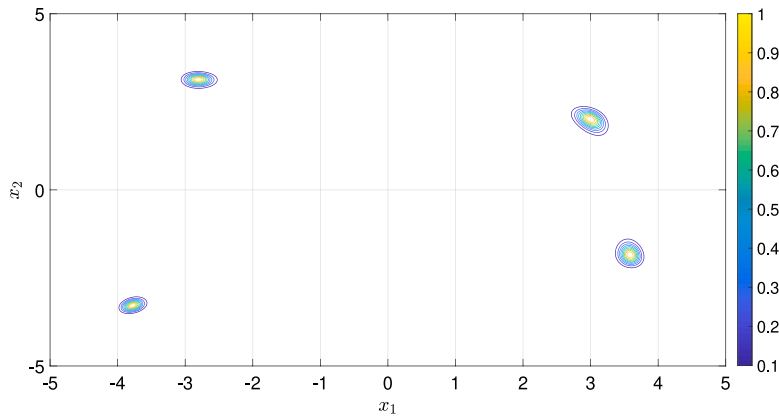


Fig. 8. Contour plot illustration of the 4-peaked posterior based on the Himmelblau's function [69]. The numbers on the colour chart represent the height of the posterior computed from Eq. (28).

follows [70]:

$$P(\theta|D, M) \propto \exp[-H(x_1, x_2)] \tag{28}$$

which ensures that the local minima of $H(x_1, x_2)$ now becomes the region of high probability giving rise to the 4 peaks.

4.2.1. Bayesian model updating set-up

For this problem, the epistemic parameters are x_1 and x_2 , thereby making this a 2-dimensional Bayesian model updating problem: $\theta = \{x_1, x_2\}$. The priors for x_1 and x_2 are set to be Uniform priors taking values between -5 and 5 and it is assumed that the epistemic parameters are independent from one another. The likelihood function is modelled as the exponential function of $-H(x_1, x_2)$ and thus takes on the same mathematical form as the posterior in Eq. (28).

4.2.2. Results

From the posterior $P(\theta|D, M)$, 1000 samples are generated using the TMCMC sampler and the proposed TEMCMC sampler and the sampling time elapsed is of 16.14 s and 4.96 s respectively. Both samplers required 5 iterations. Fig. 9 shows the evolution of the statistics of β_j and of the acceptance rates across all iterations j for both TMCMC and TEMCMC samplers. From these plots, it can be seen that the evolution of β_j across all j are identical for both the TMCMC and TEMCMC samplers while the acceptance rates for the TMCMC sampler shows a higher rate of decrease compared to that of the TEMCMC sampler, especially between $j = 1$ and $j = 2$. In addition, it can also be observed that out of 5 iterations, only 2 lie within the optimal limits of acceptance rate for the case of the TMCMC sampler and 3 for the case of the TEMCMC sampler. Furthermore, it can be seen that the acceptance rates for TEMCMC appears to tend towards the target acceptance rate value with increasing j while this is not the case for the TMCMC sampler. This indicates the effectiveness of the adaptive tuning algorithm for step-size u in the TEMCMC sampler in ensuring the majority of the iterations have acceptance rates within the optimal limits and that the tuning is done with reference to the target acceptance rate.

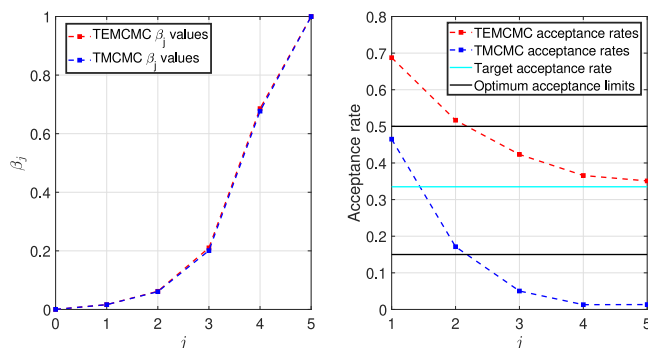


Fig. 9. The statistics of β_j and the acceptance rates across all iterations j . The target acceptance rate is 0.335.

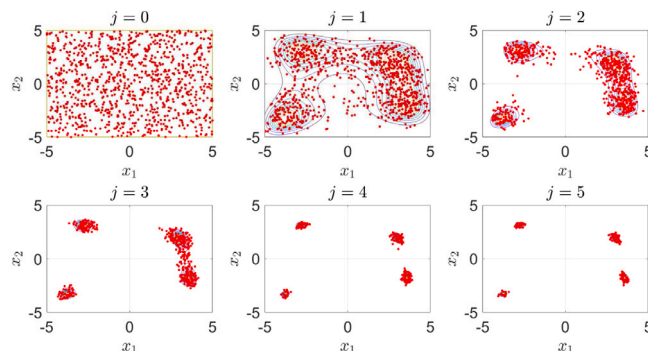


Fig. 10. Scatterplots obtained from the transitional distributions P^j between $j = 0$ and $j = 5$ via TCMCMC sampler. Each scatterplot is presented along with the contour plot profile of the analytical solution of P^j as comparison.

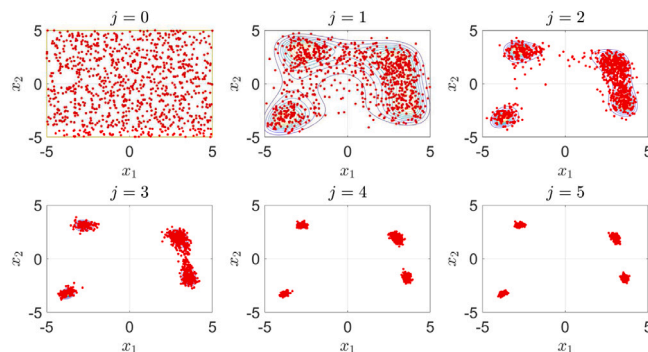


Fig. 11. Scatterplots obtained from the transitional distributions P^j between $j = 0$ and $j = 5$ via TEMCMC sampler. Each scatterplot is presented along with the contour plot profile of the analytical solution of P^j as comparison.

For the purpose of illustration, the scatterplots obtained from the transition distributions P^j between $j = 0$ and $j = 5$ via the TCMCMC and TEMCMC samplers are presented in Figs. 10 and 11 respectively. In both Figs. 10 and 11, the scatterplots obtained by TCMCMC and TEMCMC samplers are compared against the contour plot profile of the analytical solutions and it can be observed that in both figures, the scatterplot profiles match closely to the corresponding contour plot profile. This validates the effectiveness of both samplers in sampling from all P^j . Fig. 12 presents the scatterplot profile of the samples of the final posterior $P(\theta|D, M)$ in comparison with the contour plot profile of the analytical solution. While both samplers are able to sample effectively from the 4-peaked posterior, upon closer inspection, it can be observed that there is significantly less exploration of the sample space by the samples obtained via the TCMCMC sampler compared to the TEMCMC sampler. This is due to the TCMCMC sampler having a very low rate of acceptance in the latter iterations $j = 4$ and $j = 5$ where the acceptance rates are approximately 0.013 as seen in Fig. 9. This reduces the number of unique samples generated from the MCMC step of the TCMCMC algorithm leading to many repeated samples and a poor exploration of the sample space.

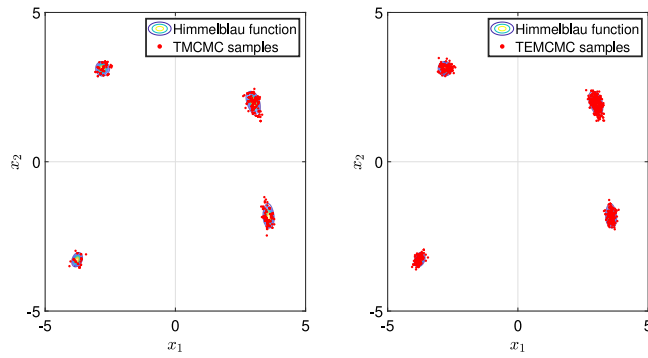


Fig. 12. Resulting scatterplots of the samples from the final posterior $P(\theta|D, M)$ obtained via TCMC (left) and TEMCMC (right) samplers along with the analytical contour plot profile as a comparison.

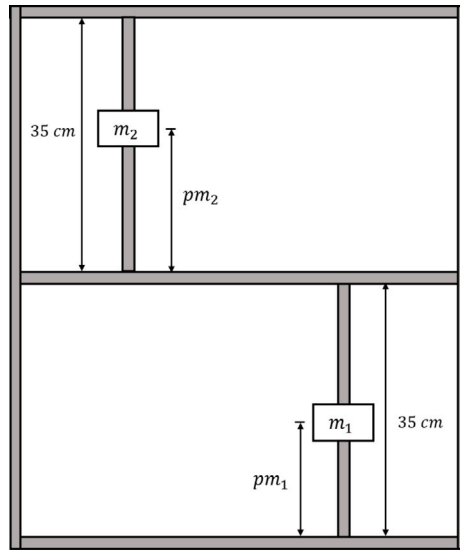


Fig. 13. Schematic diagram of the Aluminium Frame with moveable masses m_1 and m_2 [34,71,72].

5. Application: Aluminium frame problem

The following example is based on the Aluminium Frame problem presented in [34]. As per illustrated in Fig. 13, the structure consists of 7 beams (3 horizontal, 2 long vertical, and 2 short vertical) and 2 movable masses m_1 and m_2 with positions pm_1 and pm_2 respectively. The mass positions pm_1 and pm_2 are used to simulate structural damage.

Experimental data was collected and processed to determine for a given combination of $\{pm_1, pm_2\}$ the 6 natural frequencies corresponding to: ω_1 (1st in-plane bending mode); ω_2 (1st out-of-plane bending mode); ω_3 (1st torsional mode); ω_4 (2nd in-plane bending mode); ω_5 (2nd order out-of-plane bending mode); and ω_6 (2nd torsional modes). A total of 11 sets of experimental data are generated from 11 distinct combinations of $\{pm_1, pm_2\}$ and these are summarized in Table 3:


5.1. Bayesian model updating set-up

For this problem, an Artificial Neural Network (ANN) is used as a surrogate model M in place of the computationally-expensive Finite Element Model (FEM) of the structure to perform Bayesian model updating and infer $\{pm_1, pm_2\}$. The architecture of the ANN comprises of 3 layers: 1 input-layer with 2 nodes, 1 hidden-layer with 10 nodes, and 1 output-layer with 6 nodes. For the purpose of calibrating the ANN, 103 simulated values of $\{pm_1, pm_2\}$ and $\{\omega_1, \dots, \omega_6\}$ are obtained from the simulation database in [71]. The resulting 103 sets of simulated data are presented in the form of scatterplots as shown in Figs. 14(a) and 14(b). The calibration of the ANN was performed via the Feed-Forward Back-Propagation algorithm [73] with a sigmoidal activation function. Of the 103 sets of training data, 70% was used to train the ANN, 15% for validation, and 15% for testing [34]. The calibration procedure took 0.513 s and yielded an overall regression coefficient R^2 of 0.9997 which indicates that the existing ANN architecture is sufficiently robust. A regression plot of the calibrated ANN is provided in Fig. 15.


Table 3

A summary of the experimental data obtained from the hammer impact test. Data obtained from [71].

Exp.	$\{pm_1, pm_2\}$ [cm]	ω_1 [Hz]	ω_2 [Hz]	ω_3 [Hz]	ω_4 [Hz]	ω_5 [Hz]	ω_6 [Hz]
1	{5, 5}	20.11	22.79	47.52	63.96	183.82	283.51
2	{5, 20}	18.72	20.46	46.97	72.24	214.84	296.32
3	{5, 35}	17.715	18.29	46.42	63.45	196.38	278.70
4	{20, 5}	19.40	22.39	46.32	61.78	173.49	259.76
5	{20, 20}	17.91	20.28	45.67	64.73	190.84	284.09
6	{20, 35}	16.71	18.21	45.18	56.53	177.97	264.44
7	{35, 5}	17.71	21.76	44.00	59.48	164.05	254.48
8	{35, 20}	16.91	19.82	43.15	60.06	175.75	279.10
9	{35, 35}	15.95	17.89	42.44	50.66	163.55	257.82
10	{11, 11}	19.58	21.73	47.00	67.54	196.21	285.95
11	{29, 29}	16.65	18.85	43.93	55.43	174.35	284.84

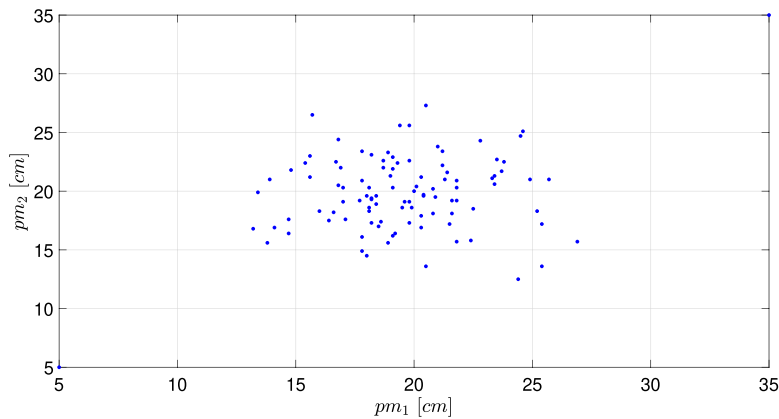

(a) Scatterplot of the 103 simulated values of $\{pm_1, pm_2\}$.

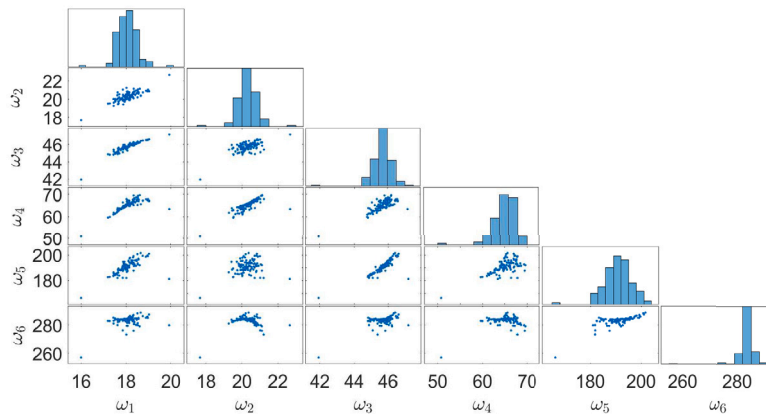

(b) Resulting scatterplot matrix of the response frequencies obtained from the FEM.

Fig. 14.

The Bayesian model updating set-up is as follows: The priors for pm_1 and pm_2 are set to be Uniform priors taking values between 5.0 cm and 35.0 cm. In addition, the measurement “noise” σ_v corresponding to the natural frequency ω_v (for $v = 1, \dots, 6$) are also set to as epistemic parameters to be inferred. The prior for each σ_v is also set as a Uniform prior taking values between 0.001 Hz and 100.0 Hz. This brings the total number of epistemic parameters to 8, thereby making this a 8-dimensional Bayesian model updating problem: $\theta = \{pm_1, pm_2, \sigma_1, \dots, \sigma_6\}$. It is assumed that the epistemic parameters are independent from one another.

In [34], 3 likelihood functions are presented and used to perform Bayesian model updating. Defining M_v being the model output for ω_v , details to each of these likelihood functions are summarized in Table 4.

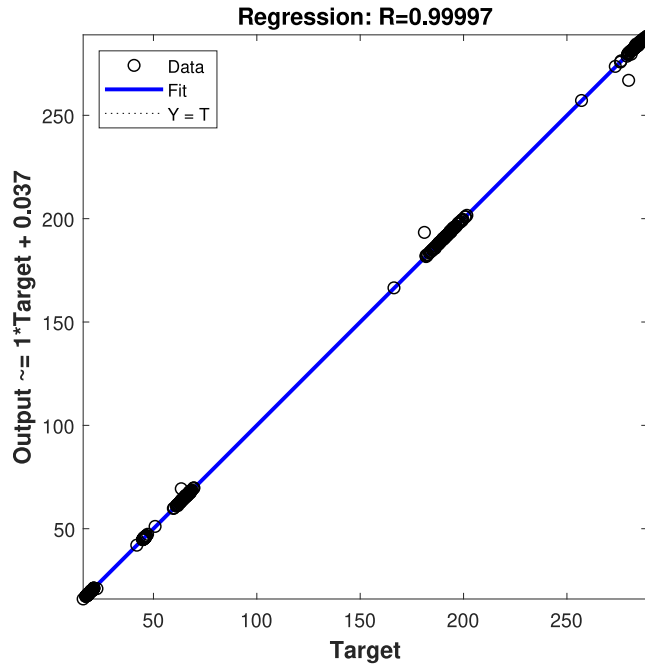


Fig. 15. Regression plot of the calibrated ANN.

Table 4

The likelihood functions employed in [34] for Bayesian inference of pm_1 and pm_2 .

Symbol	Type	Likelihood function, $P(D \theta, M)$
f_1	Normal distribution	$\prod_{v=1}^6 \frac{1}{\sigma_v \cdot \sqrt{2\pi}} \cdot \exp \left[-\frac{(\omega_v - M_v)^2}{2 \cdot \sigma_v^2} \right]$
f_2	Inverse squared error	$\prod_{v=1}^6 1 - \exp \left[-\frac{1}{(\omega_v - M_v)^2} \right]$
f_3	Inverse error	$\prod_{v=1}^6 1 - \exp \left[-\sqrt{\frac{1}{(\omega_v - M_v)^2}} \right]$

Table 5

The different forms of combined likelihood functions.

Symbol	Type	Combined likelihood function	Reference(s)
L_1	Weighted addition	$\frac{1}{3} \sum_{l=1}^3 f_l$	[74,75]
L_2	Bayes' multiplication	$\prod_{l=1}^3 f_l$	[74,76–78]
L_3	Aggregated function	$\sqrt{\frac{1}{3} \sum_{l=1}^3 f_l^2}$	[74,79]

As shown in Table 4, likelihoods f_2 and f_3 are independent of σ_v . To ensure that the uncertainty of σ_v is accounted for, and that the influence of all the likelihood functions are also captured in the Bayesian model updating procedure, an approach would be to combine all 3 likelihoods. There are 3 ways to do so, under the assumption that likelihoods f_1 , f_2 , and f_3 have all equal influence, and the resulting combined likelihood functions with relevant references are provided in Table 5.

Due to the uncertainty associated with the appropriate choice of combined likelihood function, the Robust Bayesian (RB) framework [80,81] is adopted here. Using this framework, 3 distinct posteriors are derived by combining the prior with each of the combined likelihoods. Let the m th posterior $P_m(\theta|D, M)$ be defined as the product of the prior and combined likelihood L_m (for $m = 1, \dots, 3$). From there, a P-box [82,83] can be constructed from the Empirical Cumulative Distribution Function (ECDF) of the posteriors where the 95% Credible Interval (CI) for pm_1 and pm_2 are obtained. Such analysis is performed for all 11 sets of experiments from the data presented in Table 3.

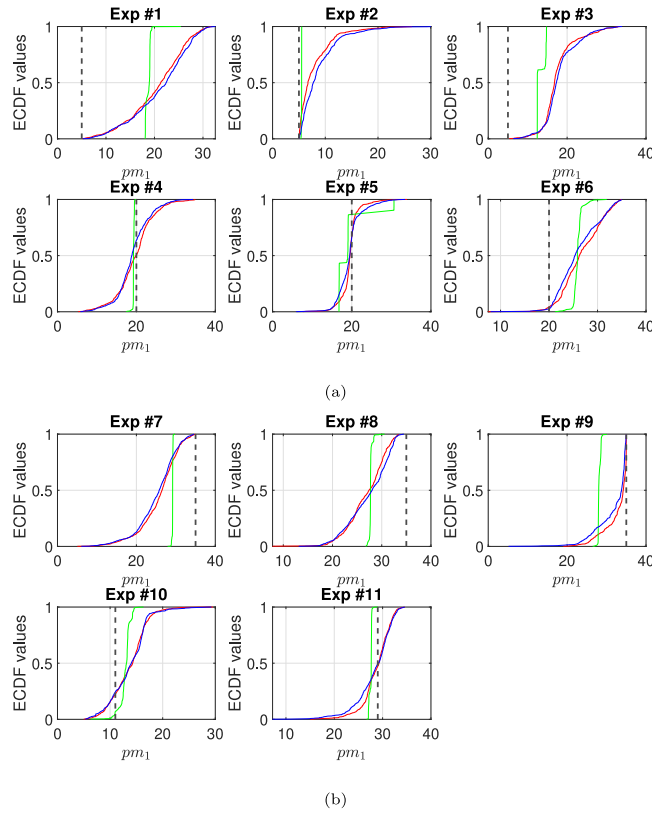


Fig. 16. P-boxes for pm_2 for the respective experiments constructed from the ECDFs of $P_1(\theta|D, M)$ (red), $P_2(\theta|D, M)$ (green), and $P_3(\theta|D, M)$ (blue). The black dotted vertical line denotes the true value.

Table 6
Results of the 95% CI obtained from the P-boxes for pm_1 and pm_2 for each experiment.

Exp.	True value pm_1 [cm]	95% CI pm_1 [cm]	True value pm_2 [cm]	95% CI pm_2 [cm]
1	5	[7.56, 30.23]	5	[5.65, 32.04]
2	5	[5.07, 19.03]	20	[10.26, 31.22]
3	5	[9.83, 29.34]	35	[10.70, 32.45]
4	20	[9.13, 28.83]	5	[5.06, 30.59]
5	20	[14.68, 30.67]	20	[15.16, 29.58]
6	20	[19.38, 34.01]	35	[6.02, 34.51]
7	35	[12.86, 33.69]	5	[5.55, 34.14]
8	35	[18.53, 32.92]	20	[9.51, 32.35]
9	35	[22.71, 34.99]	35	[8.07, 34.97]
10	11	[6.54, 20.87]	11	[5.31, 27.97]
11	29	[18.28, 33.18]	29	[18.78, 33.66]

5.2. Results

From $P_m(\theta|D, M)$, 1000 samples are generated using the TEMCMC sampler. The P-boxes obtained for each experiment are presented in Fig. 16 for the case of pm_1 , and Fig. 17 for the case of pm_2 . The numerical results of the 95% CI obtained from the P-boxes for pm_1 and pm_2 for each experiment are summarized in Table 6. As shown in Table 6, the 95% CI obtained for pm_1 generally encompasses the true value for most experiments with the exception of experiments where the true values of pm_1 are 5 cm and 35 cm. This is also observed for the case of the 95% CI obtained for pm_2 . A key reason for this is the poor performance of the ANN in regions of the sample space close to these values. To substantiate this, it can be observed from Fig. 14(a) that most of the input samples used to train the ANN are situated in the interval [15, 25] cm in both pm_1 and pm_2 coordinates and are sparsely distributed outside this region. In addition, it can also be seen from Fig. 15 that the data is not evenly distributed along the regression plot which implies that the ANN does not mimic the general behaviour displayed by the FE model in regions where training data is not obtained. This has been highlighted in [34].

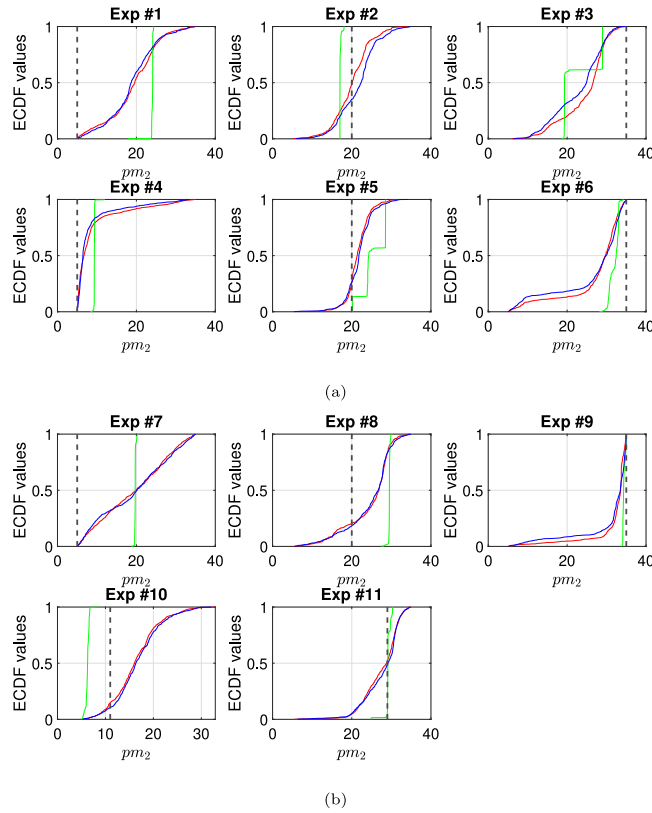


Fig. 17. P-boxes for pm_1 , for the respective experiments constructed from the ECDFs of $P_1(\theta|D, M)$ (red), $P_2(\theta|D, M)$ (green), and $P_3(\theta|D, M)$ (blue). The black dotted vertical line denotes the true value.

Table 7

Summary of the sampling time elapsed, number of iterations, and range of acceptance rates across iterations by the TEMCMC sampler for the respective posteriors in each experiment.

Exp.	$P_1(\theta D, M)$			$P_2(\theta D, M)$			$P_3(\theta D, M)$		
	Time [s]	Iterations	Acceptance	Time [s]	Iterations	Acceptance	Time [s]	Iterations	Acceptance
1	124.88	2	[0.452, 0.478]	687.63	11	[0.332, 0.474]	126.99	2	[0.438, 0.497]
2	178.40	3	[0.421, 0.503]	758.29	12	[0.342, 0.477]	172.20	3	[0.426, 0.488]
3	127.22	2	[0.441, 0.498]	634.53	10	[0.353, 0.491]	123.09	2	[0.450, 0.488]
4	177.76	3	[0.429, 0.490]	526.76	8	[0.374, 0.545]	169.55	3	[0.439, 0.494]
5	181.36	3	[0.425, 0.496]	641.87	10	[0.319, 0.476]	177.73	3	[0.424, 0.498]
6	123.92	2	[0.454, 0.500]	758.80	11	[0.344, 0.489]	119.62	2	[0.435, 0.490]
7	144.16	2	[0.456, 0.506]	757.30	10	[0.358, 0.473]	126.88	2	[0.452, 0.494]
8	129.26	2	[0.431, 0.500]	669.17	12	[0.376, 0.494]	121.28	2	[0.433, 0.511]
9	242.37	4	[0.414, 0.488]	665.24	9	[0.360, 0.476]	179.12	3	[0.419, 0.493]
10	206.06	3	[0.431, 0.497]	728.62	11	[0.352, 0.486]	169.32	3	[0.435, 0.494]
11	168.19	3	[0.436, 0.506]	650.88	11	[0.369, 0.494]	168.41	3	[0.429, 0.488]

The resulting sampling time elapsed, number of iterations, and range of acceptance rates across iterations are summarized in Table 7. As seen from the table, the acceptance rate interval by the TEMCMC sampler generally encompasses the optimal range of values for all experiments and choice of combined likelihood functions. This highlights the robustness of the proposed adaptive tuning algorithm in moderating the acceptance rates of the sampler. In addition, it can also be seen that the number of iterations required by the TEMCMC sampler to generate samples from $P_2(\theta|D, M)$ is the highest while a similar number of iterations was required for $P_1(\theta|D, M)$ and $P_3(\theta|D, M)$.

To further investigate this, the influence of the individual likelihoods within $L_1, L_2,$ and L_3 . For each L_m , the samples θ_i from $P_m(\theta|D, M)$ in a given experiment are used to compute the likelihood values of $f_1, f_2,$ and f_3 . These likelihood values are normalized

Table 8
Statistics of f_1 , f_2 , and f_3 for combined likelihood L_1 .

Exp.	f_1		f_2		f_3	
	Mean Γ_{f_1}	COV [%]	Mean Γ_{f_2}	COV [%]	Mean Γ_{f_3}	COV [%]
1	4.84×10^{-53}	3.13×10^3	0.979	2.18	0.021	100.42
2	1.38×10^{-51}	2.92×10^3	0.943	4.87	0.058	79.87
3	5.30×10^{-52}	2.75×10^3	0.931	6.08	0.069	82.07
4	4.21×10^{-53}	1.88×10^3	0.975	2.24	0.026	85.83
5	2.47×10^{-46}	2.12×10^3	0.583	29.18	0.417	40.83
6	2.03×10^{-51}	2.47×10^3	0.954	3.65	0.046	76.39
7	2.23×10^{-52}	2.19×10^3	0.999	0.07	0.001	69.49
8	2.55×10^{-52}	1.66×10^3	0.904	8.54	0.096	80.60
9	3.62×10^{-48}	2.81×10^3	0.920	11.07	0.080	126.97
10	2.13×10^{-52}	2.81×10^3	0.810	18.89	0.189	80.97
11	5.58×10^{-54}	2.20×10^3	0.931	3.16	0.069	42.54

Table 9
Statistics of f_1 , f_2 , and f_3 for combined likelihood L_2 .

Exp.	f_1		f_2		f_3	
	Mean Γ_{f_1}	COV [%]	Mean Γ_{f_2}	COV [%]	Mean Γ_{f_3}	COV [%]
1	1.95×10^{-23}	3.15×10^3	0.985	0.30	0.015	19.34
2	1.74×10^{-22}	9.26×10^2	0.920	0.84	0.080	9.63
3	1.57×10^{-30}	3.33×10^2	0.968	3.84	0.032	116.57
4	6.01×10^{-37}	1.53×10^3	0.996	0.03	0.004	6.24
5	2.54×10^{-25}	6.35×10^2	0.690	30.60	0.311	67.96
6	1.90×10^{-13}	3.11×10^3	0.960	1.53	0.041	36.08
7	9.12×10^{-30}	3.04×10^2	0.999	0.002	0.001	1.40
8	3.06×10^{-24}	1.20×10^3	0.879	2.51	0.121	18.30
9	2.04×10^{-28}	7.93×10^2	0.994	0.10	0.006	17.43
10	1.68×10^{-10}	1.99×10^3	0.995	0.17	0.005	35.95
11	1.44×10^{-20}	2.93×10^3	0.933	1.63	0.067	22.69

to obtain the relative influence of f_l , denoted by Γ_{f_l} :

$$\Gamma_{f_l} = \frac{f_l}{\sum_{l=1}^3 f_l} \tag{29}$$

From there, the mean and COV of Γ_{f_l} is computed. This procedure is repeated for all experiments. The statistics of Γ_{f_l} for L_1 , L_2 , and L_3 across all experiments are presented in Tables 8, 9, and 10 respectively.

From Tables 8 to 10, it can be observed that the value of Γ_{f_2} is consistently the highest across all experiments. Given that the analytical forms of L_1 and L_3 involve taking the sum of the individual and the square of each likelihood respectively, the overall likelihood values for L_1 and L_3 would therefore be dominated by the value of f_2 . On the other hand, Γ_{f_1} is consistently the smallest (i.e. close to 0) across all experiments within all 3 combined likelihood functions. Because the analytical form of L_2 is essentially a direct product of all 3 likelihood functions, the value of f_1 would cause the value of L_2 to be significantly smaller compared to L_1 and L_3 . As a result, the value of $\Delta\beta_j$ computed by the TEMCMC algorithm will be smaller for the case of L_2 , therefore, requiring a larger number of iterations for obtaining the posterior $P_2(\theta|D, M)$. Similarly, when L_1 and L_3 take higher values, the value of $\Delta\beta_j$ computed by the TEMCMC algorithm is larger, resulting in less iterations.

6. Conclusions

An efficient and robust sampler named Transitional Ensemble Markov Chain Monte Carlo has been proposed for Bayesian inference. The proposed sampler uses an affine-invariant ensemble sampler in place of the traditional Metropolis–Hasting sampler and includes an adaptive tuning algorithm making the approach “tune-free” for users. The proposed sampler outperforms the current samplers available in sampling from highly-skewed, anisotropic distributions [32,66] such as the transition distributions by exploiting the advantages of the Transitional Markov Chain Monte Carlo. The absence of a proposal distribution reduces the number of parameters to tune adaptively, thereby reducing the computational cost and eradicating the model uncertainty in considering the choice of the distribution model.

To illustrate the efficiency and effectiveness of the proposed Transitional Ensemble Markov Chain Monte Carlo sampler, two numerical examples and one experimental example have been presented showing the applicability of the approach for performing Bayesian model updating also in the presence of a complex a multi-modal posterior. In all the examples investigated, the Transitional Ensemble Markov Chain Monte Carlo sampler outperforms the traditional sampler by requiring a shorter time whilst ensuring that the acceptance rates are well-moderated within optimal bounds. Furthermore, through the experimental example,

Table 10
Statistics of f_1 , f_2 , and f_3 for combined likelihood L_3 .

Exp.	f_1		f_2		f_3	
	Mean Γ_{f_1}	COV [%]	Mean Γ_{f_2}	COV [%]	Mean Γ_{f_3}	COV [%]
1	5.51×10^{-52}	2.64×10^3	0.978	2.34	0.022	102.67
2	6.91×10^{-54}	2.55×10^3	0.945	5.09	0.055	87.13
3	4.60×10^{-48}	2.23×10^3	0.944	5.45	0.056	91.15
4	5.41×10^{-47}	3.12×10^3	0.973	1.98	0.027	72.24
5	1.24×10^{-49}	2.33×10^3	0.638	28.78	0.362	50.77
6	2.97×10^{-55}	2.44×10^3	0.954	3.56	0.046	73.20
7	2.37×10^{-55}	2.77×10^3	0.999	0.07	0.001	65.54
8	7.54×10^{-51}	3.03×10^3	0.914	8.19	0.086	87.34
9	1.05×10^{-51}	3.16×10^3	0.952	7.41	0.048	146.69
10	1.46×10^{-53}	1.94×10^3	0.802	18.77	0.198	76.19
11	4.42×10^{-54}	2.23×10^3	0.932	3.33	0.068	45.83

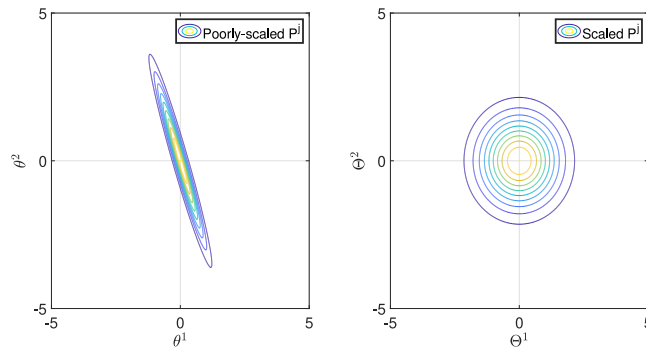


Fig. 18. Contour plots illustrating the skewed P^j defined by Eq. (30) (left) and the scaled, isotropic P^j in the affine-transformed space defined by Eq. (32) (right).

we have also demonstrated the robustness of the proposed sampler in performing Bayesian inference using measurements obtained under realistic settings. This highlights the applicability of the Transitional Ensemble Markov Chain Monte Carlo in addressing real-world engineering problems.

In summary, the results from the examples presented in this paper highlight the following key strengths of the proposed Transitional Ensemble Markov Chain Monte Carlo sampler: (1) it allows for the sampling of badly-scaled and highly-anisotropic distributions without requiring extra computational costs; (2) it is free from tuning by the user; and (3) it is more robust than the Transitional Markov Chain Monte Carlo in controlling the acceptance rates automatically. One significant drawback of this sampler, however, is the relative complexity in coding the Transitional Ensemble Markov Chain Monte Carlo algorithm from scratch compared to the standard Transitional Markov Chain Monte Carlo. To address this issue, access to the MATLAB code is provided on GitHub: https://github.com/Adolphus8/Transitional_Ensemble_MCMC.git

CRedit authorship contribution statement

Adolphus Lye: Methodology, Conceptualization, Investigation, Software, Writing – original draft. **Alice Cicirello:** Supervision, Conceptualization, Writing – reviewing and editing. **Edoardo Patelli:** Supervision, Conceptualization, Writing – reviewing and editing, Project administration.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgment

This work has been funded by the Singapore Nuclear Research and Safety Initiatives (SNRSI).

Table 11
Parameter settings implemented for the respective samplers in sampling from $P^j(\theta)$ and $P^{jj}(\Theta)$ respectively. I denotes the identity matrix.

Tuning-parameter	Case: $P^j(\theta)$	Case: $P^{jj}(\Theta)$
Step-size, u (AIES)	8.0	8.0
Covariance matrix, Σ (MH)	$0.5 \cdot I$	$5 \cdot I$

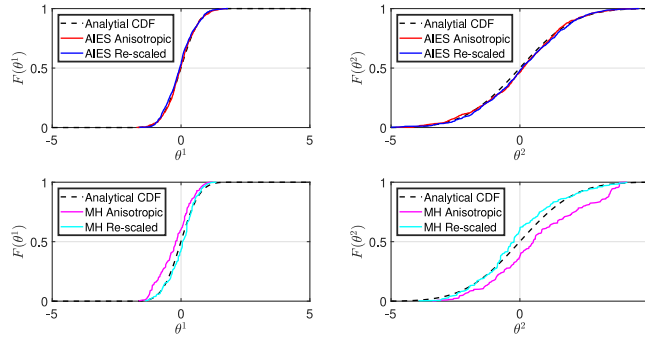


Fig. 19. ECDFs of θ^1 and θ^2 obtained directly from $P^j(\theta)$ and those re-scaled from $P^{jj}(\Theta)$ when using MH and AIES.

Table 12
Results of the area enclosed by the ECDF obtained directly from $P^j(\theta)$ and that re-scaled from $P^{jj}(\Theta)$ for the respective samplers.

	AIES	MH
θ^1	0.049	0.265
θ^2	0.089	0.813

Appendix

In this illustrative example, a skewed “transition” distribution defined in a $2D$ sample space $\theta = \{\theta^1, \theta^2\}$ is presented in Fig. 18 with the following mathematical expression:

$$P^j(\theta) \propto \left\{ \exp \left[-\frac{(3 \cdot \theta^1 + \theta^2)^2}{0.08} - \frac{(\theta^1 - \theta^2)^2}{2} \right] \right\}^{\beta_j} \tag{30}$$

where $\beta_j = 0.2$. To simplify the distribution such that it becomes easier to generate samples from, one could re-scale the problem via the following affine-transformation:

$$\begin{bmatrix} \theta^1 \\ \theta^2 \end{bmatrix} = \begin{bmatrix} 15 \cdot \sqrt{\beta_j} & 5 \cdot \sqrt{\beta_j} \\ \sqrt{\beta_j} & -\sqrt{\beta_j} \end{bmatrix} \begin{bmatrix} \theta^1 \\ \theta^2 \end{bmatrix} \tag{31}$$

This yields a relatively simpler isotropic distribution $P^{jj}(\Theta)$:

$$P^{jj}(\Theta) \propto \exp \left[-\frac{(\Theta^1)^2}{2} - \frac{(\Theta^2)^2}{2} \right] \tag{32}$$

From both $P^j(\theta)$ and $P^{jj}(\Theta)$, 1000 samples are obtained across 4 chains (i.e. 250 samples per chain) using AIES and MH samplers. The tuning-parameter settings for the respective samplers are presented in Table 11 which ensures that the acceptance rates for both samples are as close to 0.234 as possible [46]. Following which, the samples in the Θ -space obtained by the respective samplers would be re-scaled to the θ -space via the inverse of Eq. (31). This yields the results illustrated in Fig. 19 where it can be seen that the ECDF obtained directly from $P^j(\theta)$ and that re-scaled from $P^{jj}(\Theta)$ are in very good agreement. This is quantified by the area enclosed by both ECDFs where it can be seen from Table 12 that this area is small (i.e. close to 0) compared to that for the case of the MH sampler. In addition, it can also be observed from Fig. 19 that the profile of the ECDF obtained directly from $P^j(\theta)$ by MH sampler (i.e. in purple) deviates significantly from that of the analytical CDF of θ^1 and θ^2 . In the case of the AIES, such deviation is less significant in both dimensions. These results highlight not only the capability of the AIES in sampling directly from a skewed distribution without the need to re-scale such distribution under an affine-transformation, but also its affine-invariant property which allows it to sample from such distribution as effectively as it would from a scaled isotropic distribution. These characteristics are not exhibited by the MH sampler.

References

- [1] J.L. Beck, L.S. Katafygiotis, Updating models and their uncertainties. I: Bayesian statistical framework, *J. Eng. Mech.* 124 (1998) 455–461, [http://dx.doi.org/10.1061/\(asce\)0733-9399\(1998\)124:4\(455\)](http://dx.doi.org/10.1061/(asce)0733-9399(1998)124:4(455)).
- [2] L.S. Katafygiotis, J.L. Beck, Updating models and their uncertainties. II: Model identifiability, *J. Eng. Mech.* 124 (1998) 463–467, [http://dx.doi.org/10.1061/\(asce\)0733-9399\(1998\)124:4\(463\)](http://dx.doi.org/10.1061/(asce)0733-9399(1998)124:4(463)).
- [3] H. Wan, W. Ren, Stochastic model updating utilizing Bayesian approach and Gaussian process model, *Mech. Syst. Signal Process.* 70–71 (2016) 245–268, <http://dx.doi.org/10.1016/j.ymsp.2015.08.011>.
- [4] R. Astroza, N. Barrientos, Y. Li, E.I. Flores, Z. Liu, Bayesian updating of complex nonlinear FE models with high-dimensional parameter space using heterogeneous measurements and a batch-recursive approach, *Eng. Struct.* 201 (2019) <http://dx.doi.org/10.1016/j.engstruct.2019.109724>.
- [5] I. Behmanesh, B. Moaveni, Probabilistic identification of simulated damage on the dowling hall footbridge through Bayesian finite element model updating, *Struct. Control Health Monit.* 22 (2014) 463–483, <http://dx.doi.org/10.1002/stc.1684>.
- [6] Y. Ni, Y. Wang, C. Zhang, A Bayesian approach for condition assessment and damage alarm of bridge expansion joints using long-term structural health monitoring data, *Eng. Struct.* 212 (2020) <http://dx.doi.org/10.1016/j.engstruct.2020.110520>.
- [7] S. Mishra, O.A. Vanli, B.P. Alduse, S. Jung, Hurricane loss estimation in wood-frame buildings using Bayesian model updating: Assessing uncertainty in fragility and reliability analyses, *Eng. Struct.* 135 (2017) 81–94, <http://dx.doi.org/10.1016/j.engstruct.2016.12.063>.
- [8] Y. Xin, H. Hao, J. Li, Z. Wang, H. Wan, W. Ren, Bayesian based nonlinear model updating using instantaneous characteristics of structural dynamic responses, *Eng. Struct.* 183 (2019) 459–474, <http://dx.doi.org/10.1016/j.engstruct.2019.01.043>.
- [9] H. Lam, J. Hu, J. Yang, Bayesian operational modal analysis and Markov chain Monte Carlo-based model updating of a factory building, *Eng. Struct.* 132 (2017) 314–336, <http://dx.doi.org/10.1016/j.engstruct.2016.11.048>.
- [10] L. Terimonti, I. Venanzi, N. Cavalagli, F. Comodini, F. Ubertini, An innovative continuous Bayesian model updating method for base-isolated RC buildings using vibration monitoring data, *Mech. Syst. Signal Process.* 139 (2020) <http://dx.doi.org/10.1016/j.ymsp.2019.106600>.
- [11] M. Song, B. Moaveni, C. Papadimitriou, A. Stavridis, Accounting for amplitude of excitation in model updating through a hierarchical Bayesian approach: Application to a two-story reinforced concrete building, *Mech. Syst. Signal Process.* 123 (2019) 68–83, <http://dx.doi.org/10.1016/j.ymsp.2018.12.049>.
- [12] B. Goller, M. Broggi, A. Calvi, G.I. Schuëller, A stochastic model updating technique for complex aerospace structures, *Finite Elem. Anal. Des.* 47 (2011) 739–752, <http://dx.doi.org/10.1016/j.finel.2011.02.005>.
- [13] J. Sun, J. Ellerbroek, J.M. Hoekstra, Aircraft initial mass estimation using Bayesian inference method, *Transp. Res. C* 90 (2018) 59–73, <http://dx.doi.org/10.1016/j.trc.2018.02.022>.
- [14] E. Patelli, Y. Govers, M. Broggi, H.M. Gomes, M. Link, J.E. Mottershead, Sensitivity or Bayesian model updating: A comparison of techniques using the DLR-AIRMOD test data, *Arch. Appl. Mech.* 87 (2017) 905–925, <http://dx.doi.org/10.1007/s00419-017-1233-1>.
- [15] A. Lye, A. Cicirello, E. Patelli, Sampling methods for solving Bayesian model updating problems: A tutorial, *Mech. Syst. Signal Process.* 159 (2021) 107760, <http://dx.doi.org/10.1016/j.ymsp.2021.107760>.
- [16] M. Pharr, W. Jakob, G. Humphreys, Monte Carlo integration, in: *Physically Based Rendering*, 2017, pp. 747–802, <http://dx.doi.org/10.1016/b978-0-12-800645-0.50013-0>.
- [17] J.Y. Ching, Y.C. Chen, Transitional Markov chain Monte Carlo method for Bayesian model updating, model class selection, and model averaging, *J. Eng. Mech.* 133 (2007) [http://dx.doi.org/10.1061/\(ASCE\)0733-9399\(2007\)133:7\(816\)](http://dx.doi.org/10.1061/(ASCE)0733-9399(2007)133:7(816)).
- [18] J.Y. Ching, J.S. Wang, Application of the transitional Markov chain Monte Carlo algorithm to probabilistic site characterization, *Eng. Geol.* 203 (2016) 151–167, <http://dx.doi.org/10.1016/j.enggeo.2015.10.015>.
- [19] G.A. Ortiz, D.A. Alvarez, D. Bedoya-Ruiz, Identification of Bouc–Wen type models using the transitional Markov chain Monte Carlo method, *Comput. Struct.* 146 (2015) 252–269, <http://dx.doi.org/10.1016/j.compstruc.2014.10.012>.
- [20] Y. Zhou, A.D. Popolo, Z. Chang, On the absence of a universal surface density, and a maximum Newtonian acceleration in dark matter haloes: Consequences for MOND, *Phys. Dark Universe* 28 (2020) <http://dx.doi.org/10.1016/j.dark.2020.100468>.
- [21] J. Wang, L. Katafygiotis, Reliability-based optimal design of linear structures subjected to stochastic excitations, *Struct. Saf.* 47 (2014) 29–38, <http://dx.doi.org/10.1016/j.strusafe.2013.11.002>.
- [22] E. Patelli, M. Broggi, Y. Govers, J.E. Mottershead, Model updating strategy of the DLR-AIRMOD test structure, *Procedia Eng.* 199 (2017) 978–983, <http://dx.doi.org/10.1016/j.proeng.2017.09.221>.
- [23] E. Simeon, G.D. Roeck, G. Lombaert, Dealing with uncertainty in model updating for damage assessment: A review, *Mech. Syst. Signal Process.* 56–57 (2015) 123–149, <http://dx.doi.org/10.1016/j.ymsp.2014.11.001>.
- [24] S. Sehgal, H. Kumar, Structural dynamic model updating techniques: A state of the art review, *Arch. Comput. Methods Eng.* 23 (2015) 515–533, <http://dx.doi.org/10.1007/s11831-015-9150-3>.
- [25] K. Yuen, Recent developments of Bayesian model class selection and applications in civil engineering, *Struct. Saf.* 32 (2010) 338–346, <http://dx.doi.org/10.1016/j.strusafe.2010.03.011>.
- [26] S. He, C. Ng, Guided wave-based identification of multiple cracks in beams using a Bayesian approach, *Mech. Syst. Signal Process.* 84 (2017) 324–345, <http://dx.doi.org/10.1016/j.ymsp.2016.07.013>.
- [27] W.H. Zhou, F. Tan, K.V. Yuen, Model updating and uncertainty analysis for creep behavior of soft soil, *Comput. Geotech.* 100 (2018) 135–143, <http://dx.doi.org/10.1016/j.compgeo.2018.04.006>.
- [28] P. Peralta, R.O. Ruiz, A.A. Taflanidis, Bayesian identification of electromechanical properties in piezoelectric energy harvesters, *Mech. Syst. Signal Process.* 141 (2020) <http://dx.doi.org/10.1016/j.ymsp.2019.106506>.
- [29] H. Jensen, D. Jerez, A stochastic framework for hydraulic performance assessment of complex water distribution networks: Application to connectivity detection problems, *Probab. Eng. Mech.* 60 (2020) <http://dx.doi.org/10.1016/j.probenmech.2020.103029>.
- [30] W. Betz, I. Papaioannou, D. Straub, Transitional Markov chain Monte Carlo: Observations and improvements, *J. Eng. Mech.* 142 (2016) [http://dx.doi.org/10.1061/\(asce\)em.1943-7889.0001066](http://dx.doi.org/10.1061/(asce)em.1943-7889.0001066).
- [31] G.O. Roberts, A. Gelman, W.R. Gilks, Weak convergence and optimal scaling of random walk Metropolis algorithms, *Ann. Appl. Probab.* 7 (1997) 110–120, <http://dx.doi.org/10.1214/aop/1034625254>.
- [32] J. Goodman, J. Weare, Ensemble samplers with affine invariance, *Commun. Appl. Math. Comput. Sci.* 5 (2010) 65–80, <http://dx.doi.org/10.2140/camcos.2010.5.65>.
- [33] D. Foreman-Mackey, D.W. Hogg, D. Lang, J. Goodman, Emcee: The MCMC hammer, *Publ. Astron. Soc. Pac.* 125 (2013) 306–312, <http://dx.doi.org/10.1086/670067>.
- [34] R. Rocchetta, M. Broggi, Q. Huchet, E. Patelli, On-line Bayesian model updating for structural health monitoring, *Mech. Syst. Signal Process.* 103 (2018) 174–195, <http://dx.doi.org/10.1016/j.ymsp.2017.10.015>.
- [35] K.V. Yuen, *Bayesian Methods for Structural Dynamics and Civil Engineering*, John Wiley and Sons Asia, Singapore, ISBN: 978-0470824559, 2010.
- [36] T. Bayes, L. Price, An Essay towards Solving a problem in the Doctrine of Chances. By the late Rev. Mr. Bayes, F. R. S. communicated by Mr. Price, in a letter to John Canton, A.M.F.R.S., *Philos. Trans. R. Soc. Lond.* 53 (1763) 370–418, <http://dx.doi.org/10.1098/rstl.1763.0053>.
- [37] C.P. Robert, G. Casella, *Monte Carlo Statistical Methods*, second ed., Springer Science and Business Media, ISBN: 978-1475741452, 2013.

- [38] A. Gelman, J.B. Carlin, H.S. Stern, D.B. Dunson, A. Vehtari, D.B. Rubin, *Bayesian data analysis*, third ed., CRC Press, ISBN: 978-1439898208, 2013.
- [39] W.K. Hastings, Monte Carlo sampling methods using Markov chains and their applications, *Biometrika* 57 (1970) 97–109, <http://dx.doi.org/10.1093/biomet/57.1.97>.
- [40] P.D. Moral, A. Doucet, A. Jasra, *Sequential Monte Carlo samplers*, *J. R. Stat. Soc. Ser. B Stat. Methodol.* 68 (2006) 411–436.
- [41] J.L. Beck, S.K. Au, Bayesian updating of structural models and reliability using Markov chain Monte Carlo simulation, *J. Eng. Mech.* 128 (2002) 380–391, [http://dx.doi.org/10.1061/\(ASCE\)0733-9399\(2002\)128:4\(380\)](http://dx.doi.org/10.1061/(ASCE)0733-9399(2002)128:4(380)).
- [42] P. Efraimidis, P. Spirakis, Weighted random sampling, *Encycl. Algorithms* (2008) 1024–1027, http://dx.doi.org/10.1007/978-0-387-30162-4_478.
- [43] C. Andrieu, J. Thoms, A tutorial on adaptive MCMC, *Stat. Comput.* 18 (2008) 343–373, <http://dx.doi.org/10.1007/s11222-008-9110-y>.
- [44] L. Martino, V. Elvira, Metropolis sampling, in: *Wiley StatsRef: Statistics Reference Online*, 2017, pp. 1–18, <http://dx.doi.org/10.1002/9781118445112.stat07951>.
- [45] S.M. Lynch, *Introduction To Applied Bayesian Statistics and Estimation for Social Scientists*, Springer Science and Business Media, ISBN: 978-0387712659, 2007.
- [46] G.O. Roberts, J.S. Rosenthal, Optimal scaling for various Metropolis-Hastings algorithms, *Statist. Sci.* 16 (2001) 351–367, <http://dx.doi.org/10.1214/ss/1015346320>.
- [47] Y. Zhang, W. Yang, A comparative study of the stochastic simulation methods applied in structural health monitoring, *Eng. Comput.* 31 (2014) 1484–1513, <http://dx.doi.org/10.1108/ec-07-2013-0185>.
- [48] A. Lye, A. Cicirello, E. Patelli, Bayesian model updating of reliability parameters using transitional Markov chain Monte Carlo with slice sampling, in: *Proceedings of the 30th European Safety and Reliability Conference and 15th Probabilistic Safety Assessment and Management Conference*, 2020, http://dx.doi.org/10.3850/978-981-14-8593-0_4374-cd.
- [49] P. Angelikopoulos, C. Papadimitriou, P. Koumoutsakos, X-TMCMC: Adaptive kriging for Bayesian inverse modeling, *Comput. Methods Appl. Mech. Engrg.* 289 (2015) 409–428, <http://dx.doi.org/10.1016/j.cma.2015.01.015>.
- [50] Y. Jin, Z. Yin, W. Zhou, S. Horpibulsuk, Identifying parameters of advanced soil models using an enhanced transitional Markov chain Monte Carlo method, *Acta Geotech.* 14 (2019) 1925–1947, <http://dx.doi.org/10.1007/s11440-019-00847-1>.
- [51] R.M. Neal, Slice sampling, *Ann. Statist.* 31 (2003) 705–767, <http://dx.doi.org/10.1214/aos/1056562461>.
- [52] F. Hou, J. Goodman, D.W. Hogg, J. Weare, C. Schwab, An affine-invariant sampler for exoplanet fitting and discovery in radial velocity data, *Astrophys. J.* 745 (2012) 198, <http://dx.doi.org/10.1088/0004-637x/745/2/198>.
- [53] I.J.M. Crossfield, E. Petigura, J.E. Schlieder, A.W. Howard, B.J. Fulton, K.M. Aller, D.R. Ciardi, S. Lépine, T. Barclay, I.D. Pater, K.D. Kleer, E.V. Quintana, J.L. Christiansen, E. Schlafly, L. Kaltenegger, J.R. Crepp, T. Henning, C. Obermeier, N. Deacon, L.M. Weiss, H.T. Isaacson, B.M.S. Hansen, M.C. Liu, T. Greene, S.B. Howell, T. Barman, C. Mordasini, A nearby M star with three transiting super-earths discovered by K2, *Astrophys. J.* 804 (2015) 10, <http://dx.doi.org/10.1088/0004-637x/804/1/10>.
- [54] A. Vanderburg, B.T. Montet, J.A. Johnson, L.A. Buchhave, L. Zeng, F. Pepe, A.C. Cameron, D.W. Latham, E. Molinari, S. Udry, C. Lovis, J.M. Matthews, C. Cameron, N. Law, B.P. Bowler, R. Angus, C. Baranec, A. Bieryla, W. Boschin, D. Charbonneau, R. Cosentino, X. Dumusque, P. Figueira, D.B. Guenther, A. Hrutynyan, C. Hellier, R. Kuschnig, M. Lopez-Morales, M. Mayor, G. Micela, A.F.J. Moffat, M. Pedani, D.F. Phillips, G. Piotto, D. Pollacco, D. Queloz, K. Rice, R. Riddle, J.F. Rowe, S.M. Rucinski, D. Sasselov, D. Ségransan, A. Sozzetti, A. Szentgyorgyi, C. Watson, W.W. Weiss, Characterizing K2 planet discoveries: A super-earth transiting the bright K dwarf hip 116454, *Astrophys. J.* 800 (2015) 59, <http://dx.doi.org/10.1088/0004-637x/800/1/59>.
- [55] S. Luszcz-Cook, K.D. Kleer, I.D. Pater, M. Adamkovics, H. Hammel, Retrieving Neptune’s aerosol properties from Keck OSIRIS observations. I. Dark regions, *Icarus* 276 (2016) 52–87, <http://dx.doi.org/10.1016/j.icarus.2016.04.032>.
- [56] Y. Matviychuk, E.V. Harbou, J.D. Holland, An experimental validation of a Bayesian model for quantification in NMR spectroscopy, *J. Magn. Reson.* 285 (2017) 86–100, <http://dx.doi.org/10.1016/j.jmr.2017.10.009>.
- [57] S. Lunderman, M. Morzfeld, F. Glassmeier, G. Feingold, Estimating parameters of the nonlinear cloud and rain equation from a large-eddy simulation, *Physica D* 410 (2020) <http://dx.doi.org/10.1016/j.physd.2020.132500>.
- [58] L. Alawieh, J. Goodman, J.B. Bell, Iterative construction of Gaussian process surrogate models for Bayesian inference, *J. Statist. Plann. Inference* 207 (2020) 55–72, <http://dx.doi.org/10.1016/j.jspi.2019.11.002>.
- [59] J. Zhang, M.D. Shields, On the quantification and efficient propagation of imprecise probabilities resulting from small datasets, *Mech. Syst. Signal Process.* 98 (2018) 465–483, <http://dx.doi.org/10.1016/j.ymsp.2017.04.042>.
- [60] N.H. Paulson, B.J. Bocklund, R.A. Otis, Z.K. Liu, M. Stan, A stochastic regression approach to analyzing thermodynamic uncertainty in chemical speciation modeling, *Acta Mater.* 174 (2019) 9–15, <http://dx.doi.org/10.1021/es0523035.s001>.
- [61] F.P. Hollick, V. Gori, C.A. Elwell, Thermal performance of occupied homes: A dynamic grey-box method accounting for solar gains, *Energy Build.* 208 (2020) <http://dx.doi.org/10.1016/j.enbuild.2019.109669>.
- [62] P. Wagner, R. Fahrni, M. Klippel, A. Frangi, B. Sudret, Bayesian calibration and sensitivity analysis of heat transfer models for fire insulation panels, *Eng. Struct.* 205 (2020) <http://dx.doi.org/10.1016/j.engstruct.2019.110063>.
- [63] J. Zhang, S. Termaath, M.D. Shields, Imprecise global sensitivity analysis using Bayesian multimodel inference and importance sampling, *Mech. Syst. Signal Process.* 148 (2021) <http://dx.doi.org/10.1016/j.ymsp.2020.107162>.
- [64] J.H. Gallier, *Geometric Methods and Applications: For Computer Science and Engineering*, Springer Science and Business Media, ISBN: 978-1461301370, 2012.
- [65] Y. Wang, J. Solomon, Intrinsic and extrinsic operators for shape analysis, in: *Handbook of Numerical Analysis Processing, Analyzing and Learning of Images, Shapes, and Forms: Part 2*, Vol. 45, 2019, pp. 41–115, <http://dx.doi.org/10.1016/bs.hna.2019.08.003>.
- [66] T. Lampart, Implementation and performance comparison of an ensemble sampler with affine invariance, Technical Report, MOSAIC Group, Institute of Theoretical Computer Science, Department of Computer Science, ETH Zurich, 2012.
- [67] P.H. Garthwaite, Y. Fan, S.A. Sisson, Adaptive optimal scaling of Metropolis–Hastings algorithms using the Robbins–Monro process, *Comm. Statist. Theory Methods* 45 (2016) 5098–5111, <http://dx.doi.org/10.1080/03610926.2014.936562>.
- [68] S.T. Thornton, J.B. Marion, *Classical Dynamics of Particles and Systems*, fifth ed., Brooks/Cole, ISBN: 978-0534408961, 2004.
- [69] D. Himmelblau, *Applied Nonlinear Programming*, McGraw-Hill, ISBN: 0070289212, 1972.
- [70] C. Safta, M. Khalil, H.N. Najm, Transitional Markov Chain Monte Carlo Sampler in UQTK, SANDIA Report, 25, 2020, pp. 1204–1226, <http://dx.doi.org/10.2172/1606084>.
- [71] P. Liang, J.E. Mottershead, F.A. DiazDelaO, Model updating with the Kriging predictor: Effect of code uncertainty, in: *Proceedings of the International Conference on Noise and Vibration Engineering 2016, ISMA 2016*, in: *International Conference on Uncertainty in Structural Dynamics, USD 2016*, Leuven, Belgium, 1, 2016, pp. 4363–4375.
- [72] H.H. Khodaparast, J.E. Mottershead, K.J. Badcock, Interval model updating with irreducible uncertainty using the Kriging predictor, *Mech. Syst. Signal Process.* 25 (2011) 1204–1226, <http://dx.doi.org/10.1016/j.ymsp.2010.10.009>.
- [73] J.J. Jenq, W. Li, Feedforward backpropagation artificial neural networks on reconfigurable meshes, *Future Gener. Comput. Syst.* 14 (1998) 313–319, [http://dx.doi.org/10.1016/s0167-739x\(98\)00036-3](http://dx.doi.org/10.1016/s0167-739x(98)00036-3).
- [74] J. He, J.W. Jones, W.D. Graham, M.D. Dukes, Influence of likelihood function choice for estimating crop model parameters using the generalized likelihood uncertainty estimation method, *Agricult. Sys.* 103 (5) (2010) 256–264, <http://dx.doi.org/10.1016/j.agry.2010.01.006>.

- [75] S.K. Zak, K. Beven, B. Reynolds, Uncertainty in the estimation of critical loads: A practical methodology, *Water Air Soil Pollut.* 98 (3–4) (1997) 297–316, <http://dx.doi.org/10.1007/bf02047040>.
- [76] K. Beven, A. Binley, The future of distributed models: Model calibration and uncertainty prediction, *Hydrol. Process.* 6 (3) (1992) 279–298, <http://dx.doi.org/10.1002/hyp.3360060305>.
- [77] R. Romanowicz, K.J. Beven, J. Tawn, Evaluation of predictive uncertainty in non-linear hydrological models using a Bayesian approach, in: V. Barnett, K.F. Turkman (Eds.), *Statistics for the Environment II*, Wiley, New York, 1992, pp. 297–317.
- [78] R. Romanowicz, K.J. Beven, J. Tawn, Bayesian calibration of flood inundation models, in: M.G. Anderson, D.E. Walling, P.D. Bates (Eds.), *Flood Plain Processes*, Wiley, Chichester, 1996, pp. 623–667.
- [79] X. Wang, X. He, J.R. Williams, R.C. Izaurralde, J.D. Atwood, Sensitivity and uncertainty analyses of crop yields and soil organic carbon simulated with epic, *Trans. ASAE* 48 (3) (2005) 1041–1054, <http://dx.doi.org/10.13031/2013.18515>.
- [80] F. Ruggeri, D.R. Insua, J. Martín, Robust Bayesian analysis, in: *Handbook of Statistics Bayesian Thinking - Modeling and Computation*, 2005, pp. 623–667, [http://dx.doi.org/10.1016/s0169-7161\(05\)25021-6](http://dx.doi.org/10.1016/s0169-7161(05)25021-6).
- [81] J.O. Berger, E. Moreno, L.R. Pericchi, et al., An overview of robust Bayesian analysis, *Test* 3 (1994) 5–124, <http://dx.doi.org/10.1007/BF02562676>.
- [82] S. Ferson, V. Kreinovich, L. Ginzburg, F. Sentz, Constructing Probability Boxes and Dempster-Shafer Structures, 4015 (2002) <http://dx.doi.org/10.2172/809606>.
- [83] M. Beer, S. Ferson, V. Kreinovich, Imprecise probabilities in engineering analyses, *Mech. Syst. Signal Process.* 37 (2013) 4–29, <http://dx.doi.org/10.1016/j.ymssp.2013.01.024>.