TU Delft

Delft University of Technology

Document Version
Final published version

Licence
CC BY

Citation (APA)
Zhang, Y., Cabrera, M., Askarinejad, A., & Gavin, K. (2023). Development of a new T-bar for the geotechnical centrifuge at TU Delft. In P. J. Vardon, & A.-C. Dieudonné (Eds.), *Proceedings of the Symposium on Energy Geotechnics 2023: Accelerating the energy trasition* Article 132 (Symposium on Energy Geotechnics Proceedings). TU Delft OPEN Publishing. https://doi.org/10.59490/seg.2023.616

Important note
To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright
In case the licence states “Dutch Copyright Act (Article 25fa)”, this publication was made available Green Open Access via the TU Delft Institutional Repository pursuant to Dutch Copyright Act (Article 25fa, the Taverne amendment). This provision does not affect copyright ownership.
Unless copyright is transferred by contract or statute, it remains with the copyright holder.

Sharing and reuse
Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy
Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

This work is downloaded from Delft University of Technology.

Symposium on Energy Geotechnics
Accelerating the energy transition
3-5 October 2023, Delft, the Netherlands

Peer-reviewed Conference Contribution

Development of a new T-bar for the geotechnical centrifuge at TU Delft

Yuen Zhang[1,*], Miguel Cabrera[1], Amin Askarinejad[1] and Ken Gavin[1]

[1] Delft University of Technology, Geo-Engineering, Delft, The Netherlands
* Corresponding author: Y.Zhang-32@tudelft.nl

An accurate estimation of undrained shear strength of clay seabed is important for interpreting lateral pile-soil interaction response. The cylindrical T-bar is a widely used site investigation tool for profiling the undrained strength (su) of soft soils. As such, a new miniature T-bar penetrometer is designed and fabricated at TU Delft for characterization of the undrained shear strength profile of clay layer in centrifuge models, and OCR profile can be then derived from undrained shear strength profile with known pre-consolidation stress level. The miniature T-bar penetrometer head is a cylinder of 5 mm in diameter and 20 mm in length and the miniature T-bar penetrometer head is connected with a rigid shaft (Figure 1(a)). The T-bar penetration resistance along the depth of clay sample can be obtained and further interpreted into the undrained shear strength profile.

Rate of penetration is one of the key parameters that govern the drainage behaviour of soil response around the T-bar and the resulting penetration resistance. A very low rate of penetration leads to partial pore water dissipation and thus partial drainage condition. When a very large rate of penetration is applied, the fully undrained condition is achieved. However, the effect of T-bar penetration rate has not previously been fully examined for normally consolidated and over consolicated clay in the centrifuge. In this paper, the tip resistance profile of T-bar penetration tests under different rates of penetration is analyzed to obtain undrained shear strength profile of clay soils.

A series of T-bar tests are conducted in both normally consolidated and slightly over consolidated clay samples at 100 g. The sample drainage state is tested by varying the rate of penetration from 0.01 mm/s to 5 mm/s. The results are interpreted by two methods: (i) the conventional method by converting the measured penetration resistance to soil strength using a single bearing factor, indicating a full-flow mechanism at failure [1]; and (ii) an approach considering soil buoyancy and a reduced bearing factor arising from the shallow failure mechanism, indicating the shallow correction procedure has a significant influence on the soil strength profile inferred from a T-bar penetrometer test [2]. The interpreted undrained shear strength profile provides soil property and OCR information for further monopile tests in the centrifuge, allowing a comprehensive study of the soil-structure interaction on soft soils.

© 2023 Zhang et al. published by TU Delft OPEN Publishing on behalf of the authors. Licensed under a Creative Commons Attribution CC BY license.
DOI: https://doi.org/10.59490/seg23.2023.616

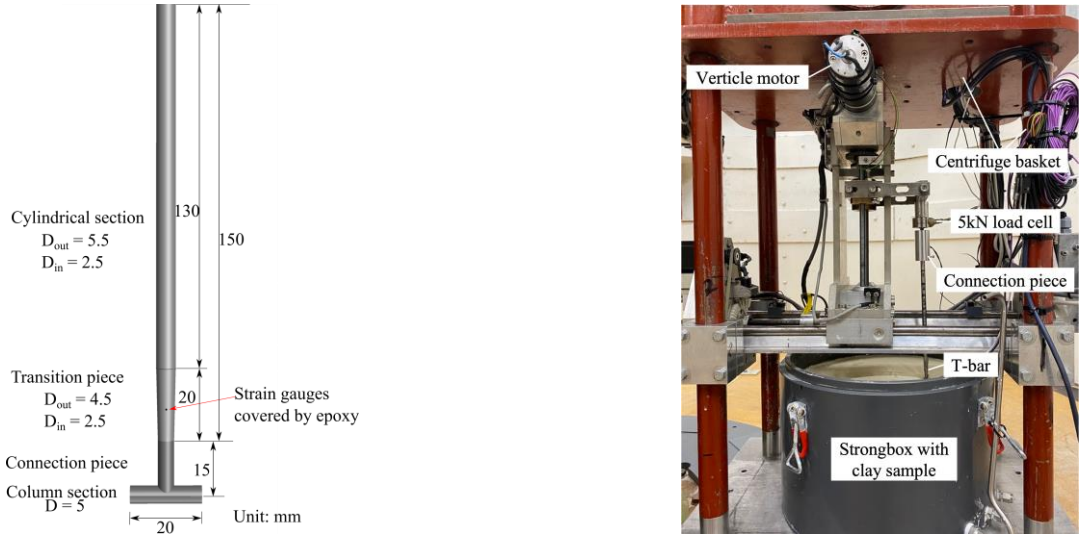


Figure 1: (a) Sketch of T-bar; (b) T-bar test setup in the centrifuge.

Contributor statement

Conceptualization: Yuen Zhang, Miguel Cabrera, Amin Askarinejad, Ken Gain, Formal analysis: Yuen Zhang, Miguel Cabrera, Amin Askarinejad, Ken Gavin, Supervision: Miguel Cabrera, Amin Askarinejad, Ken Gavin, Resources: Yuen Zhang, Miguel Cabrera, Amin Askarinejad, Writing – Original draft: Yuen Zhang, Writing – Review & Editing:Yuen Zhang, Miguel Cabrera, Amin Askarinejad

Acknowledgments

The authors want to thank the technical support of H.K.J. Heller and R.M.T. Klasen, and the help of Huan Wang with the calibration of T-bar. The first author would like to thank the China Scholarship Council (CSC) for providing the PhD scholarship.

References

[1] M. F. Randolph and G. T. Houlsby, (1984) The limiting pressure on a circular pile loaded laterally in cohesive soil, *Geotechnique*, 34 (4), 613–623, doi: 10.1680/geot.1984.34.4.613.

[2] D. J. White, C. Gaudin, N. Boylan, and H. Zhou, (2010) Interpretation of T-bar penetrometer tests at shallow embedment and in very soft soils, *Canadian Geotechnical Journal*, 47(2), 218–229, Feb. 2010, doi: 10.1139/T09-096.