

## Reliability-Based Partial Factors Considering Spatial Variability of Strength Parameters

Varkey, Divya; Hicks, Michael A.; van den Eijnden, Abraham P.

**DOI**

[10.1007/978-3-031-12851-6\\_36](https://doi.org/10.1007/978-3-031-12851-6_36)

**Publication date**

2023

**Document Version**

Final published version

**Published in**

Challenges and Innovations in Geomechanics

**Citation (APA)**

Varkey, D., Hicks, M. A., & van den Eijnden, A. P. (2023). Reliability-Based Partial Factors Considering Spatial Variability of Strength Parameters. In M. Barla, A. Insana, A. Di Donna, & D. Sterpi (Eds.), *Challenges and Innovations in Geomechanics : Proceedings of the 16th International Conference of IACMAG* (Vol. 3, pp. 299-304). (Lecture Notes in Civil Engineering; Vol. 288 LNCE). Springer.  
[https://doi.org/10.1007/978-3-031-12851-6\\_36](https://doi.org/10.1007/978-3-031-12851-6_36)

**Important note**

To cite this publication, please use the final published version (if applicable).  
Please check the document version above.

**Copyright**

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

**Takedown policy**

Please contact us and provide details if you believe this document breaches copyrights.  
We will remove access to the work immediately and investigate your claim.

***Green Open Access added to TU Delft Institutional Repository***

***'You share, we take care!' - Taverne project***

**<https://www.openaccess.nl/en/you-share-we-take-care>**

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

Lecture Notes in Civil Engineering

Marco Barla  
Alice Di Donna  
Donatella Sterpi  
Alessandra Insana *Editors*

# Challenges and Innovations in Geomechanics

Proceedings of the 16th International  
Conference of IACMAG - Volume 3



 Springer

Marco Barla · Alice Di Donna ·  
Donatella Sterpi · Alessandra Insana  
Editors

# Challenges and Innovations in Geomechanics

Proceedings of the 16th International  
Conference of IACMAG - Volume 3

 Springer



*Editors*

Marco Barla  
DISEG  
Politecnico di Torino  
Turin, Italy

Alice Di Donna  
CNRS, INP, 3SR  
Université Grenoble Alpes  
Saint Martin d'Hères, France

Donatella Sterpi  
DICA  
Politecnico di Milano  
Milan, Italy

Alessandra Insana  
DISEG  
Politecnico di Torino  
Turin, Italy

ISSN 2366-2557                      ISSN 2366-2565 (electronic)  
Lecture Notes in Civil Engineering  
ISBN 978-3-031-12850-9      ISBN 978-3-031-12851-6 (eBook)  
<https://doi.org/10.1007/978-3-031-12851-6>

© The Editor(s) (if applicable) and The Author(s), under exclusive license  
to Springer Nature Switzerland AG 2023, corrected publication 2023

This work is subject to copyright. All rights are solely and exclusively licensed by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed.

The use of general descriptive names, registered names, trademarks, service marks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

The publisher, the authors, and the editors are safe to assume that the advice and information in this book are believed to be true and accurate at the date of publication. Neither the publisher nor the authors or the editors give a warranty, expressed or implied, with respect to the material contained herein or for any errors or omissions that may have been made. The publisher remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

This Springer imprint is published by the registered company Springer Nature Switzerland AG  
The registered company address is: Gewerbestrasse 11, 6330 Cham, Switzerland



# Reliability-Based Partial Factors Considering Spatial Variability of Strength Parameters

Divya Varkey<sup>(✉)</sup>, Michael A. Hicks, and Abraham P. van den Eijnden

Section of Geo-Engineering, Faculty of Civil Engineering and Geosciences, Delft University of Technology, Delft, The Netherlands  
d.varkey@tudelft.nl

**Abstract.** The stability of six regional dyke cross-sections in the Netherlands was re-assessed using the random finite element method (RFEM), which explicitly accounts for the spatial variability of strength parameters. The RFEM assessments of the cross-sections were shown to result in significantly narrower response distributions than those obtained by ignoring the spatial variability, and therefore would result in more economical designs. Given the complexity of RFEM for applications in daily engineering practice, the results obtained from the re-assessments of the six dyke cross-sections were used to propose partial factors that can be used in practice to achieve the desired reliability levels for regional dykes. When applied in a conventional semi-probabilistic assessment of a dyke cross-section, these partial factors would result in the same level of reliability as would have been obtained by carrying out an RFEM analysis of the same cross-section.

**Keywords:** Dykes · Partial factors · Random fields · Reliability · Spatial variability

## 1 Introduction

The three primary sources of geotechnical uncertainty are: the inherent variability of soil arising due to various geological, environmental and physicochemical processes; measurement errors; and transformation errors. Of these, the spatial nature of soil variability is considered to be an aleatoric uncertainty, whereas the latter two are epistemic in nature. There are various ways of dealing with these uncertainties, ranging from (a) a semi-probabilistic approach, accounting for uncertainties within a deterministic design by applying partial factors to characteristic values of strength parameters, to (b) fully probabilistic methods such as the random finite element method (RFEM) (Fenton and Griffiths 2008). RFEM combines random fields, that are used to model the spatial variability of soil properties, with finite elements within a Monte Carlo framework to directly estimate the probability of failure. Owing to its complexity, RFEM is seldom used in engineering practice, whereas the semi-probabilistic method is widely used because of its simplicity due to the various assumptions involved. For example, the semi-probabilistic method of dyke safety assessment in the Netherlands uses a combination of partial factors and characteristic property values to achieve a target reliability level of the dyke.

In this paper, the stability of six regional dyke cross-sections in the Netherlands has been re-assessed using RFEM. The data used for the re-assessments in this paper are from a technical report on the initial assessment of these cross-sections (van der Krogt et al. 2018). The RFEM results obtained in the re-assessments are used to calibrate reliability-based partial factors that can be directly used in future semi-probabilistic analyses of regional dykes.

## 2 Methodology

In this paper, the shear strength of the dyke body and of the sand layer underneath it was modelled as drained using a linear elastic, perfectly-plastic Mohr Coulomb soil model, defined by the effective stress state ( $\sigma'$ ) and the material strength parameters (cohesion ( $c'$ ) and tangent of the friction angle ( $\tan \phi'$ )). In contrast, the clay and peat layers underlying the dyke were modelled as undrained using the Stress History and Normalised Soil Engineering Properties (SHANSEP) method (Ladd and Foott 1974). In this model, the undrained shear strength is a function of the effective major principal stress ( $\sigma'_1$ ), and is given by

$$s_u = S \times \sigma'_1 \times \left( \frac{\sigma'_{1,\max}}{\sigma'_1} \right)^m \quad (1)$$

where  $S$  and  $m$  are the normalised soil parameters representing the undrained shear strength ratio and the strength increase exponent, respectively.

Each cross-section was analysed using an in-house finite element code incorporating the strength reduction method for computing the factor of safety ( $F$ ). The initial stress state was generated by applying gravity loading. Then, further loading was applied in two stages: these were to account for the normal daily water level condition in the initial stage, and a high water level condition (to account for an annual exceedance probability of 0.1%) along with a traffic load on top of the crest in the final stage.


To carry out an RFEM analysis, the spatial variability of each strength parameter ( $c'$  and  $\tan \phi'$  for the drained layers and of the properties  $S$  and  $m$  for the undrained layers) was explicitly modelled using random fields. The random fields were generated by covariance matrix decomposition (see van den Eijnden and Hicks (2017) for details) using the Markov auto-correlation function:

$$\rho(\Delta x, \Delta z) = \exp \left( -2 \sqrt{\left( \frac{\Delta x}{\theta_h} \right)^2 + \left( \frac{\Delta z}{\theta_v} \right)^2} \right) \quad (2)$$

where  $\Delta x$  and  $\Delta z$  are the lag distances in the horizontal and vertical directions, and  $\theta_h$  and  $\theta_v$  are the corresponding scales of fluctuation in the respective directions (representing the degree of spatial correlation). As insufficient data were available, conservative estimates (de Gast et al. 2021) of  $\theta_h = 6.0$  m and  $\theta_v = 0.5$  m were assumed for all properties in all material layers.

### 3 Results and Discussions

For a cross-section of the dyke at Broekermeer (shown in Fig. 1), the means and coefficients of variation ( $COV = \text{standard deviation}/\text{mean}$ ) of the lognormal distributions of shear strength parameters ( $X$ ) for the various material layers are listed in Table 1 (van der Krogt et al. 2018). The 5<sup>th</sup> percentile values of these distributions are generally used as the characteristic property values ( $X_k$ ) in practice. A deterministic finite element strength reduction analysis of the dyke cross-section based on these 5% values resulted in a factor of safety  $F(X_k)$  of 0.86.

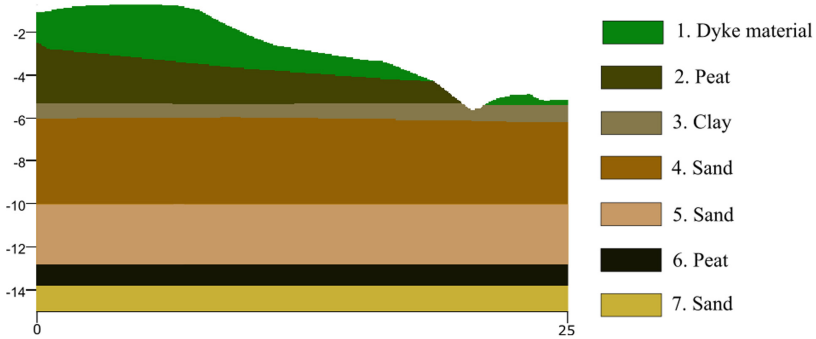


**Fig. 1.** Dyke cross-section at Broekermeer (scale in metres)

**Table 1.** Shear strength parameters used in the assessment of the dyke cross-section at Broekermeer

| Layers | Drained    |     |              |      | Undrained |      |      |      |
|--------|------------|-----|--------------|------|-----------|------|------|------|
|        | $c'$       |     | $\tan \phi'$ |      | $S$       |      | $m$  |      |
|        | Mean (kPa) | COV | Mean         | COV  | Mean      | COV  | Mean | COV  |
| 1      | 0.00       | —   | 0.63         | 0.07 | —         | —    | —    | —    |
| 2      | —          | —   | —            | —    | 0.39      | 0.10 | 0.90 | 0.03 |
| 3      | —          | —   | —            | —    | 0.29      | 0.20 | 0.90 | 0.03 |
| 4      | 0.00       | —   | 0.67         | 0.03 | —         | —    | —    | —    |
| 5      | 0.00       | —   | 0.58         | 0.05 | —         | —    | —    | —    |
| 6      | —          | —   | —            | —    | 0.31      | 0.09 | 0.90 | 0.03 |
| 7      | 0.00       | —   | 0.68         | —    | —         | —    | —    | —    |

Following this, an RFEM analysis of the cross-section was carried out using the point and spatial statistics of the strength parameters. These point statistics comprised the same mean values as listed in Table 1, but the COVs were double those in the table. This was done to remove the implicit averaging (full local averaging and a value of 0.75 for the ratio of local over regional variations) that had been assumed for the distributions

in Table 1. The cumulative distribution function (cdf) of  $F$  obtained from 500 realisations of the RFEM analysis of the cross-section is shown in Fig. 2. Also shown in the figure are the deterministic value of  $F(X_k)$  as well as a cdf of  $F$  obtained using only the point statistics of the properties, to highlight the significance of spatial averaging in the RFEM analysis. Although the consideration of spatial variability is shown to result in a much narrower response distribution, the probability of failure ( $= \text{cdf}(F = 1)$ ) for this dyke cross section is still quite high (16.3% using RFEM compared to 31.9% using only the point statistics).

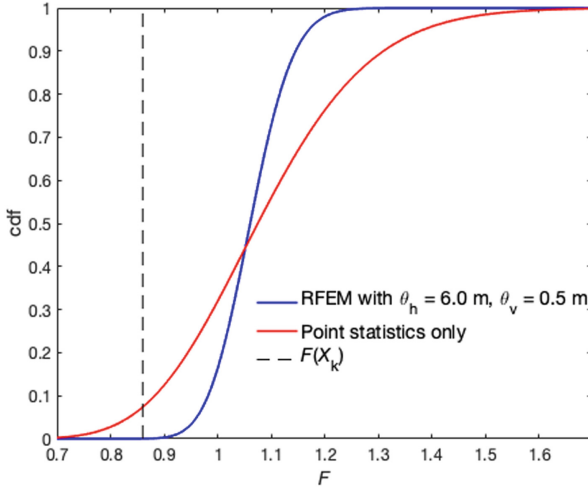

**Fig. 2.** Deterministic and RFEM solutions of  $F$  for the dyke cross-section at Broekermeer

Similar deterministic and RFEM analyses were carried out for five other cross-sections (one more from Broekermeer and four from other dykes in the Netherlands). For each cross-section, RFEM analysis resulted in a much narrower distribution of  $F$  than that obtained by ignoring the spatial variability. These results have been used to propose partial safety factors ( $\gamma$ ) that can be used to achieve target reliability levels ( $\beta$ ) of regional dyke cross-sections. Note that the RFEM result can even be used to back-calculate the characteristic strength property values that fully satisfy the requirements of Eurocode 7 (see Hicks et al. (2019) and Varkey et al. (2020) for details).


### 3.1 Calculating the Reliability-Based Partial Factors

In order to calibrate the  $\gamma - \beta$  relationship,  $\gamma$  is assumed to be equal to  $F(X_k)$ , so that the design value of  $F = F(X_k)/\gamma = 1$ . The value of  $\beta$  at  $F = 1$  is obtained by using the cdf of an RFEM analysis using the relationship,

$$\beta = -\Phi^{-1}(\text{cdf}(F = 1)) \quad (3)$$

where  $\Phi^{-1}$  is the inverse of the standard normal cdf.

With reference to Fig. 2 as an example,  $F = 1$  in the RFEM analysis corresponds to  $\beta = -\Phi^{-1}(0.16) = 0.98$ , and the partial factor corresponding to  $F = 1$  is  $\gamma = F(X_k) = 0.86$ . Similarly, the values of  $\gamma$  corresponding to the RFEM-based values of  $\beta$  for the other five cross-sections were computed and are shown in Fig. 3. Also shown in the figure is the  $\gamma - \beta$  relationship ( $\gamma = 0.08 \times \beta + 0.76$ ) obtained by drawing a regression line through these points. It can be seen from the figure that, for a target reliability level in the range of 2.1–3.6 (the approximate range for the annual target cross-sectional reliability for regional dykes in the Netherlands), the required value of  $\gamma$  based on the proposed  $\gamma - \beta$  relationship ranges from 0.93 to 1.05.

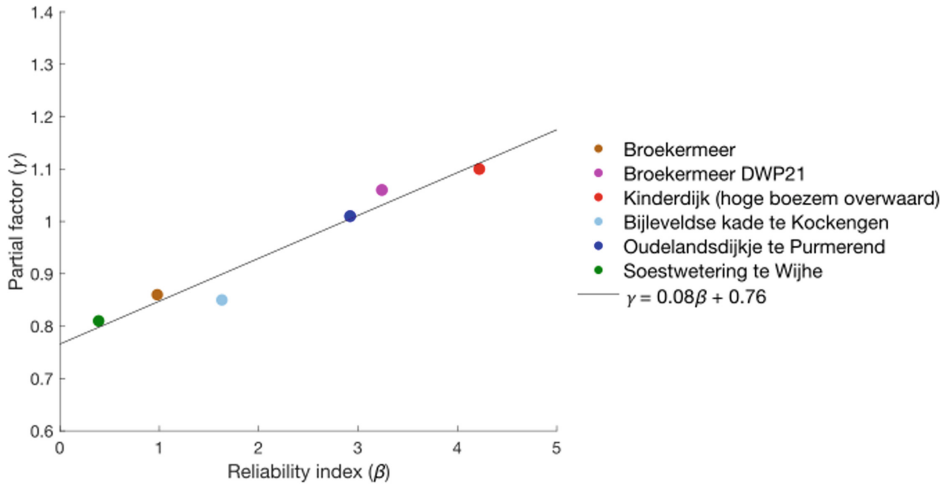

**Fig. 3.** Reliability-based partial factors calculated in the re-assessment of various dyke cross-sections

## 4 Conclusions

Six regional dyke cross-sections in the Netherlands were re-assessed using RFEM, which involves the explicit modelling of the soil spatial variability and thereby fully accounts for spatial averaging of properties along the failure surface. An underlying assumption in the re-assessments presented in this paper is that the only uncertainty is in the spatial variability of the shear strength parameters, which is modelled using the chosen auto-correlation function. Any uncertainty in the input statistics or in the model has not been accounted for in this study.

The results of the re-assessments were used in calibrating partial factors that are required to achieve the desired reliability levels. Partial factors in the range of 0.93–1.05 were obtained for desired annual cross-sectional reliabilities of 2.1–3.6 for the regional dykes. When applied in future semi-probabilistic assessments of regional dykes, the proposed partial factors would result in the same level of reliability as would be obtained by carrying out a more complex and robust RFEM analysis of the same dyke cross-section.

**Acknowledgements.** This work is part of the research programme Reliable Dykes with project number 13864 which is financed by the Netherlands Organisation for Scientific Research (NWO), and was carried out on the Dutch National e-infrastructure with the support of SURF Foundation.

## References

- de Gast, T., Vardon, P.J., Hicks, M.A.: Assessment of soil spatial variability for linear infrastructure using cone penetration tests. *Géotechnique* **71**(11), 999–1013 (2021)
- Fenton, G.A., Griffiths, D.V.: *Risk Assessment in Geotechnical Engineering*. Wiley, New York (2008)
- Hicks, M.A., Varkey, D., van den Eijnden, A.P., de Gast, T., Vardon, P.J.: On characteristic values and the reliability-based assessment of dykes. *Georisk Assess. Manag. Risk Eng. Syst. Geohazards* **13**(4), 313–319 (2019)
- Ladd, C.C., Foott, R.: New design procedure for stability of soft clays. *J. Geotech. Eng.* **100**(7), 763–786 (1974)
- van den Eijnden, A.P., Hicks, M.A.: Efficient subset simulation for evaluating the modes of improbable slope failure. *Comput. Geotech.* **88**, 267–280 (2017)
- van der Krogt, M., Schweckendiek, T., Kwakman, L.: *Verkenning toetsvoorschrift macrostabiliteit binnenwaarts regionale keringen*. Technical report, Deltares (2018)
- Varkey, D., Hicks, M.A., van den Eijnden, A.P., Vardon, P.J.: On characteristic values for calculating factors of safety for dyke stability. *Géotechnique Letters* **10**(2), 353–359 (2020)