

12 Juli 1950

REPORT No.12

December, 1947

THE COLLEGE OF AERONAUTICS
C R A N F I E L D

The Aerodynamic Derivatives with
respect to Sideslip for a Delta
Wing with Small Dihedral at
Supersonic Speeds

-by-

A. Robinson, M.Sc., A.F.R.Ae.S.,

and

Squadron Leader J.H. Hunter-Tod, M.A., A.F.R.Ae.S.

SUMMARY

Expressions are derived for the sideslip derivatives on the assumptions of the linearised theory of flow for a delta wing with small dihedral flying at supersonic speeds. A discussion is included in the appendix on the relation between two methods that have been evolved for the treatment of aerodynamic force problems of the delta wing lying within its apex Mach cone.

When the leading edges are within the Mach cone from the apex, the pressure distribution and the rolling moment are independent of Mach number but dependent on aspect ratio. There is a leading edge suction, which is a function of incidence, aspect ratio and Mach number, that contributes as well as the surface pressure distribution to the sideforce and yawing moment.

When the leading edges are outside the apex Mach cone, the non-dimensional rolling derivative is, in contrast to the other case, dependent on Mach number and independent of aspect ratio: the other derivatives and the pressure, however, are dependent on both variables. There is no leading edge suction force in this case.

1. Introduction

The present paper, in which the aerodynamic derivatives with respect to sideslip are calculated, is one of a series dealing with the force coefficients acting on a delta wing at supersonic speeds. The investigation will be confined to the case of small deviations of the wing from the neutral position, so that in particular it may be assumed that if the wing is initially wholly within the Mach cone emanating from its apex it will remain so in the disturbed condition, and vice versa.

The problem divides into the two cases in which the wing protrudes through its apex Mach cone and in which it is entirely enclosed within it. In the former the task simplifies to integrating a uniform distribution of supersonic sources, since the motion ahead of the trailing edge above the wing is independent of that below the wing. In the latter case recourse is made to a method based on that introduced by Stewart (ref.1) in his solution of the basic lift problem, except that the expression relating the pressure distribution to the boundary conditions is derived in a different manner.

Robinson (ref.2) solved the lift problem by other means and a comparison of the two techniques employed is made in the appendix to this paper.

2. Notation

| | |
|------------------------------------------|---------------------------------------------------------------|
| \bar{V} = Free stream velocity | γ = Semi vertex angle |
| \bar{v} = Sideslip velocity | c = Max. chord |
| ρ = Air density | $S = c^2 \tan \gamma$ = Wing area |
| M = Mach number | $s = c \tan \gamma$ = Semi span |
| $\beta = \sqrt{M^2 - 1}$ | $l_v = L / \rho v S s$ = Non-dimensional rolling derivative |
| $\lambda = \beta \tan \gamma$ | $n_v = N / \rho v S s$ = Non-dimensional yawing derivative |
| L = Rolling moment | $y_v = Y / \rho v S s$ = Non-dimensional sideslip derivative. |
| N = Yawing moment (referred to vertex) | α = Incidence |
| Y = Side force | |
| δ = Dihedral angle | |

3. Results

A thin flat delta wing of small dihedral is travelling at supersonic speed \bar{V} with sideslip \bar{v} with vertex into wind (See Fig.4a).

The forces due to sideslip are:-

| | Inside Mach Cone ($\lambda < 1$) | Outside Mach Cone ($\lambda > 1$) |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| L | $+\frac{2}{3}\rho\bar{v}\bar{V}\delta^3\tan^3\gamma.$ | $+\frac{2}{3\beta}\rho\bar{v}\bar{V}\delta^3\tan^2\gamma.$ |
| N | $-\frac{4}{3}\rho\bar{v}\bar{V}c^3\tan\gamma\left\{\frac{2}{\pi}\delta^2\tan\gamma-\frac{\alpha\delta}{E'(\lambda)}\sqrt{1-\lambda^2}\sec^2\gamma\right\}$ | $-\frac{8}{3\pi}\rho\bar{v}\bar{V}\delta^3\tan^2\gamma\frac{\sec^{-1}\lambda}{\sqrt{\lambda^2-1}}$ |
| Y | $-2\rho\bar{v}\bar{V}c^2\tan\gamma\left\{\frac{2}{\pi}\delta^2\tan\gamma-\frac{\alpha\delta}{E'(\lambda)}\sqrt{1-\lambda^2}\right\}$ | $-\frac{4}{\pi}\rho\bar{v}\bar{V}\delta^2c^2\tan^2\gamma\frac{\sec^{-1}\lambda}{\sqrt{\lambda^2-1}}$ |

The non-dimensional aerodynamic derivatives with respect to sideslip are:-

| | Inside Mach Cone ($\lambda < 1$) | Outside Mach Cone ($\lambda > 1$) |
|-------|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| L_v | $\frac{2}{3}\delta\tan\gamma.$ | $\frac{2}{3}\frac{\delta}{\beta}$ |
| n_v | $-\frac{4}{3}\left\{\frac{2}{\pi}\delta^2-\frac{1}{E'(\lambda)}\alpha\delta\sqrt{1-\lambda^2}\cot\gamma\sec^2\gamma\right\}$ | $-\frac{8}{3\pi}\delta^2\frac{\sec^{-1}\lambda}{\sqrt{\lambda^2-1}}$ |
| y_v | $-2\left\{\frac{2}{\pi}\delta^2\tan\gamma-\frac{1}{E'(\lambda)}\alpha\delta\sqrt{1-\lambda^2}\right\}$ | $-\frac{4}{\pi}\delta^2\tan\gamma\frac{\sec^{-1}\lambda}{\sqrt{\lambda^2-1}}$ |

It will be noted that the above quantities are continuous on transition from one case to the other.

At Fig.1 the quantities $\beta L_v/\delta$, n_v/δ^2 and $\beta y_v/\delta^2$ for zero incidence are plotted against the parameter λ .

At Fig.2 the quantities L_v/δ , n_v/δ^2 and y_v/δ^2 for zero incidence are plotted against Mach number for different aspect ratios. It will be seen that the values of L_v/δ obtained for the higher aspect ratios, when the leading edges are within the Mach cone, are comparable with those obtained in incompressible flow.

At Fig.3 the contributions to $n_v/\alpha\delta$ and $y_v/\alpha\delta$ due to incidence are plotted against Mach number for different aspect ratios. It will be noted that the parts of n_v and y_v due to incidence are of opposite sign to the remainder and, for incidences comparable to the dihedral angle, are of the same order.

The suction force at the leading edge when lying within the

/Mach.....

Mach cone is:-

$$\frac{2}{E'(\lambda)} \rho \bar{v} \delta y \sqrt{1 - \lambda^2}$$

The pressure distributions are:-

(a) Leading edges within the Mach cone:-

$$\frac{2}{\pi} \rho \bar{v} \delta \frac{y \tan \gamma}{\sqrt{x^2 \tan^2 \gamma - y^2}}$$

(b) Leading edges outside the Mach cone:-

(i) At a point outside the Mach cone:-

$$\rho \bar{v} \delta \frac{\tan \gamma}{\sqrt{\lambda^2 - 1}}$$

(ii) At a point inside the Mach cone:-

$$\frac{2}{\pi} \rho \bar{v} \delta \frac{\tan \gamma}{\sqrt{\lambda^2 - 1}} \tan^{-1} \left\{ y \cot \gamma \sqrt{\frac{\lambda^2 - 1}{x^2 - \beta^2 y^2}} \right\}.$$

4. Delta Wing Enclosed within the Apex Mach Cone

4.1 Relating the Pressure Distribution to the Boundary Conditions

In the linearised supersonic theory excess pressure is proportional to the induced velocity in the freestream direction. Since the angle of dihedral is small, the boundary conditions can be expressed by equating the velocity normal to the yawing plane to the component of the sideslip velocity along the normal to the aerofoil itself.

Using the cartesian axes indicated in Fig.4a we will establish for the class of problems to which our present one belongs that the induced velocity components u , v and w in the x , y and z -directions can be expressed as the real parts of functions U , V and W of a complex variable τ and that there exist relations of the form

$$\frac{dU}{d\tau} = f_1(\tau) \frac{dW}{d\tau} \quad \text{and} \quad \frac{dV}{d\tau} = f_2(\tau) \frac{dW}{d\tau}$$

The problem therefore reduces to determining a suitable transformation from the x , y , z -space to the τ -plane and a suitable function $\frac{dW}{d\tau}$, so that $w = R(W)$ takes up the known values at the boundaries. This is essentially the method of Stewart (ref.1), but our derivation of the relations between U , V and W will be somewhat different.

The flow at any point ahead of the trailing edge is uninfluenced by the trailing edge, so that if we replace the aerofoil by one of the same shape but of different size the flow at such a point will be unaltered. Hence the flow at any point along a ray through the vertex is the same. The induced velocity is therefore of degree zero in x , y , z ; this type of flow is called conical, a term introduced by Busemann.

In the linearised supersonic theory the equation of continuity is the Prandtl-Glauert equation:-

$$-\beta^2 \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0 \dots\dots\dots (1)$$

For irrotational flow $\text{curl}(u, v, w) = 0$ and there exists a velocity potential Φ .

It will therefore be seen that u, v, w and Φ satisfy the equation:-

$$-\beta^2 \frac{\partial^2 \Phi}{\partial x^2} + \frac{\partial^2 \Phi}{\partial y^2} + \frac{\partial^2 \Phi}{\partial z^2} = 0 \dots\dots\dots (2)$$

Under the transformation $(x', y', z') = (x, i\beta y, i\beta z)$ every solution of Laplace's equation in x', y', z' , is also a solution of equation (2) in x, y, z and vice versa.

It was established by Donkin in 1857 that the most general solution of Laplace's equation of zero degree in three dimensions is of the form:-

$$F_1 \left(\frac{y' + iz'}{x' + r} \right) + F_2 \left(\frac{y' - iz'}{x' + r} \right) \dots\dots\dots (3)$$

where $r^2 = x^2 + y^2 + z^2$.

Hence any analytic function of ω is a solution of equation (2) of degree zero, where

$$\omega = \eta + i\zeta = \beta \frac{y + iz}{x + r} \text{ and where } r^2 = x^2 - \beta^2 y^2 - \beta^2 z^2.$$

Therefore we take u, v, w to be the real parts of $U(\omega), V(\omega), W(\omega)$, satisfying both equation (2) and Laplace's equation in η, ζ . It will be noted that the velocity potential is not of degree zero and cannot therefore be put in this form.

It will be seen that for conical flow the induced velocity potential is of the form $\Phi = r \psi(\eta, \zeta)$, so that:-

$$\left. \begin{aligned} u &= \eta \frac{\partial \psi}{\partial \eta} + \zeta \frac{\partial \psi}{\partial \zeta} - \frac{1 + \eta^2 + \zeta^2}{1 - \eta^2 - \zeta^2} \psi. \\ v &= -\frac{1}{2}\beta(1 + \eta^2 - \zeta^2) \frac{\partial \psi}{\partial \eta} - \beta\eta\zeta \frac{\partial \psi}{\partial \zeta} + \frac{2\beta\eta}{1 - \eta^2 - \zeta^2} \psi. \\ w &= -\beta\eta\zeta \frac{\partial \psi}{\partial \eta} - \frac{1}{2}\beta(1 - \eta^2 + \zeta^2) \frac{\partial \psi}{\partial \zeta} + \frac{2\beta\zeta}{1 - \eta^2 - \zeta^2} \psi. \end{aligned} \right\} \dots (4)$$

The equation of continuity (1) becomes:-

$$\left\{ 1 - \eta^2 - \zeta^2 \right\}^2 \left\{ \frac{\partial^2 \psi}{\partial \eta^2} + \frac{\partial^2 \psi}{\partial \zeta^2} \right\} - 8\psi = 0 \dots (5)$$

Now since u is the real part of $U \equiv U(\omega)$ The Cauchy-Riemann equations give

$$\frac{dU}{d\omega} = \frac{\partial u}{\partial \eta} - i \frac{\partial u}{\partial \zeta}$$

and similarly for V and W . Therefore:-

$$\begin{aligned} \frac{dU}{d\omega} &= \eta \frac{\partial^2 \psi}{\partial \eta^2} - i\omega \frac{\partial^2 \psi}{\partial \eta \partial \zeta} - i\zeta \frac{\partial^2 \psi}{\partial \zeta^2} \dots\dots\dots (6) \\ &- 2 \frac{\eta^2 + \zeta^2}{1 - \eta^2 - \zeta^2} \left\{ \frac{\partial \psi}{\partial \eta} - i \frac{\partial \psi}{\partial \zeta} \right\} - 4 \frac{\eta - i\zeta}{(1 - \eta^2 - \zeta^2)^2} \psi \end{aligned}$$

$$\begin{aligned} \frac{dV}{d\omega} &= -\frac{1}{2}\beta(1 + \eta^2 - \zeta^2) \frac{\partial^2 \psi}{\partial \eta^2} + \frac{1}{2}i\beta(1 + \omega^2) \frac{\partial^2 \psi}{\partial \eta \partial \zeta} + i\beta\eta\zeta \frac{\partial^2 \psi}{\partial \zeta^2} \dots (7) \\ &+\beta \left\{ \frac{2\eta}{1 - \eta^2 - \zeta^2} - \omega \right\} \left\{ \frac{\partial \psi}{\partial \eta} - i \frac{\partial \psi}{\partial \zeta} \right\} + 2\beta \frac{1 + \eta - i\zeta}{(1 - \eta^2 - \zeta^2)^2} \end{aligned}$$

$$\begin{aligned} \text{and } \frac{dW}{d\omega} &= -\beta\eta\zeta \frac{\partial^2 \psi}{\partial \eta^2} - \frac{1}{2}\beta(1 - \omega^2) \frac{\partial^2 \psi}{\partial \eta \partial \zeta} + \frac{1}{2}i(1 - \eta^2 - \zeta^2) \frac{\partial^2 \psi}{\partial \zeta^2} \dots (8) \\ &+\beta \left\{ \frac{2\zeta}{1 - \eta^2 - \zeta^2} + i\omega \right\} \left\{ \frac{\partial \psi}{\partial \eta} - i \frac{\partial \psi}{\partial \zeta} \right\} - 2i\beta \frac{1 - \eta - i\zeta}{(1 - \eta^2 - \zeta^2)^2} \end{aligned}$$

$$\begin{aligned} \text{Hence } \beta(1 - \omega^2) \frac{dU}{d\omega} - 2i\omega \frac{dW}{d\omega} &= \beta\eta(1 - \eta^2 - \zeta^2) \left\{ \frac{\partial^2 \psi}{\partial \eta^2} + \frac{\partial^2 \psi}{\partial \zeta^2} \right\} - \frac{8\beta\eta}{1 - \eta^2 - \zeta^2} \psi \dots\dots\dots (9) \end{aligned}$$

$$\begin{aligned} \text{and } (1 - \omega^2) \frac{dV}{d\omega} + i(1 + \omega^2) \frac{dW}{d\omega} &= -\frac{1}{2}\beta(1 - \eta^2 + \zeta^2) \left\{ \frac{\partial^2 \psi}{\partial \eta^2} + \frac{\partial^2 \psi}{\partial \zeta^2} \right\} + 4\beta \frac{1 + \eta^2 + \zeta^2}{1 - \eta^2 - \zeta^2} \psi \end{aligned}$$

so that by equation (5)

$$\begin{aligned} \frac{dU}{d\omega} &= \frac{1}{\beta} \cdot \frac{2i\omega}{1 - \omega^2} \cdot \frac{dW}{d\omega} \dots\dots\dots (10) \\ \text{and } \frac{dV}{d\omega} &= -i \cdot \frac{1 + \omega^2}{1 - \omega^2} \cdot \frac{dW}{d\omega} \end{aligned}$$

On the Mach cone $r^2 = x^2 - \beta^2 (y^2 + z^2) = 0$, so that
 $|\omega|^2 = \frac{\beta^2 (y^2 + z^2)}{(r+x)^2} = 1$. At the aerofoil $z = 0$, so $\xi = 0$,

and at a leading edge $y = \pm x \tan \gamma$, so $\eta = \frac{\pm \beta \tan \gamma}{1 + \sqrt{1 - \beta^2 \tan^2 \gamma}} = \frac{\pm k'}{1+k}$,

where $k^2 = 1 - k'^2 = 1 - \beta^2 \tan^2 \gamma$.

The Mach cone and its interior are, therefore, represented in the ω -plane by the unit circle and its interior, while the aerofoil becomes the real axis between $\pm k'/(1+k)$. (Fig.4b refers).

Consider the transformation $\text{cn}(\tau, k) = \frac{2i\omega}{1-\omega^2}$ where $\text{cn}(\tau, k)$ is the Jacobian elliptic function of modulus k .

The interior of the unit circle in the ω -plane is traced on the τ -plane in the rectangle, vertices $\pm 2iK'(k)$, $K(k) \pm 2iK'(k)$. In Fig.4c the imaginary axis AA' between $\tau = \pm 2iK'$ represents the Mach cone, while the aerofoil becomes the parallel line BB' between $\tau = K \pm 2iK'$, such that CQ is the lower surface, $z = -0$, $y < 0$; QB the upper surface $z = +0$, $y < 0$, CQ' the lower surface, $z = -0$, $y > 0$ and $Q'B'$ the upper surface $z = +0$, $y > 0$. The leading edges become the points Q, Q' . The point C corresponds to the wing axis on the lower surface and the points B, B' both to the axis on the upper surface. The line OC represents the portion of the zx -plane, $y = 0$, $z < 0$, between the Mach cone and the aerofoil, while $AB, A'B'$ both correspond to the similar section above the aerofoil: the line PQ corresponds to that part of the xy -plane, $y < 0$, $z = 0$ between the Mach cone and the leading edge, and the line $P'Q'$ to the similar part, $y > 0$, $z = 0$.

$$\text{In the } \tau \text{-plane } \frac{dU}{d\tau} = \frac{1}{\beta} \text{cn}\tau \frac{dW}{d\tau} \dots\dots\dots (11)$$

$$\text{and } \frac{dV}{d\tau} = -i \text{sn}\tau \frac{dW}{d\tau}$$

4.2 Calculation of Derivatives with respect to Sideslip

As already indicated we assume that the kinematic boundary conditions are fulfilled at the normal projection of the aerofoil on the xy -plane rather than at the aerofoil itself. The boundary condition for a sideslip velocity \bar{v} and dihedral δ reduces to $w = \bar{v}\delta$ for $y > 0$ and $w = -\bar{v}\delta$ for $y < 0$.

From the asymmetry of the configuration it follows that $w = 0$ at the zx plane. In addition $w = 0$ at the Mach cone.

From physical considerations $\frac{dU}{d\tau}$, $\frac{dV}{d\tau}$ and $\frac{dW}{d\tau}$ must be finite at the Mach cone. Furthermore the aerodynamic forces must be finite, so that any infinity of u at the aerofoil must be such that the integral of u with respect to area is finite.

We have to choose $\frac{dW}{dT}$ so that $\frac{dU}{dT}, \frac{dV}{dT}, u, w$ fulfil these conditions and so that u, v, w are single valued.

In order that $\frac{dW}{dT}$ may be finite on the Mach cone and w zero on the Mach cone and the zx -plane, $\frac{dW}{dT}$ must be regular and real on AA' and be imaginary on CC, AB and $A'B'$ with no singularities other than poles; the residues of such poles must be zero or real except at C, B and B' where there are discontinuities in w . Since $\frac{dU}{dT} (= \frac{1}{\beta} \operatorname{cn} T \frac{dW}{dT})$ and $\frac{dV}{dT} (= -i \operatorname{sn} T \frac{dW}{dT})$ are to be also finite on the Mach cone, $\frac{dW}{dT}$ must have at least a simple zero at the points P and P' ($T = \pm i K'$). Since w is to be constant over the two halves of the aerofoil, $\frac{dW}{dT}$ must be real on BB' and have no singularities which contribute to w except, as before, at C, B and B' . In integrating $\frac{dW}{dT}$ along OCB w must jump in value by an amount $+\bar{v}\delta$ at C and $-\bar{v}\delta$ in integrating along OCB' . Clearly, therefore $\frac{dW}{dT}$ must have a simple pole at C of residue of imaginary part

$\frac{2\bar{v}\delta}{\pi}$. Similarly $\frac{dW}{dT}$ must have simple poles of residue of imaginary part $-\frac{2\bar{v}\delta}{\pi}$ at B and B' , so that w may return to zero on AB and $A'B'$. In order that u, v, w may be single valued $\frac{dU}{dT}, \frac{dV}{dT}, \frac{dW}{dT}$ must be regular within the rectangle.

Functions satisfying these conditions and equation (11)

are:-

$$\left. \begin{aligned} \frac{dW}{dT} &= \frac{2i\bar{v}\delta k'^3}{\pi} \operatorname{sc} T \operatorname{nc}^2 T \\ \frac{dV}{dT} &= + \frac{2\bar{v}\delta k'^3}{\pi} \operatorname{sc}^2 T \operatorname{nc} T \\ \frac{dU}{dT} &= \frac{2i\bar{v}\delta k'^3}{\pi\beta} \operatorname{sn} T \operatorname{nc}^2 T \end{aligned} \right\} \dots\dots\dots (12)$$

It will be noted that $\frac{dU}{dT}$ is pure imaginary along the real axis and regular at $T = K$, so that:-

$$\begin{aligned} u &= \frac{2\bar{v}\delta k'^3}{\pi\beta} \int_0^\sigma \operatorname{sn}(K + is) \operatorname{nc}^2(K + is) ds, T = K + i\sigma \\ &= \frac{2\bar{v}\delta k'^3}{\pi\beta} \int_0^\sigma \operatorname{dn}(s, k') \operatorname{nc}^2(s, k') ds \\ &= \frac{2}{\pi} \bar{v}\delta \tan \gamma \operatorname{sc}(\sigma, k'). \end{aligned}$$

/On.....

On the aerofoil $\omega = \frac{y}{x + \sqrt{x^2 - \beta^2 y^2}}$ and $\tau = K + i\sigma$,
 while $\text{cn}\tau = \frac{2i\beta\omega}{1 - \beta^2\omega^2}$, so that $k' \text{sd}(\sigma, k') = \frac{\beta y}{\sqrt{x^2 - \beta^2 y^2}}$.

Hence $\text{sc}^2(\sigma, k') = \frac{\text{sd}^2(\sigma, k')}{1 - k'^2 \text{sd}^2(\sigma, k')} = \frac{y^2}{x^2 \tan^2 \gamma - y^2}$

Therefore $u = \frac{2}{\pi} \bar{v} \delta \tan \gamma \frac{y}{\sqrt{x^2 \tan^2 \gamma - y^2}} \dots \dots \dots (13)$

In the linearised theory the pressure $p = \text{const.} - \rho u \bar{v}$
 so that the rolling moment due to sideslip is:-

$$\begin{aligned} L &= + \iint 2\rho \bar{v} u y \, dy \, dx, \text{ where integration is over the whole wing} \\ &= + \frac{4}{\pi} \rho \bar{v} \delta \tan \gamma \iint \frac{y^2 \, dy \, dx}{\sqrt{x^2 \tan^2 \gamma - y^2}}, \\ &= + \frac{8}{\pi} \rho \bar{v} \delta \tan^3 \gamma \int_0^{ct} \int_0^1 q^2 \sqrt{1-t^2} \frac{dt}{t^3} \, dq, \end{aligned}$$

where $x = q/t$

$$y = q \tan \gamma \frac{\sqrt{1-t^2}}{t}$$

$$= + \frac{2}{3} \rho \bar{v} \delta c^3 \tan^3 \gamma.$$

Hence the derivative $l_v = \frac{L}{\rho \bar{v} S s} = \frac{2}{3} \delta \tan \gamma.$

The sideforce due to the pressure distribution over the aerofoil resulting from a sideslip is:-

$$\begin{aligned} (Y)_\delta &= - \iint 2\rho \bar{v} \delta u \, dy \, dx \\ &= - \frac{4}{\pi} \rho \bar{v} \delta^2 \tan \gamma \iint \frac{|y| \, dy \, dx}{\sqrt{x^2 \tan^2 \gamma - y^2}}, \\ &= - \frac{8}{\pi} \rho \bar{v} \delta^2 \tan^2 \gamma \int_0^{ct} \int_0^1 \frac{q}{t^2} \, dt \, dq, \\ &= - \frac{4}{\pi} \rho \bar{v} \delta^2 c^2 \tan^2 \gamma. \end{aligned}$$

$$(y_v)_\delta = \frac{(Y)_\delta}{\rho \bar{v} S} = - \frac{4}{\pi} \delta^2 \tan \gamma.$$

The corresponding yawing moment is:-

$$\begin{aligned} (N)_\delta &= - \iint 2\rho \bar{v} |u| \delta \cdot x \, dy \, dx \\ &= - \frac{4}{\pi} \rho \bar{v} \delta^2 \tan \gamma \iint \frac{|y| x \, dy \, dx}{\sqrt{x^2 \tan^2 \gamma - y^2}} \end{aligned}$$

$$\begin{aligned}
 &= -\frac{8}{\pi} \rho \bar{v} \delta^2 \tan^2 \gamma \int_0^{\cot} \int_0^1 \frac{q^2}{t^3} dt dq \\
 &= -\frac{8}{3\pi} \rho \bar{v} \delta^2 c^3 \tan^2 \gamma. \\
 (n_v)_\delta &= \frac{(N)_\delta}{\rho \bar{v} V s} = -\frac{8}{3\pi} \delta^2.
 \end{aligned}$$

In considering forces in the plane of the delta wing, in this case sideforce and yawing moment due to sideslip, it is necessary to take into account the contribution from the infinite suction at the leading edge as well as that from the pressure distribution over the wing. At zero incidence the suction forces due to sideslip are of second order, but at a finite incidence there is a cross term of first order.

It will be shown that the induced velocity at the leading edge is perpendicular to the leading edge and that it can be expressed in the form :-

$$q = C \sqrt{\frac{1}{\xi}} + \text{bounded terms}$$

where ξ is the distance in from the leading edge.

The corresponding suction force was shown in Appendix IV to Ref.2 to be $\pi \rho C^2 \cos \gamma \sqrt{1 - \lambda^2}$ per unit length.

Considering first the flow due to the sideslip alone, the induced velocity along a leading edge ($y = x \tan \gamma$) is $(u \cos \gamma + v \sin \gamma)$, which is the real part of $\frac{1}{\delta} \cos \gamma \{U\beta + k'V\}$.

$$\text{Now from equations (12) } \frac{d}{d\tau} \{U\beta + k'V\} = \frac{2}{\pi} i \bar{v} \delta k'^3 \{c n \tau - i k' s n \tau\} s c \tau n d^2 \tau,$$

which, referring to Fig.4c, is real along OP' and pure imaginary along $P'Q'$: it is, furthermore, regular at every point along $OP'Q'$ including Q' , which corresponds to the leading edge $y = x \tan \gamma$. Hence the component of induced velocity due to sideslip along a leading edge is zero.

From Ref.2 we have that the induced velocity potential at the aerofoil due to an incidence α is -

$$\frac{\bar{v} \alpha}{E'(\lambda)} \sqrt{x^2 \tan^2 \gamma - y^2},$$

where $E'(\lambda)$ is the complete elliptic integral of the second kind. It will be noted that the velocity component along the leading edge vanishes.

As the contributions from both fields are zero in the direction of the leading edge, the total induced velocity perpendicular to the leading edge is $\text{cosec } \gamma$ times the x-wise component, which we obtain from the above expression and our previous result (13), giving:-

$$q = \frac{\sec \gamma}{\sqrt{x^2 \tan^2 \gamma - y^2}} \left\{ \frac{\bar{v} \alpha}{E'(\lambda)} x \tan \gamma + \frac{2}{\pi} \bar{v} \delta y \right\}$$

/Put.....

Put $x = x_0 + \xi \sin \gamma$, $y = x_0 \tan \gamma - \xi \cos \gamma$
 so that $q = \left\{ \frac{\bar{v} \alpha}{E'(\lambda)} + \frac{2 \bar{v} \delta}{\pi} \right\} \frac{x_0 \tan \gamma \sec \gamma}{2 \xi}$

+ bounded terms.

Hence the suction due to sideslip at incidence is

$$\frac{2 \rho \bar{v} \alpha \delta}{E'(\lambda)} x_0 \tan \gamma \sqrt{1 - \lambda^2}$$

The side force due to leading edge suction resulting from a sideslip at incidence is:-

$$\begin{aligned} (Y)_{\alpha \delta} &= \int_0^c \frac{4 \rho \bar{v} \alpha \delta}{E'(\lambda)} \tan \gamma \sqrt{1 - \lambda^2} x \, dx \\ &= \frac{2 \rho \bar{v} \alpha \delta}{E'(\lambda)} c^2 \tan \gamma \sqrt{1 - \lambda^2} \end{aligned}$$

$$(y_v)_{\alpha \delta} = (Y)_{\alpha \delta} / \rho \bar{v} S = \frac{2 \alpha \delta \sqrt{1 - \lambda^2}}{E'(\lambda)}$$

The corresponding yawing moment is:-

$$\begin{aligned} (N)_{\alpha \delta} &= \int_0^c \frac{4 \rho \bar{v} \alpha \delta}{E'(\lambda)} \tan \gamma \sqrt{1 - \lambda^2} \cdot x^2 \sec^2 \gamma \, dx \\ &= \frac{4 \bar{v} \alpha \delta}{3 E'(\lambda)} c^3 \sqrt{1 - \lambda^2} \tan \gamma \cdot \sec^2 \gamma \end{aligned}$$

$$(n_v)_{\alpha \delta} = (N)_{\alpha \delta} / \rho \bar{v} S s = \frac{4 \alpha \delta \sqrt{1 - \lambda^2}}{3 E'(\lambda)} \cot \gamma \sec^2 \gamma$$

Hence the total side force is

$$Y = -2 \rho \bar{v} c^2 \tan \gamma \left\{ \frac{2 \delta^2}{\pi} \tan \gamma - \frac{\alpha \delta \sqrt{1 - \lambda^2}}{E'(\lambda)} \right\}$$

and

$$y_v = -2 \left\{ \frac{2 \delta^2}{\pi} \tan \gamma - \frac{\alpha \delta \sqrt{1 - \lambda^2}}{E'(\lambda)} \right\}$$

/and.....

and the total yawing moment is -

$$N = -\frac{4}{3} \rho \bar{v} c^3 \tan \gamma \left\{ \frac{2}{\pi} \delta^2 \tan \gamma - \frac{\lambda \delta}{E'(\lambda)} \sqrt{1 - \lambda^2} \sec^2 \gamma \right\}$$

and

$$n_v = -\frac{4}{3} \left\{ \frac{2}{\pi} \delta^2 - \frac{\lambda \delta}{E'(\lambda)} \sqrt{1 - \lambda^2} \cot \gamma \sec^2 \gamma \right\}$$

5. Delta Wing with Leading Edges Outside Mach Cone

The boundary condition at the aerofoil is $w = \bar{v} \delta$ on one half and $-\bar{v} \delta$ on the other. When considering the upper surface, $y > 0$, where $w = v \delta$ we may take $w = -\bar{v} \delta$ on the corresponding lower surface, since the flow above the aerofoil is independent of the flow below it in the case under consideration. In this artificial condition there is a jump of $-2\bar{v} \delta$ in the value of $\frac{\partial \Phi}{\partial n}$ at the surface, so that the surface can be replaced by a uniform supersonic source distribution of density $\frac{-\bar{v} \delta}{\pi}$; the other half of the aerofoil, $y < 0$, where $w = -\bar{v} \delta$, can be likewise replaced by a source distribution of density $\frac{\bar{v} \delta}{\pi}$.

$$\text{Hence } \Phi(x, y, 0) = -\frac{\bar{v} \delta}{\pi} \iint \frac{\sigma dx_0 dy_0}{\sqrt{(x - x_0)^2 - \beta^2 (y - y_0)^2}}$$

where $\sigma = +1$, when $y > 0$

$\sigma = -1$, when $y < 0$.

so
$$\Phi = -\frac{\bar{v} \delta}{\pi} \iint \sigma d\rho d\psi,$$

where $x_0 = x - \beta \rho \cosh \psi$

$y_0 = y - \rho \sinh \psi$

In Fig.4d P is the point (x, y) , OL_1 and OL_2 are the loading edges, and PL_1 and PL_2 are the boundaries where $(x - x_0)^2 - \beta^2 (y - y_0)^2 = 0$.

The values of ρ, ψ vary as follows:-

when (x_0, y_0) is on (i) PL_1 , $\psi = -\infty$

(ii) PL_2 , $\psi = +\infty$

(iii) OP, $\psi = \tanh^{-1} \frac{\beta y}{x} = \epsilon$

(iv) OX, $\rho = \rho_0 = y \operatorname{cosech} \psi$

(v) OL_1 , $\rho = \rho_1 = \frac{x \tan \gamma - y}{\lambda \cosh \psi - \sinh \psi}$

(vi) OL_2 , $\rho = \rho_2 = \frac{x \tan \gamma + y}{\lambda \cosh \psi + \sinh \psi}$

/When.....

When P is inside the Mach cone from the apex, we have

$$\Phi = -\frac{\bar{v}\delta}{\pi} \left\{ \int_{-\infty}^{\epsilon} \rho_1 d\psi + \int_{\epsilon}^{\infty} \rho_0 d\psi - \int_{\epsilon}^{\infty} (\rho_2 - \rho_0) d\psi \right\}$$

so that $u = \frac{\bar{v}\delta}{\pi} \left\{ \int_{-\infty}^{\epsilon} \frac{\partial \rho_1}{\partial x} d\psi - \int_{\epsilon}^{\infty} \frac{\partial \rho_2}{\partial x} d\psi \right\}$, since $\frac{\partial \rho_0}{\partial x} = 0$

and $\rho_0 = \rho_1 = \rho_2$, when $\psi = \epsilon$

$$u = \frac{\bar{v}\delta}{\pi} \int_{-\infty}^{\epsilon} \frac{\tan \gamma d\psi}{\lambda \cosh \psi - \sinh \psi} - \frac{\bar{v}\delta}{\pi} \int_{\epsilon}^{\infty} \frac{\tan \gamma d\psi}{\lambda \cosh \psi + \sinh \psi}$$

$$= \frac{2\bar{v}\delta}{\pi} \int_{-1}^{\tau} \frac{\tan \gamma dt}{\lambda(1+t^2) - 2t} - \frac{2\bar{v}\delta}{\pi} \int_{\tau}^1 \frac{\tan \gamma dt}{\lambda(1+t^2) + 2t}$$

where $t = \tanh \frac{1}{2} \psi$, $\tau = \tanh \frac{1}{2} \epsilon$

$$= \frac{2\bar{v}\delta \tan \gamma}{\pi \sqrt{\lambda^2 - 1}} \left\{ \tan^{-1} \frac{\lambda\tau - 1}{\sqrt{\lambda^2 - 1}} + \tan^{-1} \frac{\lambda\tau + 1}{\sqrt{\lambda^2 - 1}} \right\}$$

$$= \frac{2\bar{v}\delta \tan \gamma}{\pi \sqrt{\lambda^2 - 1}} \tan^{-1} \left\{ y \cot \gamma \sqrt{\frac{\lambda^2 - 1}{x^2 - \beta^2 y^2}} \right\}$$

When P is outside the apex Mach cone

$$\Phi = -\frac{\bar{v}\delta}{\pi} \int_{-\infty}^{\infty} \rho_1 d\psi, \quad y > 0$$

so that $u = \frac{\bar{v}\delta \tan \gamma}{\sqrt{\lambda^2 - 1}}$, by putting $\epsilon = \infty$ in the above.

When $y < 0$, u changes sign.

Hence the rolling moment due to sideslip is:-

$$L = + \iint 2\rho \bar{v} u y dy dx$$

$$= + \frac{4\rho \bar{v} \delta \tan \gamma}{\sqrt{\lambda^2 - 1}} \left\{ \int_0^c \sec \theta \int_{\cot^{-1} \beta}^{\gamma} r^2 \sin \theta d\theta dr \right.$$

$$\left. + \frac{2}{\pi} \int_0^{\beta \sec \psi} \int_0^{\infty} \beta \tan^{-1} \left[\frac{\sqrt{\lambda^2 - 1}}{\lambda} \sinh \psi \right] q^2 \sinh \psi d\psi dq \right\}$$

/where.....

where $x = r \cos \theta$, $y = r \sin \theta$ in the 1st integral

and $x = q \cosh \psi$, $y = q \sinh \psi$ in the 2nd integral

$$= + \frac{4\rho\bar{v}\bar{v}\delta c^3 \tan \gamma}{3\sqrt{\lambda^2 - 1}} \left\{ \int_{\cot^{-1}\beta}^{\gamma} \tan \theta \sec^2 \theta d\theta + \frac{2}{\pi\beta^2} \int_0^{\infty} \tan^{-1} \left[\frac{\sqrt{\lambda^2 - 1}}{\lambda} \sinh \psi \right] \tanh \psi \operatorname{sech}^2 \psi d\psi \right\}$$

$$= + \frac{2\rho\bar{v}\bar{v}\delta c^3 \tan \gamma}{3\sqrt{\lambda^2 - 1}} \left\{ \tan^2 \gamma - \frac{1}{\beta^2} + \frac{2}{\pi\beta^2} \left[\frac{\pi}{2} - \int_0^{\infty} \frac{\lambda\sqrt{\lambda^2 - 1} \cosh \psi \tanh^2 \psi d\psi}{\lambda^2 - 1 \cdot \sinh^2 \psi + \lambda^2} \right] \right\}$$

$$= + \frac{2\rho\bar{v}\bar{v}\delta c^3 \tan \gamma}{3\sqrt{\lambda^2 - 1}} \left\{ \tan^2 \gamma - \frac{2}{\pi\beta^2} \int_0^{\infty} \frac{\lambda\sqrt{\lambda^2 + 1} t^2 dt}{(1 + t^2)(\lambda^2 - 1 t^2 + \lambda^2)} \right\}$$

where $t = \sinh \psi$

$$= + \frac{2\rho\bar{v}\bar{v}\delta c^3 \tan \gamma}{3\sqrt{\lambda^2 - 1}} \left\{ \tan^2 \gamma + \frac{2\lambda\sqrt{\lambda^2 - 1}}{\pi\beta^2} \left[\tan^{-1} t - \frac{\lambda}{\sqrt{\lambda^2 - 1}} \tan^{-1} \frac{t\sqrt{\lambda^2 - 1}}{\lambda} \right] \right\}$$

$$= + \frac{2\rho\bar{v}\bar{v}\delta c^3 \tan^2 \gamma}{3\beta}$$

Hence $L_v = \frac{L}{\rho\bar{v}\bar{v}Ss} = + \frac{2\delta}{3\beta}$

The side force due to sideslip is:-

$$Y = - \iint 2\rho\bar{v} |u| \delta \, dy dx$$

$$= - \frac{4\rho\bar{v}\delta^2 \tan \gamma}{\sqrt{\lambda^2 - 1}} \left\{ \int_0^c \int_{\cot^{-1} \beta}^{\sec \theta \gamma} r dr d\theta + \frac{2}{\pi} \int_0^{\frac{c}{\beta} \operatorname{sech} \psi} \int_0^{\infty} \beta \tan^{-1} \left[\frac{\sqrt{\lambda^2 - 1} \sinh \psi}{\lambda} \right] q d\psi dq \right\}$$

$$= - \frac{2\rho\bar{v}\delta^2 c^2 \tan \gamma}{\sqrt{\lambda^2 - 1}} \left\{ \tan \gamma - \frac{1}{\beta} + \frac{2}{\pi\beta} \int_0^{\infty} \tan^{-1} \left[\frac{\sqrt{\lambda^2 - 1} \sinh \psi}{\lambda} \right] \operatorname{sech}^2 \psi d\psi \right\}$$

$$= - \frac{2\rho\bar{v}\delta^2 c^2 \tan \gamma}{\sqrt{\lambda^2 - 1}} \left\{ \tan \gamma - \frac{1}{\beta} + \frac{2}{\pi\beta} \left[\frac{\pi}{2} - \int_0^{\infty} \frac{\lambda \sqrt{\lambda^2 - 1} \cosh \psi \tanh \psi d\psi}{\lambda^2 - 1 \sinh^2 \psi + \lambda^2} \right] \right\}$$

$$= - \frac{2\rho\bar{v}\delta^2 c^2 \tan \gamma}{\sqrt{\lambda^2 - 1}} \left\{ \tan \gamma - \frac{2}{\pi\beta} \int_1^{\infty} \frac{\lambda \sqrt{\lambda^2 - 1} dt}{\lambda^2 - 1 t^2 + 1} \right\}, \quad t = \cosh \psi$$

$$= - \frac{4}{\pi} \rho\bar{v}\delta^2 c^2 \tan^2 \gamma \frac{\sec^{-1} \lambda}{\sqrt{\lambda^2 - 1}}$$

$$y_v = \frac{Y}{\rho\bar{v}S} = - \frac{4}{\pi} \delta^2 \tan \gamma \frac{\sec^{-1} \lambda}{\sqrt{\lambda^2 - 1}}$$

The yawing moment due to sideslip is:-

$$N = - \iint 2\rho\bar{v} |u| x \delta \, dy dx$$

$$= - \frac{4\rho\bar{v}\delta^2 \tan \lambda}{\sqrt{\lambda^2 - 1}} \left\{ \int_0^c \int_{\cot^{-1} \beta}^{\sec \theta \gamma} r^2 \cos \theta dr d\theta + \frac{2}{\pi} \int_0^{\frac{c}{\beta} \operatorname{sech} \psi} \int_0^{\infty} \beta^2 \tan^{-1} \left[\frac{\sqrt{\lambda^2 - 1} \sinh \psi}{\lambda} \right] q^2 \cosh \psi d\psi dq \right\}$$

$$= - \frac{4\rho\bar{v}\bar{V}\delta^2 c^3 \tan\gamma}{3\sqrt{\lambda^2 - 1}} \left\{ \tan\gamma - \frac{1}{\beta} + \frac{2}{\pi\beta} \int_0^{\infty} \tan^{-1} \left[\frac{\sqrt{\lambda^2 - 1}}{\lambda} \sinh\psi \right] \operatorname{sech}^2 \psi d\psi \right\}$$

$$= - \frac{8}{3\pi} \rho\bar{v}\bar{V}\delta^2 c^3 \tan^2\gamma \frac{\sec^{-1} \lambda}{\sqrt{\lambda^2 - 1}}$$

$$n_v = - \frac{N}{\rho\bar{v}\bar{V}Ss} = - \frac{8\delta^2}{3\pi} \cdot \frac{\sec^{-1} \lambda}{\sqrt{\lambda^2 - 1}} .$$

-----oOo-----

REFERENCES

| <u>No.</u> | <u>Author</u> | <u>Title</u> |
|------------|---------------|-------------------------------------------------------------------------------------------------------------|
| 1 | H.J. Stewart | The Lift of a Delta Wing at Supersonic Speeds. Quarterly of Applied Mathematics, October, 1946. |
| 2 | A. Robinson | Aerofoil Theory of a Flat Delta Wing at Supersonic Speeds. R.A.E. Report No. Aero 2151 (A.R.C.10222), 1946. |

APPENDIX

The Relation between Two Methods
of Treating Aerodynamic Force Problems
of a Delta Wing at Supersonic Speeds

1. Introduction

1.1 Solutions to the problem of the lift at supersonic speeds of a flat delta wing lying within its apex Mach cone were obtained independently by Stewart (ref.1) and by Robinson (ref.2) by methods which at first sight appear very different. A transformation will be derived that links the two under conditions of conical flow.

1.2 Robinson's method of hyperboloido-conal coordinates is classical in its approach to the problem, for it reduces to the finding of a system of which the Mach cone and the delta wing are coordinate surfaces. Stewart's treatment is special to a particular set of problems.

1.3 Despite the link between the methods they are different in scope. Stewart's method is suitable for problems involving a discontinuity in the boundary conditions, while the other is not: on the other hand hyperboloido-conal coordinates are not limited to solutions of degree zero in x, y, z. Thus, for example, Stewart's method is suitable for calculating the aerodynamic derivatives with respect to sideslip and the other for pitching moment due to pitching and rolling moment due to rolling, but not vice versa.

2. Hyperboloido-Conal Coordinates

The coordinates developed in ref.2 were as follows:-

$$\left. \begin{aligned}
 x &= \frac{r\mu\nu}{k} \\
 y &= \frac{r\sqrt{(\mu^2-k^2)(\nu^2-k^2)}}{\beta k k'} \\
 z &= \frac{r\sqrt{(\mu^2-1)(1-\nu^2)}}{\beta k'}
 \end{aligned} \right\} \dots\dots\dots (1)$$

where $k'^2 = 1 - k^2 = \beta^2 \tan^2 \gamma$

$0 \leq r < \infty$

$1 \leq \mu < \infty$

$k \leq \nu < 1$

The family of surfaces constituting the system are:-

$$\left. \begin{aligned} x^2 - \beta^2(y^2 + z^2) &= r^2 \\ \frac{x^2}{\mu^2} - \frac{\beta^2 y^2}{\mu^2 - k^2} - \frac{\beta^2 z^2}{\mu^2 - 1} &= 0 \\ \frac{x^2}{\nu^2} - \frac{\beta^2 y^2}{\nu^2 - k^2} - \frac{\beta^2 z^2}{1 - \nu^2} &= 0 \end{aligned} \right\} \dots\dots\dots (2)$$

It will be observed that these coordinates are analogous to sphero-conal coordinates; in fact they correspond under the transformation $(x', y', z') = (x, i\beta y, i\beta z)$.

As $\mu \rightarrow 1$, the cones of the second family of surfaces approximate to the delta wing from both sides, and as $\mu \rightarrow \infty$ they tend to the Mach cone.

The equation
$$-\beta^2 \frac{\partial^2 \phi}{\partial x^2} + \frac{\partial^2 \phi}{\partial y^2} + \frac{\partial^2 \phi}{\partial z^2} = 0 \dots\dots\dots (3)$$

now becomes:-

$$\sqrt{(\mu^2 - k^2)(\mu^2 - 1)} \frac{\partial}{\partial \mu} \left\{ \sqrt{(\mu^2 - k^2)(\mu^2 - 1)} \frac{\partial \phi}{\partial \mu} \right\} + \sqrt{(\nu^2 - k^2)(1 - \nu^2)} \frac{\partial}{\partial \nu} \left\{ \sqrt{(\nu^2 - k^2)(1 - \nu^2)} \frac{\partial \phi}{\partial \nu} \right\} - (\mu^2 - \nu^2) \frac{\partial}{\partial r} \left(r^2 \frac{\partial \phi}{\partial r} \right) = 0 \dots\dots\dots (4)$$

Writing
$$\bar{\rho} = \int_{\mu}^{\infty} \frac{dt}{\sqrt{(t^2 - k^2)(t^2 - 1)}}, \bar{\sigma} = \int_{\nu}^k \frac{dt}{\sqrt{(t^2 - k^2)(1 - t^2)}}$$

i.e.,
$$\left. \begin{aligned} \mu &= ns(\bar{\rho}, k) \\ \nu &= kn d(\bar{\sigma}, k') \end{aligned} \right\} \dots\dots\dots (5)$$

we have
$$\frac{\partial^2 \phi}{\partial \bar{\rho}^2} + \frac{\partial^2 \phi}{\partial \bar{\sigma}^2} - (\mu^2 - \nu^2) \frac{\partial}{\partial r} \left(r^2 \frac{\partial \phi}{\partial r} \right) = 0 \dots\dots\dots (6)$$

Hence for conical flow $\frac{\partial^2 \phi}{\partial \bar{\rho}^2} + \frac{\partial^2 \phi}{\partial \bar{\sigma}^2} = 0$, where ϕ is a velocity.

As $\bar{\rho}$ varies from 0 to $K(k)$, μ varies from ∞ to 1. As $\bar{\sigma}$ varies from $-2K'(k)$ to $-K'(k)$, ν varies from k to 1 and back to k as $\bar{\sigma}$ continues through to zero, repeating as $\bar{\sigma}$ increases to $2K'$.

Equations (1) and (5) give:-

$$\left. \begin{aligned} x &= rns (\bar{\rho}, k) \text{ nd } (\bar{\sigma}, k') \\ y &\equiv \frac{r}{\beta} ds (\bar{\rho}, k) \text{ sd } (\bar{\sigma}, k') \\ z &\equiv \frac{r}{\beta} cs (\bar{\rho}, k) \text{ cd } (\bar{\sigma}, k') \end{aligned} \right\} \dots\dots\dots (7)$$

To each value of $\bar{\rho}, \bar{\sigma}$ in the specified intervals of variation there corresponds just one triplet x, y, z for constant r on the right hand sheet of the hyperboloid $x^2 - \beta^2 y^2 - \beta^2 z^2 = r^2$. Previously we traced the (x, y, z) -plane on the ω -plane ($\omega = \eta + i\beta \frac{y + iz}{x + r}$), so that evidently there is a one to one correspondence between the points inside $|\omega| = 1$ in the ω -plane and the points in the τ -plane ($\tau = \bar{\rho} + i\bar{\sigma}$) within the specified intervals of variation of $\bar{\rho}$ and $\bar{\sigma}$.

Equation (6) shows that a function ϕ which satisfies equation (3) and is of degree zero in x, y, z satisfies Laplace's equation in $\bar{\rho}, \bar{\sigma}$, but any function which satisfies Laplace's equation in the ω -plane is of zero degree in x, y, z and satisfies equation (3). Hence every potential function in the ω -plane is a potential function in the τ -plane, provided the ω -plane is traced on the latter by means of the transformations given by $\omega = \beta \frac{y + iz}{x + r}$ and equations (1) and (5). Therefore the transformation is conformal.

By a transformation based on Stewart's method we previously transformed a set of points in the ω -plane into the rectangle, vertices $\tau = \pm 2iK', K \pm 2iK'$, but that set of points corresponds to the points in the (x, y, z) -plane which become, by the transformation of the previous paragraph, the "same" rectangle in the τ -plane with the vertices corresponding. It therefore follows from the general theory of conformal representation that the two transformations are identical.

We have shown that Stewart's τ -plane is connected to the system of hyperboloido-conal coordinates by the simple relations of equations (5). Furthermore we have given at equations (7) a direct coordinate transformation between (x, y, z) and $(\bar{\rho}, \bar{\sigma})$, by which Stewart's relation between U, V and W as functions of τ could be established in the same manner as the relation between them as functions of the intermediate variable ω was established.

3. Aerodynamic Derivatives L_p and M_q

In the first section of this appendix it was stated the rolling moment due to rolling, L_p , and the pitching moment due to pitching, M_q , could be derived by the method of hyperboloido-conal coordinates in the quasi-subsonic case. This will now be indicated.

By the transformation $(x', y', z') = (x, i\beta y, i\beta z)$ these coordinates become sphero-conal, while equation (3) reduces to Laplace's equation.

Hence there exist solutions for the induced potential Φ of the form $\Phi = r^n E_n(\nu) F_n(\mu)$ where E_n and F_n are Lamé functions of the same class, of degree n and of the first and second kind respectively.

Such a solution satisfies the boundary condition at the Mach cone, where $\mu \rightarrow \infty$, since $F_n(\mu)$ is of order μ^{-n-1} at infinity.

To find L_p we choose the degree and class of the Lamé functions so that

$$\Phi = yz \frac{F_2(\mu)}{E_2(\mu)}.$$

Though at first sight $\frac{\partial \Phi}{\partial z}$ is proportional to y , and therefore of the right form, at the aerofoil where $z = 0, \mu = 1$, we require some reassurance on the point, for here

$$\frac{F_2(\mu)}{E_2(\mu)} = \int_{\mu}^{\infty} \frac{dt}{\sqrt{(t^2 - 1)^3(t^2 - k^2)^3}}, \text{ which is of order } (\mu^2 - 1)^{-\frac{1}{2}}$$

as μ tends to unity; however it may be shown that $\frac{\partial}{\partial z} \left\{ z \frac{F_2(\mu)}{E_2(\mu)} \right\}$

tends to a limit that is independent of γ .

We find M_q in a similar fashion by taking

$$\Phi = zx \frac{F_2(\mu)}{E_2(\mu)} = zx \int_{\mu}^{\infty} \frac{dt}{t^2 \sqrt{(t^2 - 1)^3(t^2 - k^2)}}.$$

Detailed numerical results for these cases will be published shortly in the Journal of the Royal Aeronautical Society.

COLLEGE
REPORT

No. 12.

1.8

1.6

1.4

1.2

1.0

0.8

0.6

0.4

0.2

$-\beta y_v / \delta^2$


$+\beta l_v / \delta$


$-\pi_v / \delta^2$

$\lambda = \beta \tan \gamma$

VARIATION OF DERIVATIVE β, π_v, y_v
AT ZERO INCIDENCE
WITH THE PARAMETER λ

FIG 1

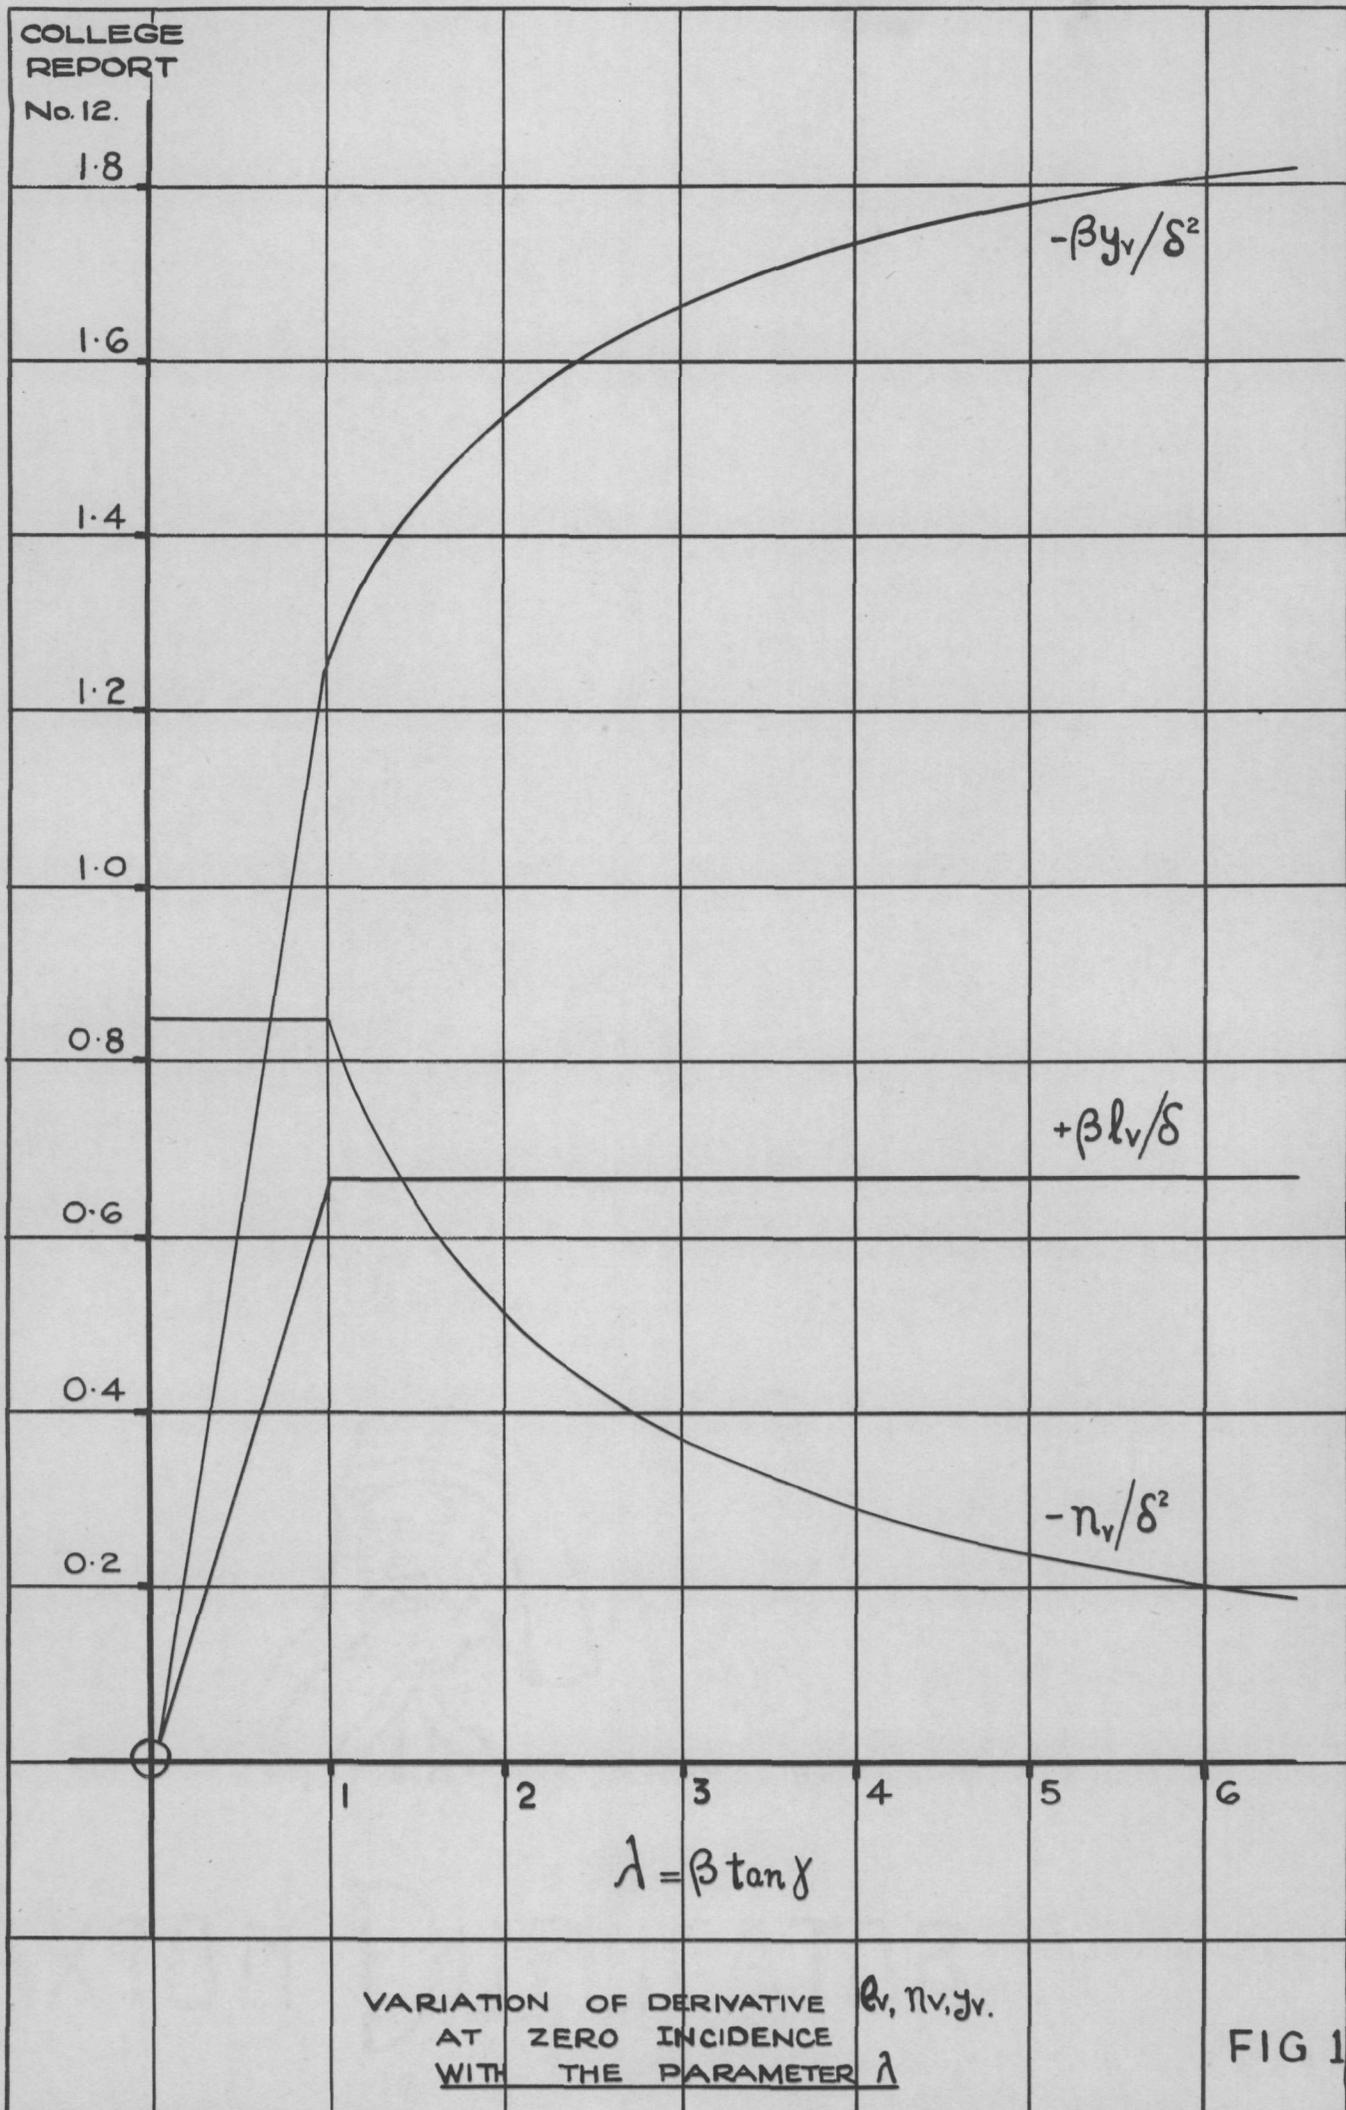

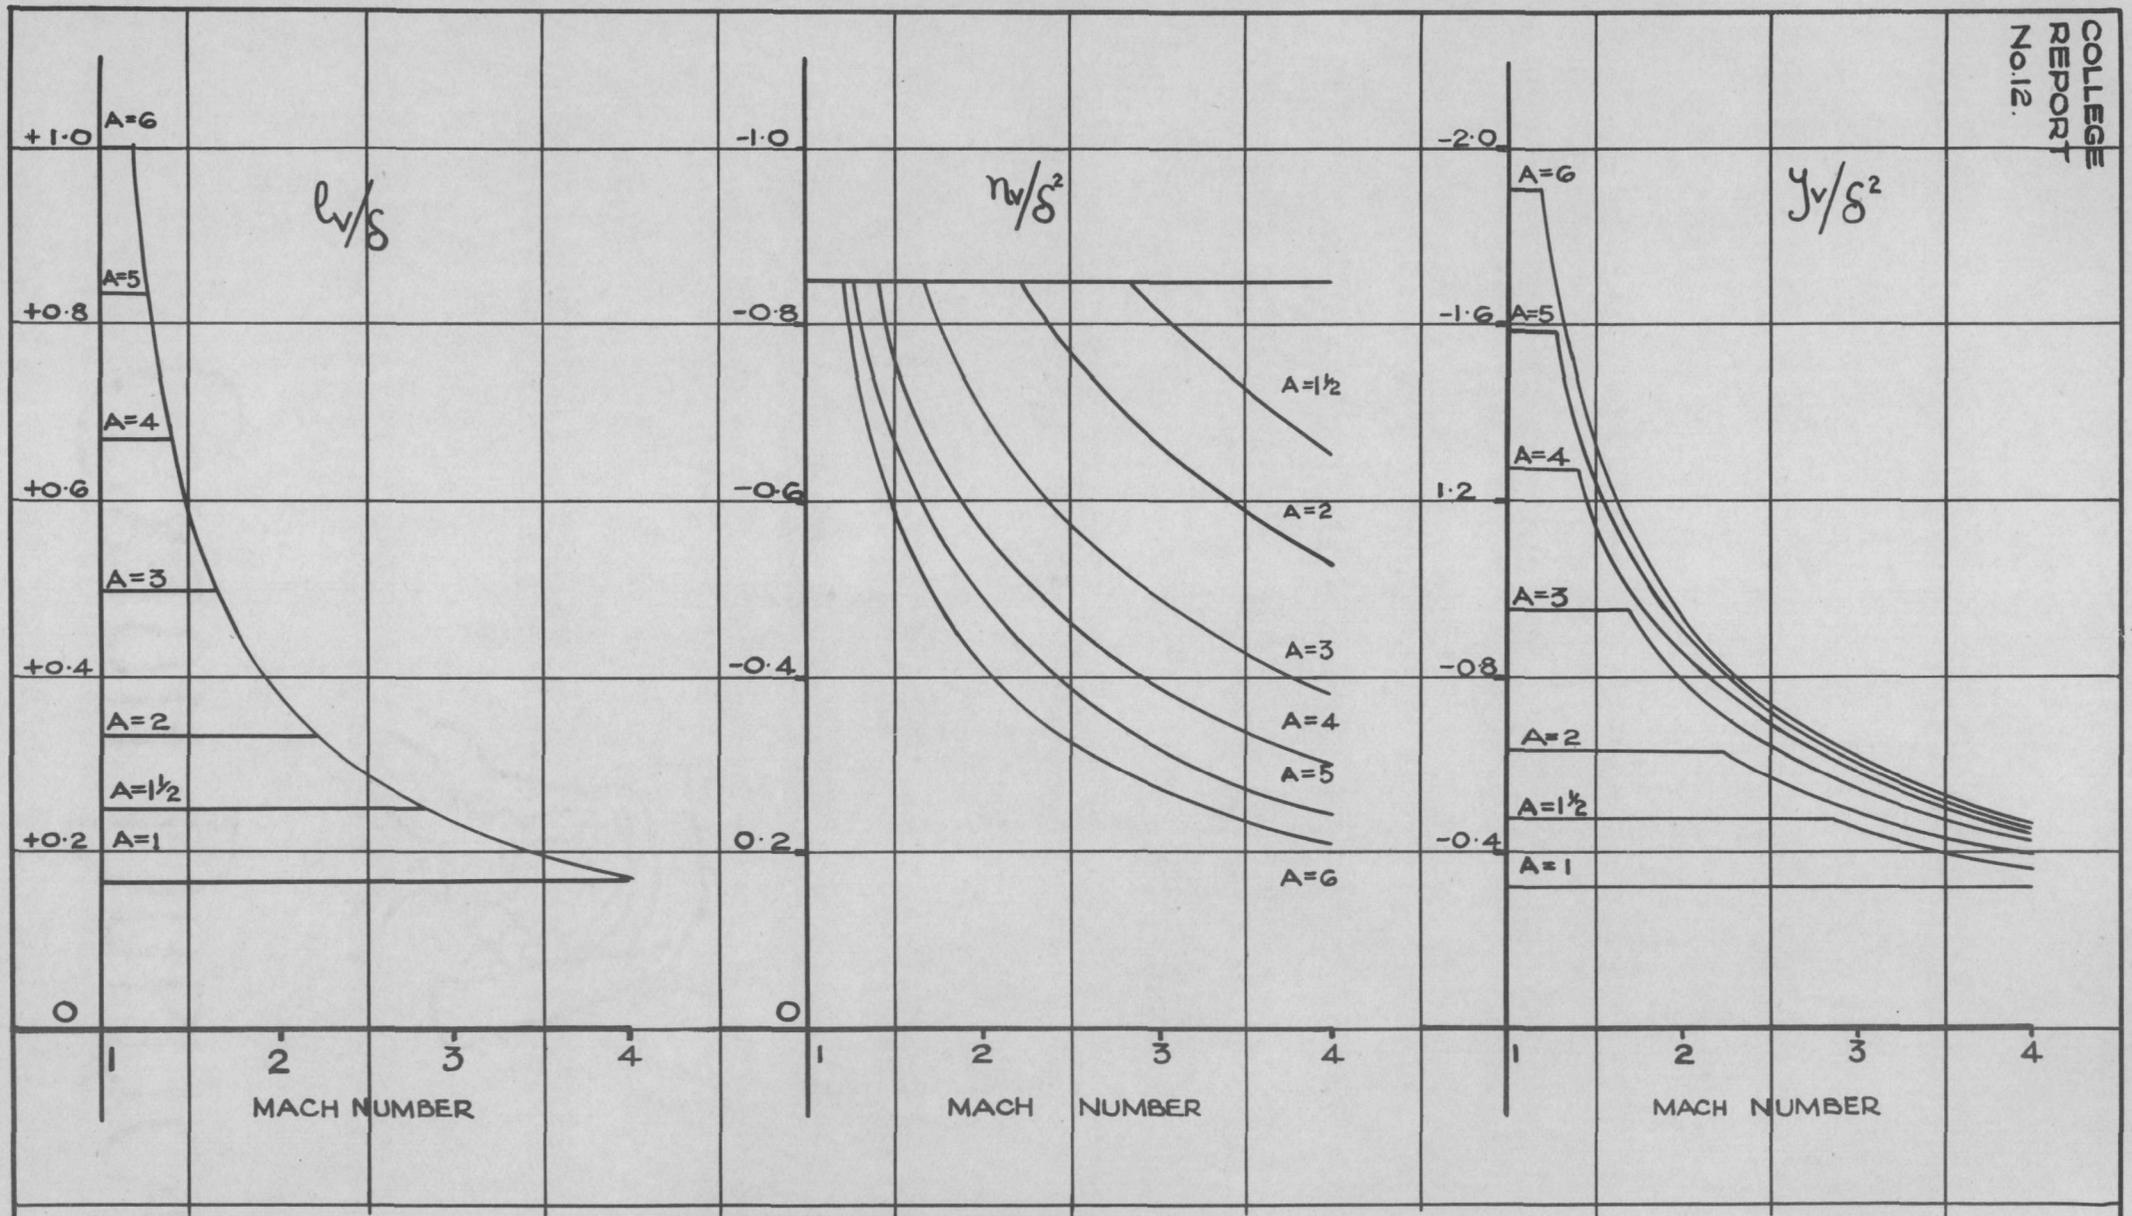

VARIATION OF DERIVATIVES l_v, n_v, y_v AT ZERO
INCIDENCE WITH MACH NUMBER AND ASPECT RATIO.

FIG.2

$\frac{y_v}{\alpha \delta}$

2.5
2.0
1.5
1.0
0.5

$\frac{\eta_v}{\alpha \delta}$

5.0
4.0
3.0
2.0
1.0

A=1
A=1½
A=2
A=3
A=4
A=5
A=6

A=1
A=1½
A=2
A=3
A=4
A=5
A=6

1 2 3 4


MACH NUMBER

1 2 3 4

MACH NUMBER


FIG 3

VARIATION OF CONTRIBUTION OF SUCTION
FORCE TO DERIVATIVES y_v, η_v , WITH
ASPECT RATIO AND MACH NUMBER.

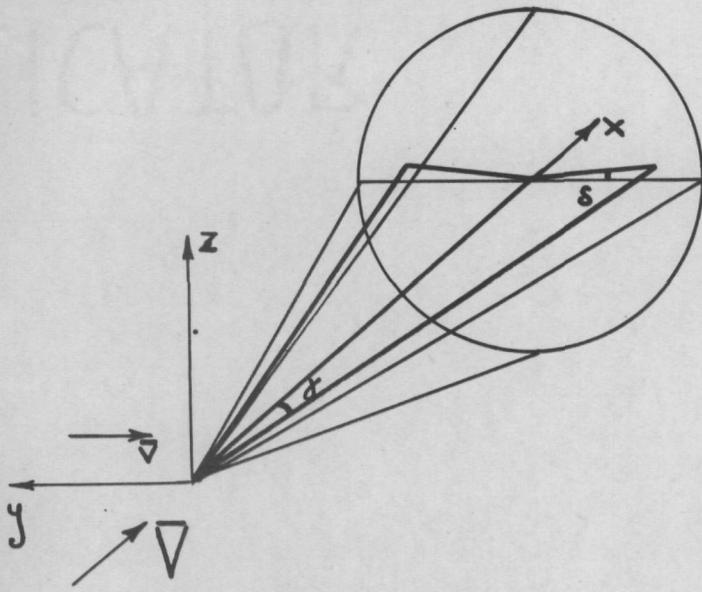


THE AEROFOIL IN THE
(x, y, z) FIELD.

FIG 4a

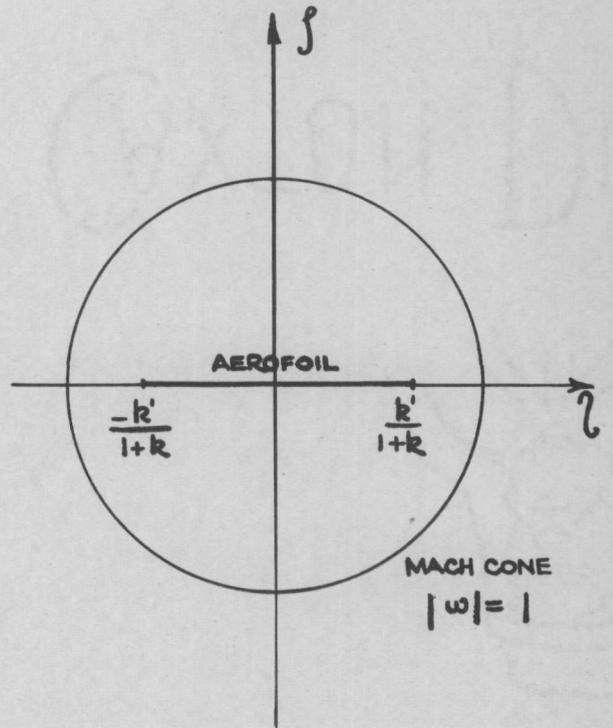


THE w - PLANE.

FIG 4b

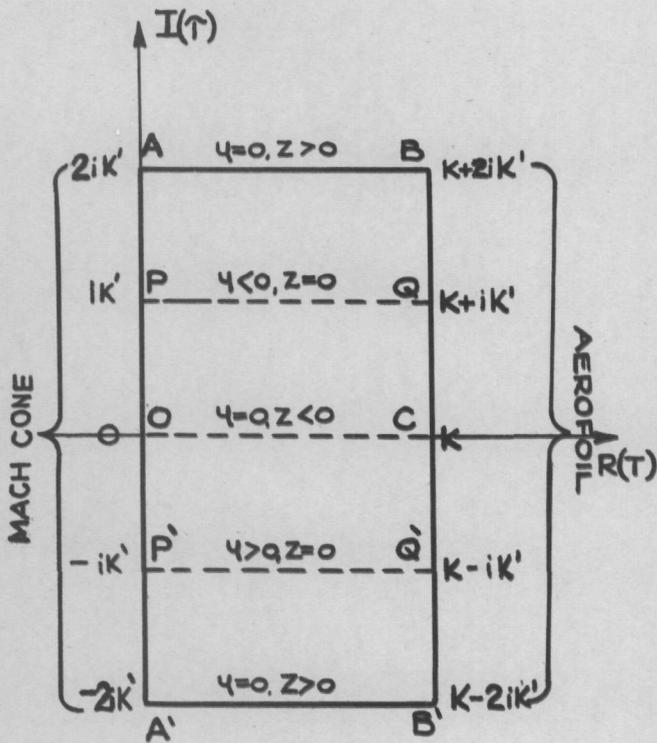

THE tau-PLANE

FIG 4c.

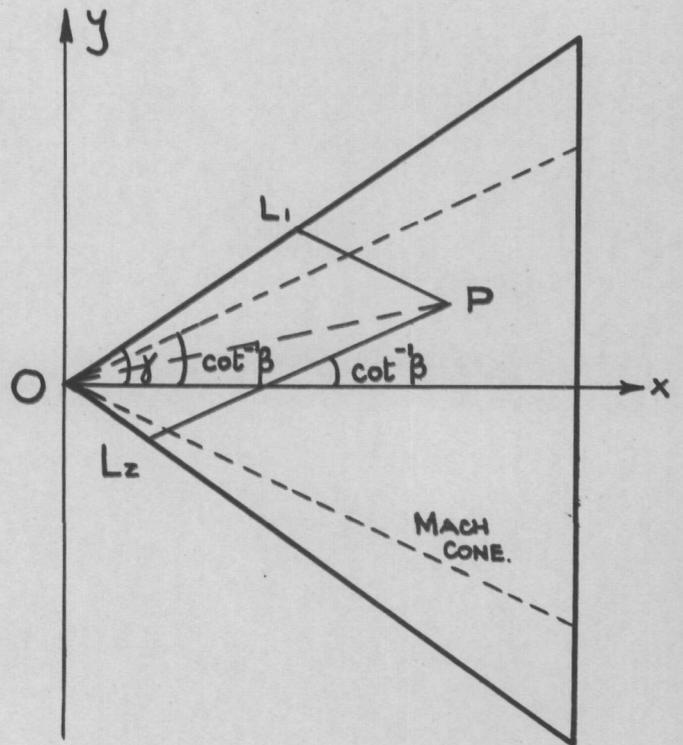

THE AEROFOIL FOR lambda > 1

FIG 4d.