TU Delft

Delft University of Technology

Document Version
Final published version

Licence
CC BY

Citation (APA)
Kementzetzidis, E., Pisanò, F., Tsetas, A., S. Gòmez, S., & Metrikine, A. (2023). The post-installation performance of piles installed with a novel driving method: field tests and numerical modelling. In P. J. Vardon, & A.-C. Dieudonné (Eds.), *Proceedings of the Symposium on Energy Geotechnics 2023: Accelerating the energy trasition* Article 042 (Symposium on Energy Geotechnics Proceedings). TU Delft OPEN Publishing. https://doi.org/10.59490/seg.2023.604

Important note
To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright
In case the licence states “Dutch Copyright Act (Article 25fa)”, this publication was made available Green Open Access via the TU Delft Institutional Repository pursuant to Dutch Copyright Act (Article 25fa, the Taverne amendment). This provision does not affect copyright ownership.
Unless copyright is transferred by contract or statute, it remains with the copyright holder.

Sharing and reuse
Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy
Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

This work is downloaded from Delft University of Technology.

Symposium on Energy Geotechnics
Accelerating the energy transition
3-5 October 2023, Delft, the Netherlands

Peer-reviewed Conference Contribution

The post-installation performance of piles installed with a novel driving method: field tests and numerical modelling

Evangelos Kementzetzidis[1,*], Federico Pisanò[1,2], Athanasios Tsetas[1], Sergio S. Gòmez[1] and Andrei Metrikine[1]

[1] Delft University of Technology, Delft, the Netherlands
[2] NGI, Oslo, Norway
* Corresponding author: e.kementzetzidis@tudelft.nl

Since the industrial revolution, humanity's impact on the planet has increased significantly. The growth of global economies and population size in the 20th century was fueled by the combustion of fossil fuels. In an effort to reduce the impact of human kind on the environment, governments ratified landmark agreements such as the Montreal Protocol in 1987, the UNFCCC in 1992, the Kyoto Protocol in 2005, and the Paris Agreement in 2015.

To support this effort, the European implemented the European Green Deal (2019), which aims to achieve no-net greenhouse gas emissions by 2050. Offshore wind energy, particularly large-diameter monopiles, is expected to play a substantial role in this transition. Europe has already developed over 28 GW of offshore wind power, with a global capacity of 37 GW as of 2021 [8]. However, to meet the goals of the European Green Deal, offshore wind capacity needs to scale up significantly in the next 28 years.

The installation of monopiles, the most selected foundation option for offshore wind turbines, has traditionally relied on impact hammering. This method has drawbacks such as lengthy installation times, and noise emissions harmful to marine life. An alternative approach is axial vibratory pile driving, which offers faster and quieter installation. However, certification bodies have yet to endorse its use for offshore wind farm construction owing to uncertainties relating to the post-installation monopile performance. Research efforts are being devoted to understanding the dynamic behaviour of the soil during vibro-driving and the effects of vibro-installation on pile performance. Several geotechnical research teams are investigating the post-installation lateral behaviour of monopiles and comparing the performance of impact piling and vibratory piling [1-7,9-13].

To complement the effort towards noiseless pile driving researchers from TU Delft proposed the novel Gentle Driving of Piles (GDP) method which aims to enhance traditional axial vibro-pile driving by incorporating high-frequency torsional vibrations [9]. The addition of torsional vibrations is expected to consume/redirect soil frictional resistance and limit radial expansion during pile driving, resulting in faster and quieter installation – the GDP shaker is presented in Figure 1.a.

To demonstrate the GDP technology and compare its performance with traditional pile-driving methods (impact pilling and axial vibratory driving), comprehensive medium-scale field tests were conducted in an inhomogeneous sand deposit at the Port of Rotterdam. Eight identical test piles with a diameter of 0.762 m and an embedded length of 8 m were installed using impact hammering, traditional axial vibratory piling, and the GDP method. Out of the eight test piles, four were heavily instrumented out of which two were GDP-driven, and the remaining two were installed with impact pilling (IH) and axial vibro-driving (VH).

The tests performed on the four main test piles consisted of two stages: the first stage focused on driving performance, while the second stage examined the cyclic lateral behaviour of the piles under repeated loading for different installation methods -cyclic loading programme in Figure 1.b. The test results highlighted the promise of the method towards faster (Figure 1.c.) and less perturbing pile driving [1,9,13] but also enhanced post-installation lateral response [5,6,7] compared to the traditional alternative installation methods (Figure 1.d.).

© 2023 Kementzetzidis et al. published by TU Delft OPEN Publishing on behalf of the authors. Licensed under a Creative Commons Attribution CC BY license.
DOI: https://doi.org/10.59490/seg23.2023.604

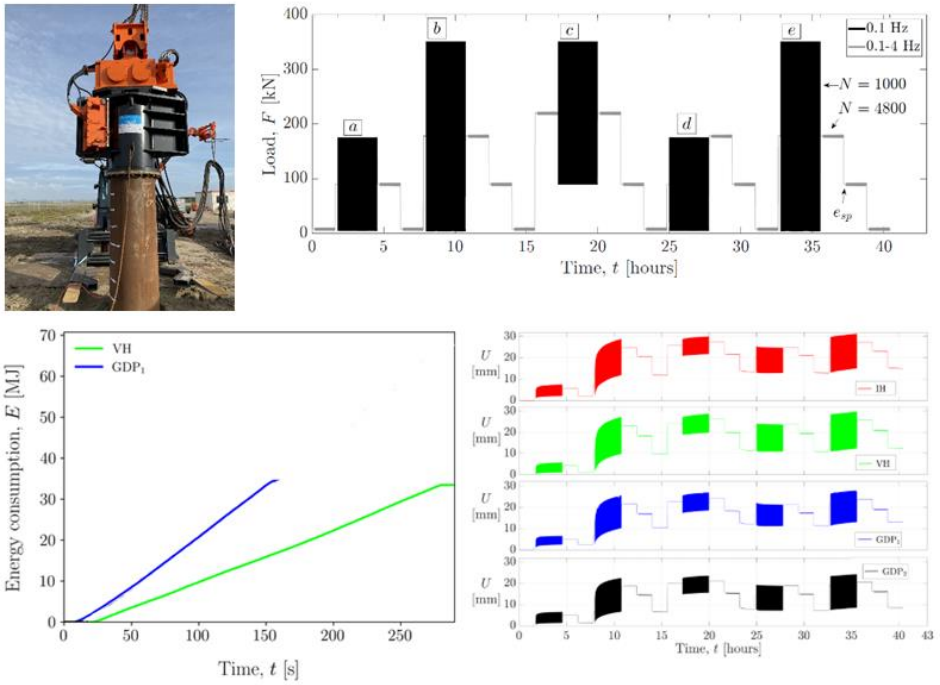


Figure 1: a. (top left) The GDP shaker. b. (top right) The cyclic lateral loading programme applied to the test piles. The loading programme consisted of approximately 82.000 loading cycles (N). c. (bottom left) Energy consumption – and driving duration, during axial vibratory driving (VH) and GDP pile driving (GDP¬1), in the Maasvlakte 2 test site. d (bottom right) Displacement time histories at the pile head for the four test piles installed measured during the cyclic lateral loading programme in Figure 1.b.

Contributor statement

E. Kementzetzidis: Conceptualization, Formal analysis, Writing-Original Draft, Writing- Review & Editing. **F. Pisanò**: Conceptualization, Formal analysis, Writing- Review & Editing. **A. Tsetas**: Conceptualization, Formal analysis, Writing- Review & Editing. **Sergio S. Gòmez**: Conceptualization, Formal analysis, Writing- Review & Editing. **A. Metrikine**: Conceptualization, Writing- Review & Editing, Project Administration, Resources.

References

[1] Achmus, M., Schmoor, K. A.,Herwig, V., &Matlock, B. (2020). *Lateral bearing behaviour of vibro-and impact-driven large-diameter piles in dense sand.* geotechnik, 43(3), 147–159

[2] Anusic, I., Lehane, B., Eiksund, G., & Liingaard, M. (2019). *Influence of installation method on static lateral response of displacement piles in sand.* Géotechnique Letters, 9(3), 193–197.

[3] Heins, E., & Grabe, J. (2017). *Class-A-prediction of lateral pile deformation with respect to vibratory and impact pile driving.* Computers and Geotechnics, 86, 108–119.

[4] Herwig, V., & Gattermann, J. (2015). *VIBRO-Project–Vergleich der lateralen Tragfähigkeit von vibrierten und geschlagenen Stahlpfählen in sandigen Böden.* Pfahl-Symposium, 19(20.02), 2015.

[5] Kementzetzidis, E. (2023a). *Cyclic behaviour of laterally loaded (mono) piles in sand: With emphasis on pile driving effects.* Delft: Delft University of Technology. doi:10.4233/uuid:36b8a133-2a5a-49b3-9701-f75f102bbe3d

[6] Kementzetzidis, E., Pisanò, F., Elkadi, A., Tsouvalas, A., & Metrikine, A. (2023). *Gentle Driving of Piles (GDPb) at a sandy site combining axial and torsional vibrations: Part II-cyclic/dynamic lateral loading tests.* Ocean Engineering, 270, 113452.

[7] Kementzetzidis, E., Pisanò, F., Tsetas A,, & Metrikine, A. (2023). *Gentle Driving of Piles (GDP) at a sandy site combining axial and torsional vibrations: quantifying the influence of pile installation method on lateral behaviour*. – Accepted for publication in Journal of Geotechnical and Geoenvironmental Engineering

[8] Lee, J., Zhao, F., & Dutton. (2021). *Global Offshore Wind Report 2021.* GWEC (Global Wind Energy Council).

[9] Metrikine, A. V., Tsouvalas, A., Segeren, M. L. A., Elkadi, A. S. K., Tehrani, F. S., Gómez, S. S., ... & de Vries, P. (2020, August*). GDP: A new technology for Gentle Driving of (mono) Piles.* In Proceedings of the 4th International Symposium on Frontiers in Offshore Geotechnics, Austin, TX, USA (pp. 16-19).Mitchell, J.A. (2017). How citation changed the research world. *The Mendeley*, pp. 26-28

[10] Staubach, P. (2022). *Contributions to the numerical modelling of pile installation processes and high-cyclic loading of soils* (Doctoral dissertation) [ruhr-unibochum.de]. Ruhr-Universität Bochum. Bochum, Germany.

[11] Tsetas A. (2023). *A unified modelling framework for vibratory pile driving methods.* PhD Thesis. TU Delft.

[12] Tsetas, A., Tsouvalas, A., & Metrikine, A. V. (2023). *A non-linear three-dimensional pile–soil model for vibratory pile installation in layered media.* International Journal of Solids and Structures, 269, 112202.

[13] Tsetas, A., Tsouvalas, A., Gómez, S., Pisanò, F., Kementzetzidis, E., Molenkamp, T., . . . Metrikine, A. (2023). *Gentle Driving of Piles (GDP) at a sandy site combining axial and torsional vibrations: Part I-installation tests. Ocean Engineering*, 270, 113453.