



Delft University of Technology

Document Version

Final published version

Citation (APA)

Buzzi, A., Papon, C., Pirro, M., Hooybergs, O., Raniwala, H., Saggio, V., Errando-Herranz, C., & Englund, D. (2025). Strain Tuning of a Single Quantum Emitter in Silicon Photonics. In *2025 Conference on Lasers and Electro-Optics, CLEO 2025* (2025 Conference on Lasers and Electro-Optics, CLEO 2025). IEEE.

Important note

To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright

In case the licence states "Dutch Copyright Act (Article 25fa)", this publication was made available Green Open Access via the TU Delft Institutional Repository pursuant to Dutch Copyright Act (Article 25fa, the Taverne amendment). This provision does not affect copyright ownership.
Unless copyright is transferred by contract or statute, it remains with the copyright holder.

Sharing and reuse

Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy

Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

This work is downloaded from Delft University of Technology.

**Green Open Access added to [TU Delft Institutional Repository](#)
as part of the Taverne amendment.**

More information about this copyright law amendment
can be found at <https://www.openaccess.nl>.

Otherwise as indicated in the copyright section:
the publisher is the copyright holder of this work and the
author uses the Dutch legislation to make this work public.

Strain Tuning of a Single Quantum Emitter in Silicon Photonics

Alessandro Buzzi^{1,*}, Camille Papon¹, Matteo Pirro^{2,3}, Odiel Hooybergs¹, Hamza Raniwala¹, Valeria Saggio¹, Carlos Errando-Herranz^{2,3}, and Dirk Englund¹

¹Research Laboratory of Electronics, Massachusetts Institute of Technology, Cambridge, MA, USA

²QuTech and Kavli Institute of Nanoscience, Delft University of Technology, Delft 2628 CJ, Netherlands

³Department of Quantum and Computer Engineering, Delft University of Technology, Delft 2628 CJ, Netherlands

*abuzzi@mit.edu

Abstract: We demonstrate controllable and reversible spectral tuning of a single quantum emitter in a silicon photonic integrated circuit, achieving up to 400 pm shift at telecom wavelength, paving the way for monolithically integrated quantum technologies. © 2024 The Author(s)

Silicon color centers have emerged as a promising platform for quantum communication and computing [1–3], combining telecom-band emission with the technological maturity and scalability of silicon photonics and CMOS-compatible nanofabrication processes. Driven by these promising characteristics, substantial progress has been made in integrating such emitters into photonic nanostructures [2, 4, 5], achieving deterministic emitter formation [6–8] and enabling the electrical manipulation of emitter ensembles [9]. Quantum information processing relies on the generation of indistinguishable photons, which requires solid-state emitters to have identical emission wavelengths. However, the ability to reversibly tune individual emitters remains an open challenge, limiting both the realization of multiphoton interference and the investigation of the emitter's intrinsic properties.

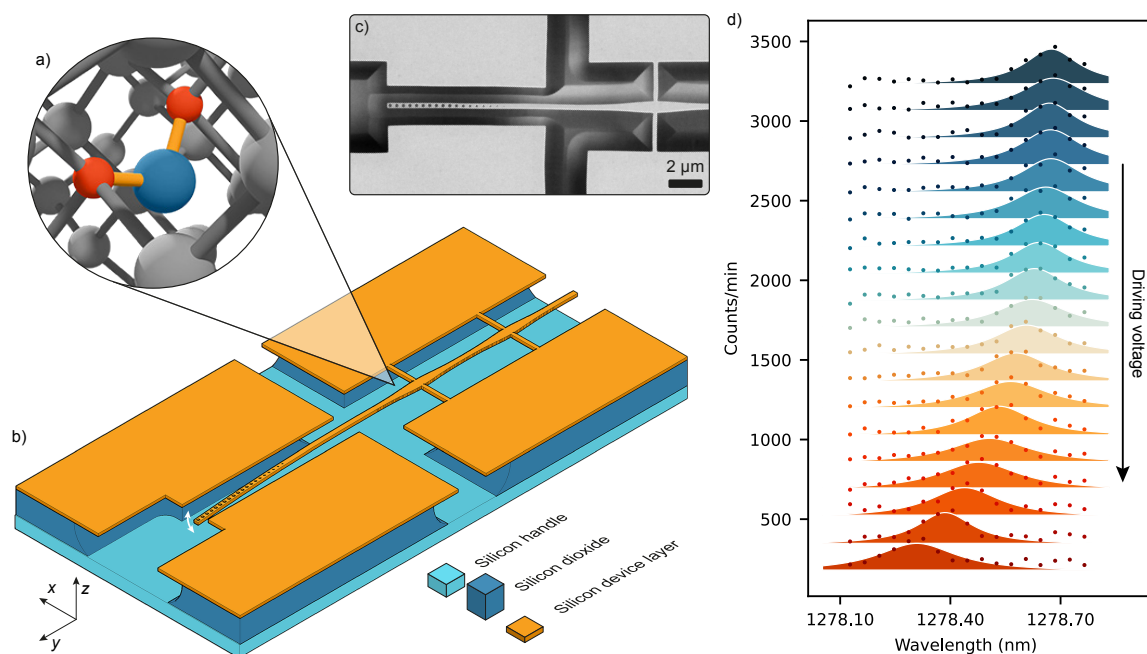


Fig. 1. Suspended cantilever waveguide illustration and emitter spectral tuning. a) Ball-and-stick model of the G center in a silicon lattice, consisting of two substitutional carbon atoms (orange) and an interstitial silicon atom (light blue). b) Diagram of the suspended cantilever waveguide, bent via capacitive actuation for strain control. c) Scanning electron micrograph of the suspended cantilever terminated by a Bragg reflector. d) Spectral tuning of the G center as a function of applied voltage (from 0 to 12 V). Dots represent the data points, and the filled curves are the Lorentzian fits.

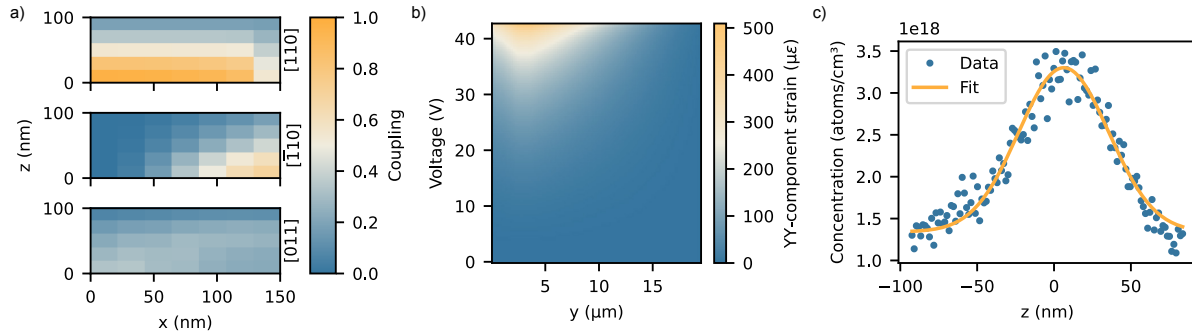


Fig. 2. Simulations and experimental data used in the model to determine the emitter's position in the waveguide. (a) Coupling efficiency of dipoles at different waveguide positions. (b) Heatmap of maximum strain in the cantilever as a function of voltage and position along y ($[-110]$ direction). (c) Fitted SIMS data of carbon distribution in the waveguide, used to estimate G center generation likelihood. The origin of the coordinate system is defined at the center of the waveguide cross-section for x and z and at the center of the last tether along the cantilever's y -axis.

In this work, we experimentally demonstrate the controllable and reversible spectral tuning of a single G center embedded in an integrated photonic circuit (Fig. 1a). To control the local strain applied to the emitter, we employ a MEMS suspended cantilever waveguide (shown in Fig. 1b-c) that is capacitively actuated by applying a voltage between the device layer, through a deposited metal electrode, and the silicon handle ground plane. We drive the device up to 35 V and observe a maximum wavelength shift of over 100 pm in a reproducible, reversible, and low-power fashion while maintaining the emission intensity.

By combining the piezospectroscopic model for G centers, dipole orientation coupling to the waveguide (Fig. 2a), electromechanical finite element method simulations (Fig. 2b), and secondary ion mass spectroscopy (SIMS) measured carbon distribution (Fig. 2c), we model emitter positions and orientations. Maximum likelihood estimation is used to analyze potential scenarios for four individual emitters inside the waveguide.

The methods demonstrated here can be readily applied to other color centers in silicon, such as the T center, enabling broader quantum technology applications. Future work will focus on demonstrating the spectral tuning of two emitters at the same wavelength, which is essential for achieving the multiphoton interference required for quantum networking and computing.

This work represents a significant milestone in the physical understanding of these emitters and a crucial step toward developing large-scale quantum communication and computing systems based on silicon color centers.

References

1. D. B. Higginbottom, A. T. K. Kurkjian, C. Chartrand, M. Kazemi, N. A. Brunelle, E. R. MacQuarrie, J. R. Klein, N. R. Lee-Hone *et al.*, "Optical observation of single spins in silicon," *Nature* **607**, 266–270 (2022).
2. V. Saggio, C. Errando-Herranz, S. Gyger, C. Panuski, M. Prabhu, L. De Santis, I. Christen, D. Ornelas-Huerta *et al.*, "Cavity-enhanced single artificial atoms in silicon," *Nature Commun.* **15**, 5296 (2024).
3. Photonic Inc., "Distributed Quantum Computing in Silicon," *arXiv preprint* arXiv:2406.01704 (2024).
4. M. Prabhu, C. Errando-Herranz, L. De Santis, I. Christen, C. Chen, C. Gerlach, and D. Englund, "Individually addressable and spectrally programmable artificial atoms in silicon photonics," *Nature Commun.* **14**, 2380 (2023).
5. L. Komza, P. Samutpraphoot, M. Odeh, Y.-L. Tang, M. Mathew, J. Chang, H. Song, M.-K. Kim *et al.*, "Indistinguishable photons from an artificial atom in silicon photonics," *Nature Commun.* **15**, 6920 (2024).
6. K. Jhuria, V. Ivanov, D. Polley, Y. Zhiyenbayev, W. Liu, A. Persaud, W. Redjem, W. Qarony *et al.*, "Programmable quantum emitter formation in silicon," *Nature Commun.* **15**, 4497 (2024).
7. G. Andrini, G. Zanelli, S. D. Tchernij, E. Corte, E. N. Hernández, A. Verna, M. Cocuzza, E. Bernardi *et al.*, "Activation of telecom emitters in silicon upon ion implantation and ns pulsed laser annealing," *Commun. Mater.* **5**, 47 (2024).
8. M. Hollenbach, N. Klingner, N. S. Jagtap, L. Bischoff, C. Fowley, U. Kentsch, G. Hlawacek, A. Erbe *et al.*, "Wafer-scale nanofabrication of telecom single-photon emitters in silicon," *Nature Commun.* **13**, 7683 (2022).
9. A. M. Day, M. Sutula, J. R. Dietz, A. Raun, D. D. Sukachev, M. K. Bhaskar, and E. L. Hu, "Electrical manipulation of telecom color centers in silicon," *Nature Commun.* **15**, 4722 (2024).