

Morphological Impacts of Porcupine River Training Structures

Irving, Meghan; Sloff, Kees

Publication date
2021

Document Version
Final published version

Citation (APA)
Irving, M., & Sloff, K. (2021). *Morphological Impacts of Porcupine River Training Structures*. 52-53. Abstract from NCR DAYS 2021. <https://kbase.ncr-web.org/outputs/rivers-in-an-uncertain-future/>

Important note
To cite this publication, please use the final published version (if applicable).
Please check the document version above.

Copyright
Other than for strictly personal use, it is not permitted to download, forward or distribute the text or part of it, without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license such as Creative Commons.

Takedown policy
Please contact us and provide details if you believe this document breaches copyrights.
We will remove access to the work immediately and investigate your claim.

Green Open Access added to TU Delft Institutional Repository

'You share, we take care!' - Taverne project

<https://www.openaccess.nl/en/you-share-we-take-care>

Otherwise as indicated in the copyright section: the publisher is the copyright holder of this work and the author uses the Dutch legislation to make this work public.

Book of abstracts

Rivers in an uncertain future

NCR days 2021 | Enschede, February 11-12



Jord J. Warmink, Anouk Bomers,
Vasileios Kitsikoudis, R. Pepijn van
Denderen & Fredrik Huthoff (eds.)

NCR publication: 46-2021

Netherlands
Centre for
River studies **NCR**

NCR Days 2021

Rivers in an uncertain future

Jord J. Warmink, Anouk Bomers, Vasileios Kitsikoudis, R. Pepijn
van Denderen & Fredrik Huthoff (eds.)

Organising partner:

UNIVERSITY OF TWENTE.

Co-sponsored by:



Organising partner

University of Twente
P.O. 217
7500 AE Enschede
The Netherlands

telephone: +31 53 489 35 46
e-mail: secretariat-mfs-et@utwente.nl
www: <https://www.utwente.nl>

Contact NCR

dr. ir. K.D. Berends (programme Secretary)
Netherlands Centre for River Studies
c/o Deltares
P.O. 177
2600 MH Delft
The Netherlands

telephone: +31 6 21 28 74 61
e-mail: secretary@ncr-web.org
www: <https://www.ncr-web.org>

Cite as: Warmink, J.J., Bomers, A., Kitsikoudis, V., van Denderen, R.P., Huthoff, F. (2021), *Rivers in an uncertain future: NCR Days proceedings*. Netherlands Centre for River Studies, publication 46-2021

Photo credits cover: IJssel river from Bureau Beeldtaal Filmmakers (2018)

Copyright © 2021 Netherlands Centre for River Studies

All rights reserved. No parts of this document may be reproduced in any form by print, photo print, photo copy, microfilm or any other means, without permission of the publisher: Netherlands Centre for River Studies.

Morphological Impacts of Porcupine River Training Structures

Meghan Irving^{a,*}, Kees Sloff^{a,b}

^a TU Delft, Faculty of CEG, Building 23, Stevinweg 1, 2628 CN Delft, the Netherlands

^b Deltares, P.O. Box 177, 2600 MH Delft, the Netherlands

Keywords — River Training, Porcupine, Morphology

Introduction

Flexible river training structures such as tetrahedron frames ('porcupines') can be attractive for control of braided river channel networks in regions where permanent control structures (e.g. groynes) are too expensive or potentially inefficient, such as areas with highly dynamic flow regimes and morphology. Porcupine fields (see Fig. 1) provide hydraulic resistance, generating energy loss through turbulence that may reduce velocities and promote sediment deposition (Shang *et al.*, 2013).

Porcupine systems can be used for bed or bank protection, and were implemented in a 2019 channel-control pilot project on the Ayeyarwady River in Myanmar. Incorporating porcupine resistance into numerical models has not been systematically evaluated. First, we must understand the processes that need to be captured for accurate predictions of impacts to flow and sediment transport, which is the focus of this work. Improved models can aid in future porcupine system design.



Figure 1: Porcupine field in secondary channel of Ayeyarwady River, Myanmar. Photo courtesy of H. Fredrikze, Royal HaskoningDHV.

Methods

Predicted impacts were examined using literature review and data from a 2018 porcupine flume experiment (Nientker, 2018), and then

evaluated against pilot project observations.

The pilot project was implemented in the Ayeyarwady River near Mandalay. In this location the river consists of a primary channel and four secondary channels (see Fig. 2).

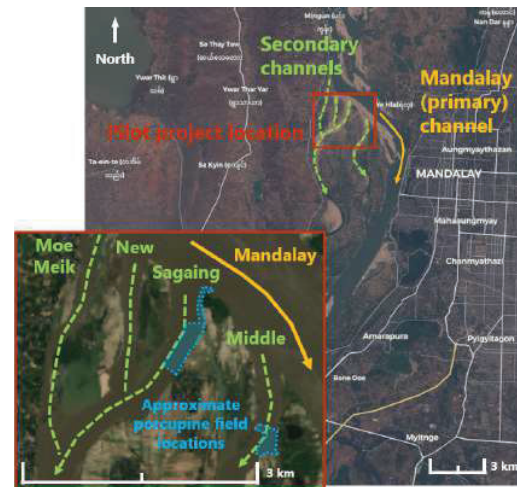


Figure 2: Ayeyarwady River pilot project location. Aerial imagery: Landsat 11/03/2020 (overview), 18/09/2020 (inset); (apps.sentinel-hub.com)

The main objective is to improve navigational stability by maintaining the current channel discharge distributions and hence a least available depth of 2 m in Mandalay channel. To encourage this, 2 m tall concrete porcupines were placed in a staggered configuration in secondary channels to increase local roughness (Kreeke *et al.*, 2018). Survey measurements were taken before and after the first wet season to examine morphological changes.

Results

Predicted Hydrodynamic and Morphological Impacts

The velocity and turbulence profiles through a field of resistance elements varies as density increases from 'sparse' to 'dense'. Dense fields generally reduce velocities and shear stresses inducing sedimentation. Sparse fields may experience erosion or deposition depending on the exact velocities and shear stresses. The leading, trailing and lateral field edges can have a different response than a central

*Corresponding author
Email address: meghan.irving@gmail.com (Meghan Irving)

(fully-developed) flow area for dense fields. Increased shear stresses and erosion may be observed at the leading or lateral edges, while deposition is likely in the center and trailing edge. This effect may be absent in sparse fields where edge velocity gradients are weak. In addition, channel placement dictates initial flow velocities in or along the field (e.g. higher velocities in an outer versus inner bend).

Pilot Study Observations

The pilot porcupines likely exhibit transitional or sparse behavior of the flow field, where significant scour at leading and lateral edges was not evident; however, porcupines located at the leading edge and especially in high-energy areas (e.g. outer bend) did show signs of scour and sinking into the bed (see Fig. 3). Porcupines were also partially buried through deposition, while largely maintaining their installation elevation.

Buried (shorter) porcupines offer less flow resistance and velocity reduction. Therefore upstream porcupines sinking can cause downstream porcupines to sink as they receive higher flow velocities. Loss of elevation may reduce the field's long-term effectiveness.

Fig. 3 also suggests that transverse resistance gradients from equi-height porcupines installed at varying cross-sectional elevations (generally higher at the inner bend) have helped push the flow (and thalweg) towards the outer bend.

Note that limited site data prevents us from entirely separating porcupine-induced changes from external influences.

Conclusion

Numerical modeling of porcupine systems must take into account changes in resistance due to porcupine burial over time, through sinking or deposition. They should accurately capture predicted behaviors according to field density including variations at leading and lateral edges to make informed design choices. In addition, estimating the strength of transverse gradients may be important if protecting the outer bend is a design goal. Further studies are needed to validate and expand these results for a wider range of field configurations and flow conditions.

Acknowledgements

This work was conducted as a Civil Engineering Masters thesis at TU Delft. Special thanks to my committee members A. Blom, J. Bricker and F. Schuurman, and to H. Fredrikze of Royal HaskoningDHV for providing the pilot data.

References

- Shang, Q., Xu, H., Li, G. (2013) Overview of research on the influence of permeable structures. *Applied Mechanics and Materials* 405-408, pp. 2115–2122. issn: 16609336.
- Nientker, G. (2018) Porcupines for river training: A study on the near-field effects of porcupines. Tech. rep. Delft University of Technology.
- Kreeke, P. van de, Schuurman, F., Commandeur, A., Laboyrie, H., Kesteren, J. van, Nieuwenhuis, O. (2018) Report AIRBM - Component 3, Engineering, Design, Capacity Building and Construction Supervision for Sub-Project 1. Detailed Design Report.

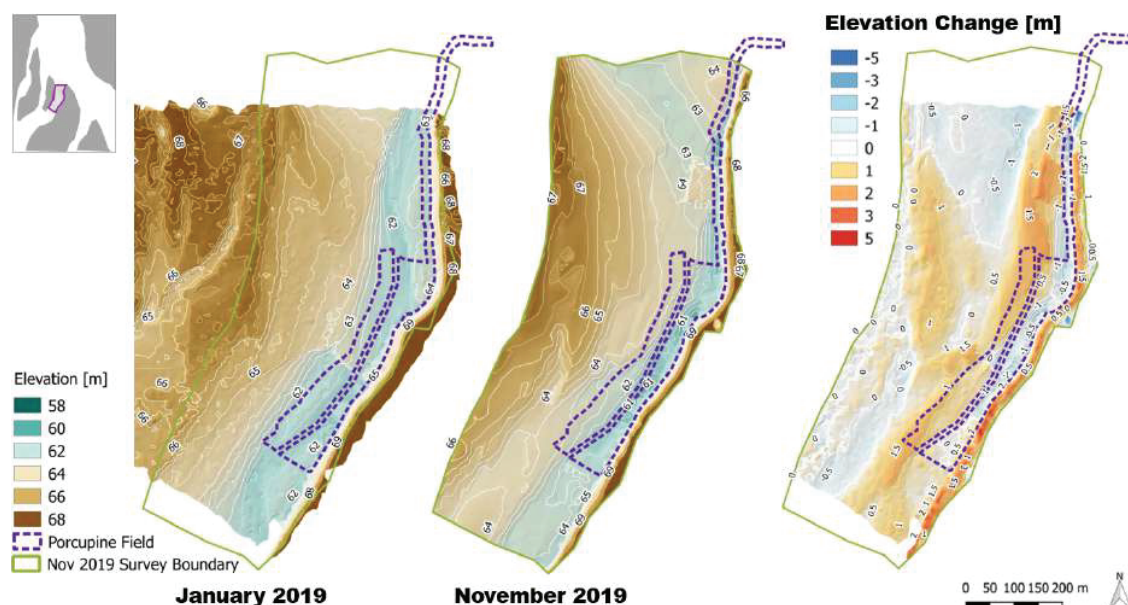


Figure 3: Morphological change in Sagaing Channel (November elevation minus January elevation).